

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-185-00434-00-01
Spot: SESENW Sec/Twnshp/Rge: 13-25S-13W
2200 feet from N Section Line, 2200 feet from W Section Line
Lease Name: S LEESBURG UNIT Well #: 101
County: STAFFORD Total Vertical Depth: 4132 feet

Operator License No.: 6679
Op Name: SHORT, W.D. AND MARJORIE DBA W.
Address: PO BOX 1
OXFORD, KS 67119

String	Size	Depth (ft)	Pulled (ft)	Comment
CIBP		3500		
PROD	7	4116	730	WITH 300 SX CMT
SURF	10.75	451		WITH 400 SX CMT

#134²⁹

Well Type: OIL UIC Docket No: _____ Date/Time to Plug: 10/31/2005 1:00 PM
Plug Co. License No.: 31529 Plug Co. Name: MIKE'S TESTING & SALVAGE, INC.
Proposal Rcvd. from: CURTIS KELSO Company: MIKE'S TESTING & SALVAGE, INC Phone: (620) 938-2537

Proposed Plugging Method: SAND TO 2850' & 7 SX CMT. PERFORATE @ 730'. PUMP 325 SX CMT CIRCULATING CMT TO SURFACE.

Plugging Proposal Received By: RICHARD LACEY WitnessType: COMPLETE (100%)
Date/Time Plugging Completed: 10/31/2005 3:35 PM KCC Agent: RICHARD LACEY

Actual Plugging Report:

SANDED TO 2850' & 7 SX CMT WITH DUMP BAILER. PERFORATED 7" AT 730'. PUMPED 325 SX CMT DOWN 7" CIRCULATING CMT TO SURFACE UP 10 3/4" X 7" ANNULUS. 11/1/05: TOPPED OFF WITH 60 SX CMT 7" & 40 SX CMT DOWN 7" X 10 3/4".

Perfs:


Top	Bot	Thru	Comments
3075	3082		

Remarks: USED 60/40 POZMIX 6% GEL BY COPELAND ACID.

Plugged through: CSG

INVOICED
DATE 11-15-05
INV. NO. 2006060739

District: 01

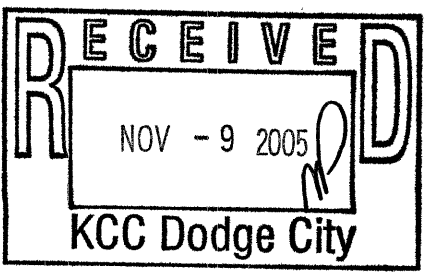

Signed Richard M. Lacey
(TECHNICIAN)

RECEIVED
NOV 15 2005
KCC WICHITA

Form CR-2A