


15-163-00457-06-01

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

WELL PLUGGING RECORD

NORTH

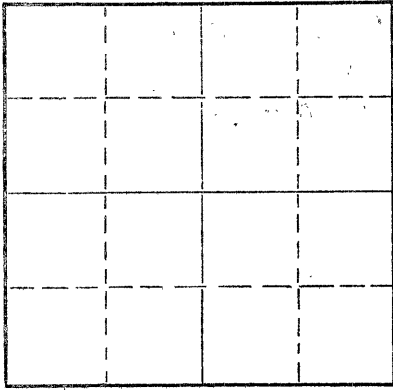

Locate well correctly on above
Section Plat

Rooks County. Sec. 35 Twp. 7 Rge. 18 (E) (W)
Location as "NE/CNW/SW" or footage from lines. SE SW NE
Lease Owner Midwestern Supply Co., Inc. J. Mark Richardson
Lease Name Roelfs Well No. 1
Office Address 710 Union National Building Wichita, Kansas 67202
Character of Well (completed as Oil, Gas or Dry Hole) _____
Date well completed _____ 19____
Application for plugging filed 2-19-70 19____
Application for plugging approved 2-20-70 19____
Plugging commenced 2-27-70 19____
Plugging completed 3-7-70 19____
Reason for abandonment of well or producing formation _____

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Leo Massey
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3398 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS				CASING RECORD		
FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8	203	None
				4 1/2	None	2032

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Moved into location. Rigged up pole, sanded to 3340' and dumped 4 sacks of cement. Dug out cellar and rigged up jacks, had 7" tension.
Shot pipe at 2876' and working pipe. Spotted oil at 2800', pressure broke from 1000 psi to 500 psi.
Working pipe and waited on oil to soak. Working pipe with 19" tension. Shot pipe at 2514' and working pipe, gained 4" tension to 25" with 2500 psi.
Shot pipe at 2317' and 2014'. Pulled 51 joints of 4 1/2" pipe. Finished pulling pipe. Loaded trailer. Tore down rig.
Globe squeezed well with 5 sacks of hulls, 25 sacks of mud and 120 sacks of 50/50 pozmix cement.

RECEIVED
STATE CORPORATION COMMISSION
MAR 16 1970
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Forbes Casing Pulling Company, Inc.
Address P. O. Box 221 Great Bend, Kansas 67530


STATE OF Kansas, COUNTY OF Barton, ss.
James W. Rockhold (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) James W. Rockhold
P. O. Box 221 Great Bend, Kansas
(Address)

3-16-70

SUBSCRIBED AND SWORN TO before me this 10 day of March, 19 70

My commission expires May 27, 1973



Alice Mickel
Notary Public.