

15-163-20093-00-00


STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

WELL PLUGGING RECORD

NORTH

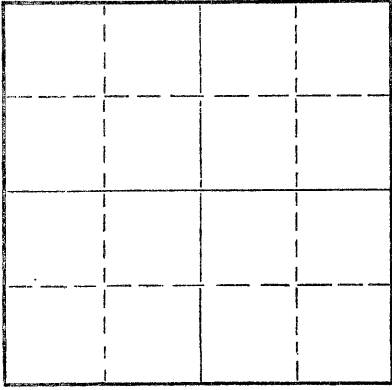

Locate well correctly on above
Section Plat

Rooks County. Sec. 35 Twp. 7S Rge. (E) 18 (W)
Location as "NE/CNW%SW%" or footage from lines SE SE SW
Lease Owner J. MARK RICHARDSON
Lease Name MADY Well No. 1
Office Address 502 UNION CENTER BLDG., WICHITA, KANSAS
Character of Well (completed as Oil, Gas or Dry Hole) DRY HOLE
Date well completed DEC. 29, 1967
Application for plugging filed (PHONE 12-29-67) JAN. 3, 1968
Application for plugging approved DEC. 29, 1967
Plugging commenced DEC. 29, 1967
Plugging completed DEC. 30, 1967

Reason for abandonment of well or producing formation _____
If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? YES

Name of Conservation Agent who supervised plugging of this well LEO MASSEY
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3470 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
		0	206	8-5/8"	206'	NONE
						JAN 4 1968
						1-4-68

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

FILLED HOLE WITH HEAVY MUD TO 720 FEET. SET FIRST PLUG @ 720 FEET WITH 70 SACKS CEMENT THROUGH DRILL PIPE. FILLED HOLE WITH HEAVY MUD TO 210 FEET. SET SECOND PLUG @ 210 FEET WITH 20 SACKS CEMENT THROUGH DRILL PIPE. FILLED HOLE WITH HEAVY MUD TO 40 FEET. MADE BRIDGE AND SET THIRD PLUG AT 40 FEET WITH 10 SACKS CEMENT. PLUGGED RAT HOLE WITH 2 SACKS CEMENT. JOB STARTED 12/29/67 @ 11:00 PM, JOB COMPLETED @ 2:00 AM 12/30/67. USED GLOBE CEMENT PUMP TRUCK TO PUMP CEMENT THROUGH DRILL PIPE.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor GABBERT-JONES, INC.
Address 830 SUTTON PLACE, WICHITA, KANSAS 67202


STATE OF KANSAS, COUNTY OF SEDGWICK, ss.
E. E. HALL (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) E. E. Hall

830 SUTTON PLACE, WICHITA, KANSAS
(Address)

SUBSCRIBED AND SWORN TO before me this 3RD day of JANUARY, 19 68

Barbara J. Layton
BARBARA J. LAYTON Notary Public.



MY COMMISSION EXPIRES FEB. 1, 1968