

TO: STATE CORPORATION COMMISSION  
CONSERVATION DIVISION - PLUGGING  
130 SOUTH MARKET, SUITE 2078  
WICHITA, KANSAS 67202

API Well Number: 15-185-10098-00-01  
Spot: NWSENV Sec/Twnshp/Rge: 13-25S-13W  
3630 feet from S Section Line, 3630 feet from E Section Line  
Lease Name: SOUTH LEESBURG UNIT Well #: 103  
County: STAFFORD Total Vertical Depth: 4120 feet

Operator License No.: 33608  
Op Name: W.D. SHORT OIL CO., LLC  
Address: PO BOX 729 - 102 S. RIVER ROAD  
OXFORD, KS 67119

String	Size	Depth (ft)	Pulled (ft)	Comment
CIBP		3543		
PROD	4.5	4120	720	WITH 200 SX CMT
SURF	8.625	322		WITH 150 SX CMT
UNK		3180		CMT RETAINER

Well Type: EOR UIC Docket No: E22477.2 Date/Time to Plug: 10/27/2005 9:30 AM

Plug Co. License No.: 31529 Plug Co. Name: MIKE'S TESTING & SALVAGE, INC.

Proposal Rcvd. from: MIKE KELSO Company: MIKE'S TESTING & SALVAGE, INC Phone: (620) 938-2537

Proposed Plugging Method: SAND TO 3000' WITH 4 SX CMT. PLUG AT 700' WITH 10 SX GEL & 50 SX CMT. PLUG AT 350' WITH 50 SX CMT. PLUG AT 40' WITH 20 SX CMT.

Plugging Proposal Received By: RICHARD LACEY  
Date/Time Plugging Completed: 10/27/2005 12:12 PM

WitnessType: COMPLETE (100%)  
KCC Agent: RICHARD LACEY

Actual Plugging Report:

SANDED BACK TO 3000' & 4 SX CMT WITH BAILER. SPOTTED PLUGS THROUGH CASING WHILE PULLING. 1ST PLUG AT 700' WITH 10 SX GEL & 50 SX CMT. 2ND PLUG AT 350' WITH 50 SX CMT. 3RD PLUG AT 40' WITH 20 SX CMT.

Perfs:


Top	Bot	Thru	Comments
3078	3083		
3069	3070		

Remarks: USED 60/40 POZMIX 6% GEL BY COPELAND ACID.

Plugged through: CSG

**INVOICED**  
DATE 11-15-05  
INV. NO. 2006060738

District: 01

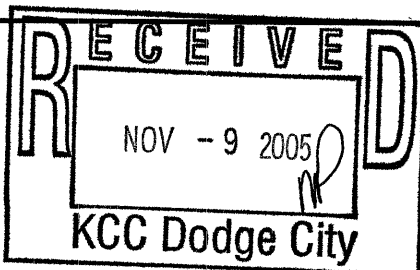

Signed Richard W. Lacey  
(TECHNICIAN)

RECEIVED  
NOV 15 2005  
KCC WICHITA

Form CR-3/3