


15-163-30043-00-00

STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

WELL PLUGGING RECORD

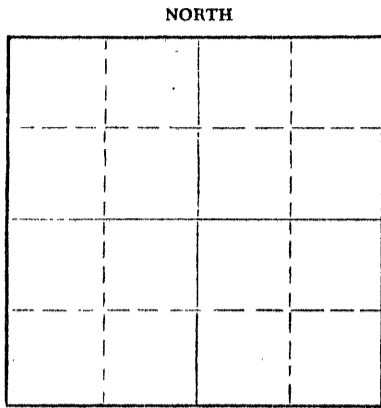

Locate well correctly on above
Section Plat

Rooks County. Sec. 18 Twp. 7S Rge. (E) 20 (W)
Location as "NE/CNW&SW" or footage from lines C NE NW
Lease Owner Chief Drilling Co., Inc.
Lease Name LeSAGE Well No. 1
Office Address Box 797 - Gt. Bend, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed 8/3 1965
Application for plugging filed 8/3 1965
Application for plugging approved 8/3 1965
Plugging commenced 8/3 1965
Plugging completed 8/3 1965
Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Eldon Petty - Hays, Kansas
Producing formation Depth to top Bottom Total Depth of Well 3630 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
		0	199	8-5/8"	199	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Wooden plug set @ 540'
Mixed 20 sacks cement through drill pipe
Wooden plug set @ 180'
Mixed 20 sacks cement through drill pipe
Hulls & wooden plug set @ 35'
Mixed 10 sacks cement through drill pipe

RECEIVED
STATE CORPORATION COMMISSION

AUG 6 - 1965

CONSERVATION DIVISION
Wichita, Kansas

8-6-65

Name of Plugging Contractor Chief Drilling Co., Inc.
Address Box 797 - Gt. Bend, Kansas

STATE OF KANSAS, COUNTY OF BARTON, ss.
V. Richard Hoover, President (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) V. Richard Hoover
Box 797 - Great Bend, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 4th day of August 19 65

My commission expires Jan. 26, 1967

Carmen R. Cook
Notary Public.

15-163-30043-00-00

WELL LOG

Chief Drilling Co., Inc.
Box 797
Great Bend, Kansas

LeSAGE #1
C NE NW Sec. 18-7S-20W
Rooks County, Kansas

Contractor: Chief Drilling Co., Inc.

Commenced: 7-26-65
Completed: 8-3-65

Casing Record: 8-5/8" @ 199' w/150 sacks Sunset & 2 sacks Gel.

DRY & ABANDONED

<u>FORMATION</u>	<u>FROM</u>	<u>TO</u>	<u>ELEVATION</u>
Shale & Post Rock	0	60	2108 Gr.
Shale	60	1220	2110 D.F.
Sand	1220	1430	2113 K.B.
Shale & Shells	1430	1700	
Shale	1700	1703	
Anhydrite	1703	1736	
Shale	1736	2225	
Shale & Lime	2225	3100	
Lime	3100	3304	
Shale & Lime	3304	3342	
Lime	3342	3587	
Dolomite	3587	3630	
Total Depth	3630		

<u>FORMATION TOPS</u>	
Anhydrite	1703 + 410
Topeka	3100 - 987
Heebner	3304 - 1191
Toronto	3326 - 1213
Lansing	3342 - 1229
Arbuckle	3587 - 1474
Total Depth	3630 - 1517

STATE OF KANSAS, COUNTY OF BARTON) SS

I hereby certify that the above is a true and correct copy of the Driller's Log of the well drilled in the C NE NW of Section 18-7S-20W, Rooks County, Kansas, to the best of my knowledge and belief.

CHIEF DRILLING CO., INC.

V. Richard Hoover
V. Richard Hoover, President

Subscribed and sworn to before me this 4th day of August, 1965.

Carmen R. Cook
Carmen R. Cook, Notary Public

My commission expires: Jan. 26, 1967.

RECEIVED
STATE CORPORATION COMMISSION

AUG 6 - 1965
8-6-65
CONSERVATION DIVISION
Wichita, Kansas