


STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

15-163-19147-00-00
WELL PLUGGING RECORD

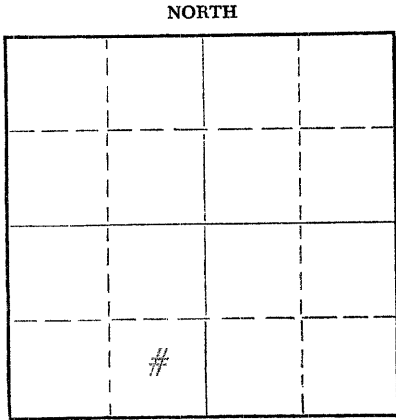

Locate well correctly on above Section Plat

Rooks County, Sec. 36 Twp. 10 Rge. 20 (E) W (W)
Location as "NE/CNW/SW" or footage from lines SE SE SW
Lease Owner Herman George Kaiser
Lease Name Kelleritz Well No. 1
Office Address Ellinwood, Ks.
Character of Well (completed as Oil, Gas or Dry Hole) Oil
Date well completed _____ 19____
Application for plugging filed _____ 19____
Application for plugging approved _____ 19____
Plugging commenced Oct. 7 1958
Plugging completed Oct. 9 1958
Reason for abandonment of well or producing formation Formation depleted

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Eldon Petty
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3706 Feet
Show depth and thickness of all water, oil and gas formations.


OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8	225	none
				5 1/2	3700	2826

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Plugged back with sand from 3450' to 3410'. Mixed and dumped 4 sx. cement from 3410' to 3378'. Pulled 5 1/2 to 600'. Mixed and circulated 21 sx. gel mud and 20 sx. cement. Pulled 5 1/2 to 200'. Pumped in 20 sx. cement. Pulled rest 5 1/2. Set 10' rock bridge from 40' to 30'. Mixed and dumped 10 sx. cement from 30' to base cellar.

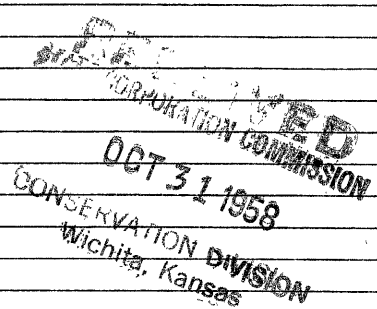

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Ace Pipe Pulling Co.
Address Box 304 Great Bend, Ks.

STATE OF Kansas, COUNTY OF Barton, ss.
I, W. J. Hall (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) W. J. Hall

SUBSCRIBED AND SWORN TO before me this 15 day of October, 19 58
Delmer L Posten
Notary Public.

My commission expires _____

