


15-163-21171-00-00

STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

Rooks County. Sec. 7 Twp. 7S Rge. 20 E/W
Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines
C SW SE
Lease Owner Zenith Drilling, Inc.
Lease Name LESAGE Well No. 1
Office Address 200 W. Douglas, Suite 600, Wichita, KS
Character of Well (Completed as Oil, Gas or Dry Hole) Dry Hole

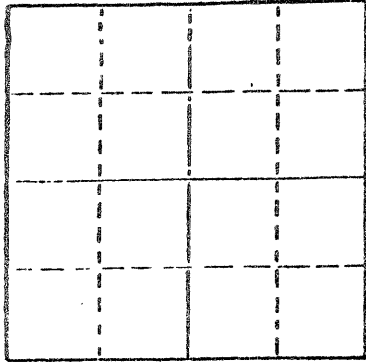

Locate well correctly on above
Section Plat

Date Well completed 10-20 19 80
Application for plugging filed 10-20 19 80
Application for plugging approved 10-20 19 80
Plugging commenced 10-20 19 80
Plugging completed 10-20 19 80
Reason for abandonment of well or producing formation
No commercial quantity of oil or gas available
If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or
its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Marion Schmidt
Producing formation Depth to top Bottom Total Depth of Well 3607'
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT

Describe in detail the manner in which the well was plugged, indicating where the mud fluid
was placed and the method or methods used in introducing it into the hold. If cement or other
plugs were used, state the character of same and depth placed, from feet to
feet for each plug set.

T.D. 3607'
Set 1st plug @ 900' with 70 sx.
2nd plug @ 240' with 25 sx.
3rd plug @ 40' solid bridge with 10 sx.
rathole with 5 sx., 50/50 posmix, 6% gel.
Plug was down @ 4:00 p.m. 10-20-80.

RECEIVED
STATE CORPORATION COMMISSION
NOV - 3 1980
11-03-1980
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Abercrombie Drilling, Inc.


STATE OF Kansas COUNTY OF Sedgwick, ss.
Jack L. Partridge, Asst. Sec.-Treas. (employee of owner) or (owner or operator)
of the above-described well, being first duly sworn on oath, says: That I have knowledge of
the facts, statements, and matters herein contained and the log of the above-described well
as filed and that the same are true and correct. So help me God.

(Signature) Jack L. Partridge
801 Union Center, Wichita, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 29th day of October, 1980

Jeanette A. Metheny
Jeanette A. Metheny Notary Public.

My commission expires 08-18-84



15-163-21171-00-00

CONTRACTOR'S WELL LOG

OPERATOR:	Zenith Drilling, Inc.
CONTRACTOR:	Abercrombie Drilling, Inc.
WELL NAME:	LESAGE #1
LOCATION:	C SW SE, Section 7-7S-20W Rooks County, Kansas
SPUD DATE:	10-14-80
COMPLETION DATE:	10-20-80

0	180	Sand & Shale
180	246	Shale & Sand
246	1020	Shale
1020	1745	Sand & Shale
1745	1777	Anhydrite
1777	2708	Shale & Lime
2708	2935	Shale
2935	3355	Shale & Lime
3355	3706	Lime
	3706	Rotary Total Depth

Spud hole @ 8:45 p.m. 10-14-80. Drilled 246' of a 12-1/4" hole. Ran 6 joints of 8-5/8" 20# casing (tally 235.14') Set @ 245'. Cemented with 175 sx. of common, 2% gel, 3% c.c. Cement did circulate. Plug was down @ 12:45 a.m. 10-15-80.

T.D. 3607'. Set 1st plug @ 9' with 70 sx., 2nd plug @ 240' with 25 sx., 3rd plug @ 40' solid bridge with 10 sx., rathole with 5 sx., 50/50 posmix, 6% gel. Plug was down @ 4:00 p.m. 10-20-80.

SAMPLE TOPS:

Anhydrite 1745'
B/Anhydrite 1777'

RECEIVED
STATE CORPORATION COMMISSION

NOV - 3 1980

CONSERVATION DIVISION
Wichita, Kansas


STATE OF KANSAS)
) SS
COUNTY OF SEDGWICK)

Jack L. Partridge, Assistant Secretary-Treasurer of Abercrombie Drilling, Inc., does hereby state that the above and foregoing is a true and correct copy of the log of the LESAGE #1, C SW SE, Section 7-7S-20W, Rooks County, Kansas.

ABERCROMBIE DRILLING, INC.

BY: Jack L. Partridge
Jack L. Partridge, Asst. Sec.-Treas

Subscribed and sworn to before me, a Notary Public, in and for the aforesaid county and state as of this 29th day of October, 1980.



Jeanette A. Metheny
Jeanette A. Metheny, Notary Public