


STATE OF KANSAS  
STATE CORPORATION COMMISSION

15-163-20301-00-00

Form CP-4

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
212 No. Market  
Wichita, Kansas 67202

WELL PLUGGING RECORD

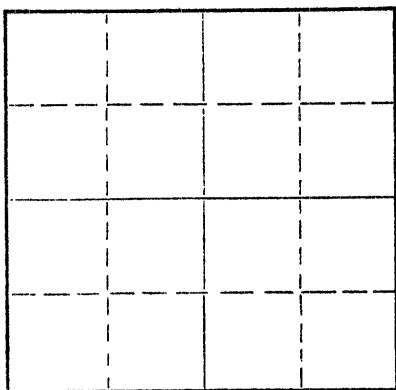

Locate well correctly on above Section Plat

Rooks \_\_\_\_\_ County. Sec. 7 Twp. 7S Rge. (E)20 (W)  
Location as "NE/CNWxSWx" or footage from lines NE SW SW  
Lease Owner American Drilling Corp.  
Lease Name Western Auto Well No. 1  
Office Address 360 Sutton Place, Wichita, Kansas  
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole  
Date well completed April 21, 1970  
Application for plugging filed 19  
Application for plugging approved 19  
Plugging commenced April 21, 1970  
Plugging completed April 21, 1970  
Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production 19  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Leo Massey of Hays, Kansas  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 3627 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
	Surface	0	205'	8-5/8"		None
	Casing					

RECEIVED  
APR 27 1970  
CONSERVATION DIVISION  
Wichita, Kansas  
04-27-1970

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Heavy Mud from Total Depth to 800 Feet,  
Plug & 70 sax Cement; Mud to 180 Feet,  
Plug & 20 sax Cement; Mud to 40 Feet,  
1/2 sax Halls, Plug Bridged with Kelly,  
and 10 sax Cement to Base of Cellar;  
2 sax Cement in Rat Hole.  
Job Completed @ 2:00 P.M. on 4/21/70.


(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Sage Drilling Co., Inc.  
Address 500 Bitting Building, Wichita, Kansas 67202

STATE OF KANSAS, COUNTY OF SEDGWICK, SS.  
Wayne W. Kahmeyer of Sage Drilling (employee of owner) or (owner or operator) of the above described well being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above described well as filed and that the same are true and correct. So help me God.

(Signature) Wayne W. Kahmeyer  
500 Bitting Building, Wichita, Kansas  
(Address)

Subscribed and Sworn to before me this 23rd day of April, 19 70



Louise K. Whitted  
Louise K. Whitted - Notary Public.

My commission expires November 26, 1970.

15-63-20301-00-00

DRILLERS LOG

WESTERN AUTO NO. 1

CASING RECORD:	OPERATOR:	American Drilling Corp.	DESCRIPTION:
8-5/8" @ 205'	CONTRACTOR:	Sage Drilling Co., Inc.	NE SW SW
w/160 sax cement	COMMENCED:	April 12, 1970	Sec. 7-7S-20W
TOTAL DEPTH:	COMPLETED:	April 21, 1970	Rooks Co., Kansas
3627'			ELEVATION: 2127 KB


<u>FORMATION</u>	<u>FROM</u>	<u>TO</u>	<u>REMARKS</u>
Top Soil & Post Rock	0	30	
Shale	30	250	
Shale & Sand	250	1115	
Sand & Iron Pyrite	1115	1150	
Red Bed & Shale	1150	1185	
Pyrite & Sand	1185	1220	
Shale	1220	1230	
Dakota Sand	1230	1445	
Shale	1445	1545	
Shale, Shells & Sand	1545	1690	
Anhydrite	1690	1750	
Lime & Shale	1750	1930	
Shale & Shells	1930	2350	
Shale & Lime	2350	2628	
Lime & Shale	2628	2805	
Shale & Lime	2805	2920	
Shale & Lime	2920	3205	
Lime & Shale	3205	3627	D&A

RECEIVED  
STATE CORPORATION COMMISSION  
APR 27 1970  
CONSERVATION DIVISION  
Wichita, Kansas

I certify that this is a true and correct copy of the above log to the best of my knowledge.

SAGE DRILLING CO., INC.

By Wayne W. Kahmeyer  
Wayne W. Kahmeyer



Subscribed and sworn to before me this 23rd day of April, 1970.

Louise K. Whitted  
Louise K. Whitted, Notary Public

My commission expires:  
November 26, 1970.