


15-163-06780-00-00

WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
211 No. Broadway  
Wichita, Kansas

Rooks County, Sec. 7 Twp. 7 Rge. 20 (E) (W)  
Location as "NE/CNW/SW" or footage from lines C SE SW

Lease Owner American Drilling Corporation  
Lease Name Western Auto Well No. 1  
Office Address 360 Sutton Place Wichita, Kansas 67202  
Character of Well (completed as Oil, Gas or Dry Hole) \_\_\_\_\_  
Date well completed \_\_\_\_\_ 19\_\_\_\_  
Application for plugging filed 6-2-70 19\_\_\_\_  
Application for plugging approved 6-3-70 19\_\_\_\_  
Plugging commenced 7-9-70 19\_\_\_\_  
Plugging completed 7-18-70 19\_\_\_\_  
Reason for abandonment of well or producing formation \_\_\_\_\_

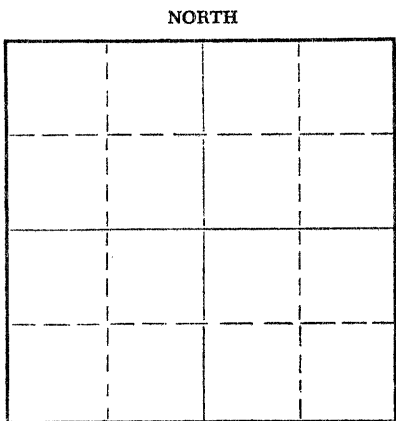

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production \_\_\_\_\_ 19\_\_\_\_  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Leo Massey  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 3660 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8	214	None
				4 1/2	3611	713.85

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Moved to location and cleaned out cellar.  
Welded on 8 5/8" and 4 1/2" collars. Rigged up and worked pipe. Shot pipe at 1000', 800' and 715'. Pulled 23 joints of pipe. Loaded out equipment and unit.  
Moved off muddy location.  
Squeezed well with 2 sacks of hulls, 20 sacks of mud and 100 sacks of pozmix cement.

(If additional description is necessary, use BACK of this sheet)


Name of Plugging Contractor Forbes Casing Pulling Company, Inc.  
Address P. O. Box 221 Great Bend, Kansas 67530

STATE OF Kansas, COUNTY OF Barton, ss.  
James W. Rockhold (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) James W. Rockhold  
P. O. Box 221 Great Bend, Kansas  
(Address)

SUBSCRIBED AND SWORN to before me this 21 day of July, 19 70

My commission expires \_\_\_\_\_



Alice Mickel  
Notary Public.  
Rec'd 7-22-70