



Pioneer Energy Services

# Microresistivity Log

API No. 15-159-22778-00-00

Company **Gilbert-Stewart Operating, LLC**  
 Well **Lincoln #18**  
 Field **Chase-Silica**  
 County **Rice** State **Kansas**

Location **1900' FSL / 1830' FWL**

Sec: **28** Twp: **19S** Rge: **9W**

Permanent Datum **Ground Level** Elevation **1709**  
 Log Measured From **Kelly Bushing** 9 Ft. Above Perm. Datum  
 Drilling Measured From **Kelly Bushing**

Other Services  
 CNL / CDL  
 DIL / BHCS  
 Elevation  
 K.B. 1718  
 D.F. G.L. 1709

|                        |                 |
|------------------------|-----------------|
| Date                   | 5/5/2014        |
| Run Number             | Two             |
| Depth Driller          | 3350            |
| Depth Logger           | 3348            |
| Bottom Logged Interval | 3347            |
| Top Log Interval       | 2400            |
| Casing Driller         | 8.625 @ 265     |
| Casing Logger          | 262             |
| Bit Size               | 7.875           |
| Type Fluid in Hole     | Chemical        |
| Salinity, ppm CL       | 6900            |
| Density / Viscosity    | 9.3 54          |
| pH / Fluid Loss        | 10.5 8.8        |
| Source of Sample       | Flowline        |
| Rm @ Meas. Temp        | 0.75 @ 58       |
| Rmf @ Meas. Temp       | 0.56 @ 58       |
| Rmc @ Meas. Temp       | 1.01 @ 58       |
| Source of Rmf / Rmc    | Charts          |
| Rm @ BHT               | 0.40 @ 110      |
| Operating Rig Time     | 4 Hours         |
| Max Rec. Temp. F       | 110             |
| Equipment Number       | 17              |
| Location               | Hays            |
| Recorded By            | R. Barnhart     |
| Witnessed By           | Derek Patterson |

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

Thank you for using Log-Tech, Inc.  
 (785) 625-3858



Chase, KS:  
 1 1/2E, N into

Database File: gilbertstewarhd.db  
 Dataset Pathname: dil/gsmain  
 Presentation Format: micro  
 Dataset Creation: Mon May 05 08:44:34 2014  
 Charted by: Depth in Feet scaled 1:240

|       |                  |       |
|-------|------------------|-------|
| 0     | Gamma Ray (GAPI) | 150   |
| 6     | MCAL (in)        | 16    |
| 2.875 | Mud Cake (in)    | 7.875 |
| -200  | SP (mV)          | 0     |

|       |                             |    |
|-------|-----------------------------|----|
| 0     | Micro Inverse 1 X 1 (Ohm-m) | 40 |
| 0     | Micro Normal 2" (Ohm-m)     | 40 |
| 10000 | Line Weight (lb)            | 0  |

LSPD  
(ft/min)

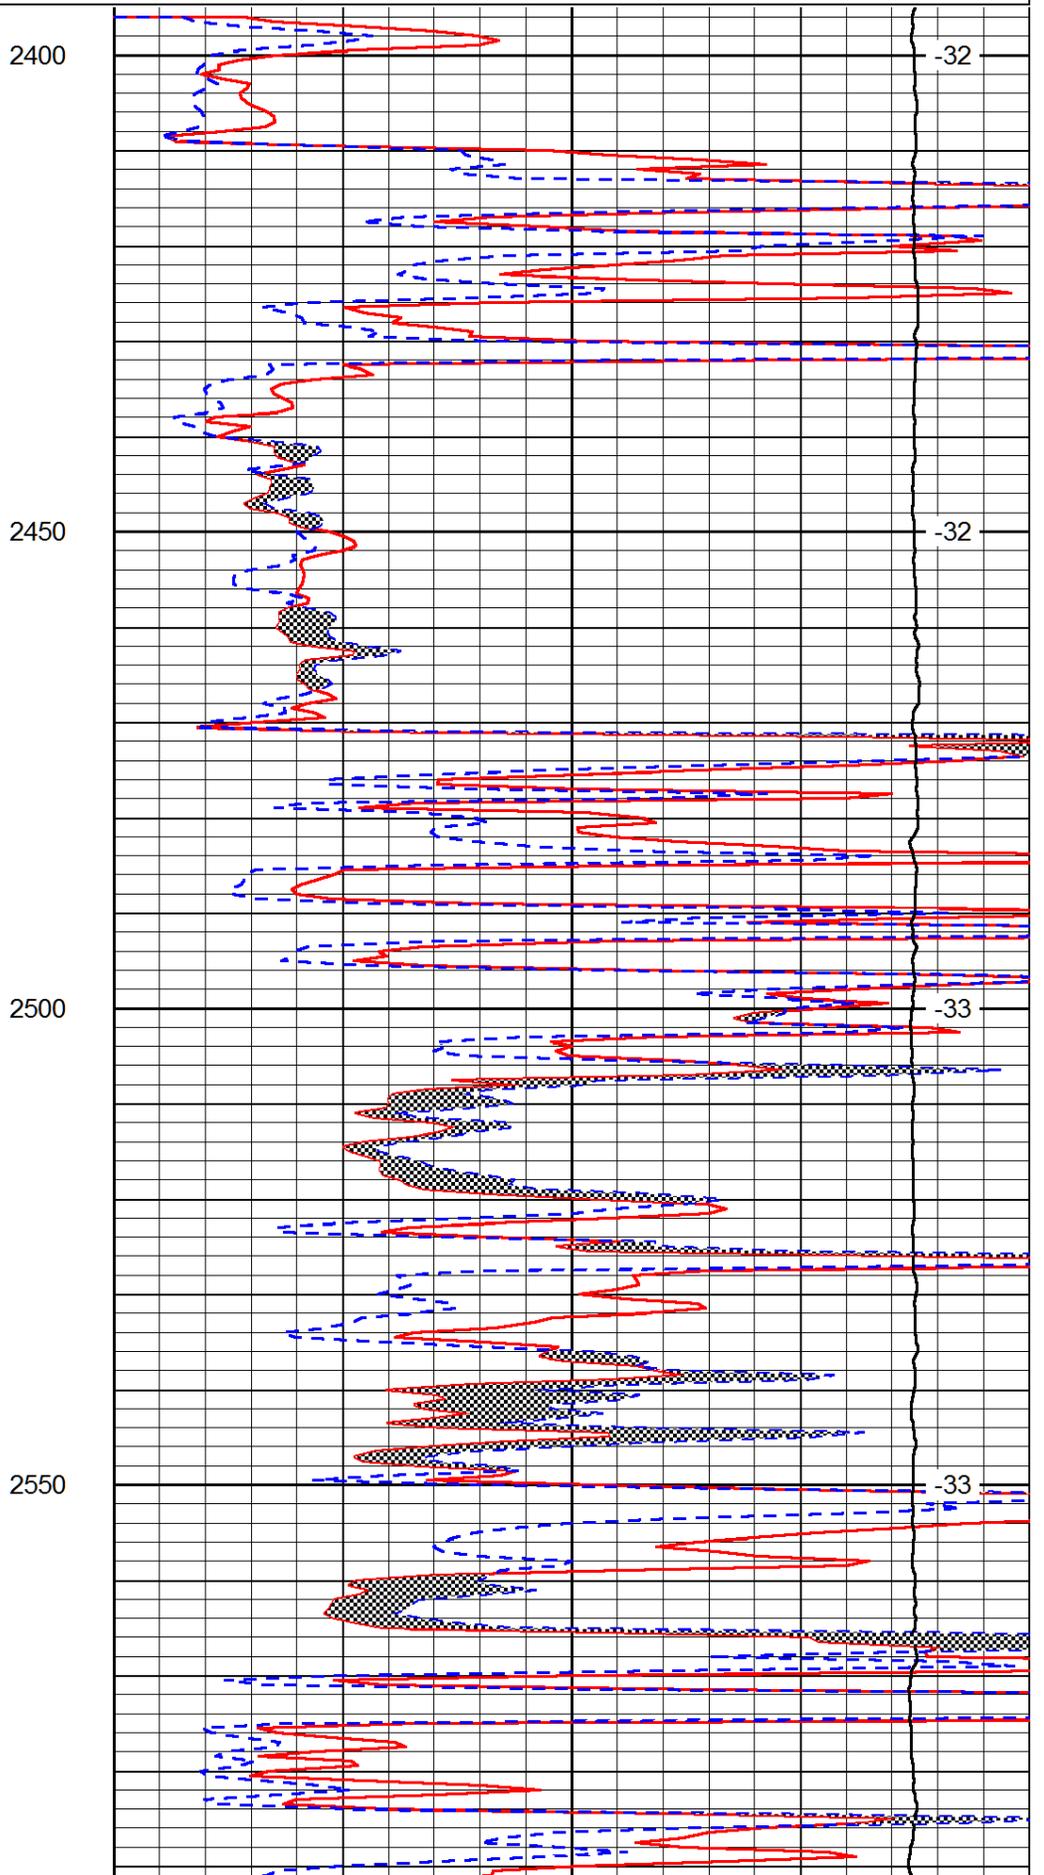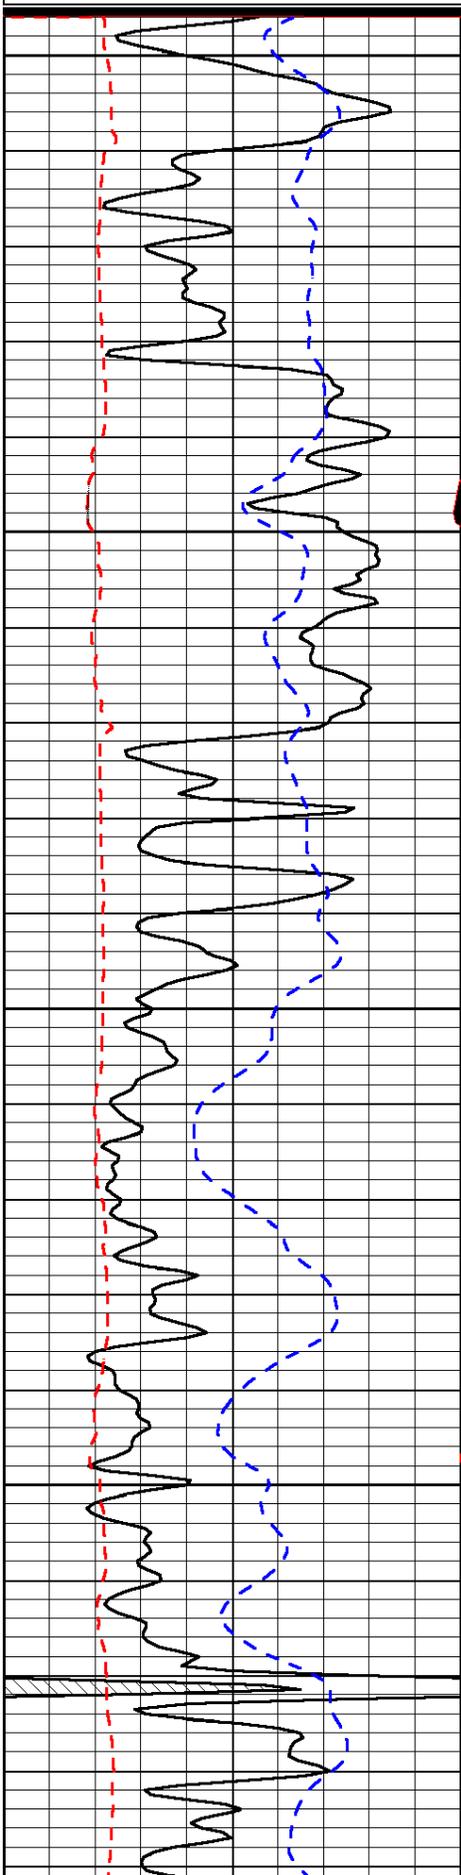

2400

-32

2450


-32

2500

-33

2550

-33

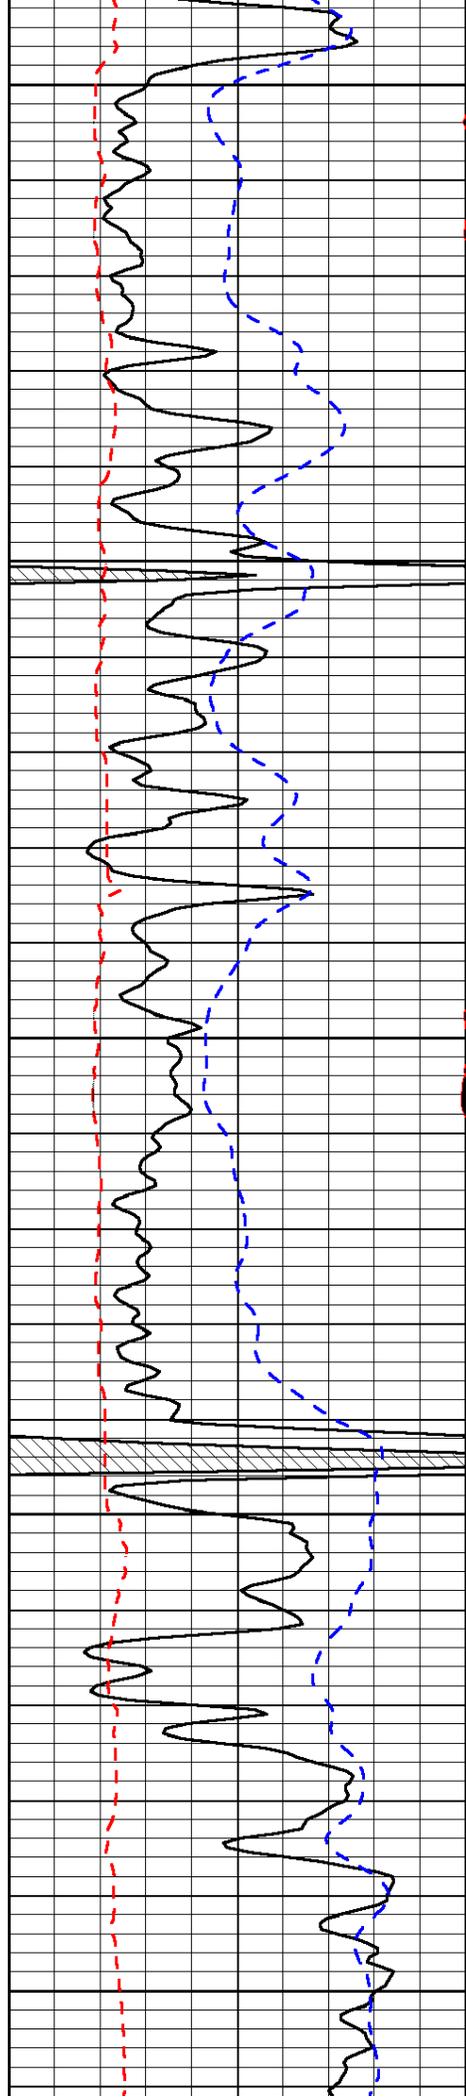


2600

2650

2700

2750

2800

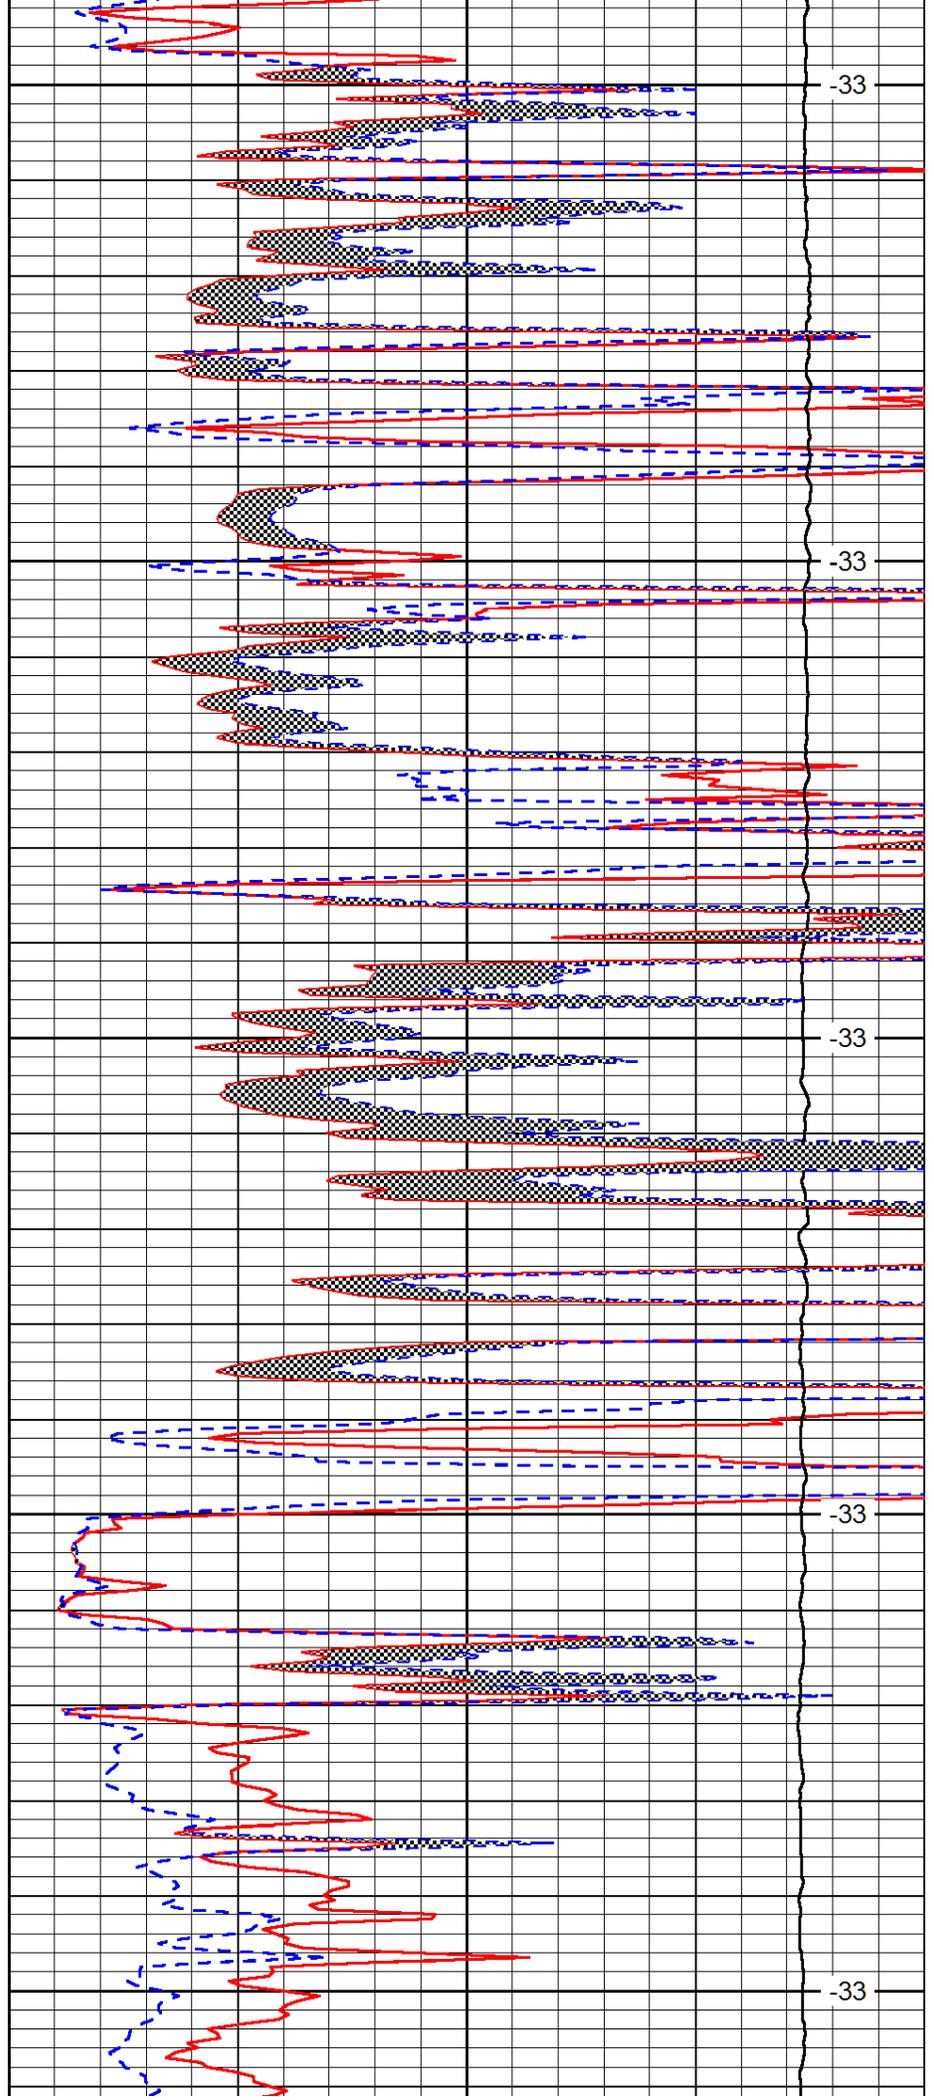


-33

-33

-33

-33

-33

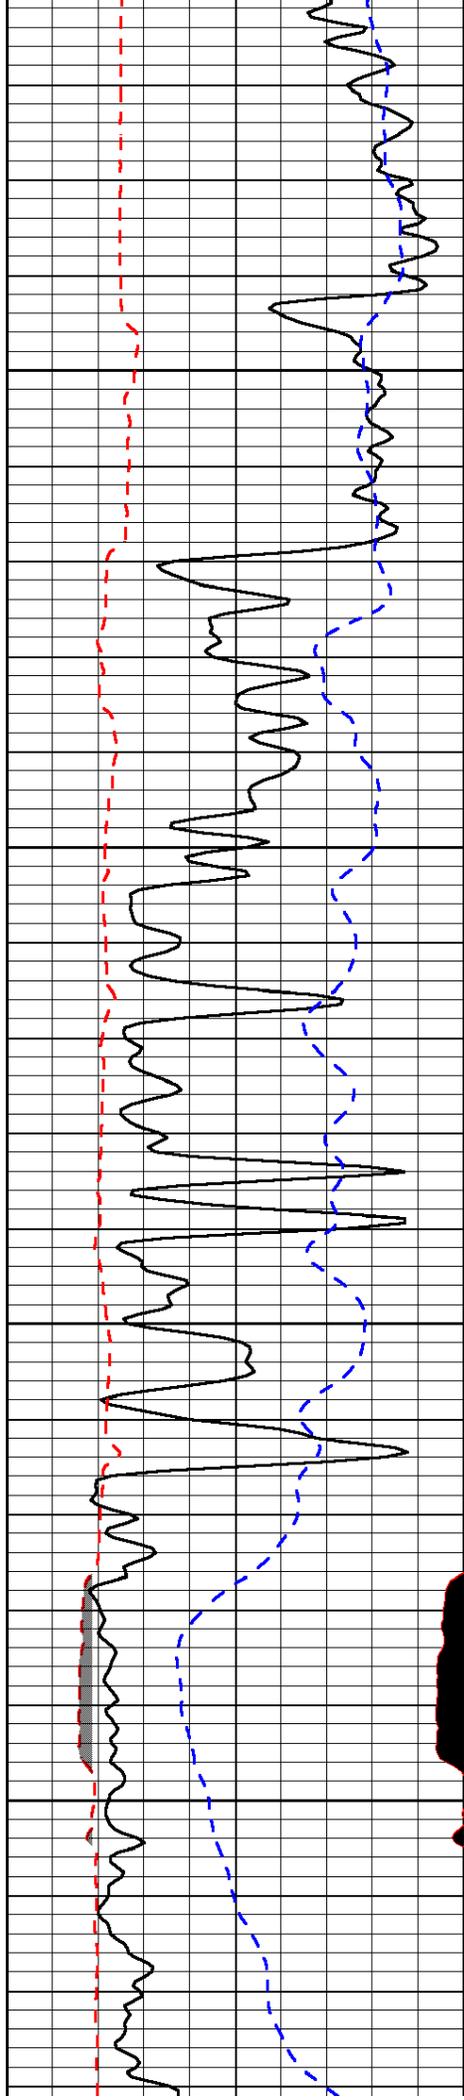


2850

2900

2950

3000

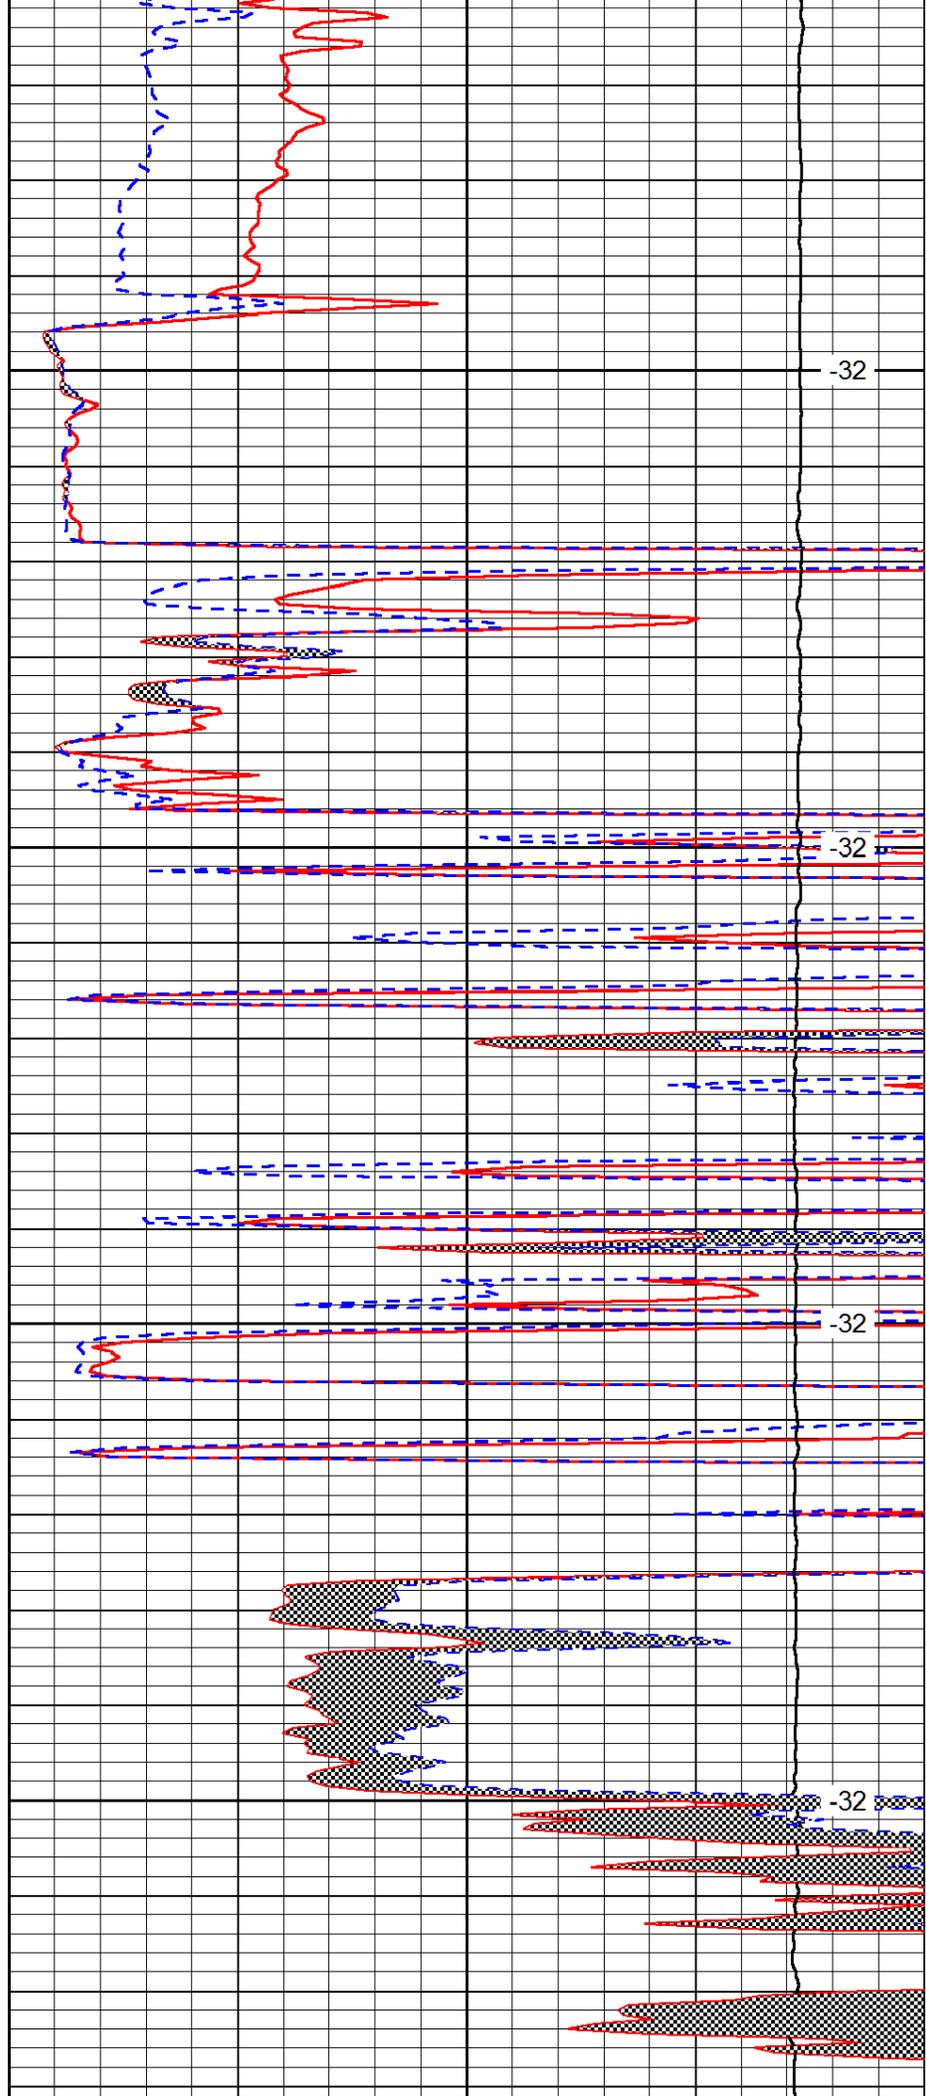


-32

-32

-32

-32

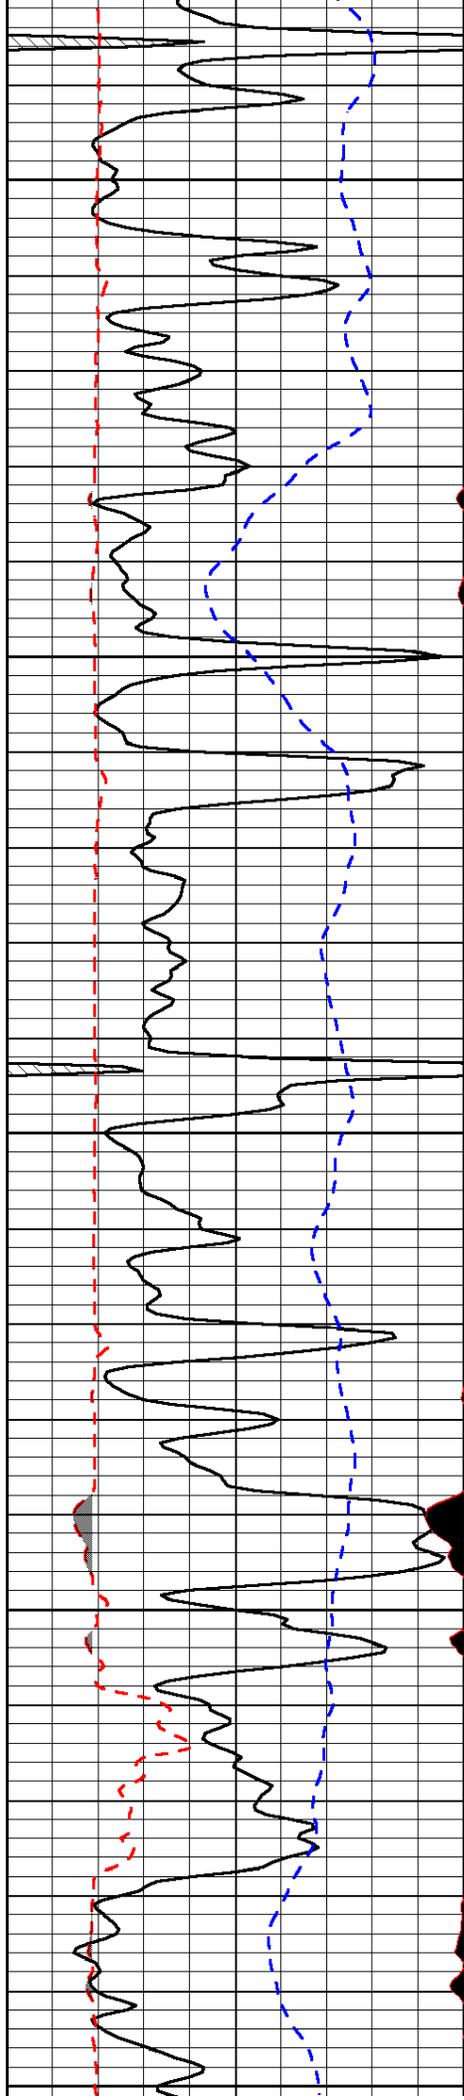


3050

3100

3150

3200

3250

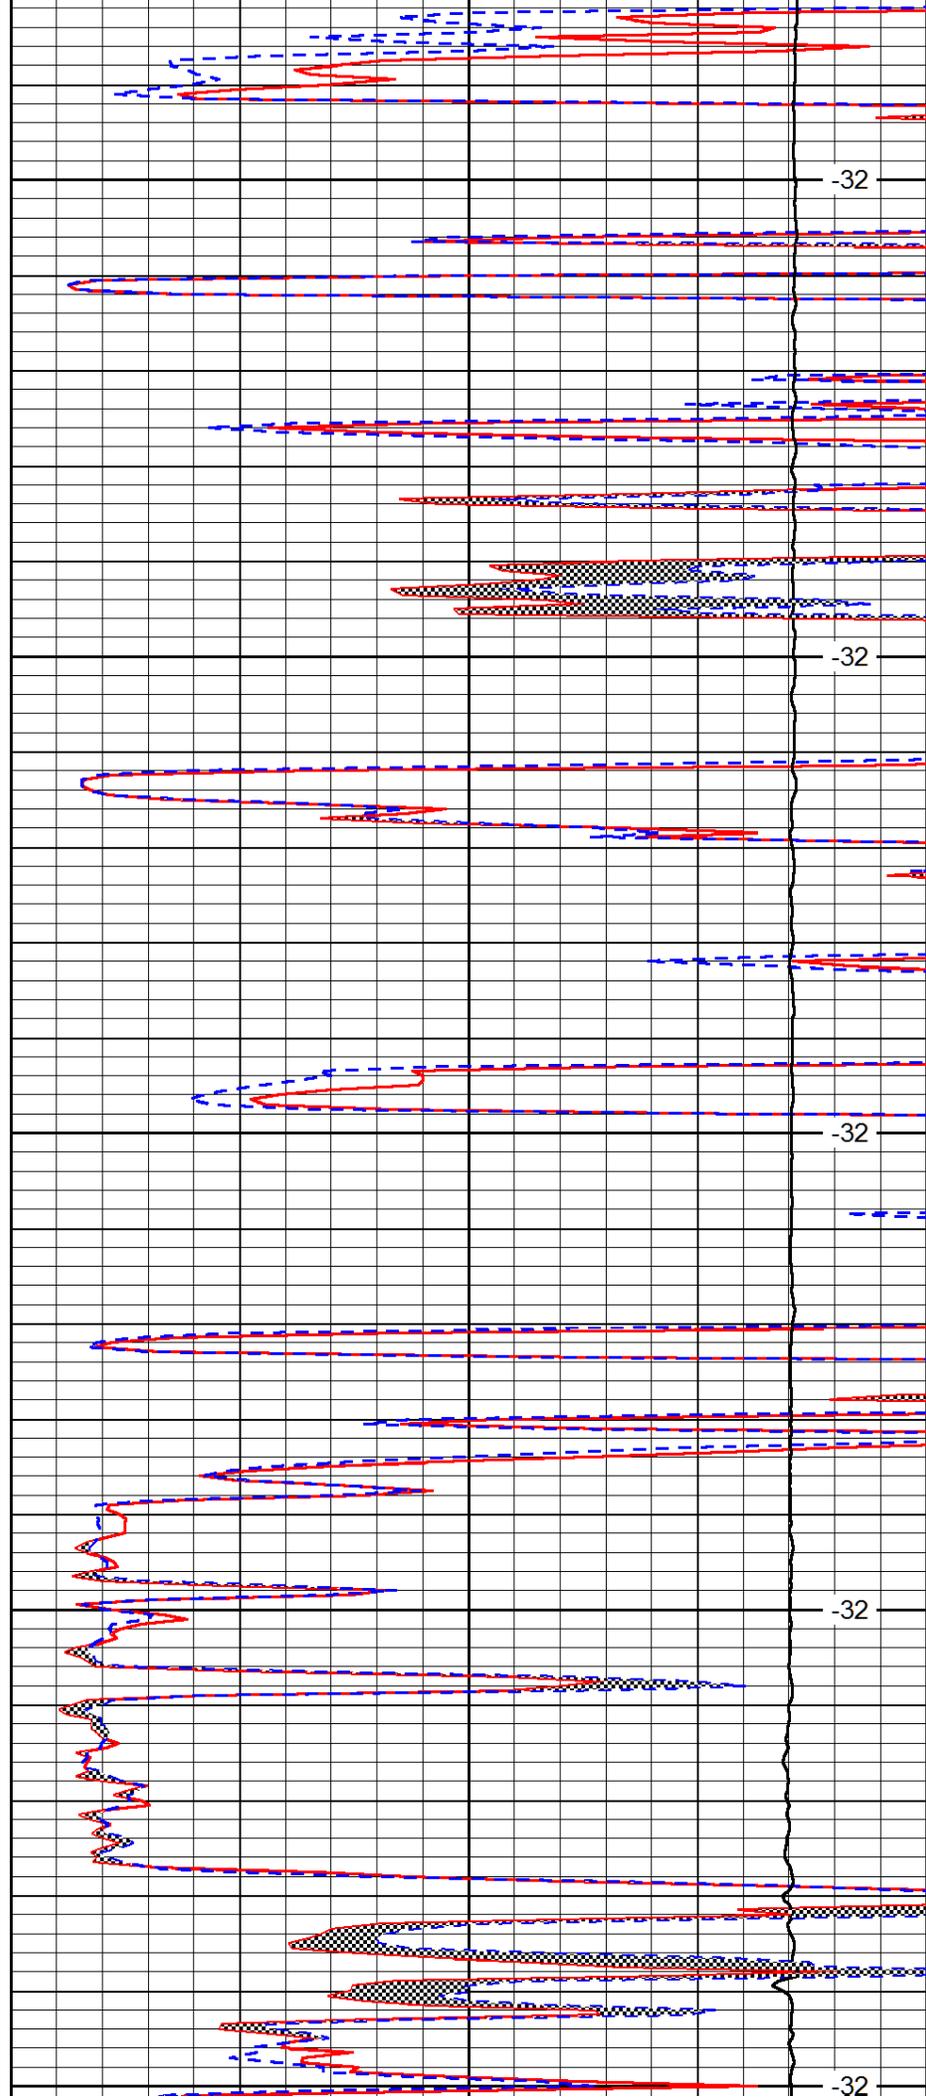


-32

-32

-32

-32


-32

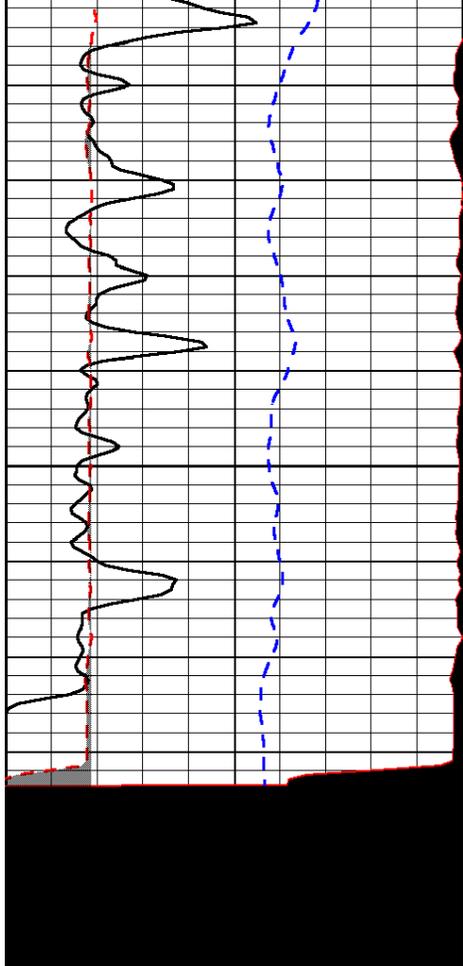

3300

3350

|       |                  |       |
|-------|------------------|-------|
| 0     | Gamma Ray (GAPI) | 150   |
| 6     | MCAL (in)        | 16    |
| 2.875 | Mud Cake (in)    | 7.875 |
| -200  | SP (mV)          | 0     |

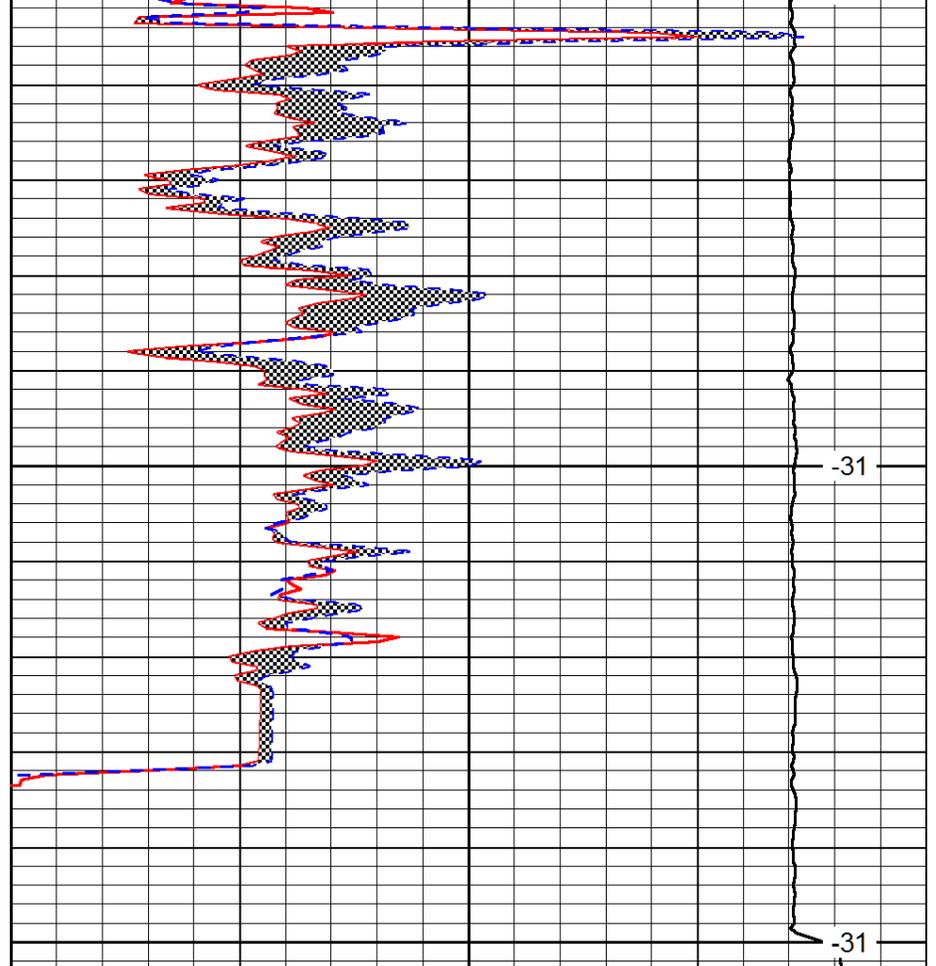

-31

-31

|       |                             |    |
|-------|-----------------------------|----|
| 0     | Micro Inverse 1 X 1 (Ohm-m) | 40 |
| 0     | Micro Normal 2" (Ohm-m)     | 40 |
| 10000 | Line Weight (lb)            | 0  |

LSPD  
(ft/min)