

KANSAS CORPORATION COMMISSION
OIL & GAS CONSERVATION DIVISION

Form CP-1
September 2003
This Form must be Typed
Form must be Signed
All blanks must be Filled

WELL PLUGGING APPLICATION

RECEIVED
Please TYPE Form and File ONE Copy
KANSAS CORPORATION COMMISSION

API # 15 - 131-20178-00-00

NOV 18 2005

(Identifier Number of this well). This must be listed for wells drilled since 1967; if no API # was issued,

indicate original spud or completion date CONSERVATION DIVISION

WICHITA, KS

Well Operator: Heartland Oil & Gas Corporation

KCC License #: 33233

Address: 1610 Industrial Park Drive

City: Paola

State: Kansas

Zip Code: 66071

Contact Phone: (913) 294 - 1400

Lease: Bloom

Well #: 13-17

Sec. 17

Twp. 05

S. R. 14

East West

SW - SW Spot Location / QQQQ

County: Nemaha

605 Feet (in exact footage) From North / South (from nearest outside section corner) Line of Section (Not Lease Line)

815 Feet (in exact footage) From East / West (from nearest outside section corner) Line of Section (Not Lease Line)

Check One: Oil Well Gas Well D&A Cathodic Water Supply Well

SWD Docket # _____ ENHR Docket # _____ Other: _____

Conductor Casing Size: _____ Set at: _____ Cemented with: _____ Sacks

Surface Casing Size: 8 5/8" Set at: 282' Cemented with: 135 Sacks

Production Casing Size: 5 1/2" Set at: 2677' Cemented with: 245 Sacks

List (ALL) Perforations and Bridgeplug Sets: 2266-2268', 2277-2279', 2287-2289', 2296-2298', 2300-2302', 2335-2337', 2348-2350'
2359-2361', 2384-2386', 2412-2414'

Elevation: 1245' (G.L. / K.B.) T.D.: 2720' PBTD: 2639' Anhydrite Depth: _____
(Stone Corral Formation)

Condition of Well: Good Poor Casing Leak Junk in Hole

Proposed Method of Plugging (attach a separate page if additional space is needed): Gel from 2639' to 2464' Cement from 2464' to 2216'

Gel from 2216' to 300' Cement from 300' to surface

Is Well Log attached to this application as required? Yes No Is ACO-1 filed? Yes No

If not explain why? _____

Plugging of this Well will be done in accordance with K.S.A. 55-101 et. seq. and the Rules and Regulations of the State Corporation Commission.

List Name of Company Representative authorized to be in charge of plugging operations: _____

Steve Littell

Phone: (913) 294 - 1400 or 785-893-2066

Address: 1610 Industrial Park Drive

City / State: Paola, KS

Plugging Contractor: Hurricane Well Service, Inc.

KCC License #: 32006

Address: P. O. Box 782228 Wichita, KS 67278-2228

Phone: (316) 685 - 5908


Proposed Date and Hour of Plugging (if known?): Not at this time

Payment of the Plugging Fee (K.A.R. 82-3-118) will be guaranteed by Operator or Agent

Date: 11-16-05 Authorized Operator / Agent: Steve Littell

(Signature)

Mail to: KCC - Conservation Division, 130 S. Market - Room 2078, Wichita, Kansas 67202

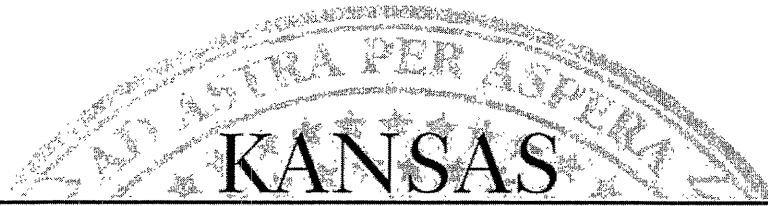

NOTICE OF RECEIPT OF WELL PLUGGING APPLICATION (CP-1)

Heartland Oil & Gas, Inc.
1610 Industrial Park Drive
Paola, KS 66071

November 23, 2005

Re: BLOOM #13-17
API 15-131-20178-00-00
SWSW 17-5S-14E, 605 FSL 815 FWL
NEMAHA COUNTY, KANSAS

Dear Operator:


This letter is to notify you that the Conservation Division is in receipt of your plugging proposal, form CP-1, for the above-captioned well.

Your CP-1 has been reviewed by the Conservation Division central office for completeness and to verify license numbers. The plugging proposal will now be forwarded to the district office listed below for review of your proposed method of plugging.

Please contact the district office for approval of your proposed plugging method at least five (5) days before plugging the well, pursuant to K.A.R. 82-3-113 (b). If a workover pit will be used during the plugging of the well it must be permitted. A CDP-1 form must be filed and approved prior to the use of the pit.

The Conservation Division's review of form CP-1, either in the central or district office, does not include an inquiry into well ownership or the filing operator's legal right to plug the well.

This notice in no way constitutes authorization to plug the above-captioned well by persons not having legal rights of ownership or interest in the well. This notice is void after ninety (90) days from the above date.

Sincerely,


David P. Williams
Production Supervisor

District: #3
1500 W. 7th
Chanute, KS 67220
(620) 432-2300