

RECEIVED  
NOV 17 2005  
KCC WICHITA

KANSAS CORPORATION COMMISSION  
OIL & GAS CONSERVATION DIVISION  
WELL PLUGGING APPLICATION  
Please TYPE Form and File ONE Copy

Form CP-1  
September 2003  
This Form must be Typed  
Form must be Signed  
All blanks must be Filled

API # 15 - 171-20194 - 00 - 00 (Identifier Number of this well). This must be listed for wells drilled since 1967; if no API # was issued, indicate original spud or completion date 09/25/69.

Well Operator: Novy Oil & Gas, Inc. KCC License #: 31714  
(Owner / Company Name) (Operator's)

Address: 125 N. Market suite 1230 City: Wichita

State: Kansas Zip Code: 67202 Contact Phone: ( 316 ) 265 - 4651

Lease: Smith Well #: 14 Sec. 26 Twp. 19 S. R. 33  East  West

C SW NE SE - SW Spot Location / QQQQ County: Scott  
KCC-SKA-11-25-05-Per RBDMS.

760 Feet (in exact footage) From  North /  South (from nearest outside section corner) Line of Section (Not Lease Line)

2180 Feet (in exact footage) From  East /  West (from nearest outside section corner) Line of Section (Not Lease Line)

Check One:  Oil Well  Gas Well  D&A  Cathodic  Water Supply Well  
 SWD Docket # \_\_\_\_\_  ENHR Docket # \_\_\_\_\_  Other: \_\_\_\_\_

Conductor Casing Size: \_\_\_\_\_ Set at: \_\_\_\_\_ Cemented with: \_\_\_\_\_ Sacks

Surface Casing Size: 8 5/8 Set at: 374 Cemented with: 300 Sacks

Production Casing Size: 5 1/2 Set at: 4719 Cemented with: 300 Sacks

List (ALL) Perforations and Bridgeplug Sets: perf, 4624 TO 4630 & 4633 TO 4642

Elevation: 2973 ( G.L. /  K.B.) T.D.: 4720 PBTD: 4683 Anhydrite Depth: 2110  
(Stone Corral Formation)

Condition of Well:  Good  Poor  Casing Leak  Junk in Hole

Proposed Method of Plugging (attach a separate page if additional space is needed): sand off perfs top of sand 4500' Place a 5 sack cement cap on top of sand. place gel pill from 4500 to 2500 spot 25 sacks, Cut and pull pipe from 2500. Pump 150 sacks down casing . cut off casing 5' below ground.

Is Well Log attached to this application as required?  Yes  No Is ACO-1 filed?  Yes  No

If not explain why? \_\_\_\_\_

Plugging of this Well will be done in accordance with K.S.A. 55-101 et. seq. and the Rules and Regulations of the State Corporation Commission.

List Name of Company Representative authorized to be in charge of plugging operations: Michael E. Novy

Phone: ( 316 ) 265 - 4651

Address: 125 N. Market suite 1230 City / State: Wichita, Kansas

Plugging Contractor: Mike's Testing & Salvage, Inc. KCC License #: 31529  
(Company Name) (Contractor's)

Address: PO. Box 467, Chase, Kansas 67524 Phone: ( 620 ) 938 - 2943

Proposed Date and Hour of Plugging (if known?): \_\_\_\_\_


Payment of the Plugging Fee (K.A.R. 82-3-118) will be guaranteed by Operator or Agent

Date: 11-9-05 Authorized Operator / Agent: Michael E. Novy  
(Signature)

Mail to: KCC - Conservation Division, 130 S. Market - Room 2078, Wichita, Kansas 67202

Yof

9/06

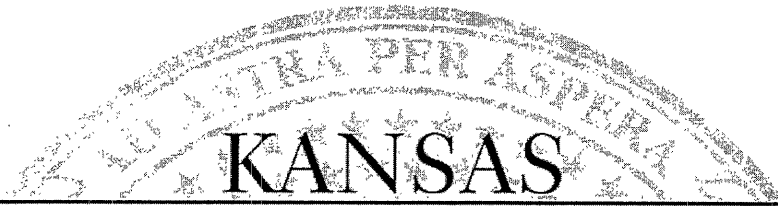

CORPORATION COMMISSION

Kathleen Sebelius, Governor    Brian J. Moline, Chair    Robert E. Krehbiel, Commissioner    Michael C. Moffet, Commissioner

**NOTICE OF RECEIPT OF WELL PLUGGING APPLICATION (CP-1)**

Novy Oil & Gas, Inc.  
125 N. Market Ste. 1230  
Wichita, KS 67202-1712

November 23, 2005

Re: SMITH #14  
API 15-171-20194-00-00  
SWNESESW 26-19S-33W, 760 FSL 2180 FWL  
SCOTT COUNTY, KANSAS

Dear Operator:


This letter is to notify you that the Conservation Division is in receipt of your plugging proposal, form CP-1, for the above-captioned well.

Your CP-1 has been reviewed by the Conservation Division central office for completeness and to verify license numbers. The plugging proposal will now be forwarded to the district office listed below for review of your proposed method of plugging.

**Please contact the district office for approval of your proposed plugging method at least five (5) days before plugging the well, pursuant to K.A.R. 82-3-113 (b). If a workover pit will be used during the plugging of the well it must be permitted. A CDP-1 form must be filed and approved prior to the use of the pit.**

The Conservation Division's review of form CP-1, either in the central or district office, does not include an inquiry into well ownership or the filing operator's legal right to plug the well.

**This notice in no way constitutes authorization to plug the above-captioned well by persons not having legal rights of ownership or interest in the well. This notice is void after ninety (90) days from the above date.**

Sincerely,  


David P. Williams  
Production Supervisor

District: #1  
210 E Frontview, Suite A  
Dodge City, KS 67801  
(620) 225-8888