

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-067-21344-00-00
Spot: NENWSE Sec/Twnshp/Rge: 35-29S-35W
2255 feet from S Section Line, 1650 feet from E Section Line
Lease Name: MLP NICEWANDER A Well #: 2-35
County: GRANT Total Vertical Depth: 5780 feet

Operator License No.: 9953
Op Name: HARRIS OIL & GAS COMPANY
Address: 1125 17TH STREET, STE 2290
DENVER, CO 80202

String	Size	Depth (ft)	Pulled (ft)	Comment
CIBP		4610		
PC		3026		WITH 550 SX CMT
PROD	5.5	5722	0	WITH 300 SX CMT \$ 187 ⁸⁵
SURF	8.625	1815		WITH 675 SX CMT

Well Type: OIL UIC Docket No: _____ Date/Time to Plug: 11/11/2005 10:00 AM
Plug Co. License No.: 7407 Plug Co. Name: EAGLE WELL SERVICE
Proposal Rcvd. from: CHRIS Company: EAGLE WELL SERVICE Phone: (620) 624-1904

Proposed Plugging Method: PUMP 200# HULLS WITH 30 SX CMT. SPACER TO 1850' WITH 200 +/- SX CMT TO SURFACE. CHECK BACKSIDE.

Plugging Proposal Received By: JIM HOLLAND Witness Type: NONE
Date/Time Plugging Completed: 11/11/2005 4:30 PM KCC Agent: JIM HOLLAND

Actual Plugging Report:

PUMP 200# HULLS WITH 30 SX CMT. PUMP 55 BBL MUD SPACER TO 1825'. PUMP 190 SX CMT FROM 1825' TO SURFACE INSIDE 5 1/2" CASING. PRESSURED TO 500# & SHUT IN. HOOK UP TO BACKSIDE. PRESSURED IMMEDIATELY. BACKSIDE FULL.

Perfs:


Top	Bot	Thru	Comments
5602	5606		
5502	5512		
4551	4554		

Remarks: USED COMMON CEMENT BY EAGLE WELL SERVICE.

Plugged through: CSG

INVOICED
DATE 11-22-05
INV. NO. 2006060774

District: 01

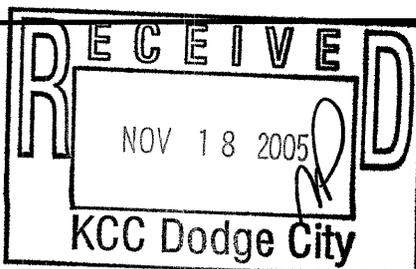

Signed

Jim Holland PIRTEH
(TECHNICIAN)

RECEIVED
NOV 22 2005
KCC WICHITA

Form CP-23