



NABORS

**COMPLETION
& PRODUCTION
SERVICES CO.**

**MICRO
LOG**

Company	ANDERSON ENERGY, INC.	Company	ANDERSON ENERGY, INC.
Well	EATON TRUST #2	Well	EATON TRUST #2
Field	ET	Field	ET
County	ROOKS	County	ROOKS
State	KANSAS	State	KANSAS
Location:	API # : 15-163-24188-00-00 1840' FSL & 335' FEL NW - SE - NE - SE	Other Services CNL/CDL DIL	
Permanent Datum Log Measured From Drilling Measured From	SEC 18 TWP 10S RGE 20W GROUND LEVEL KELLY BUSHING 8' A.G.L. KELLY BUSHING	Elevation K.B. 2157 D.F. 2155 G.L. 2149	
Date	4-4-14		
Run Number	TWO		
Depth Driller	3820		
Depth Logger	3818		
Bottom Logged Interval	3816		
Top Log Interval	3000		
Casing Driller	8 5/8 @ 305'		
Casing Logger	303'		
Bit Size	7.875		
Type Fluid in Hole	CHEMICAL MUD	CHLORIDES 2400 PPM	
Density / Viscosity	9.1 / 58		
pH / Fluid Loss	10.5 / 5.8		
Source of Sample	FLOWLINE		
Rim @ Meas. Temp	1.10 @ 80F		
Rinf @ Meas. Temp	0.83 @ 80F		
Rinc @ Meas. Temp	1.32 @ 80F		
Source of Rinf / Rinc	MEASURED		
Rim @ BHT	0.77 @ 114F		
Time Circulation Stopped	2 HOURS		
Time Logger on Bottom			
Maximum Recorded Temperature	114F		
Equipment Number	860		
Location	HAYS, KS.		
Recorded By	IAN MABB		
Witnessed By	ROGER MARTIN		

<<< Fold Here >>>


All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.


Comments


NABORS COMPLETION & PRODUCTION SERVICES
785-628-6395
THANK YOU FOR YOUR BUSINESS
DIRECTIONS: ELLIS, KS. - NORTH TO THE COUNTY LINE 2 MORE MILES NORTH TO RD CC - WEST 1 MILE
TO RD 2 - NORTH 1 1/2 MILE WEST INTO

0	GAMMA RAY (GAPI)	150
6	MELCAL (in)	16
0	MINMK	20

0	MEL1.5 (Ohm-m)	40
0	MEL2.0 (Ohm-m)	40

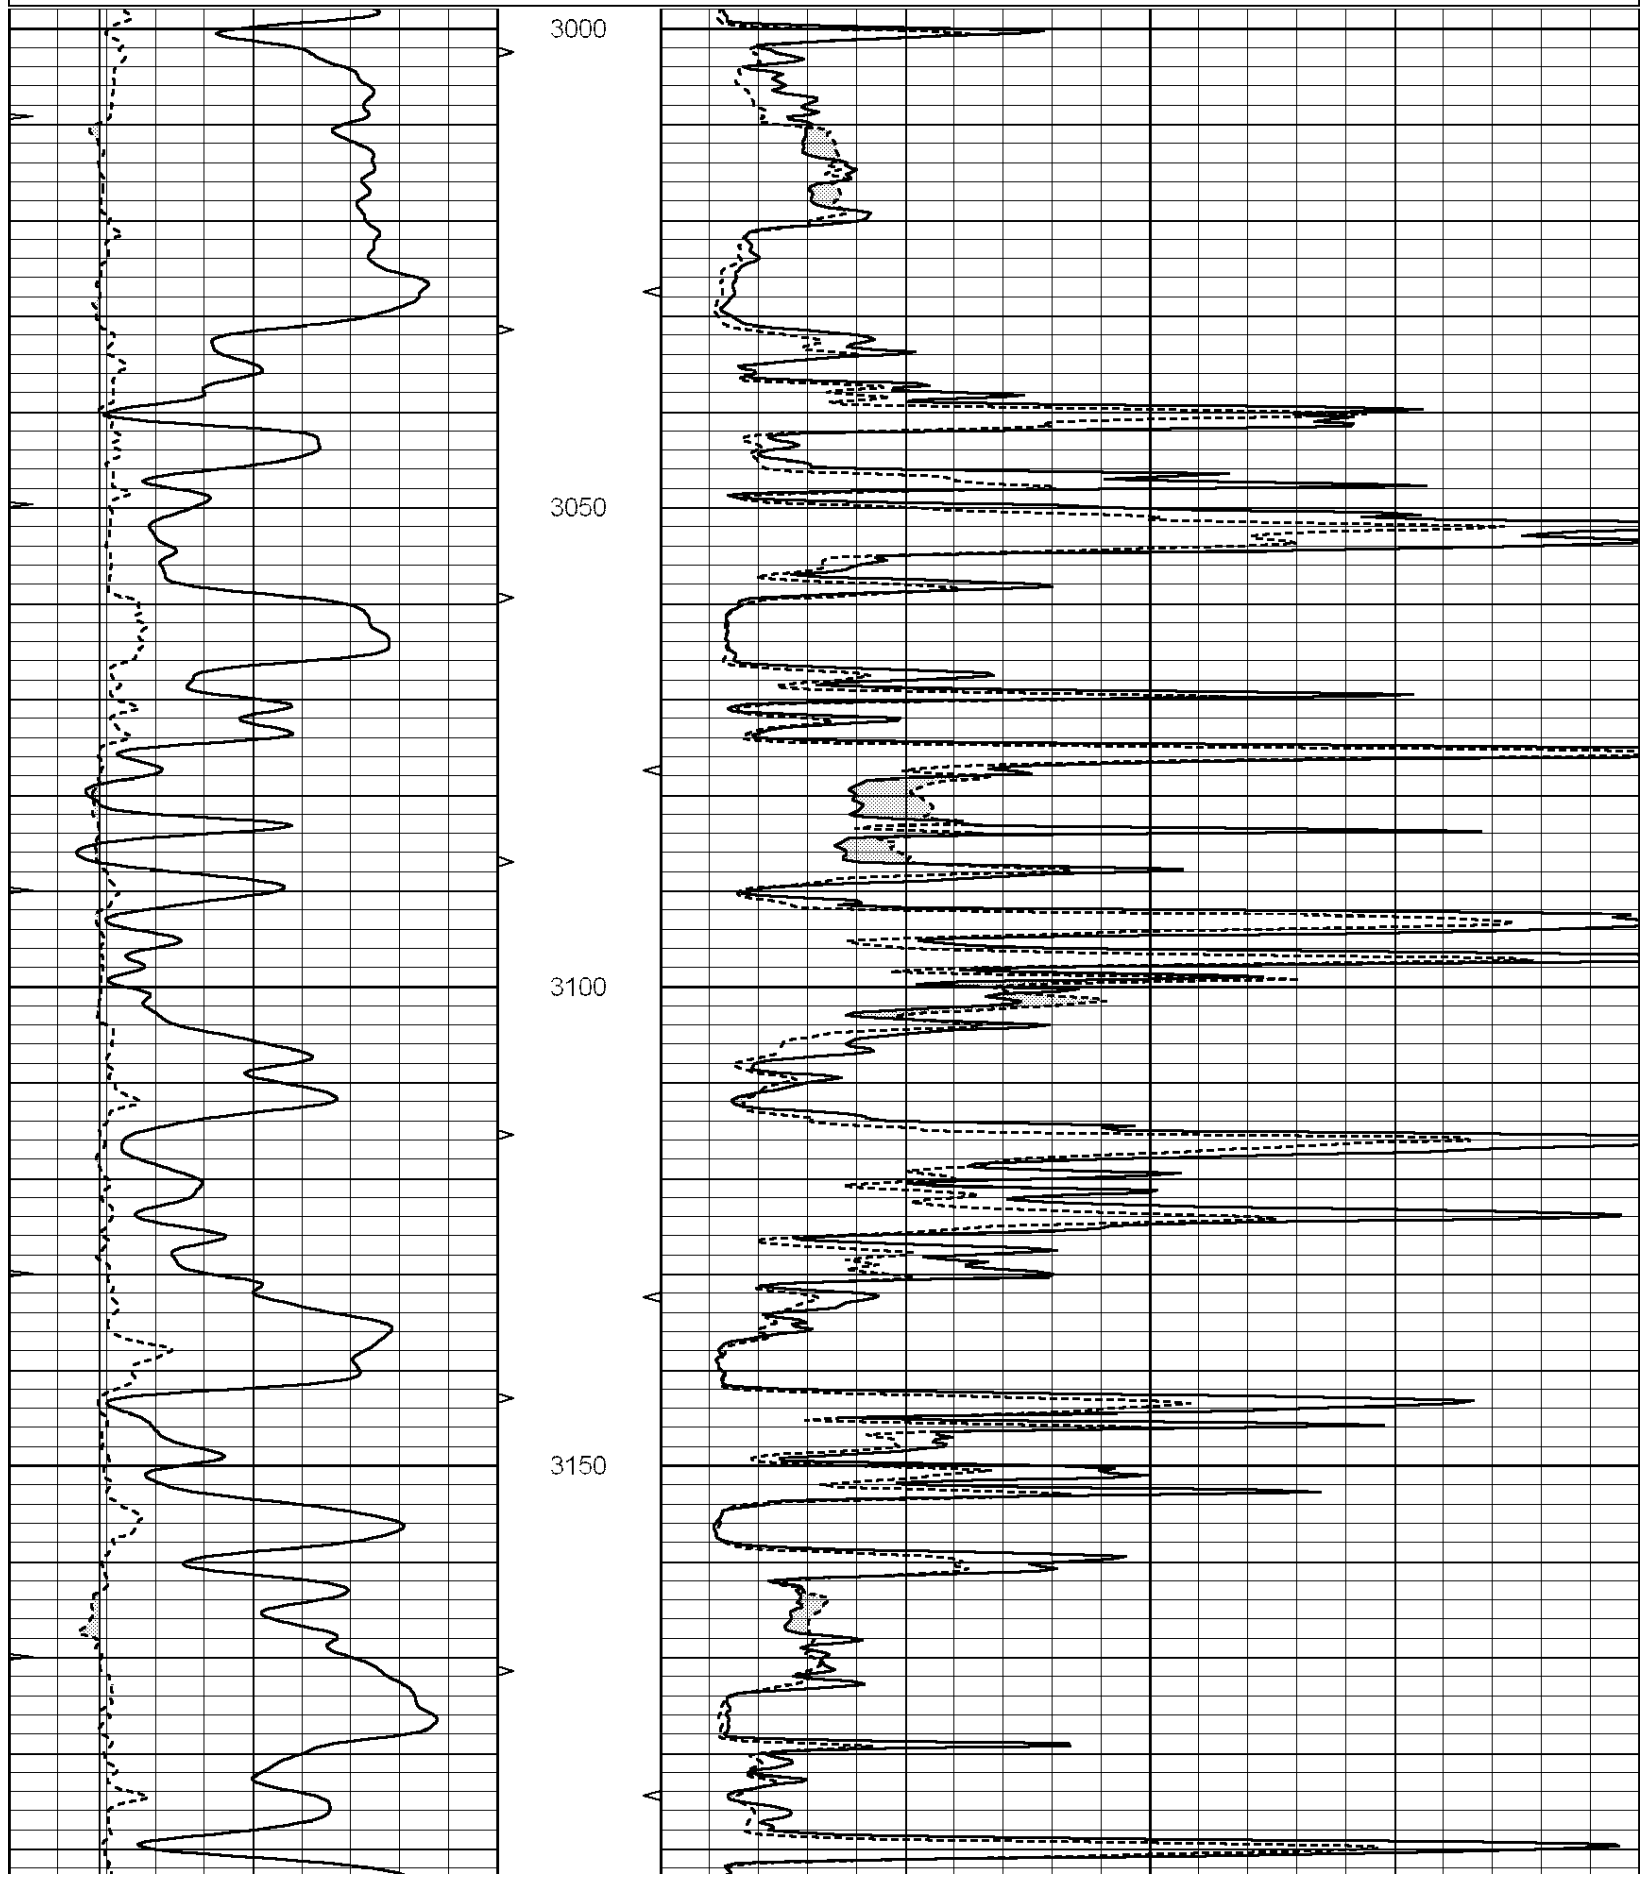

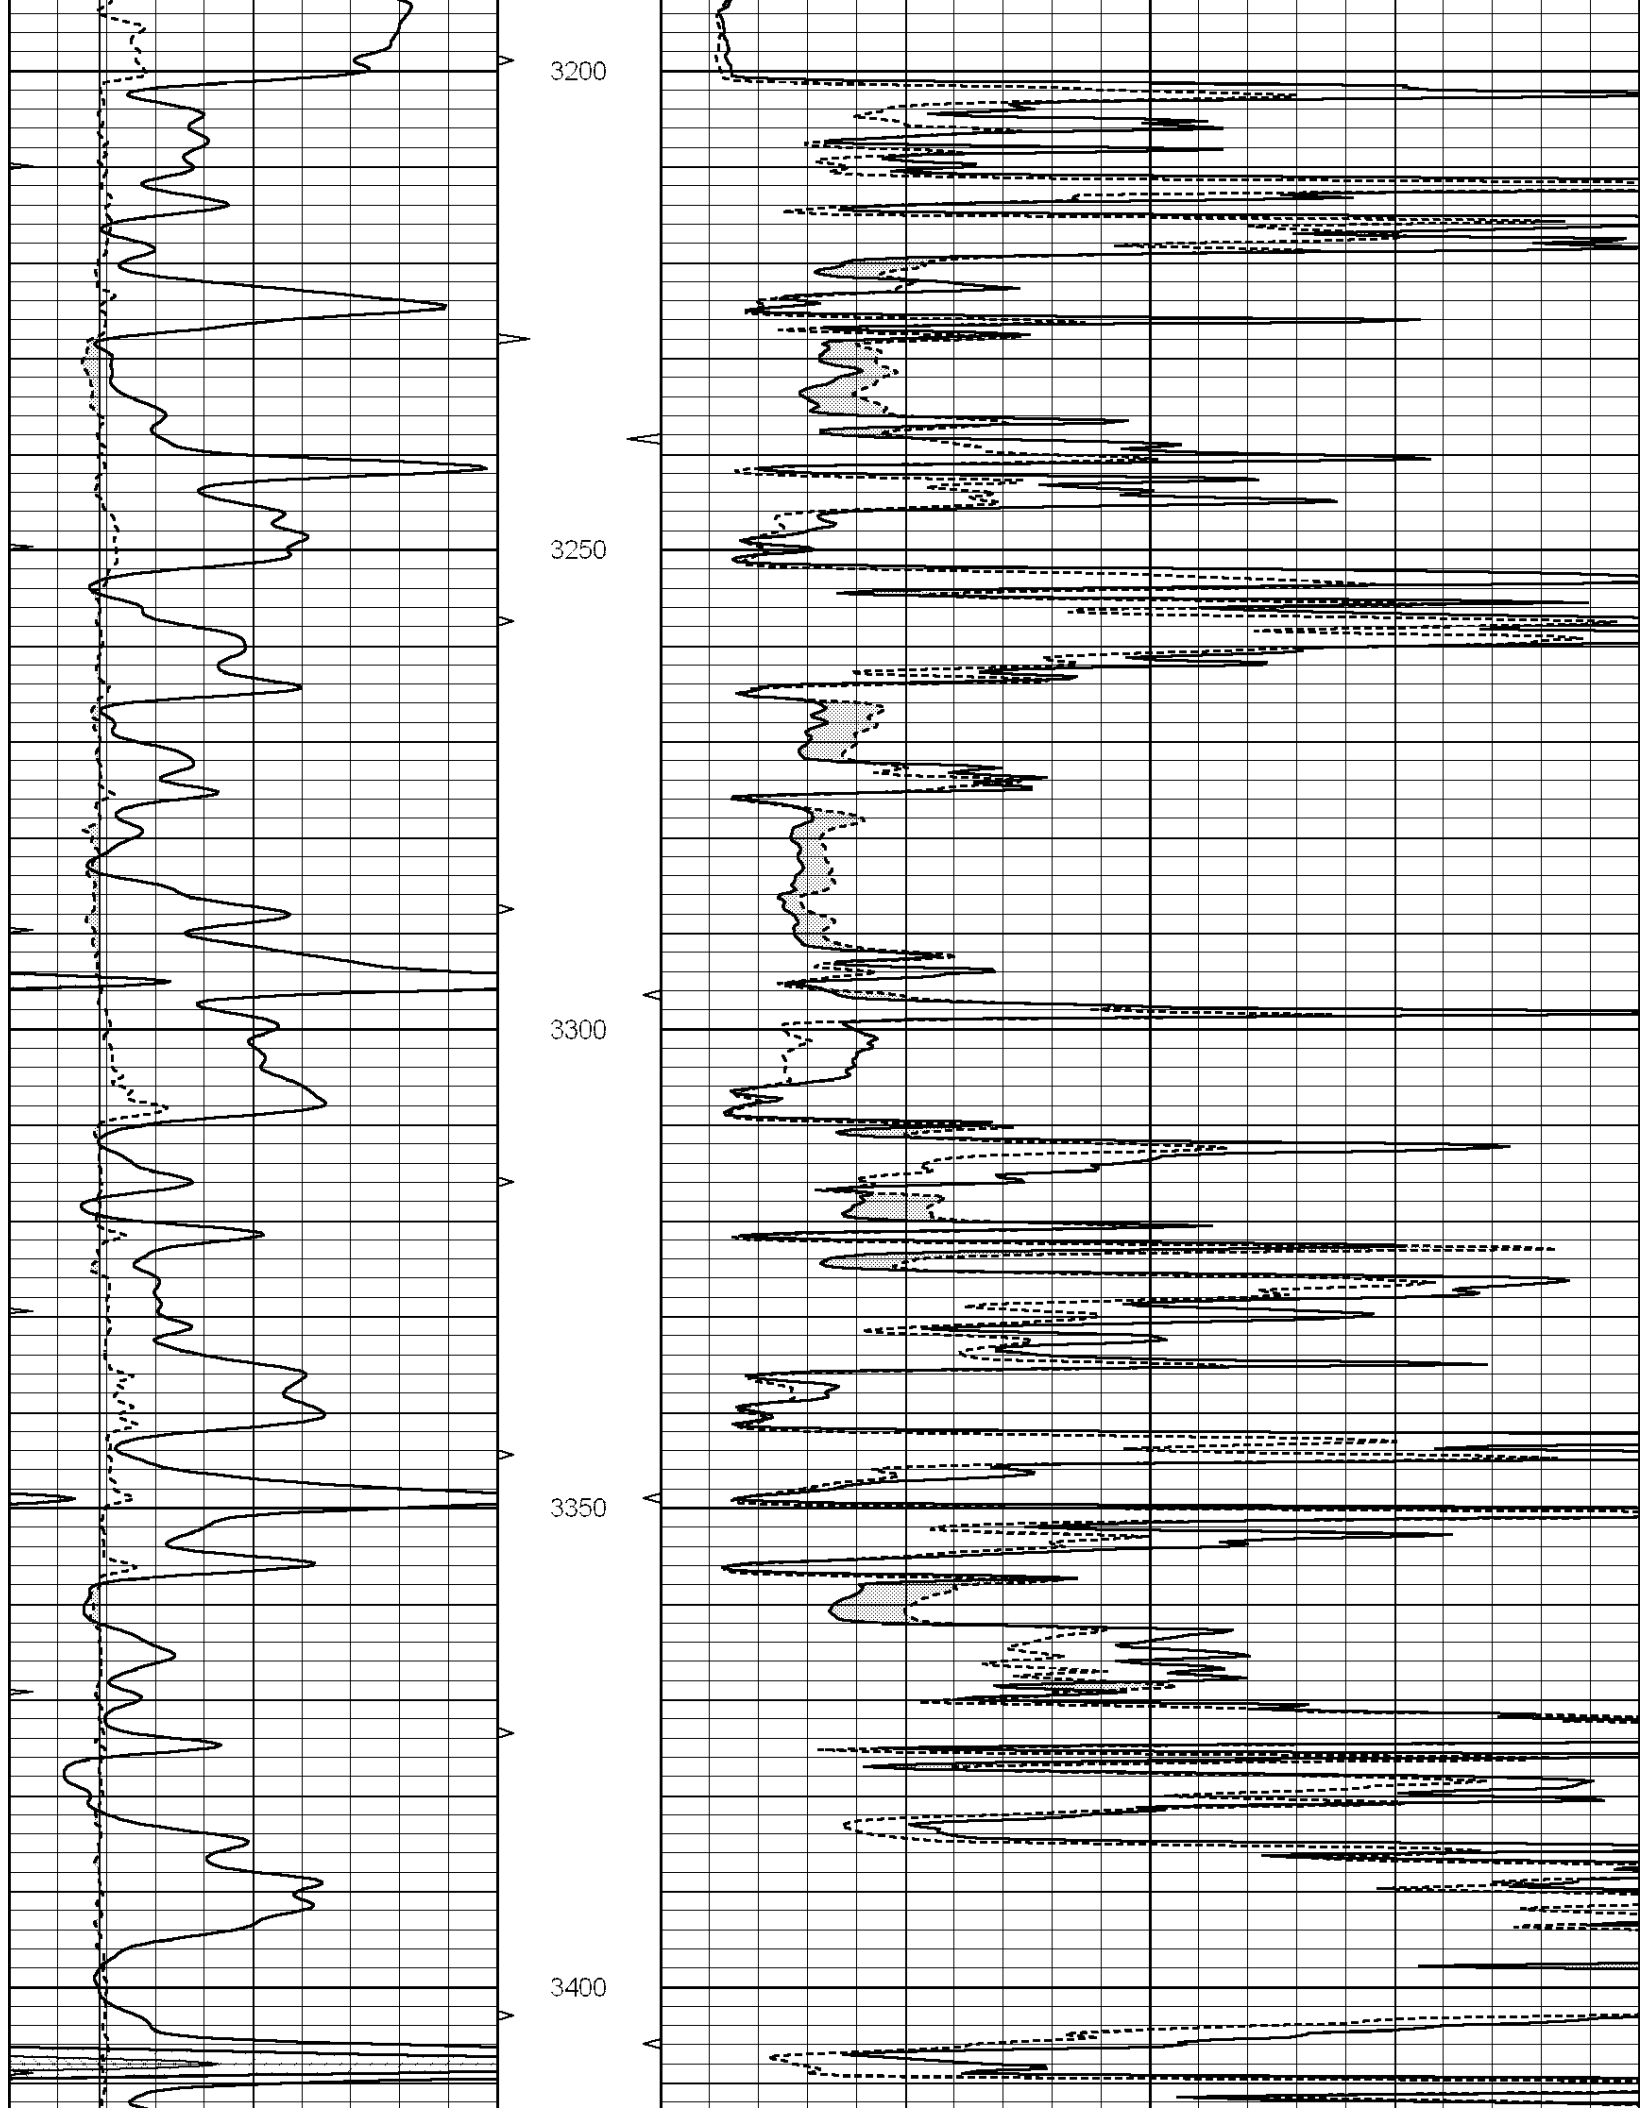

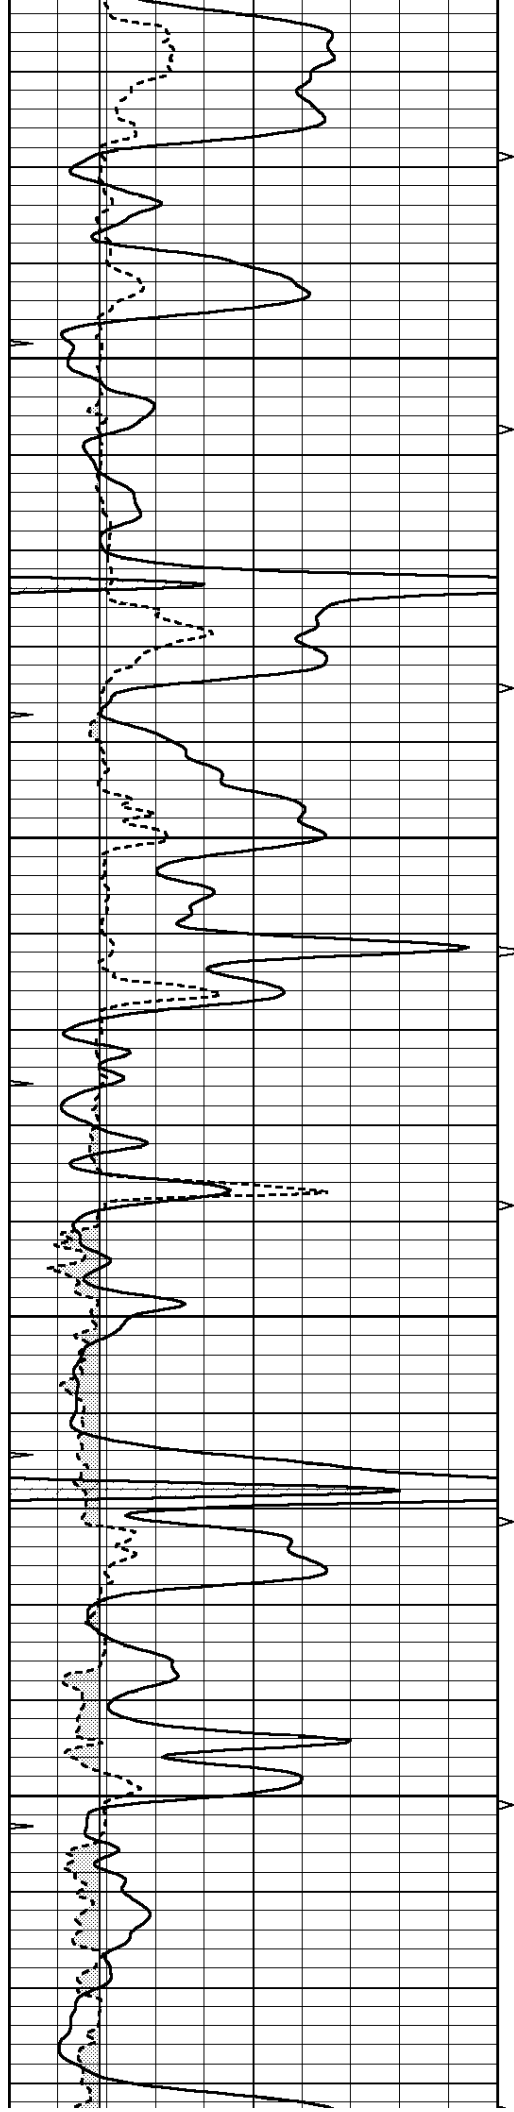



3450

3500

3550

3600

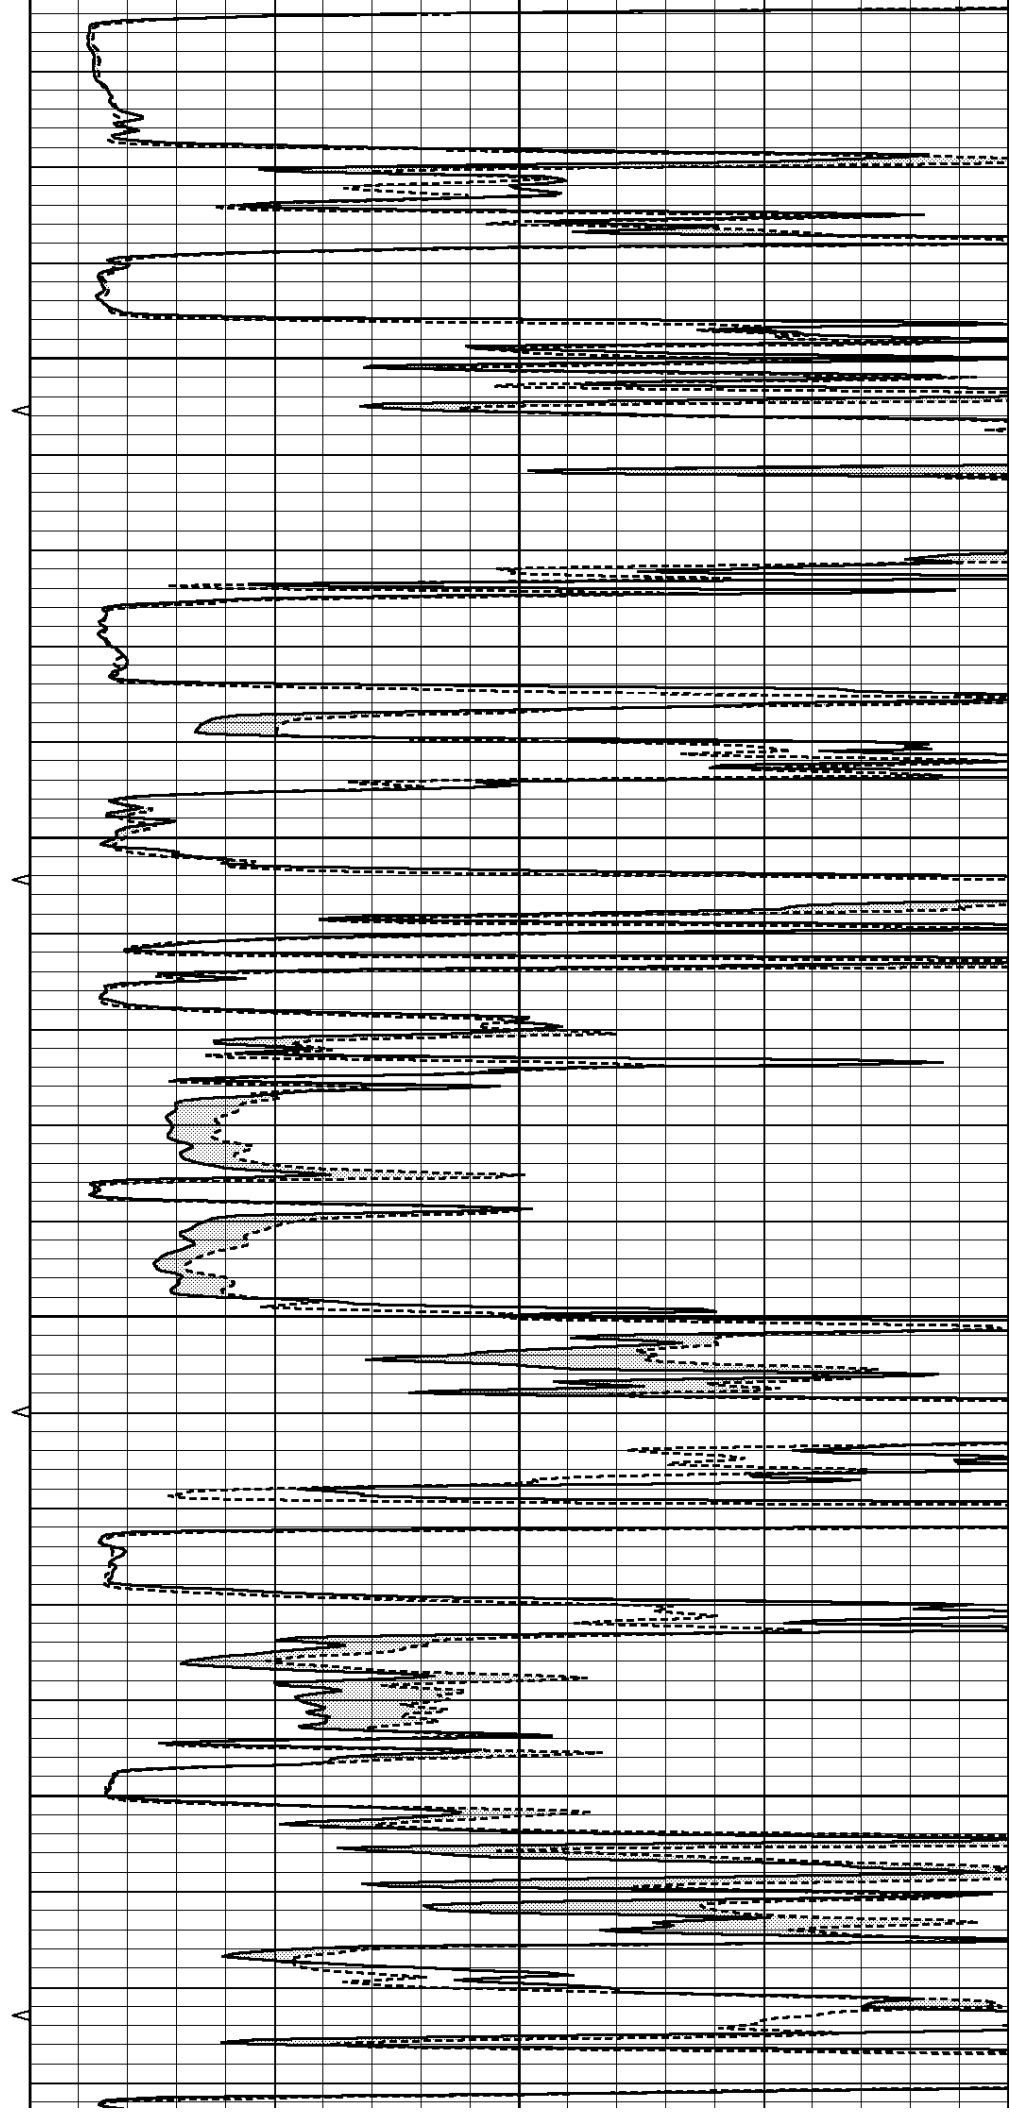


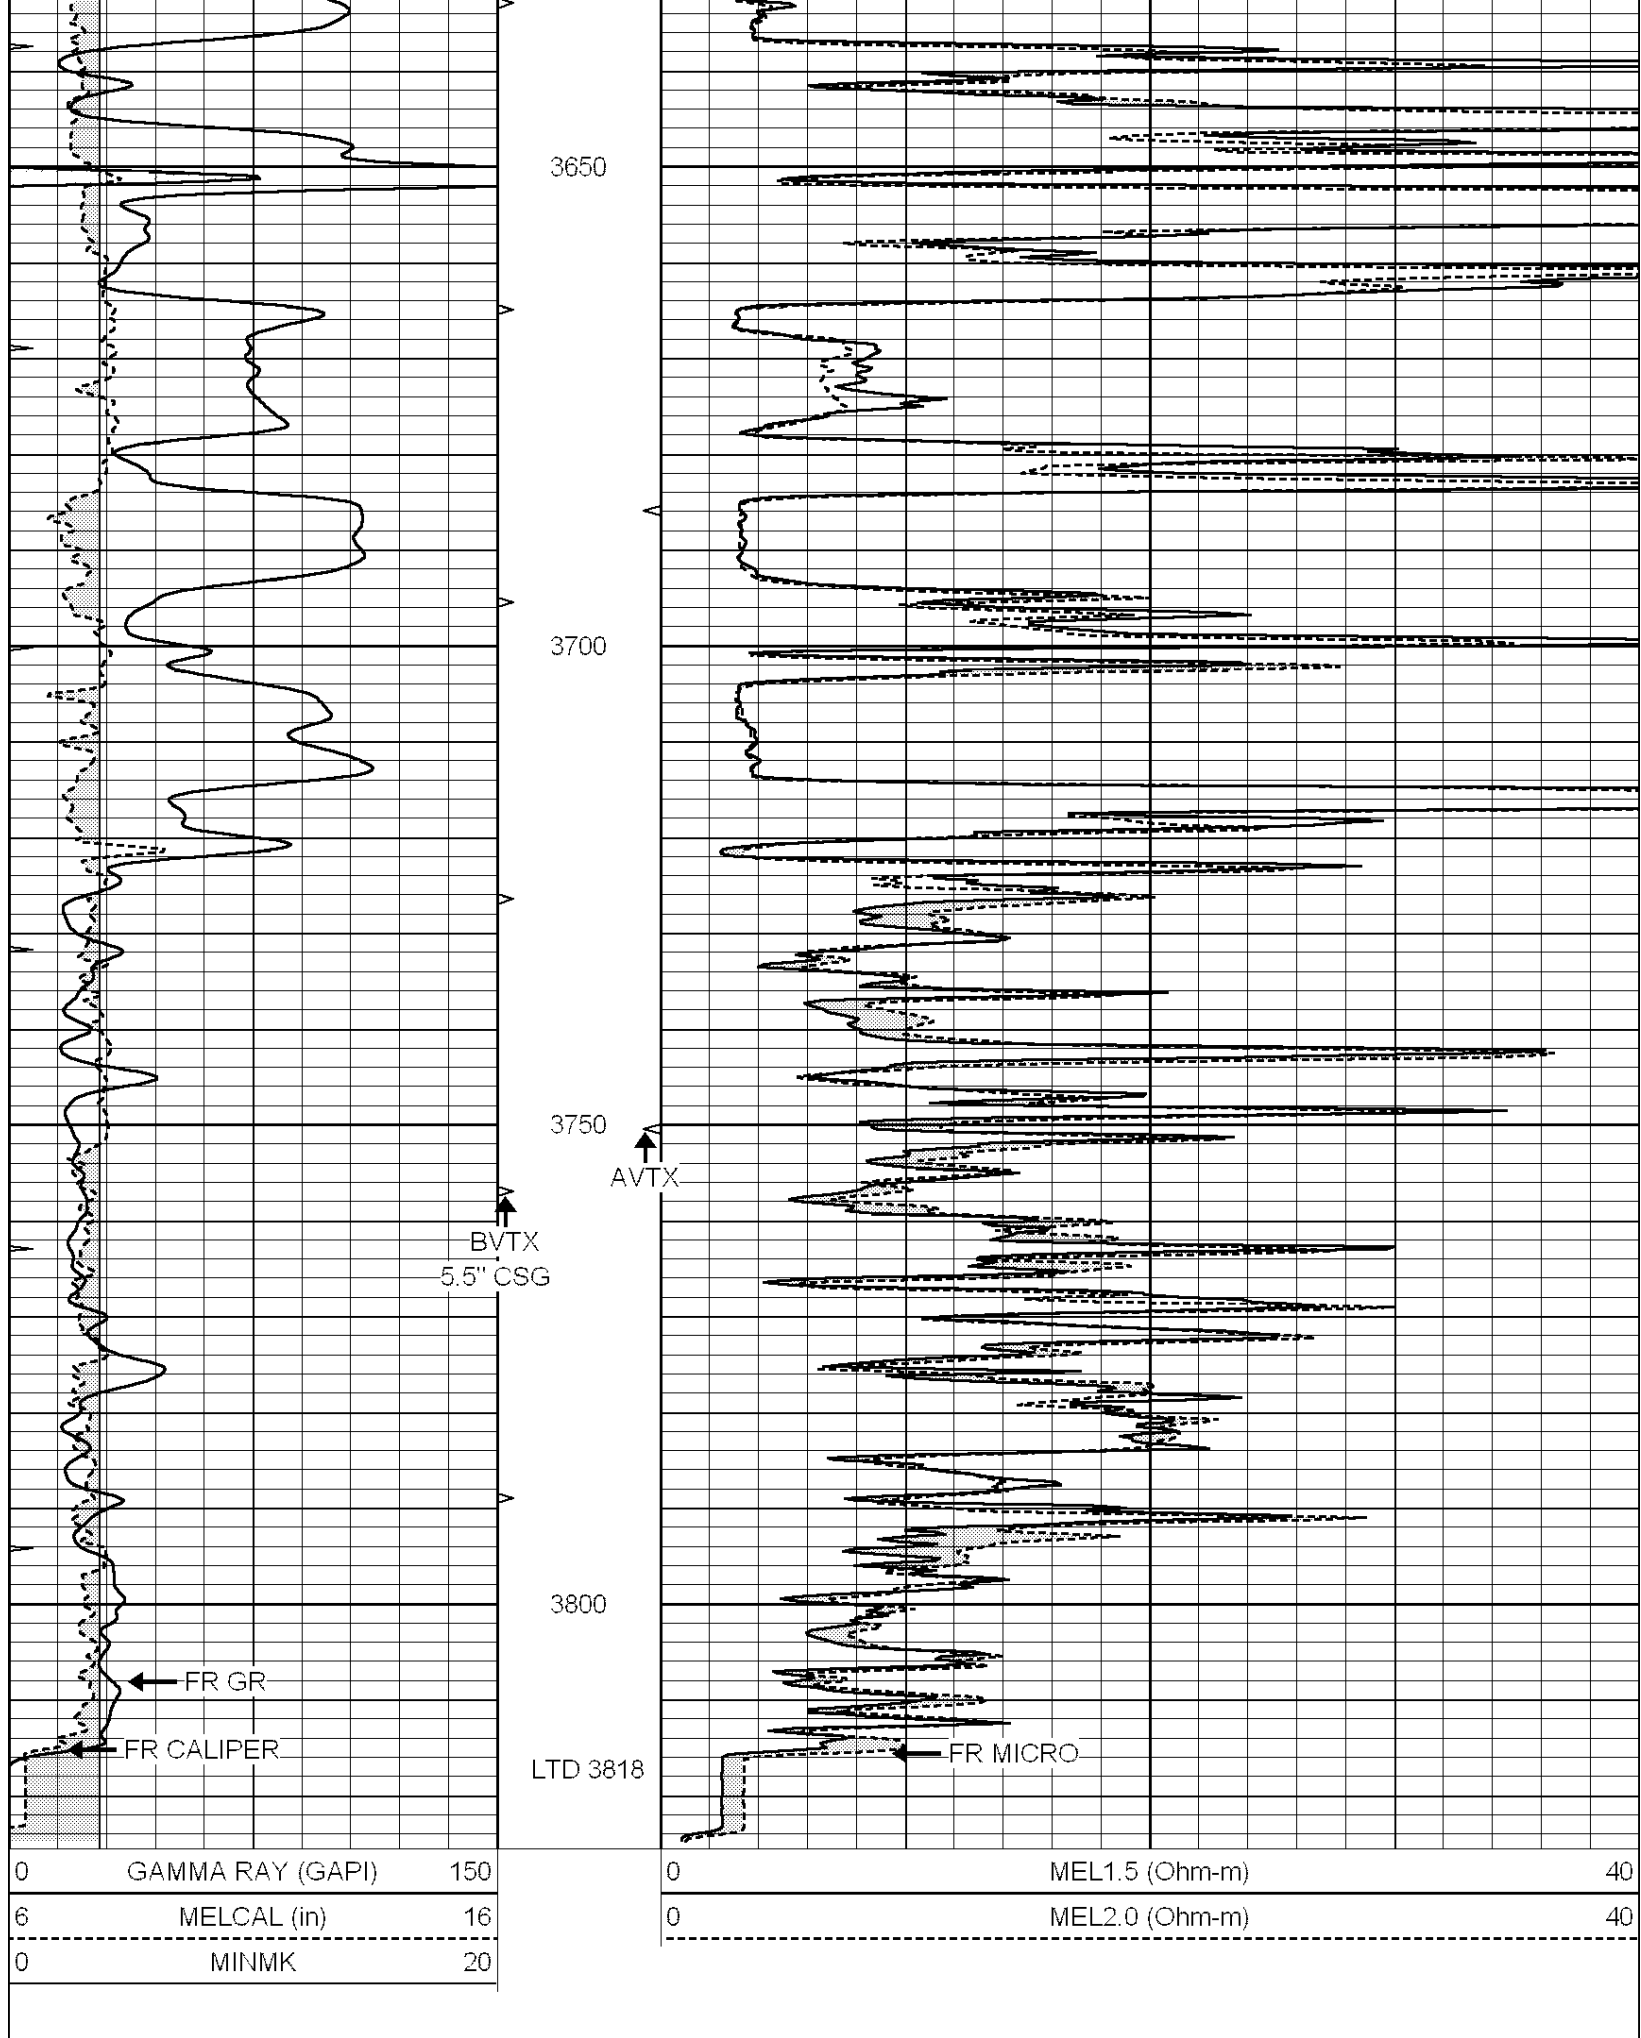



REPEAT SECTION

Database File: 24130ddn.db
 Dataset Pathname: pass10.1
 Presentation Format: _micro
 Dataset Creation: Fri Apr 04 18:41:53 2014 by Calc Open-Cased 090629
 Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150
6	MELCAL (in)	16
0	MINMK	20

0	MEL1.5 (Ohm-m)	40
0	MEL2.0 (Ohm-m)	40

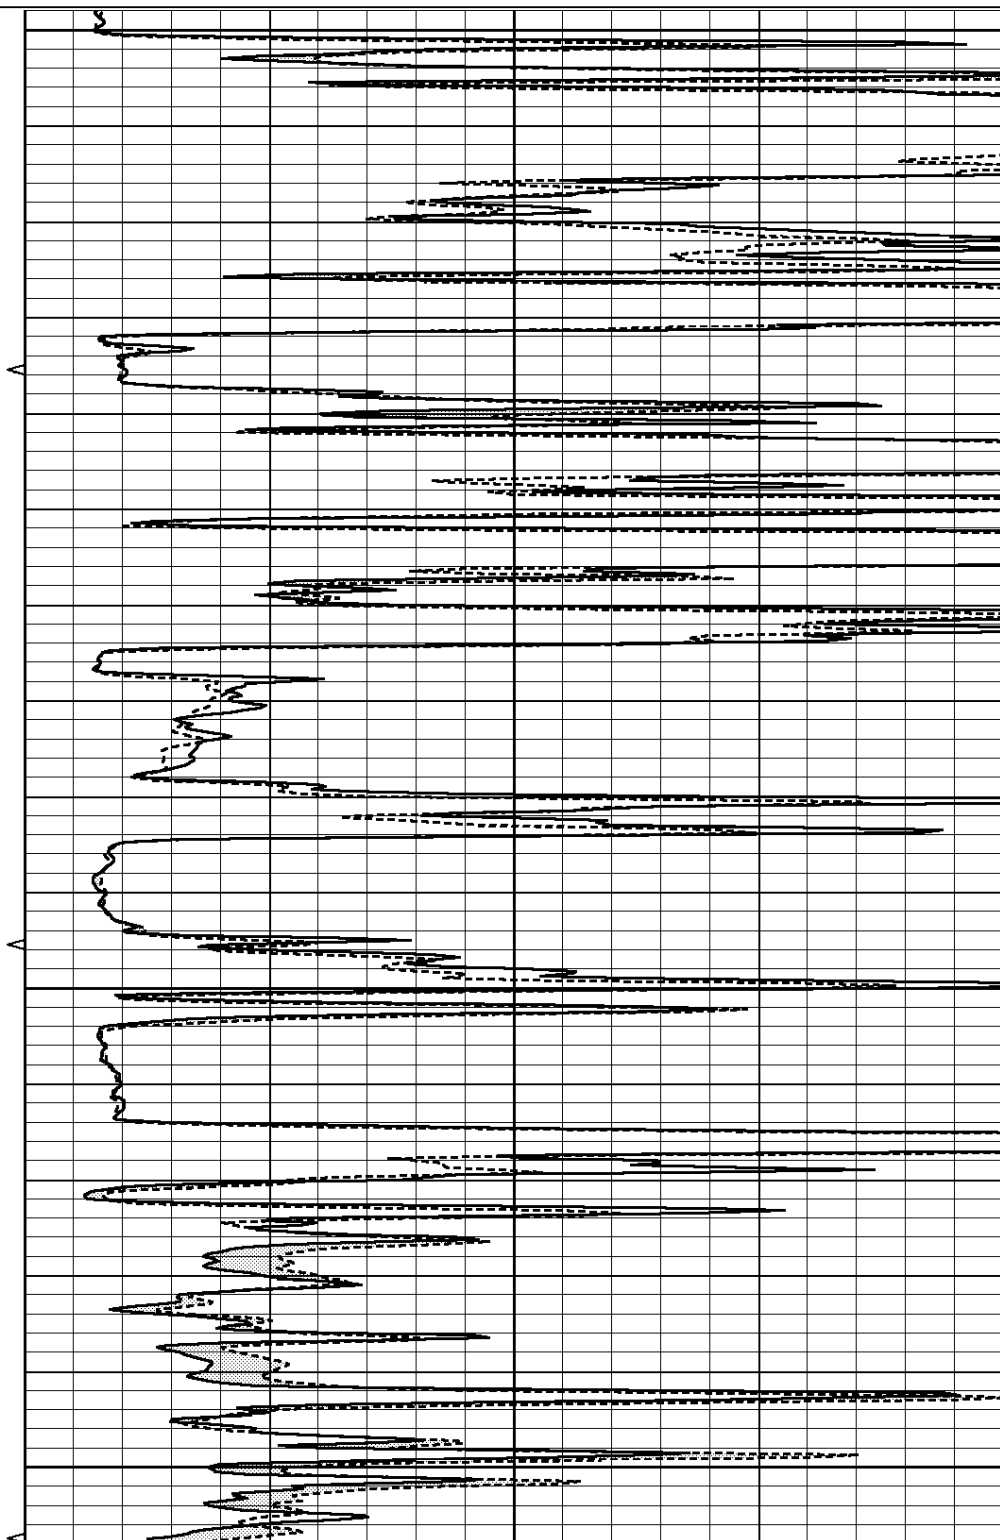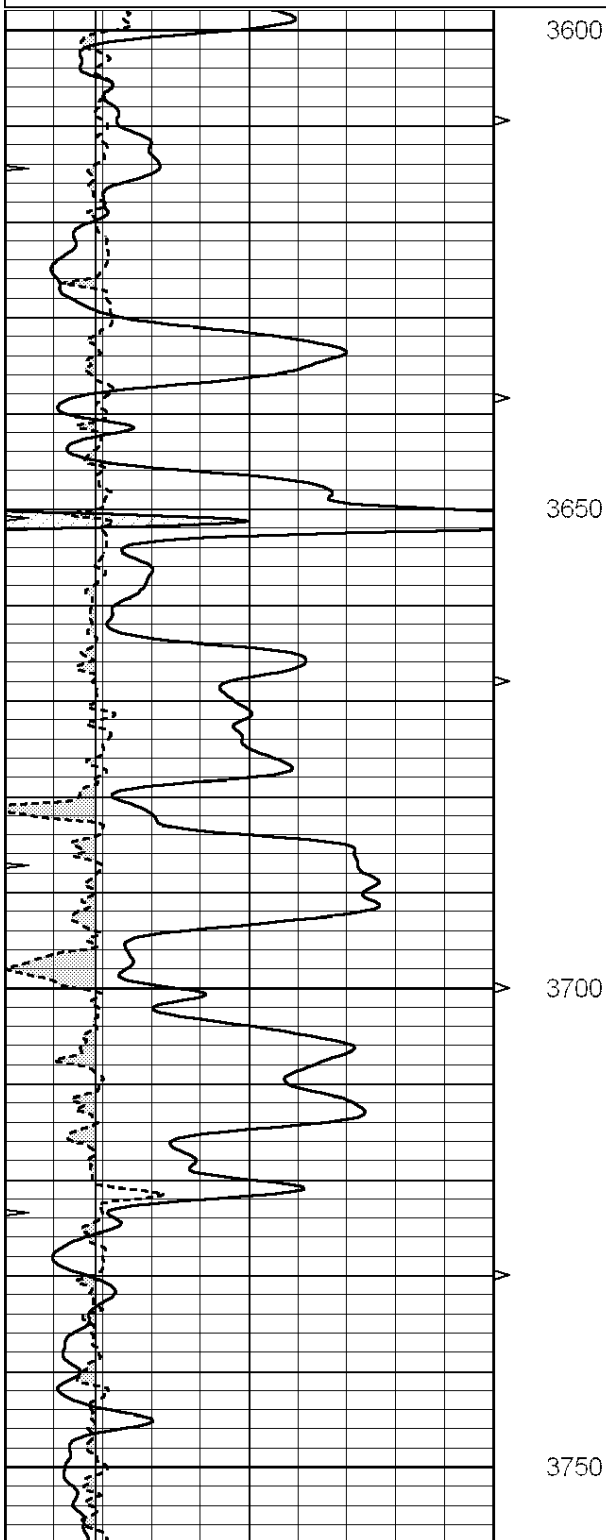

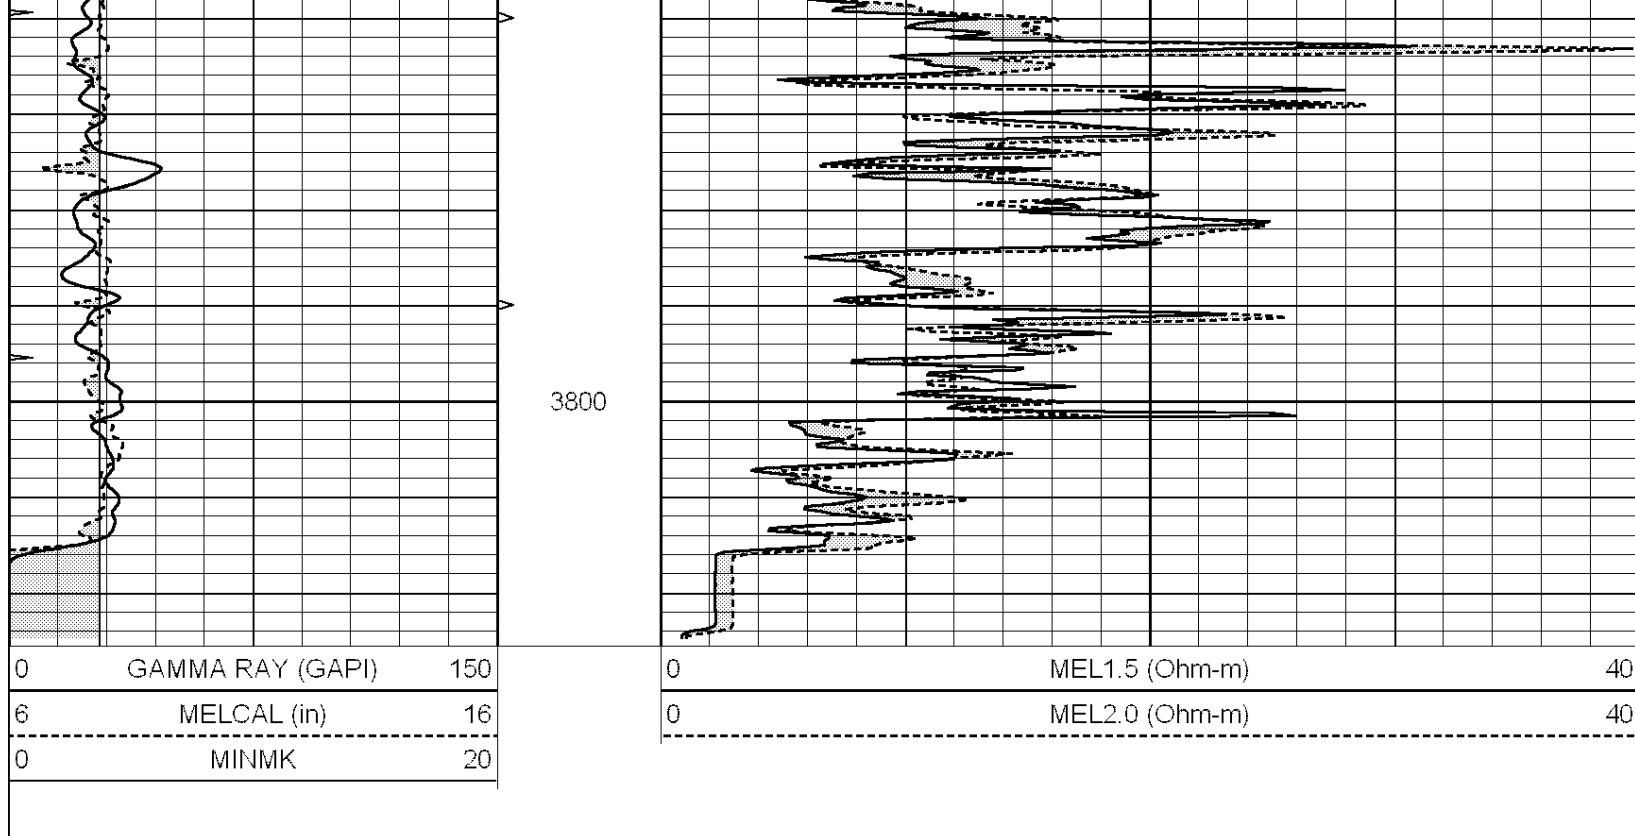

Calibration Report

Database File: 24130ddn.db
 Dataset Pathname: pass11.1
 Dataset Creation: Fri Apr 04 19:07:06 2014 by Calc Open-Cased 090629

MICRO Calibration Report

Serial Number:	MICRO5	
Tool Model:	PROBE	
Performed:	Tue Apr 01 21:42:18 2014	
Caliper Calibration:	Gain=3.536	Offset=-6.100
References	Low Cal	High Cal
Readings	6.200	15.000
	3.737	5.660
1.5" Calibration:	Gain=20.334	Offset=0.850
References	Low Cal	High Cal
Readings	0.000	20.000
	0.025	1.009
2" Calibration:	Gain=25.398	Offset=1.000
References	Low Cal	High Cal
Readings	0.000	20.000
	0.014	0.802

Gamma Ray Calibration Report

Serial Number:	GR2	
Tool Model:	OPEN	
Performed:	Tue Apr 01 21:06:00 2014	
Calibrator Value:	200.0	GAPI
Background Reading:	0.0	cps
Calibrator Reading:	740.0	cps

Sensitivity:

0.3400

GAPI/cps