



**COMPLETION
& PRODUCTION
SERVICES CO.**

**DUAL
INDUCTION
LOG**

Company	ANDERSON ENERGY, INC.	Company	ANDERSON ENERGY, INC.
Well	EATON TRUST #2	Well	EATON TRUST #2
Field	ET	Field	ET
County	ROOKS	County	ROOKS
State	KANSAS	State	KANSAS
Location:	API # : 15-163-24188-00-00	Other Services	
	1840' FSL & 335' FEL NW - SE - NE - SE	DIL/MEL	
	SEC 18 TWP 10S RGE 20W	Elevation	
Permanent Datum	GROUND LEVEL	Elevation	2149
Log Measured From	KELLY BUSHING 8' A.G.L.	D.F.	2155
Drilling Measured From	KELLY BUSHING	G.L.	2149
Date	4-4-14		
Run Number	ONE		
Depth Driller	3820		
Depth Logger	3818		
Bottom Logged Interval	3816		
Top Log Interval	00		
Casing Driller	8 5/8 @ 305'		
Casing Logger	303'		
Bit Size	7.875		
Type Fluid in Hole	CHEMICAL MUD	CHLORIDES 2400 PPM	
Density / Viscosity	9.1 / 58		
pH / Fluid Loss	10.5 / 5.8		
Source of Sample	FLOWLINE		
Rm @ Meas. Temp	1.10 @ 80F		
Rmf @ Meas. Temp	0.83 @ 80F		
Rmc @ Meas. Temp	1.32 @ 80F		
Source of Rmf / Rmc	MEASURED		
Rm @ BHT	0.77 @ 114F		
Time Circulation Stopped	2 HOURS		
Time Logger on Bottom			
Maximum Recorded Temperature	114F		
Equipment Number	860		
Location	HAYS, KS.		
Recorded By	IAN MABB		
Witnessed By	ROGER MARTIN		


<<< Fold Here >>>


All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments



NABORS COMPLETION & PRODUCTION SERVICES
785-628-6395
THANK YOU FOR YOUR BUSINESS
DIRECTIONS: ELLIS, KS. - NORTH TO THE COUNTY LINE 2 MORE MILES NORTH TO RD CC - WEST 1 MILE TO RD 2 - NORTH 1 1/2 MILE WEST INTO


0	Gamma Ray (GAPI)	150	0	RLL3 (Ohm-m)	50	
			0	Deep Induction (Ohm-m)	50	
			1000		CILD (mmho/m)	0
			50	RILD X10 (Ohm-m)	500	
			50	RLL3 X10 (Ohm-m)	500	

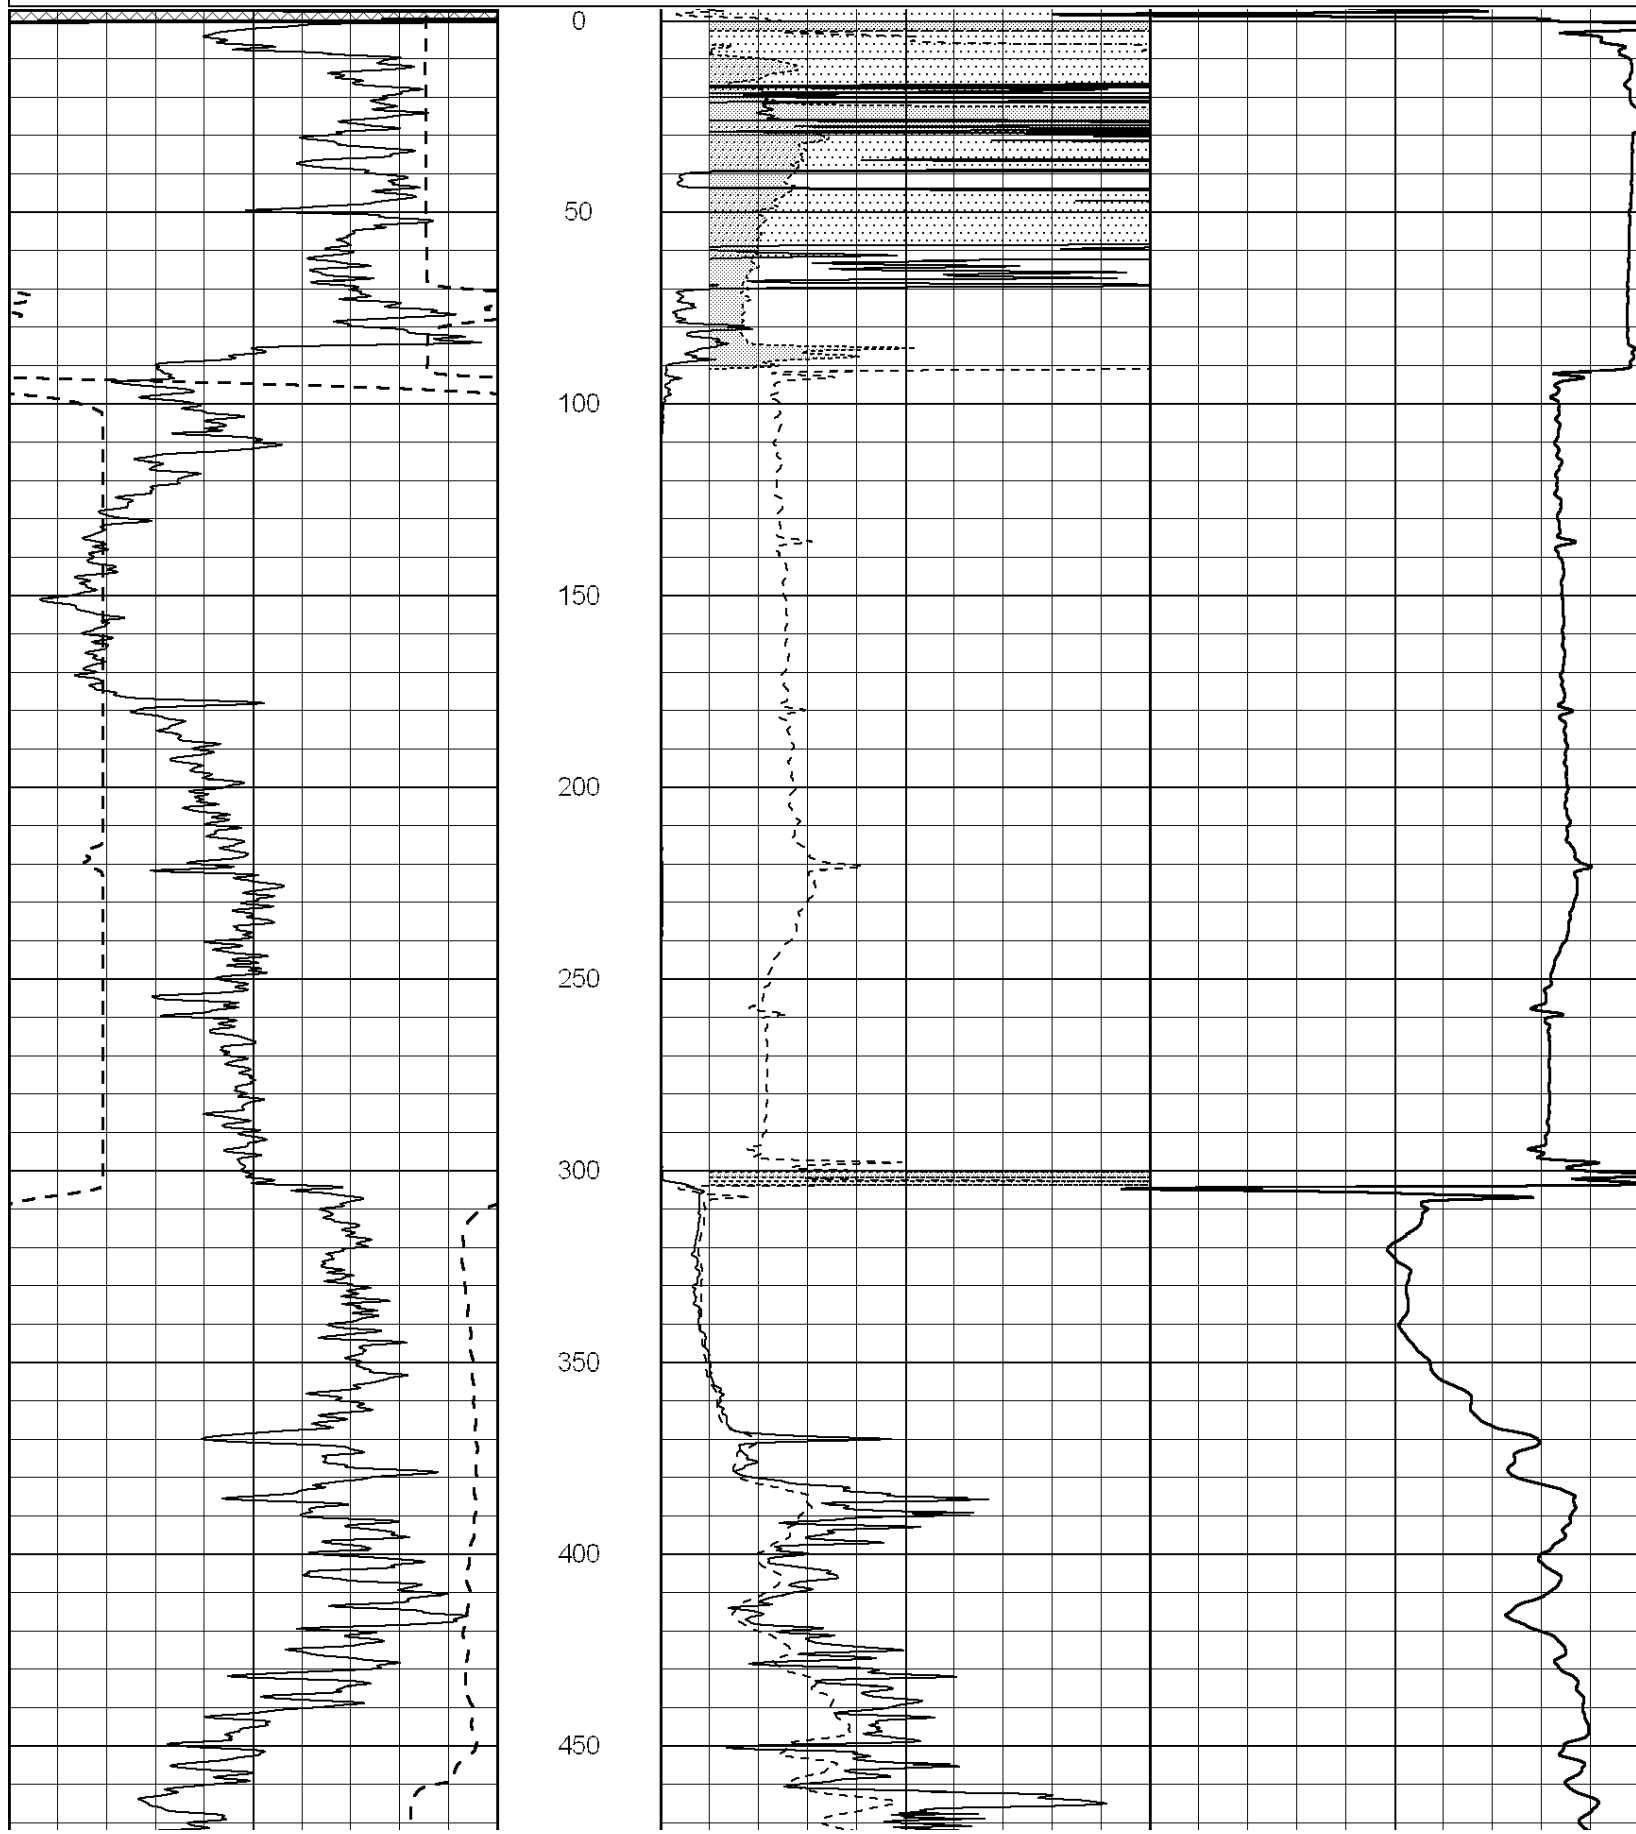







500
550
600
650
700
750
800
850
900
950
1000

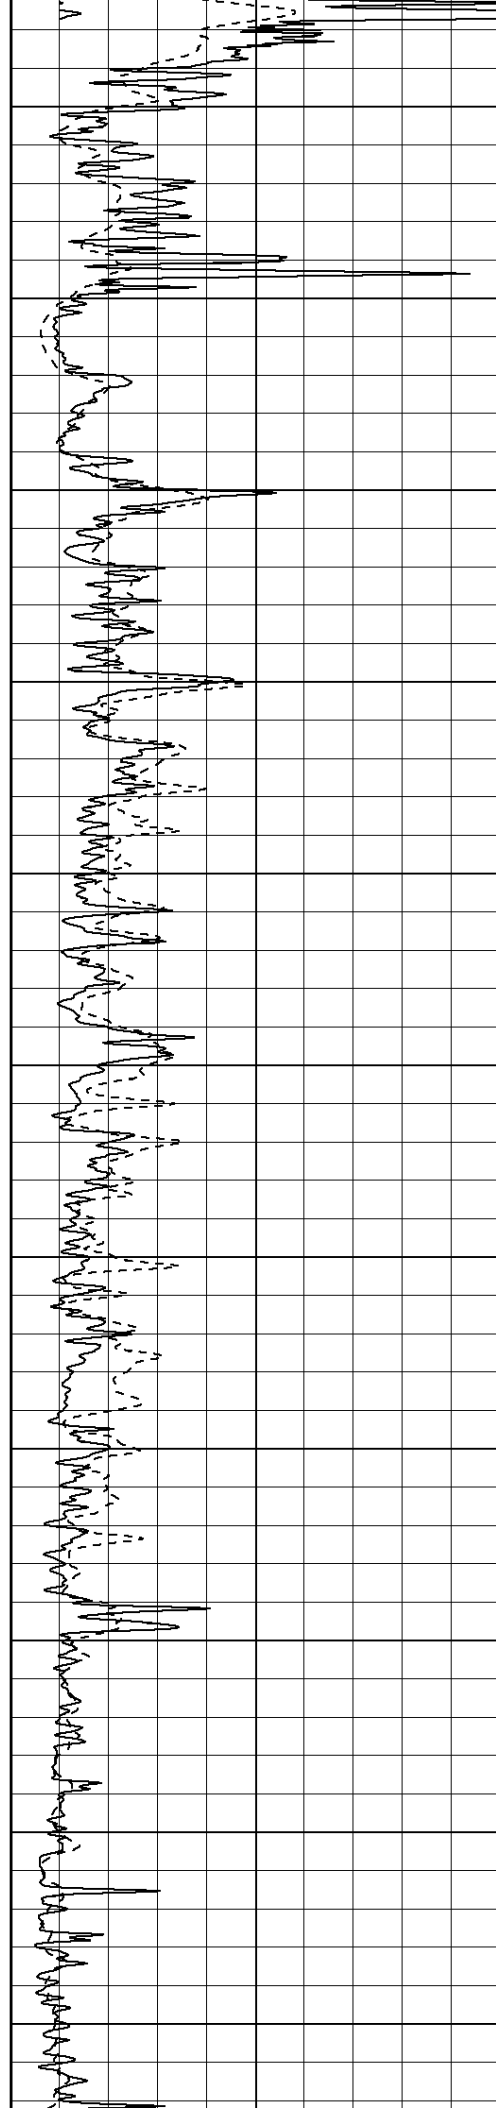


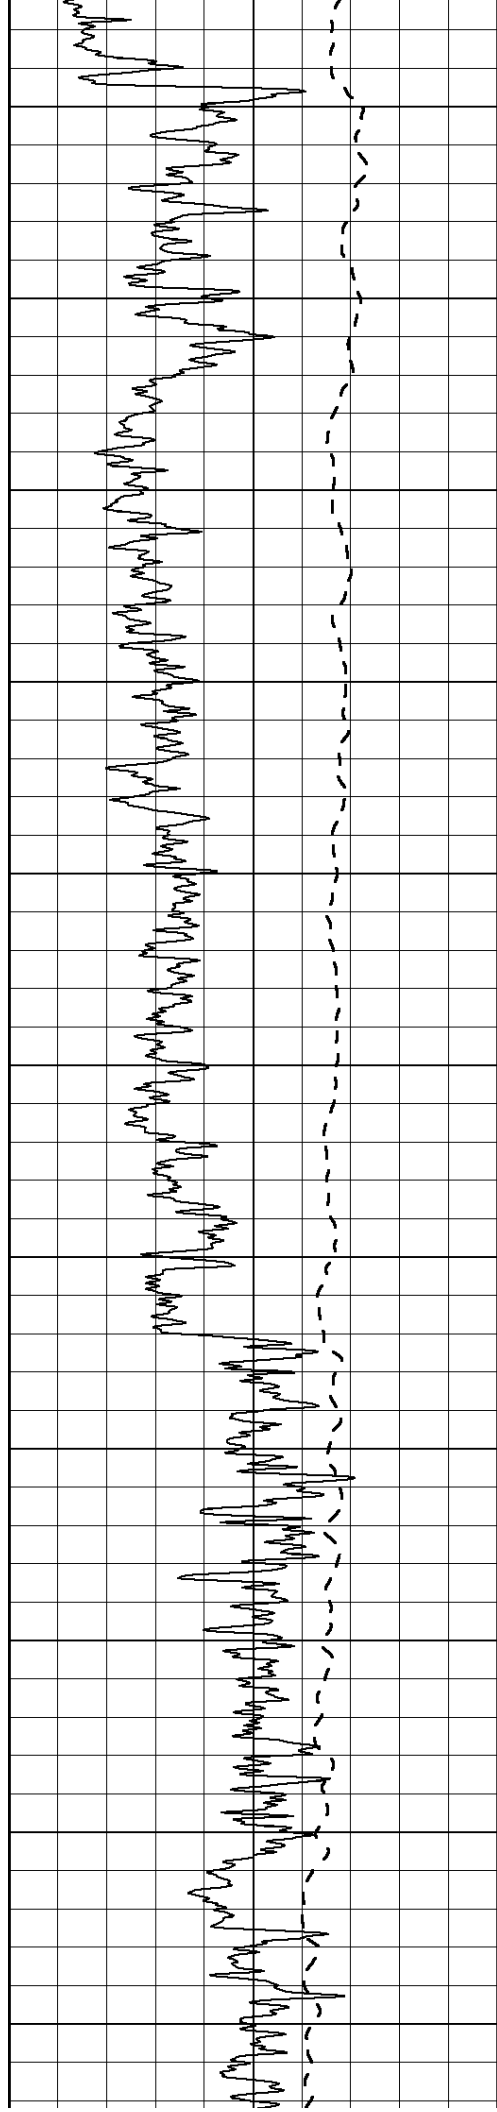

1050
1100
1150
1200
1250
1300
1350
1400
1450
1500
1550

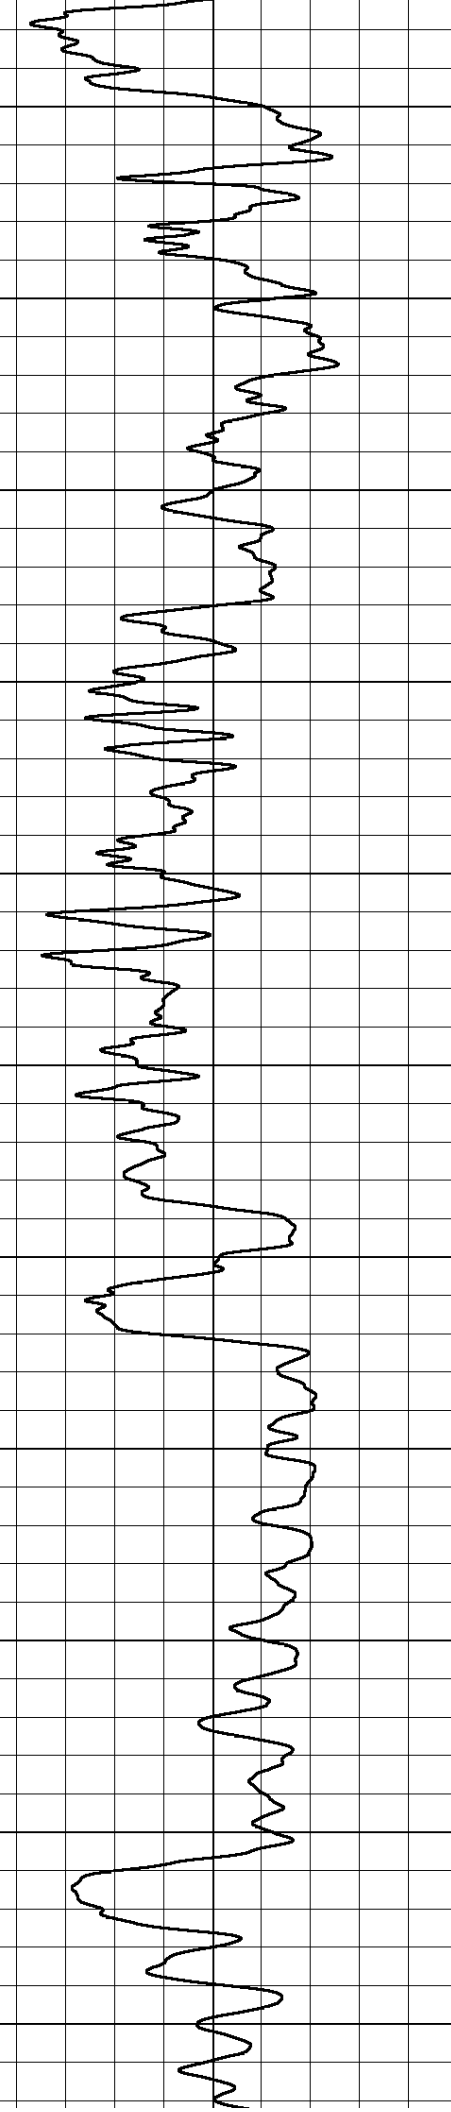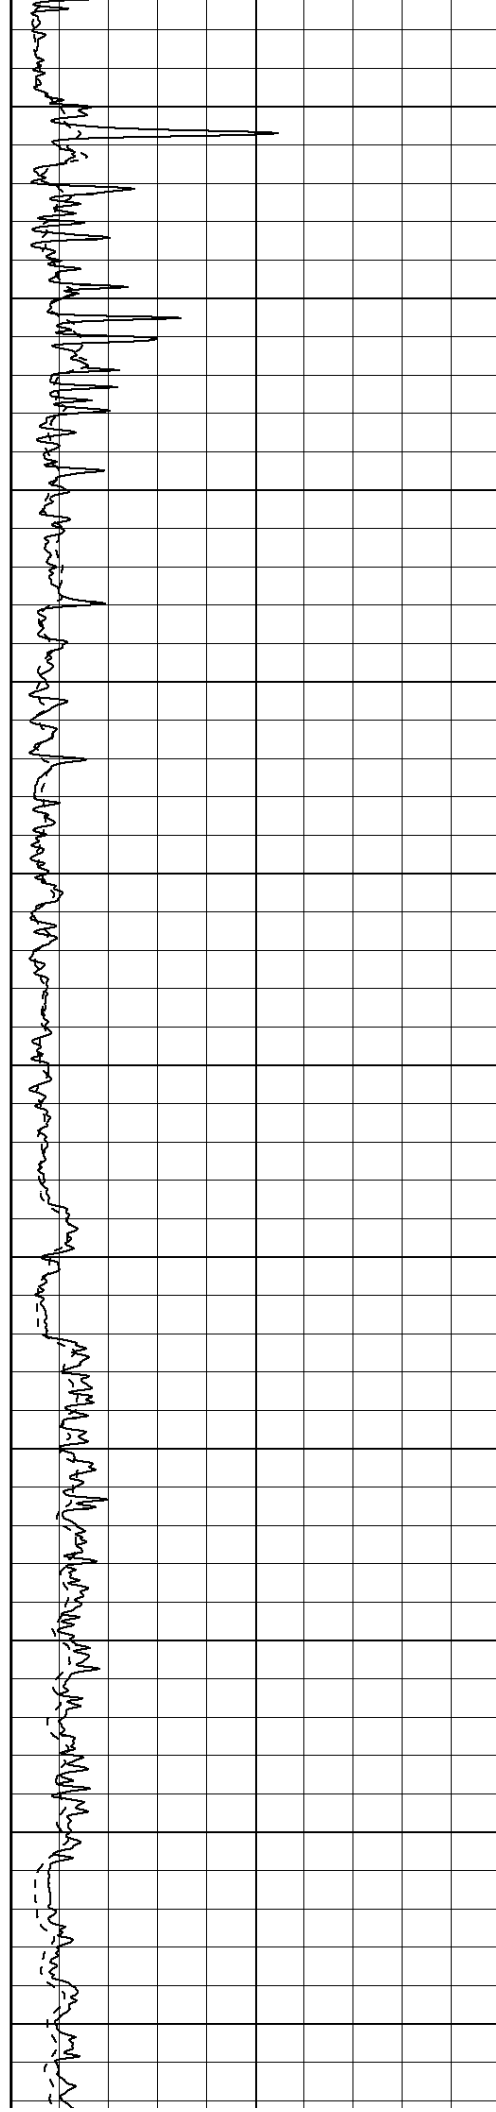

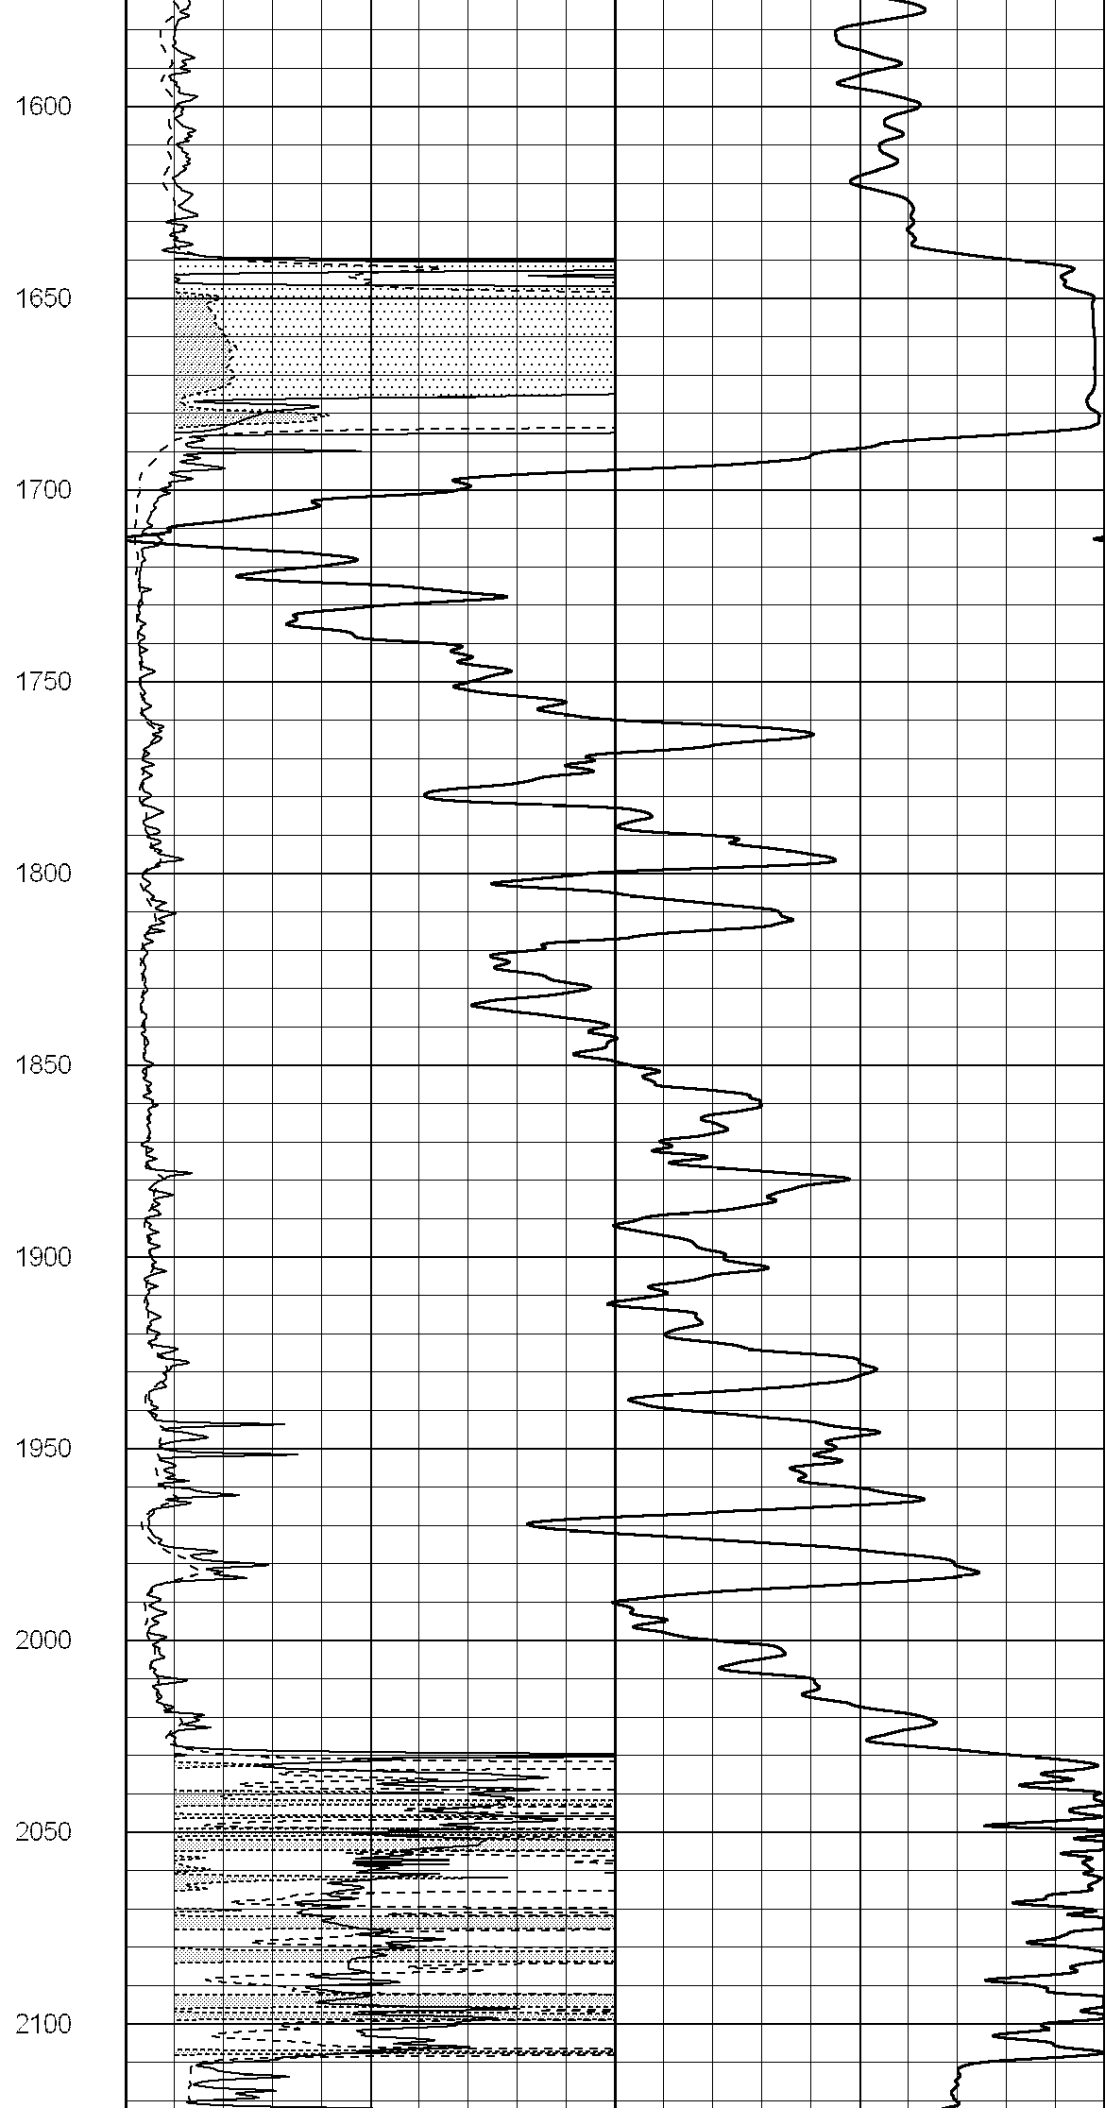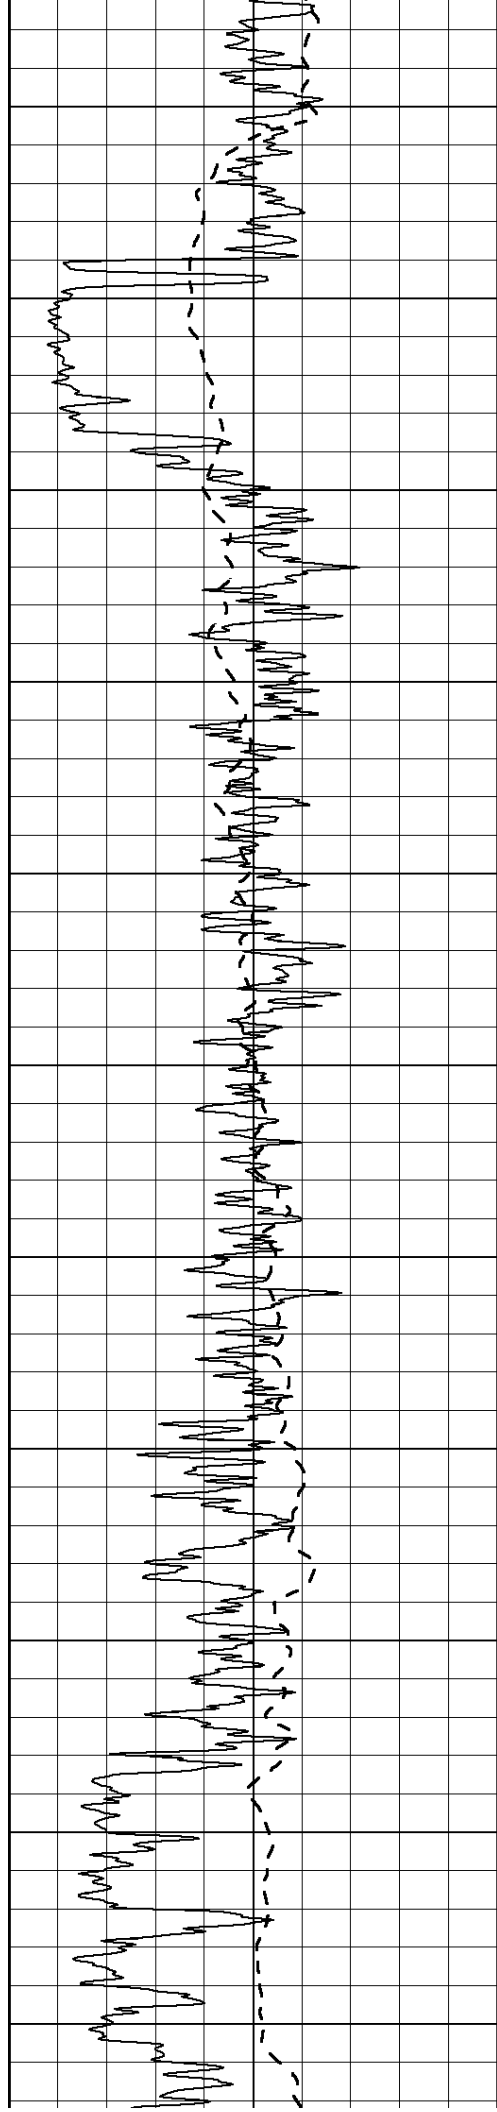

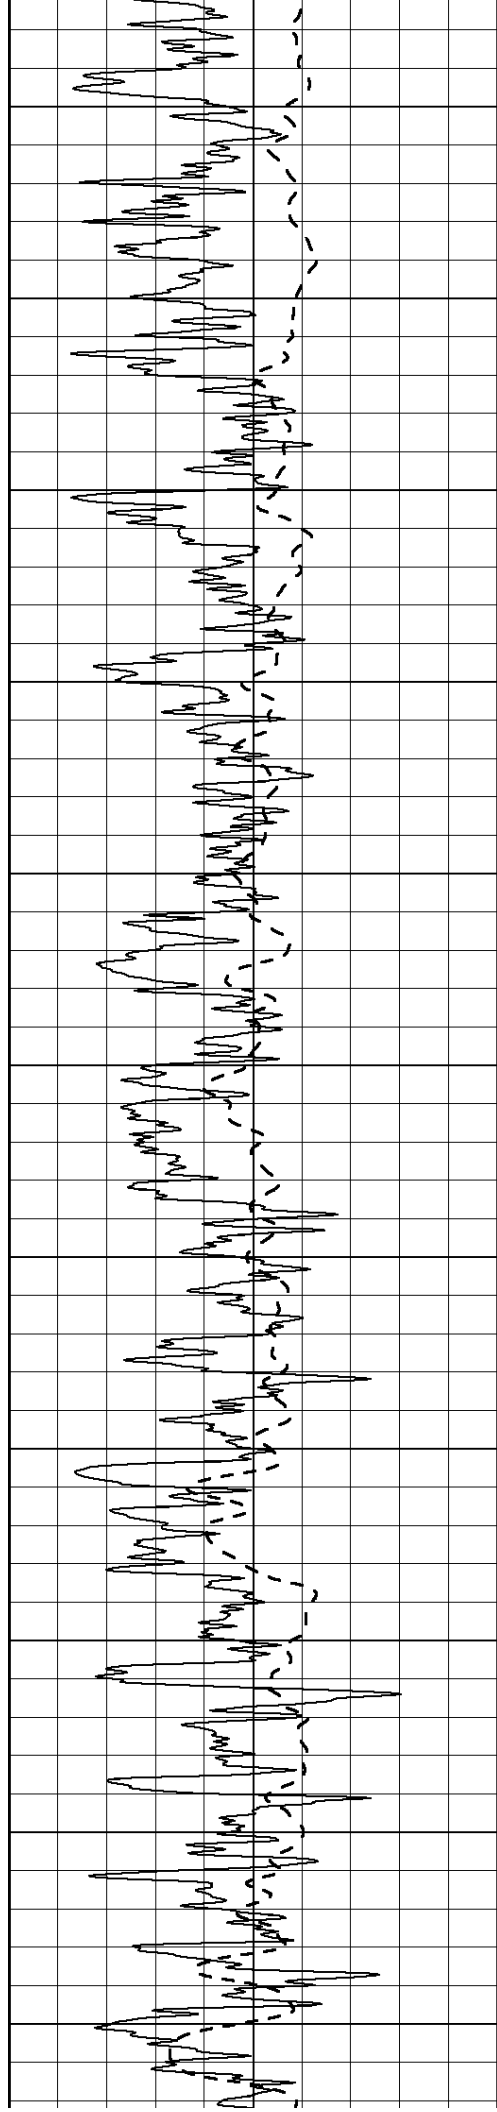

2150

2200

2250

2300

2350

2400


2450


2500

2550

2600

2650

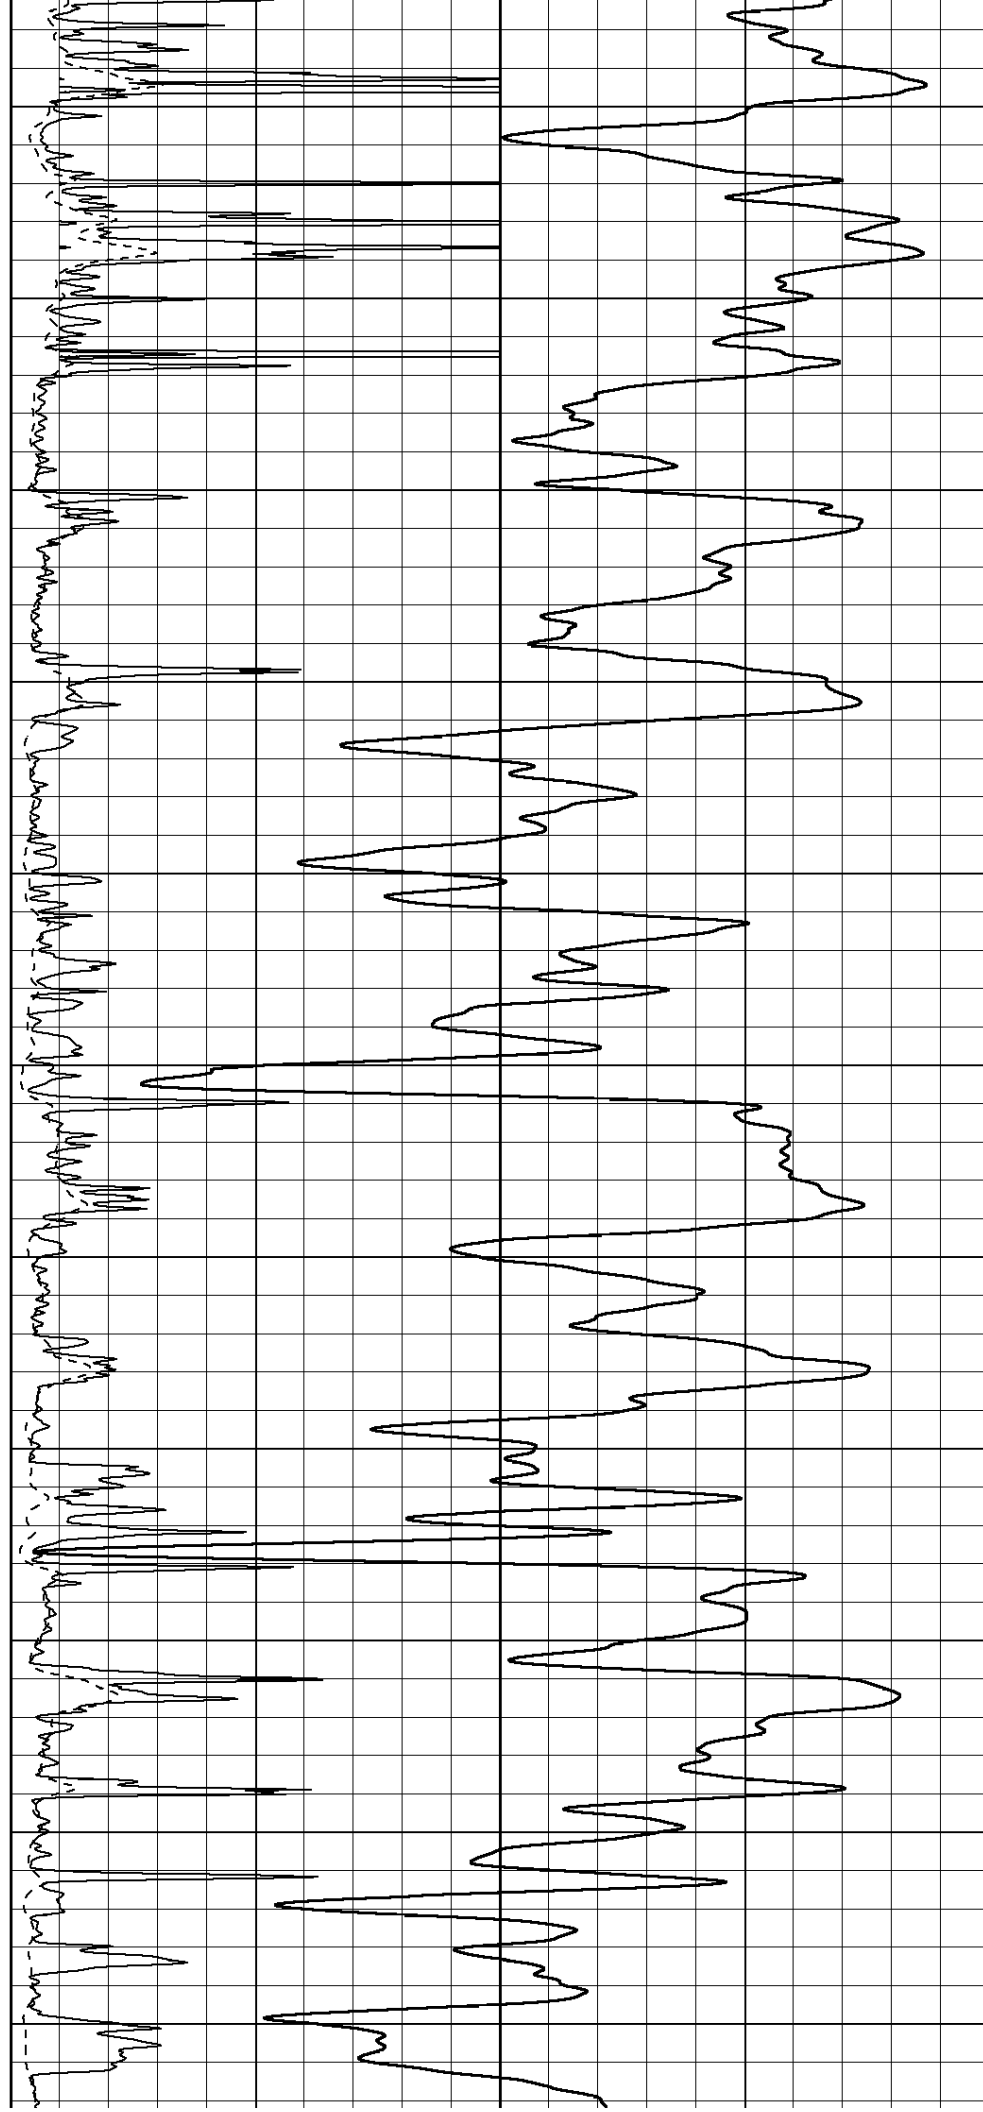

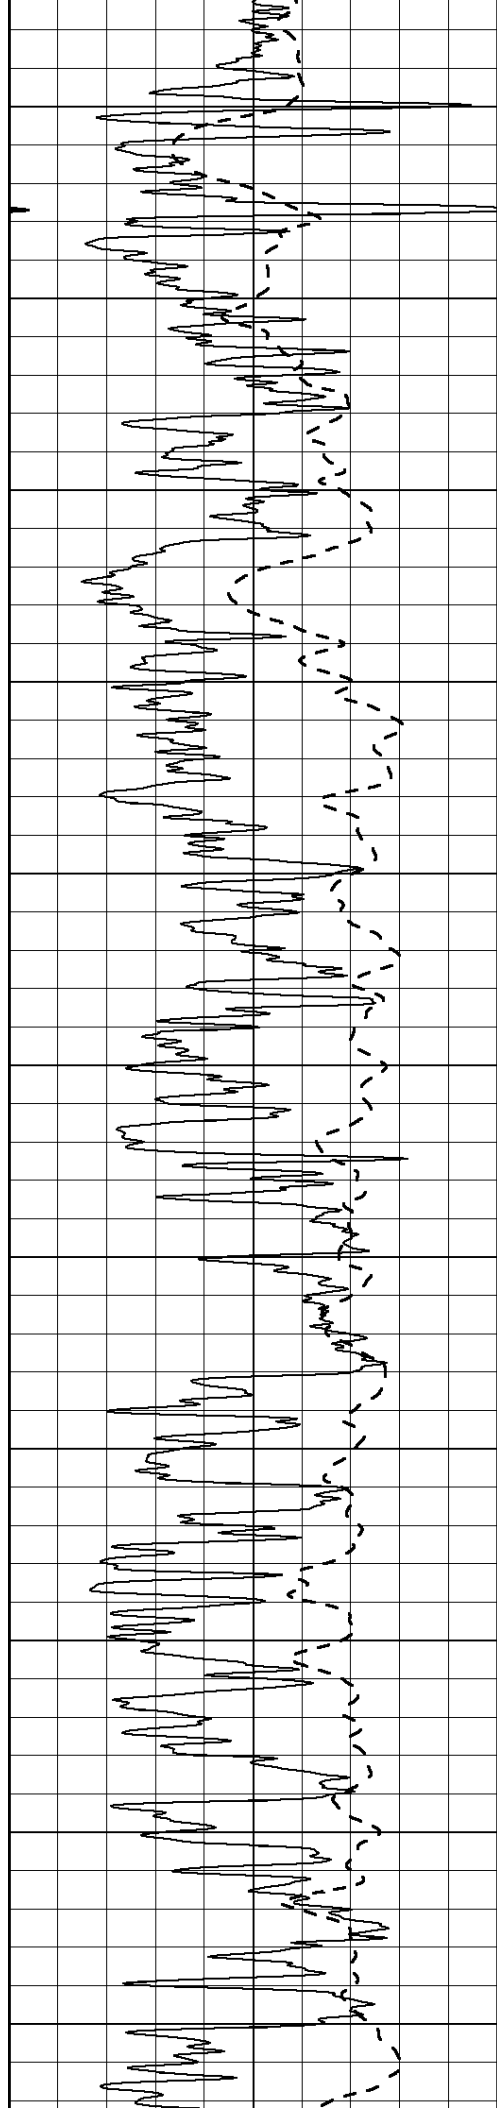

2700

2750

2800

2850

2900

2950


3000


3050

3100

3150

3200

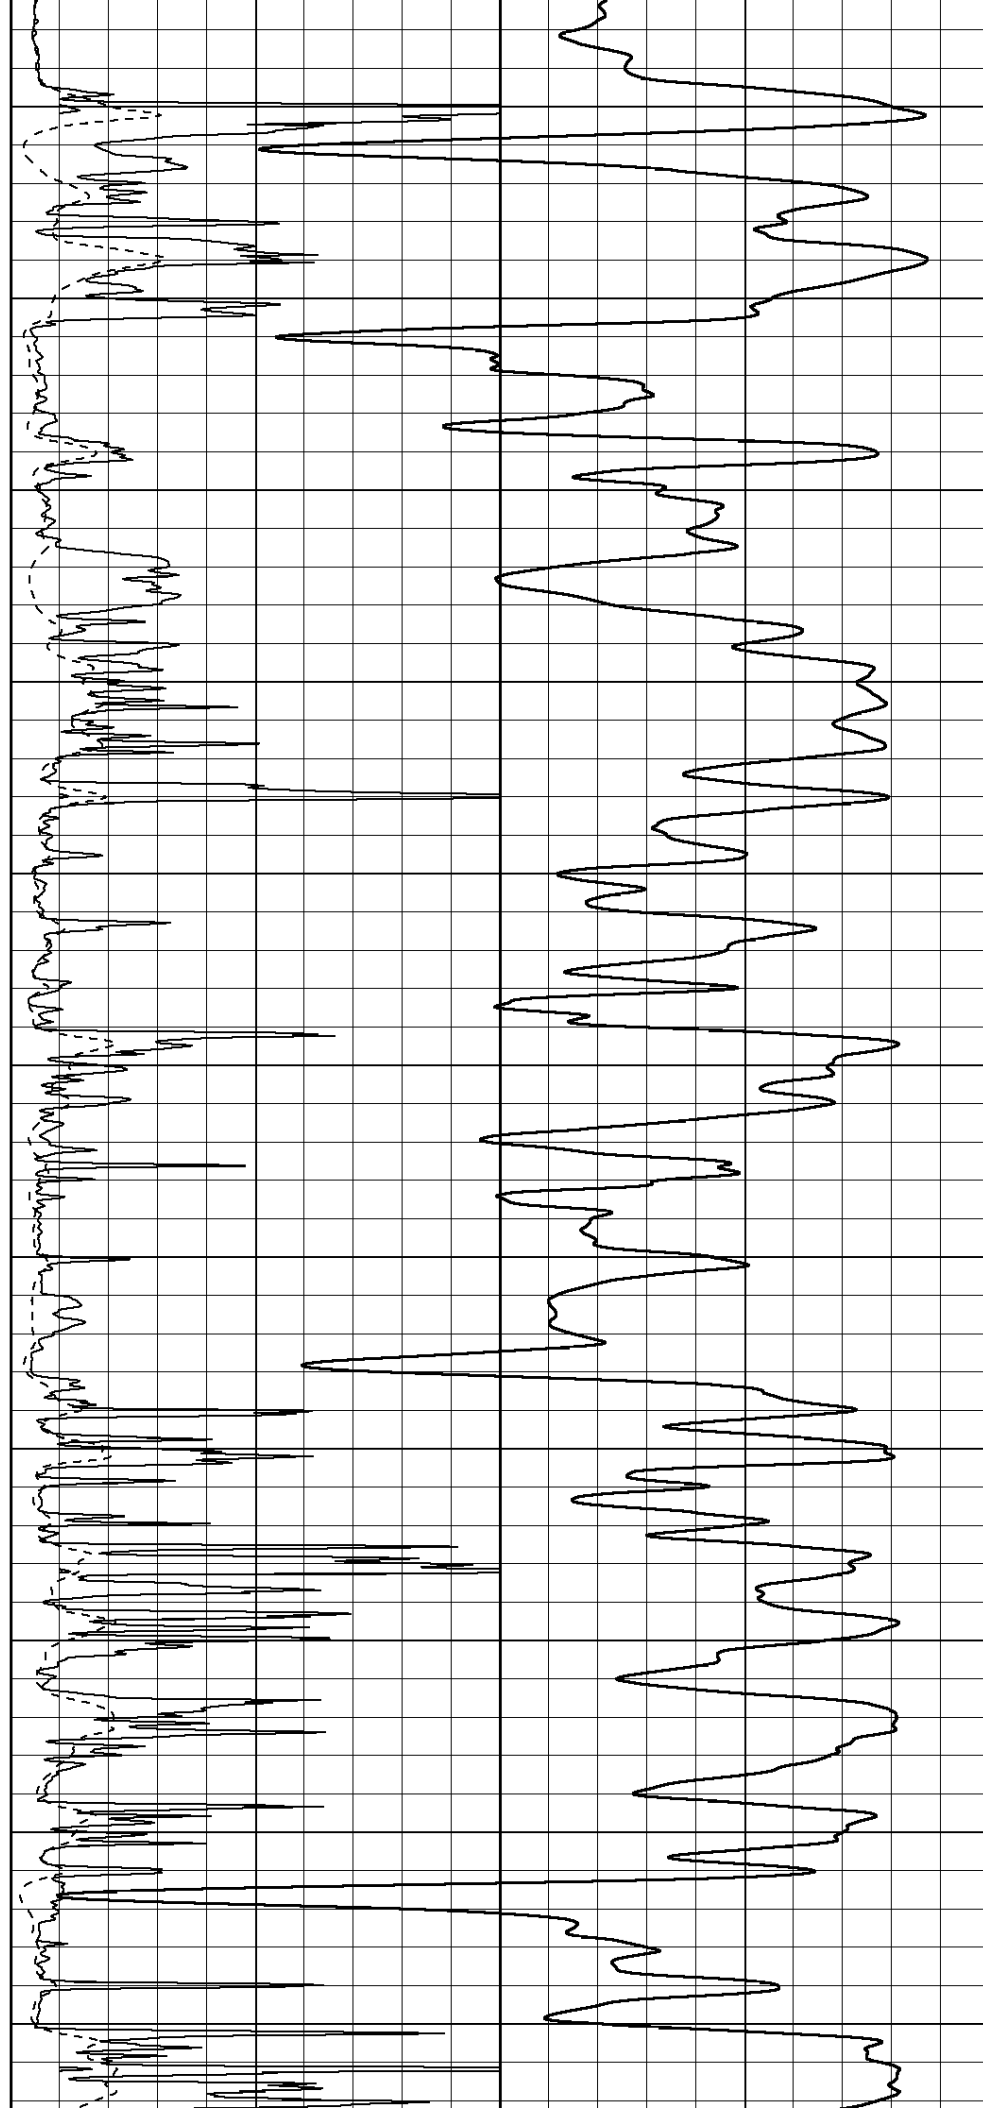

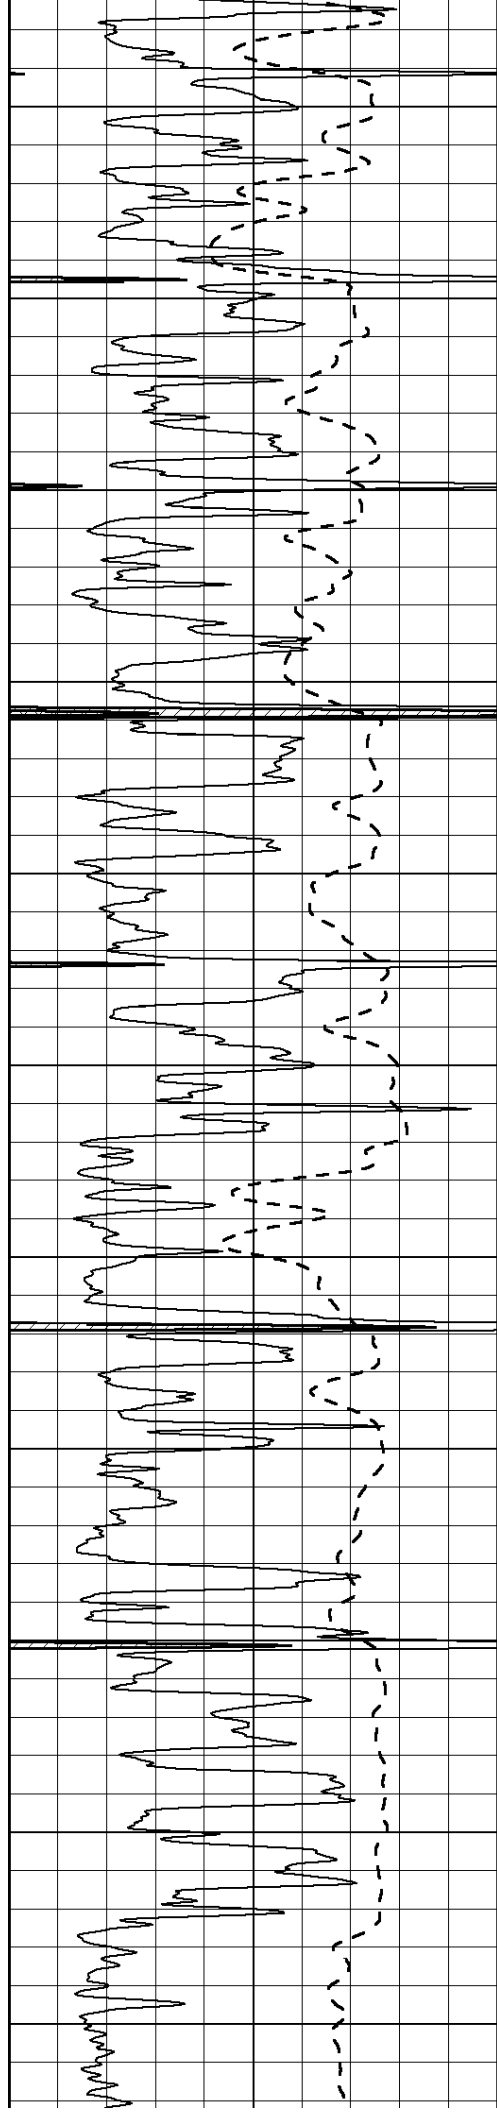

3250

3300

3350

3400

3450

3500



3550


3600

3650

3700


3750

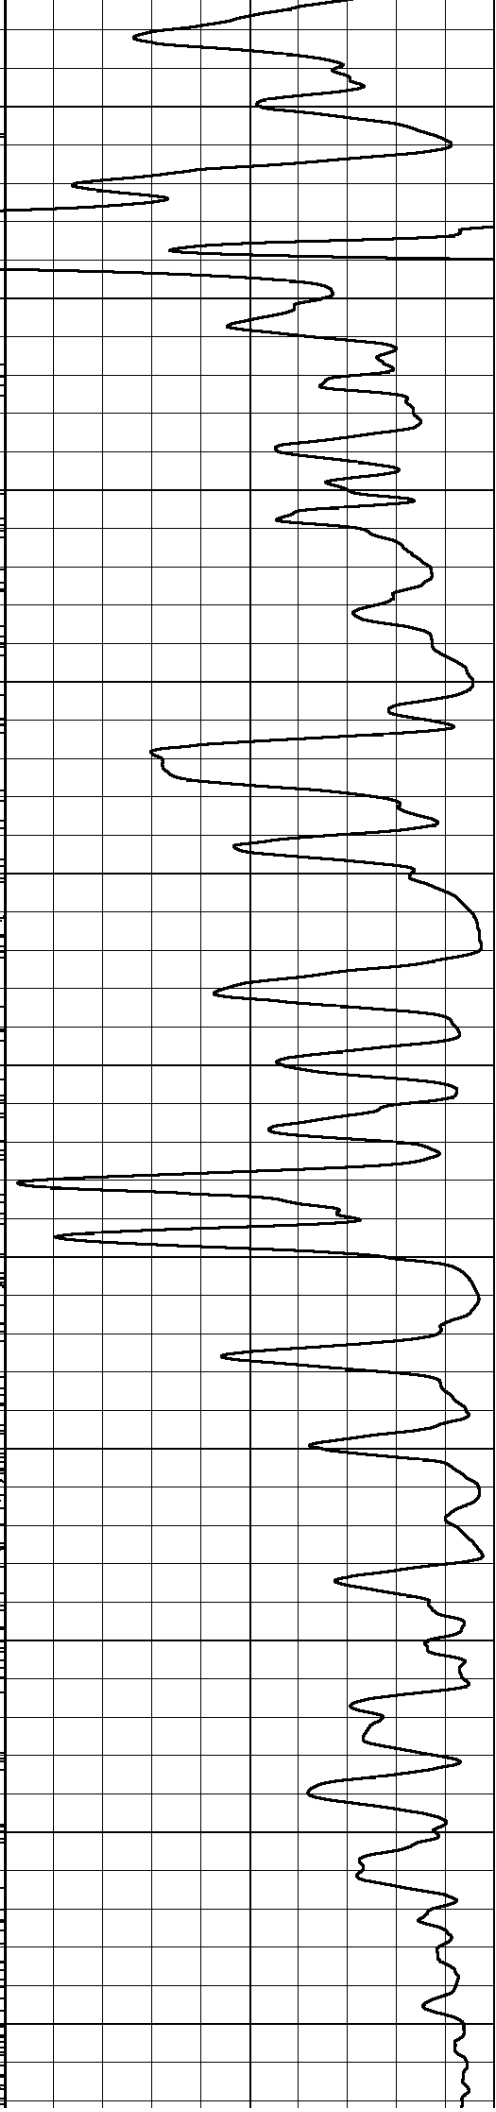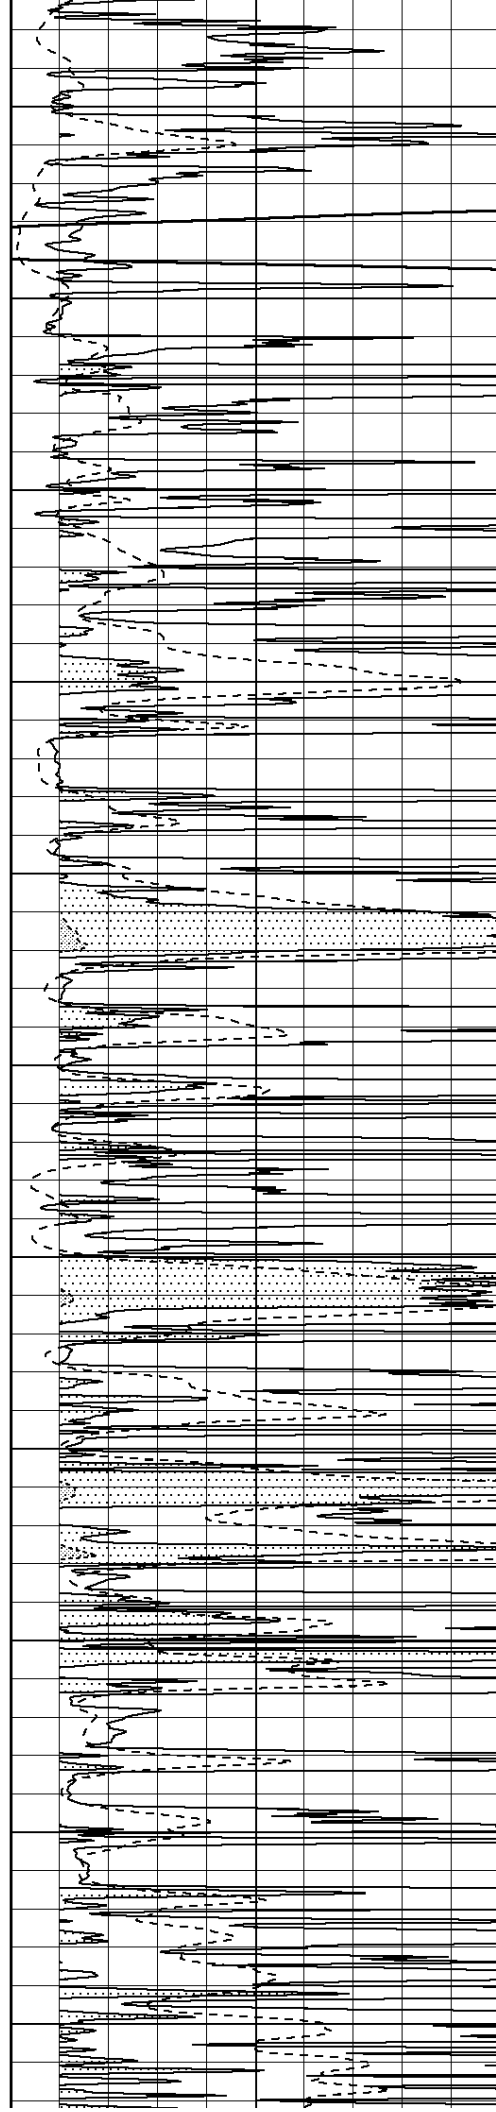


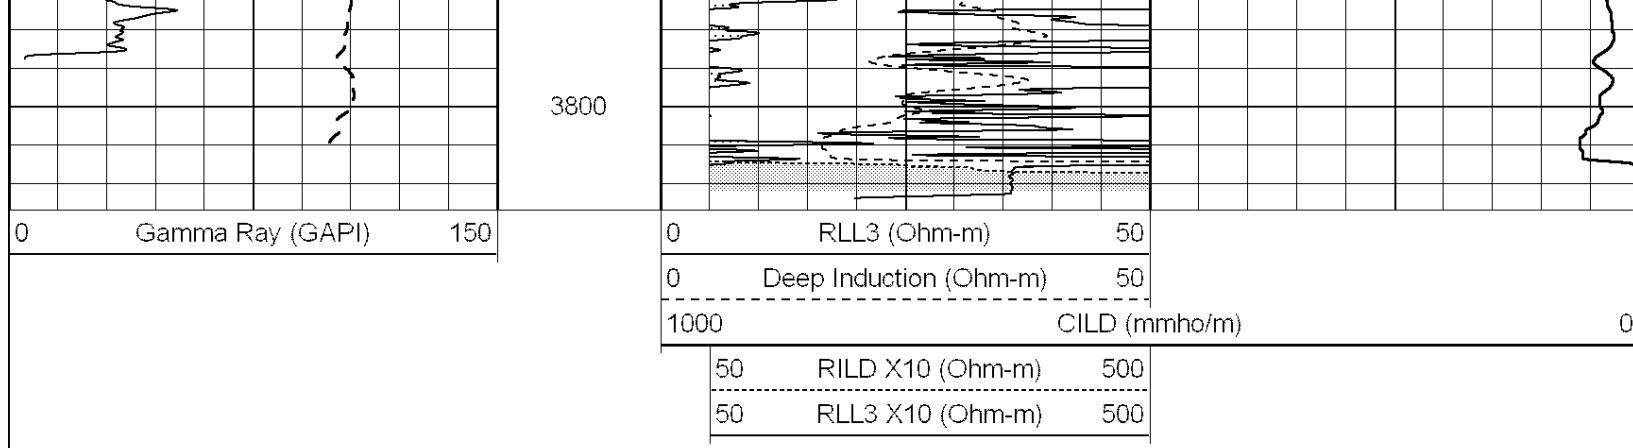


Database File: 24130ddn.db
 Dataset Pathname: pass8.1
 Presentation Format: _dil
 Dataset Creation: Fri Apr 04 17:57:41 2014 by Calc Open-Cased 090629
 Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	0.2	RLL3 (Ohm-m)	2000
-100	SP (mV)	100	0.2	DEEP INDUCTION (Ohm-m)	2000
-250	RxoRt	50	0.2	MEDIUM INDUCTION (Ohm-m)	2000
0	MINMK	20			

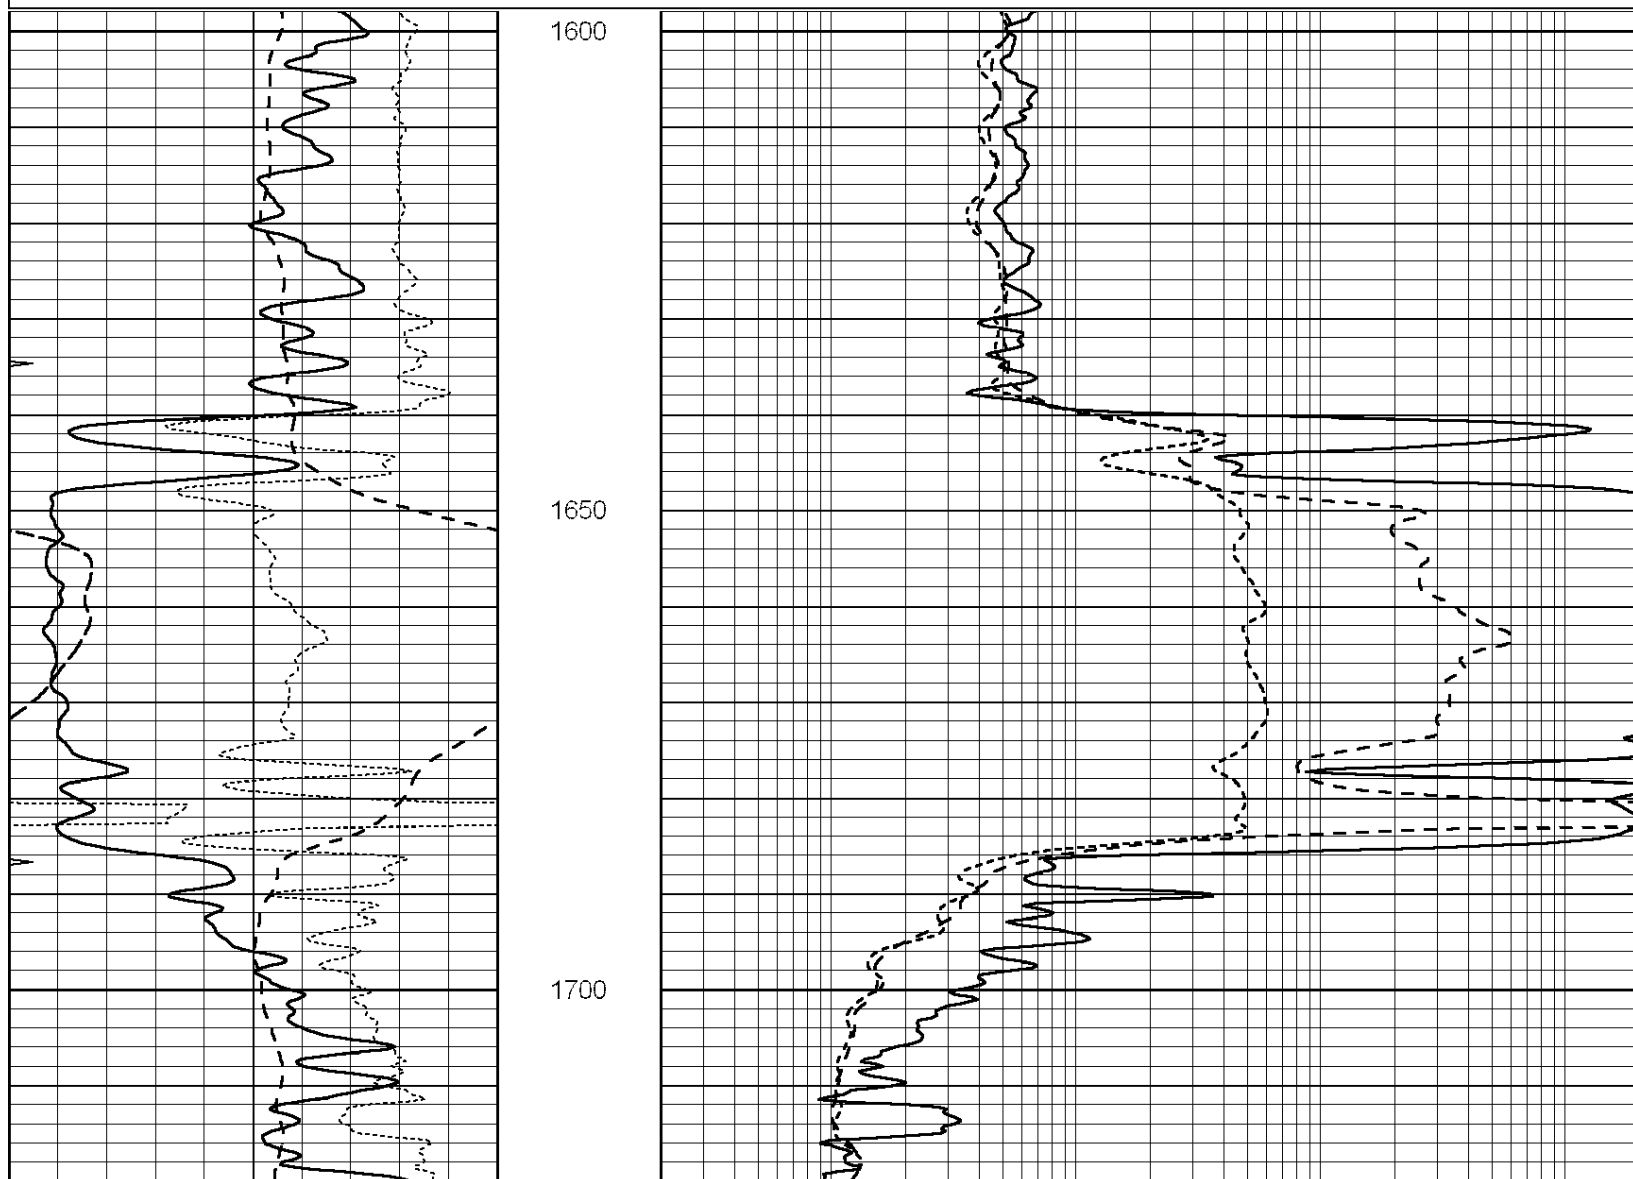


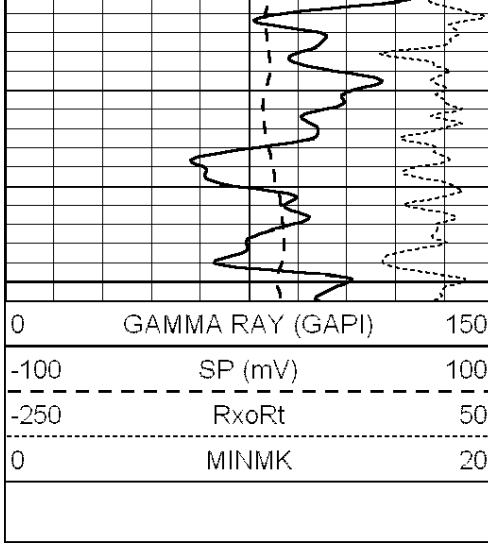


1750

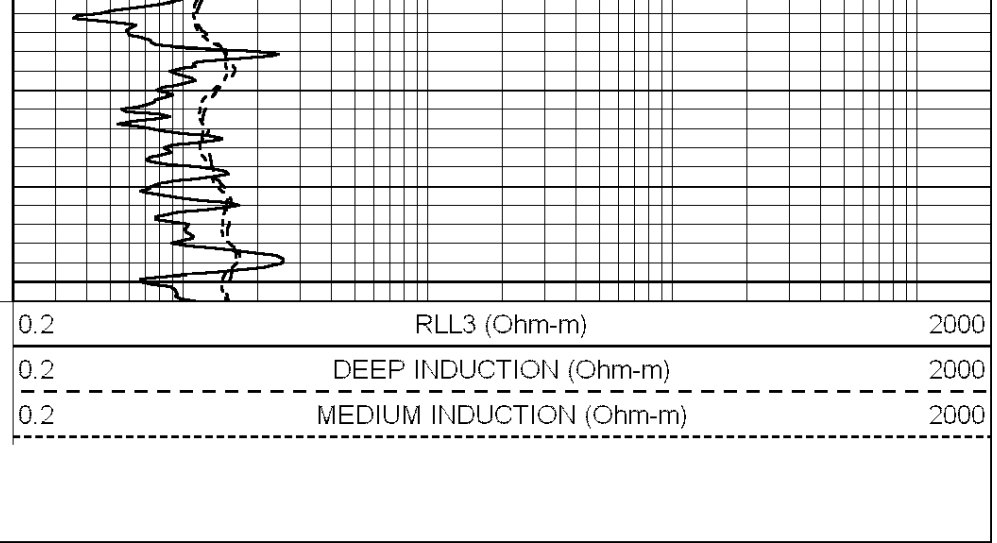


Database File: 24130ddn.db
 Dataset Pathname: pass7.1
 Presentation Format: _dil
 Dataset Creation: Fri Apr 04 17:48:18 2014 by Calc Open-Cased 090629
 Charted by: Depth in Feet scaled 1:240

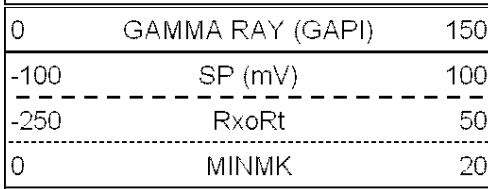


3000

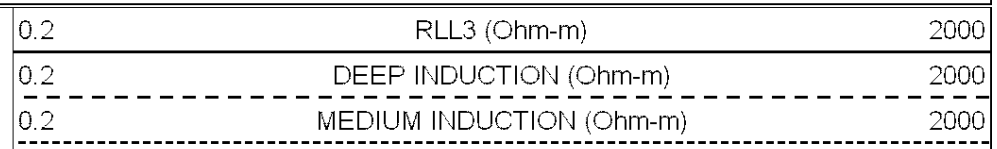


3050

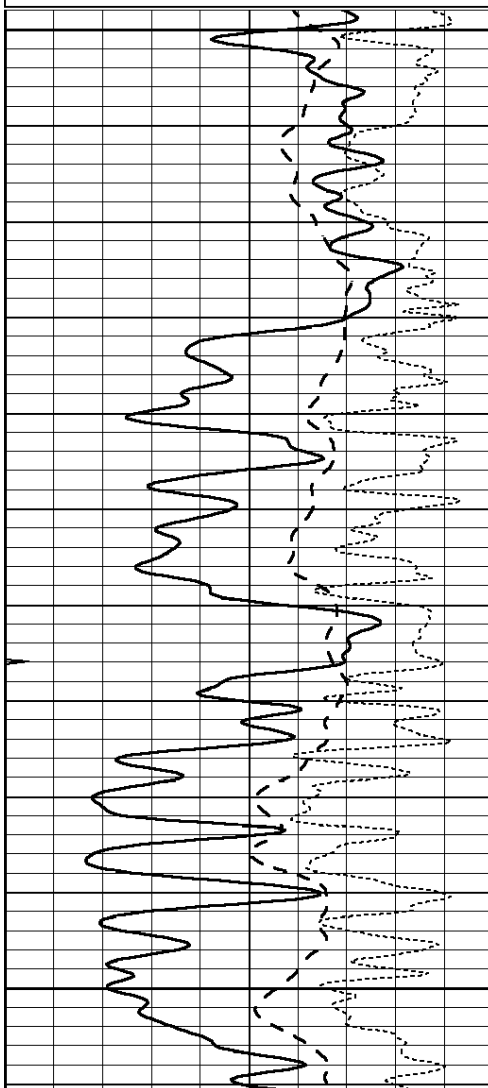

3100

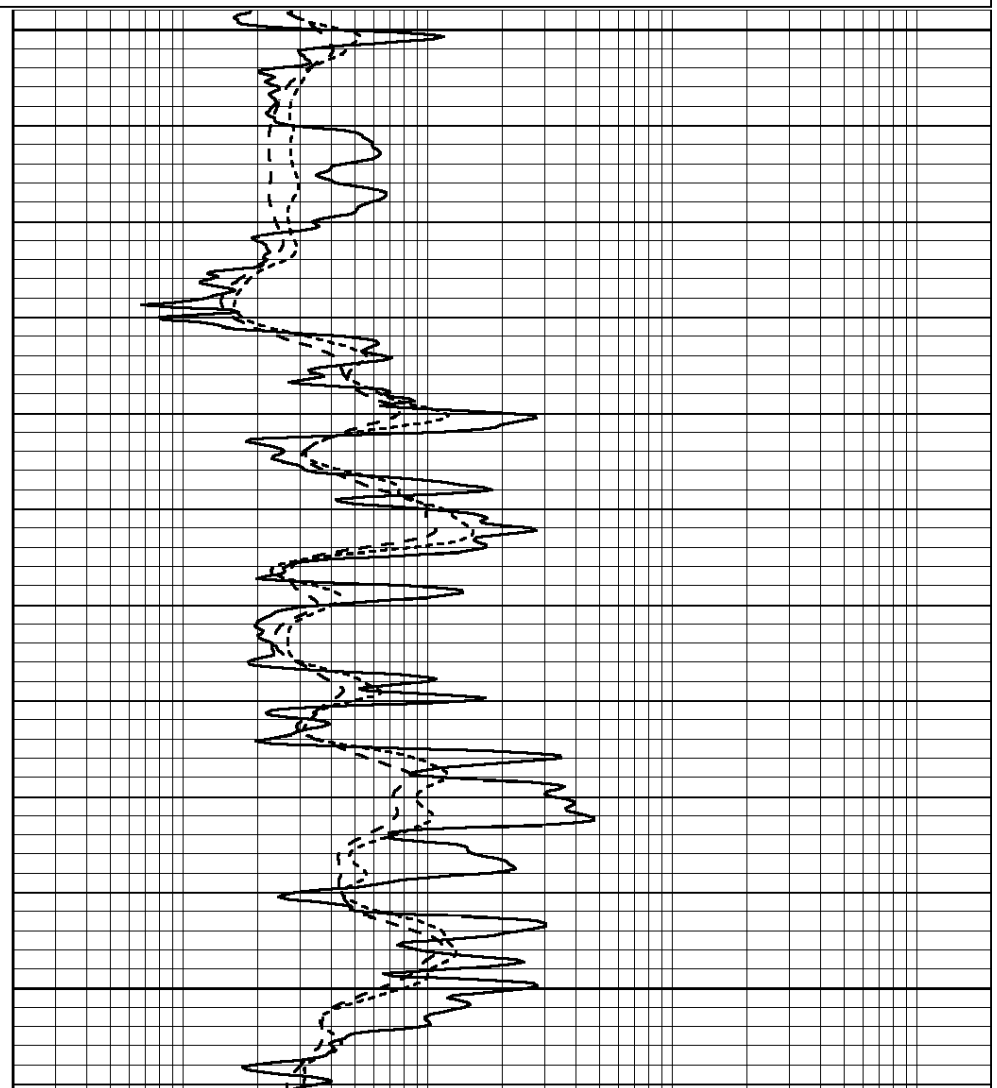

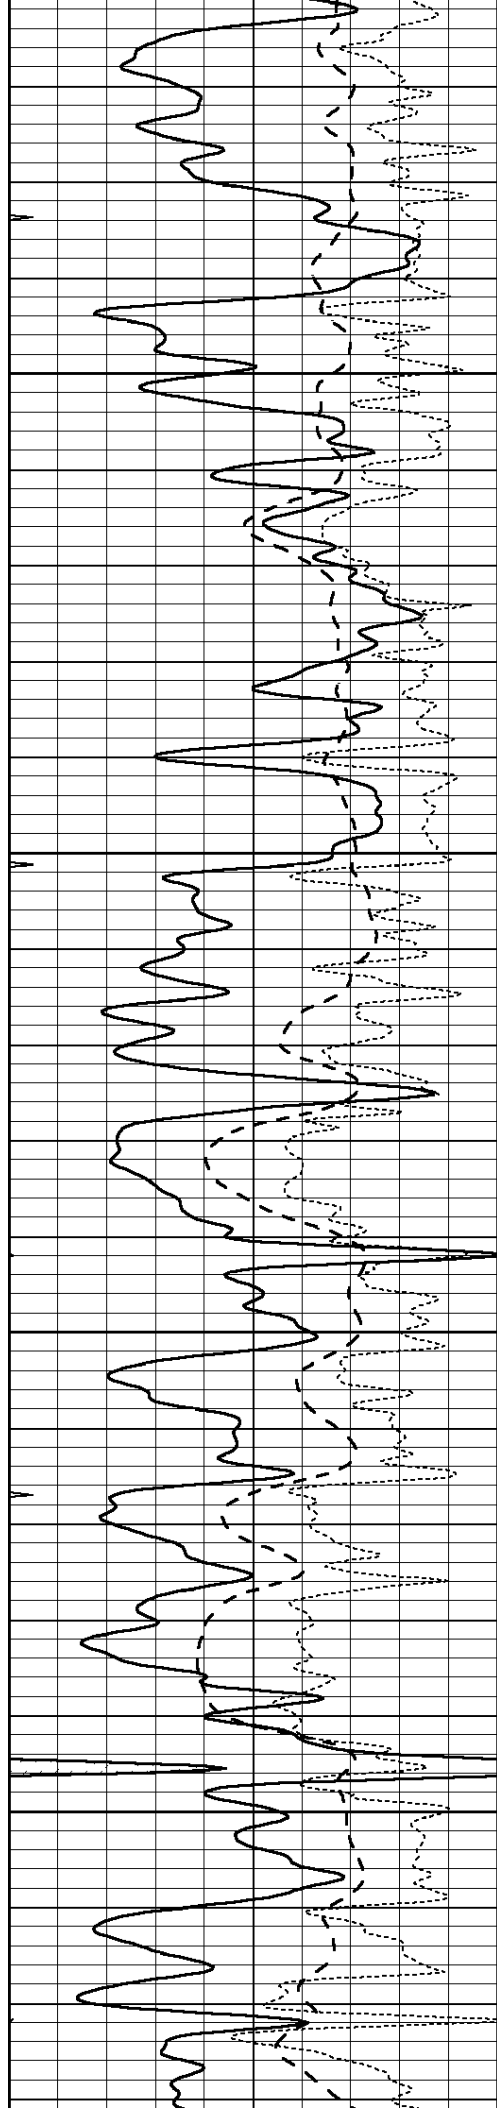



3150

3200

3250

3300

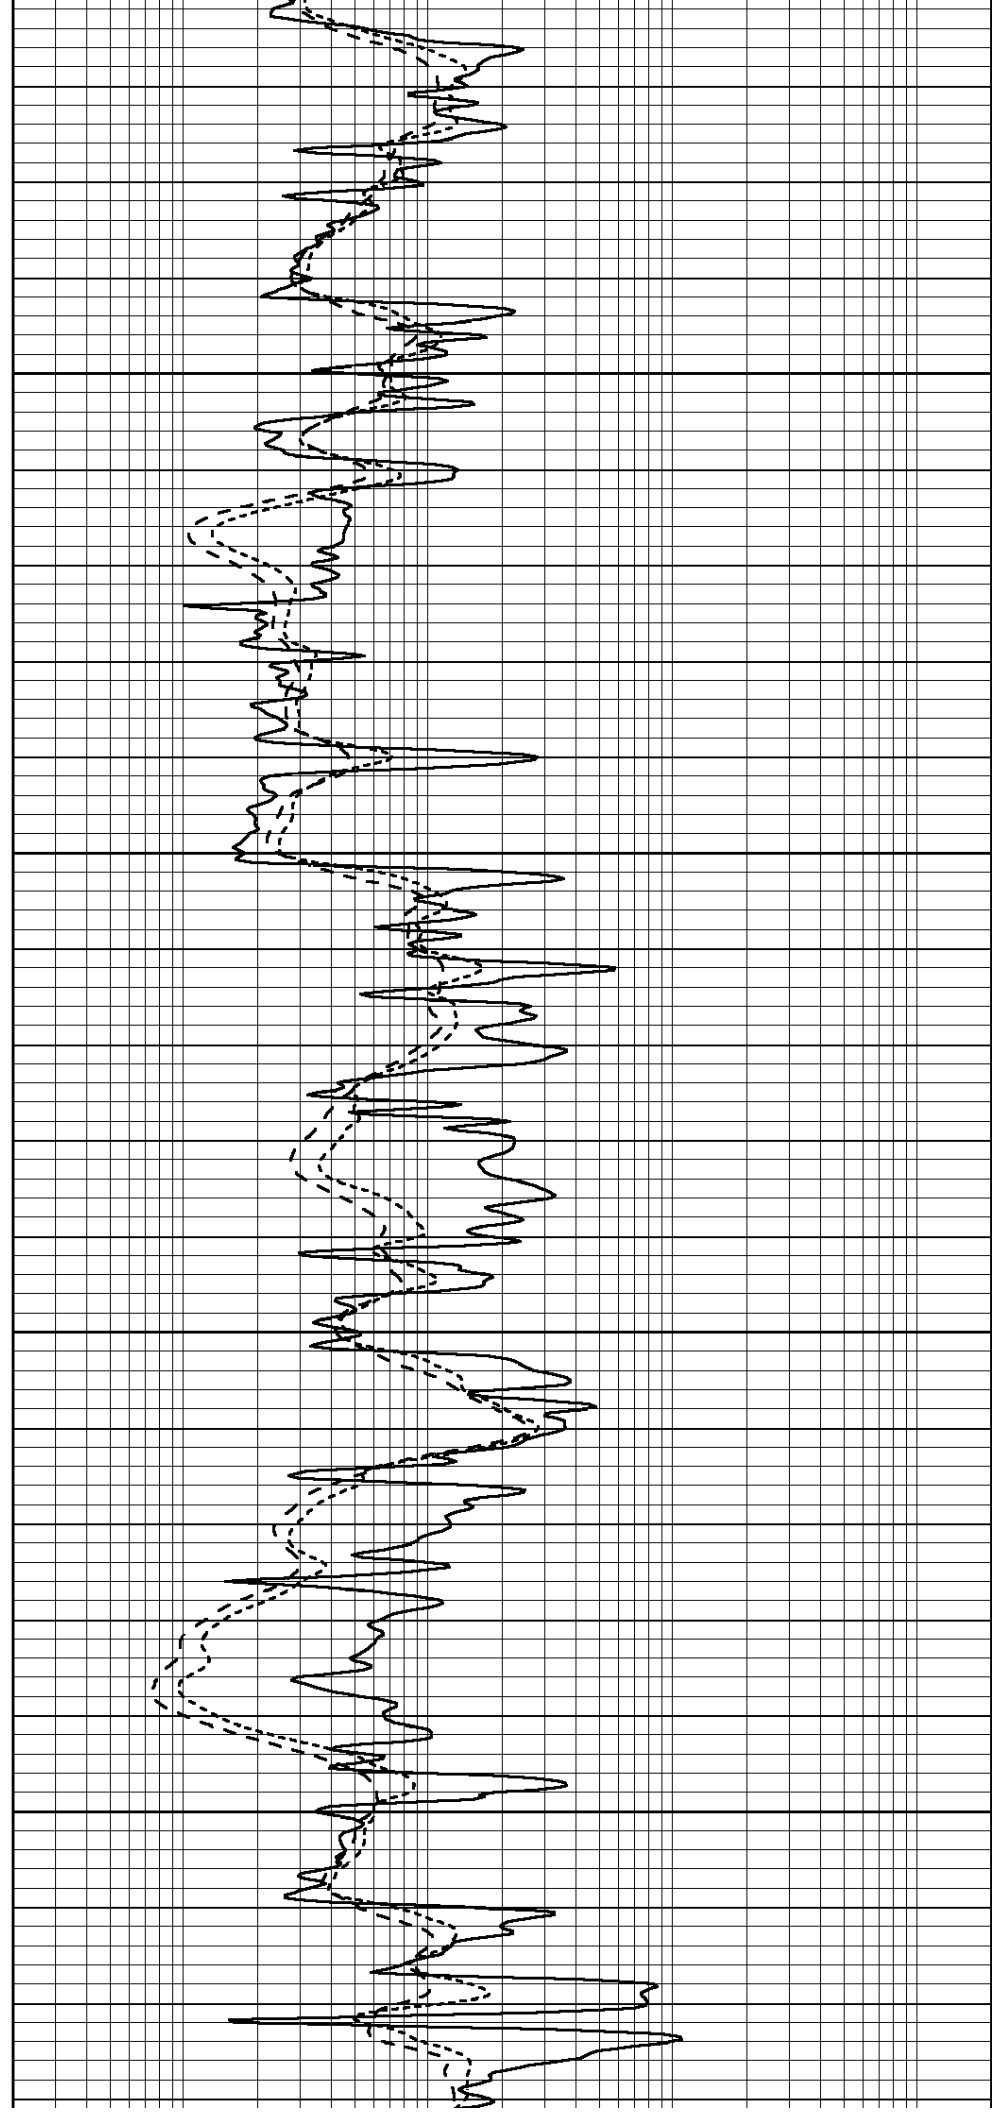

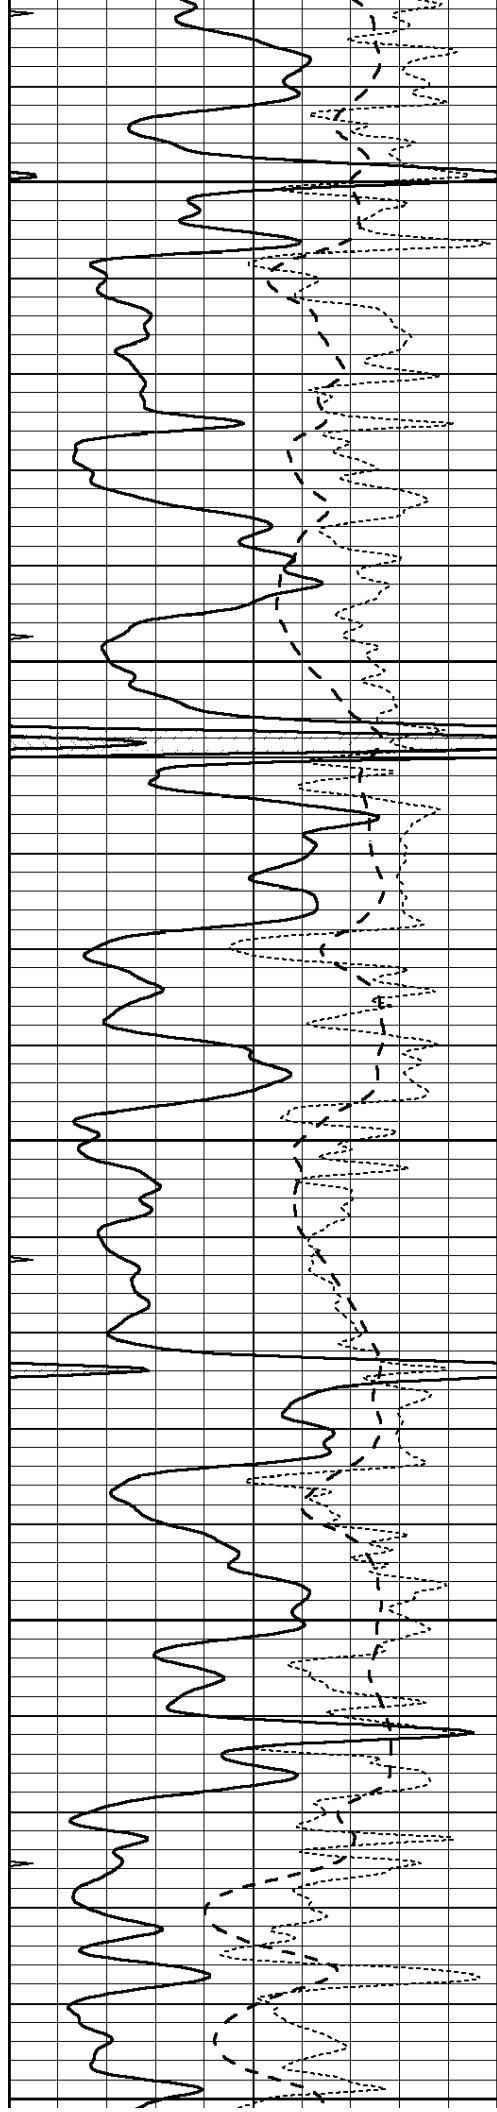


3350


3400

3450

3500

3550

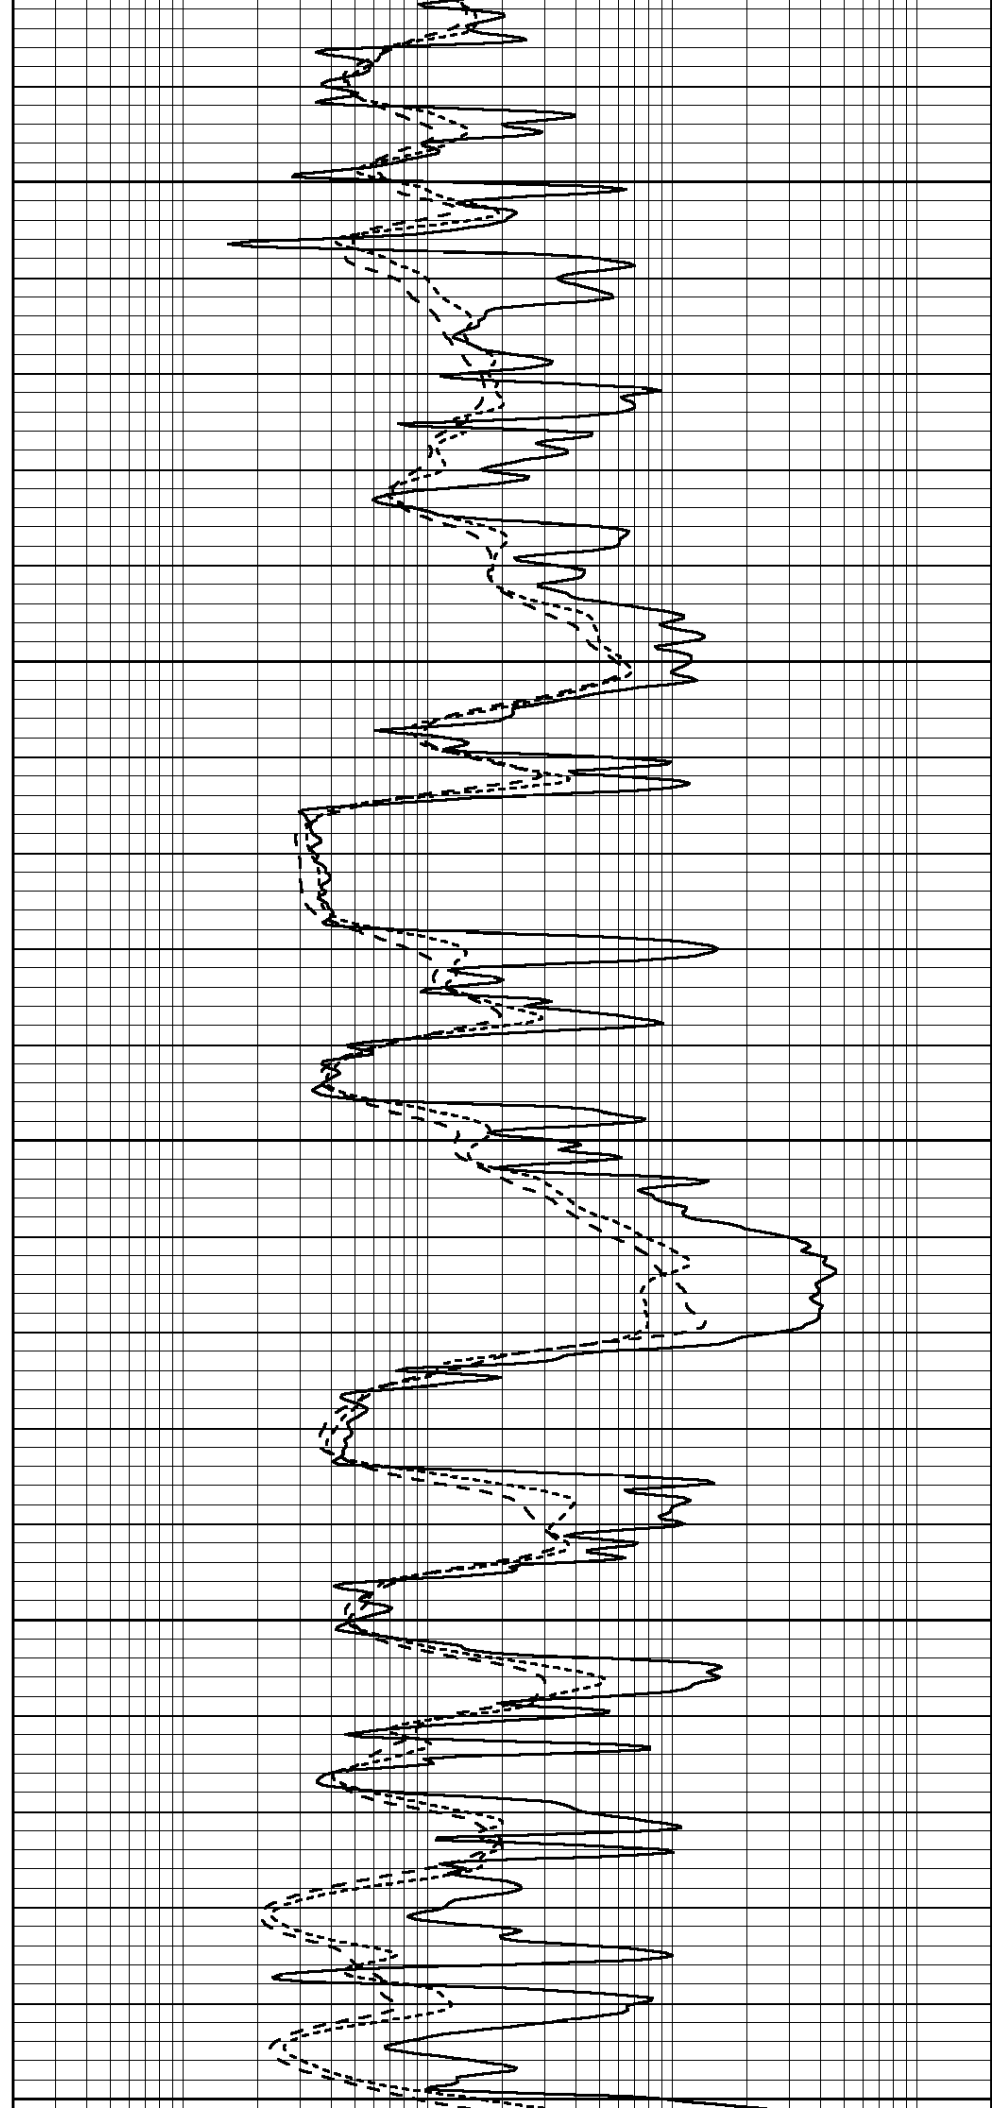

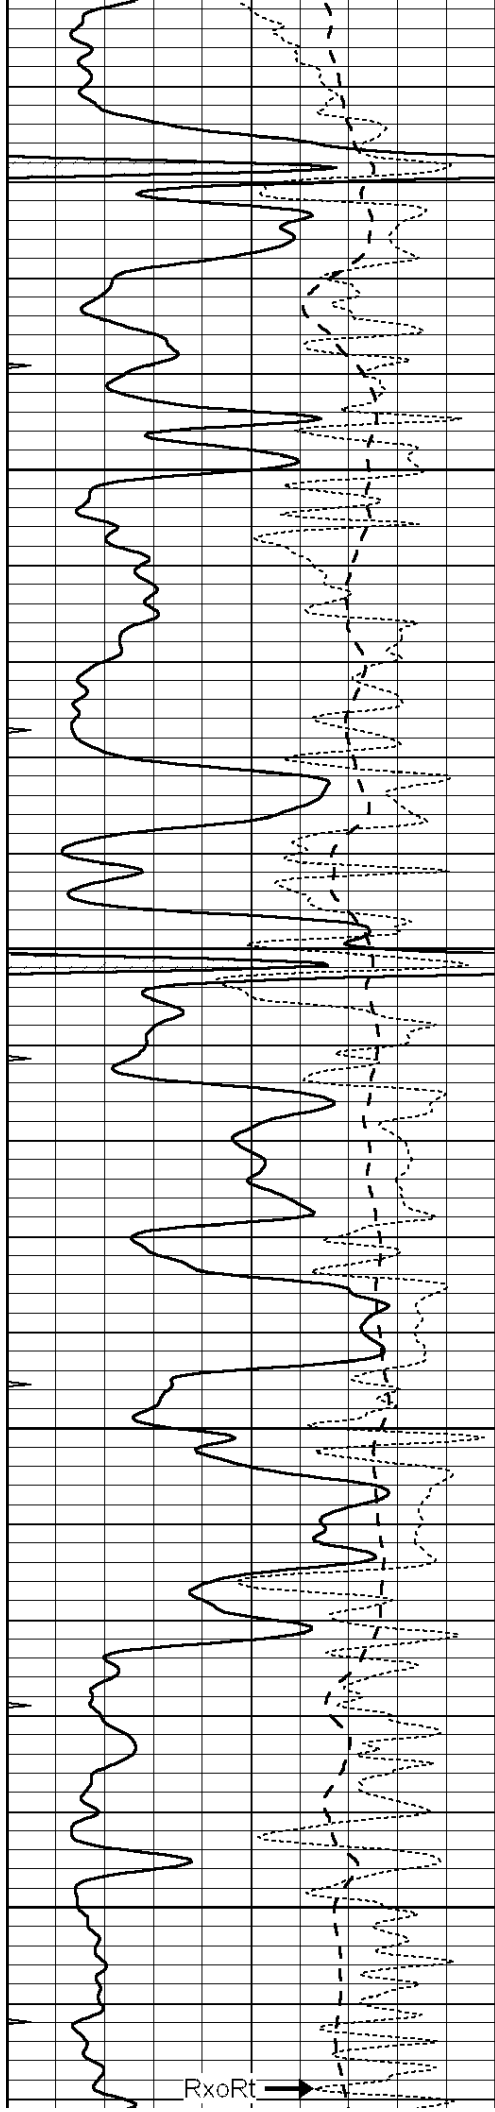



3600

3650

3700



3750

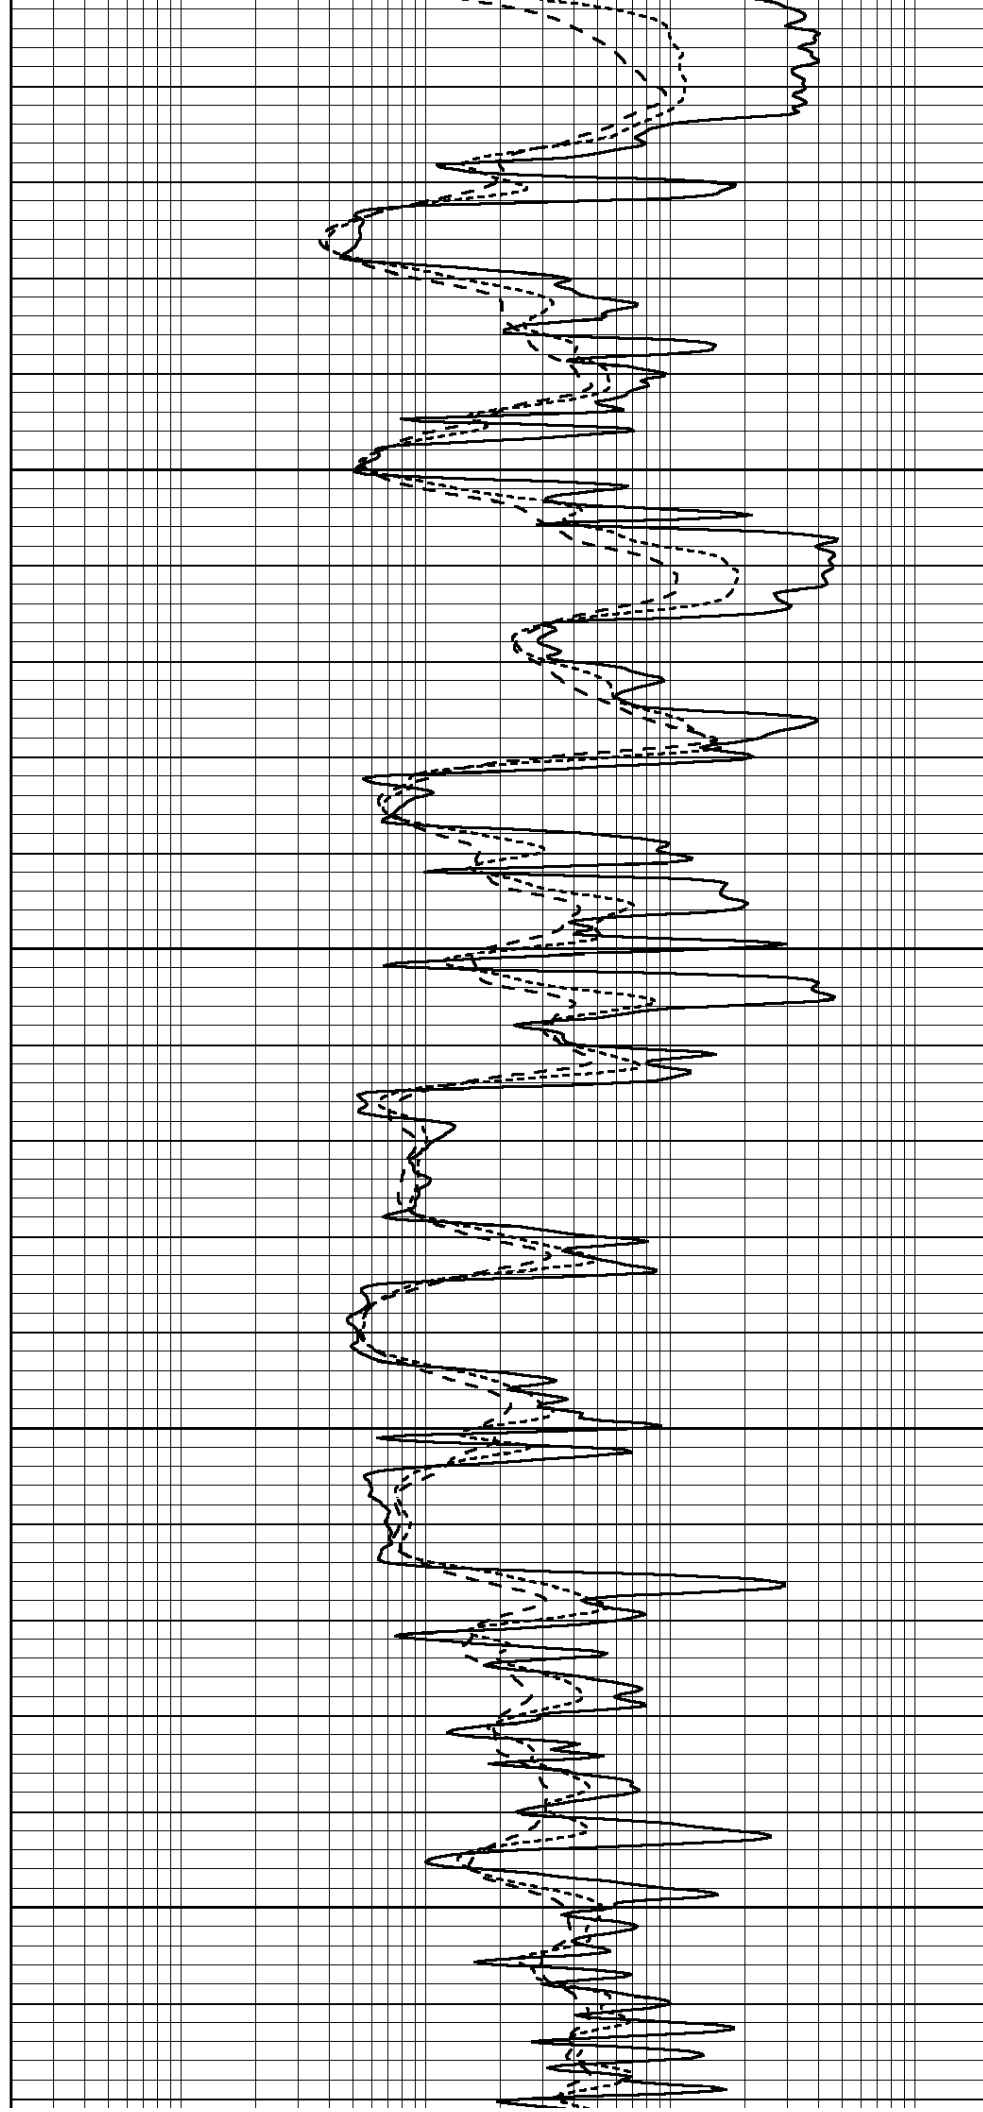


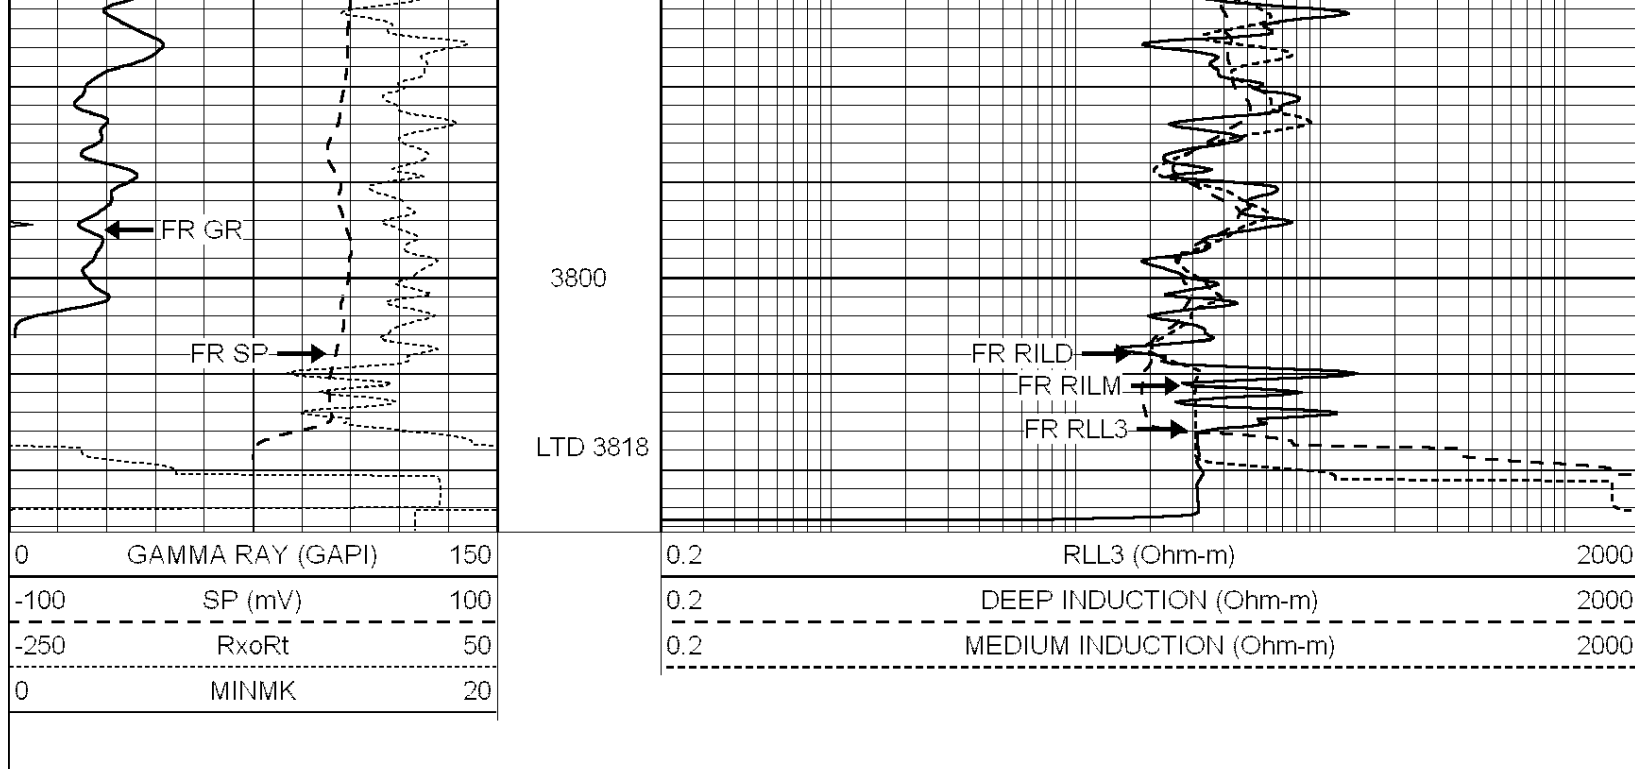

REPEAT SECTION

Database File: 24130ddn.db
 Dataset Pathname: pass6.1
 Presentation Format: _dil
 Dataset Creation: Fri Apr 04 17:29:27 2014 by Calc Open-Cased 090629
 Charted by: Depth in Feet scaled 1:240

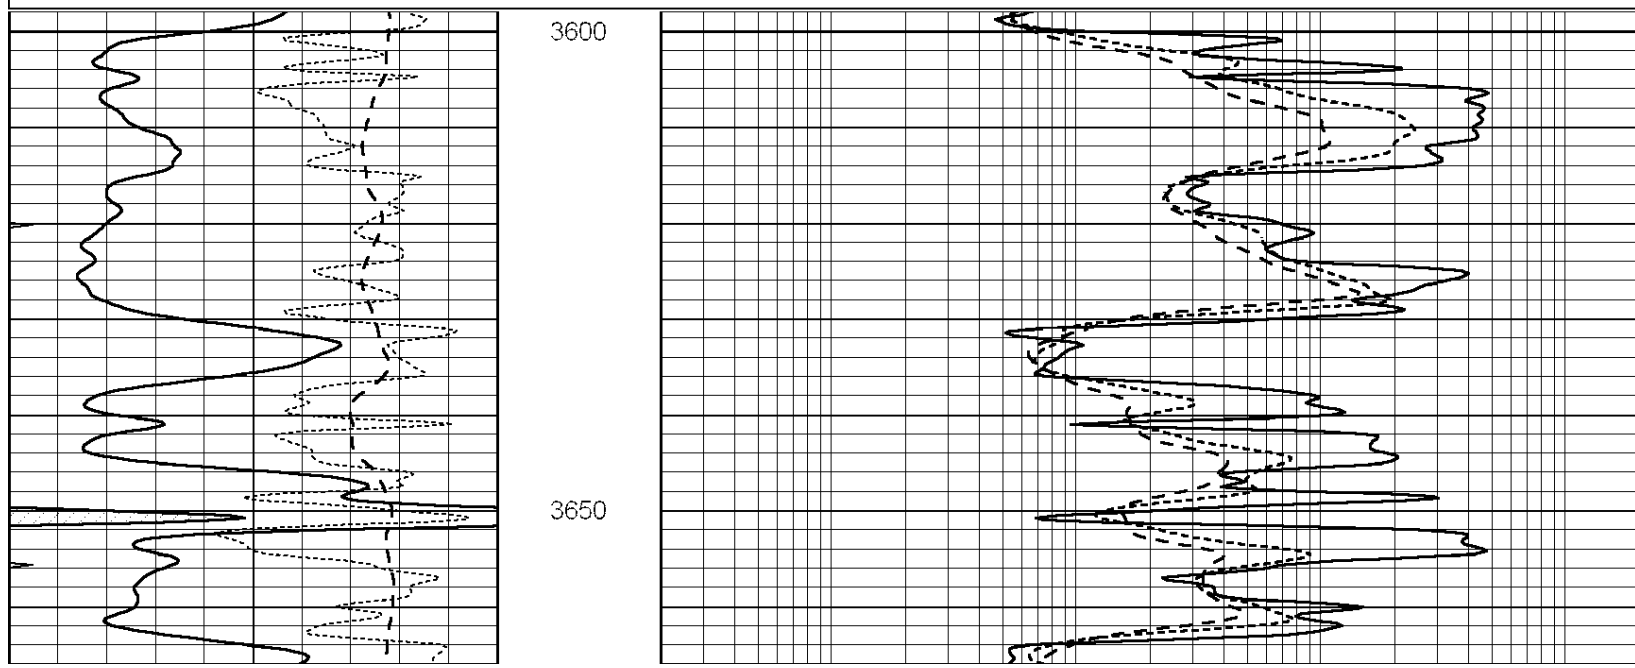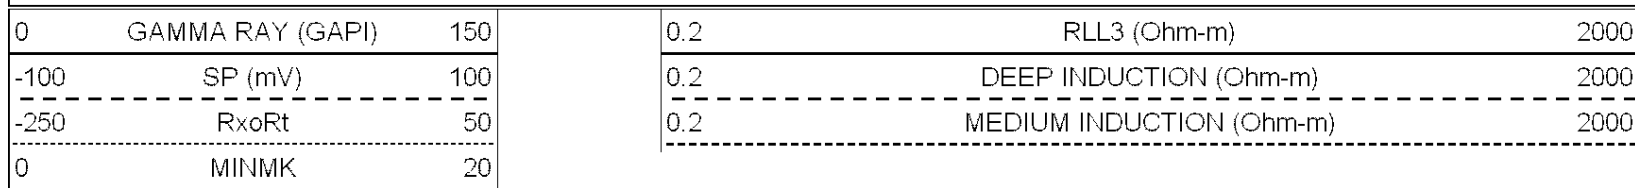


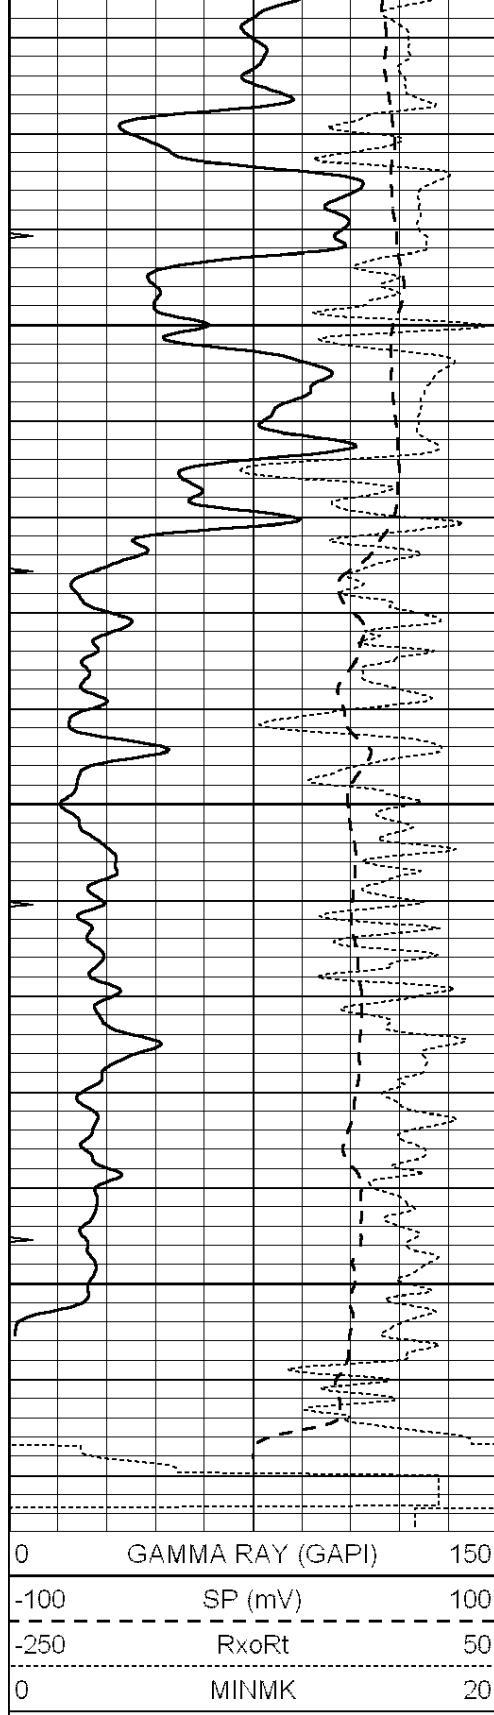

3700

3750

3800

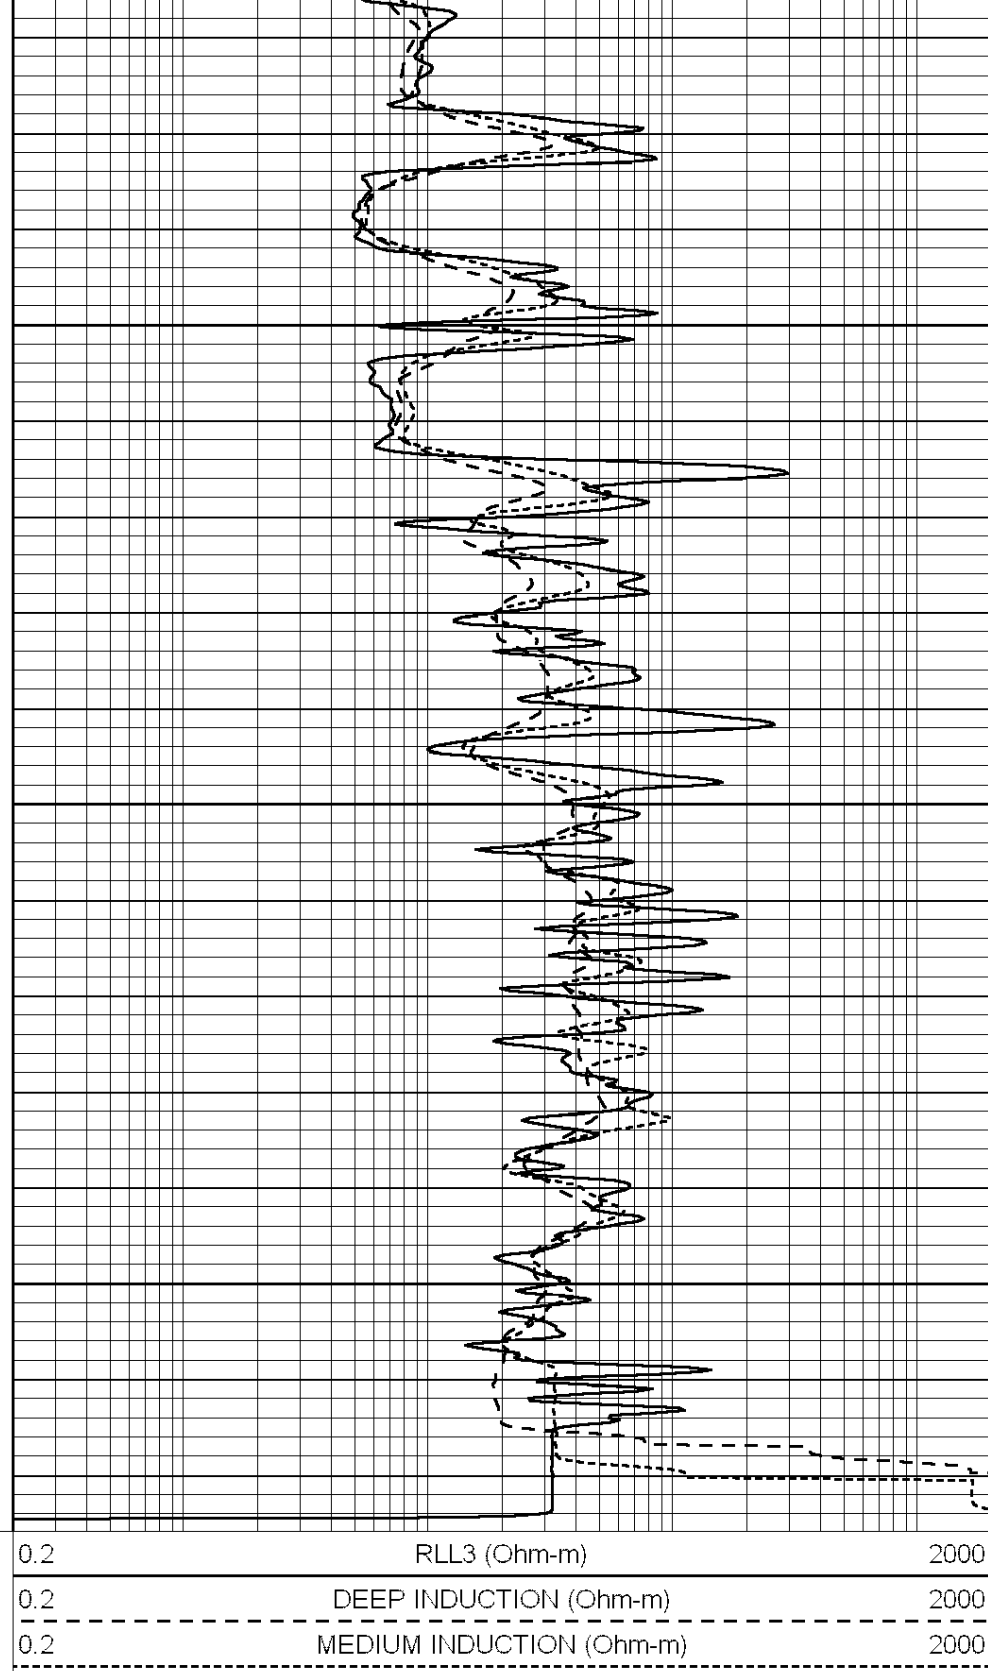

Calibration Report

Database File: 24130ddn.db
Dataset Pathname: pass7.1
Dataset Creation: Fri Apr 04 17:48:18 2014 by Calc Open-Cased 090629

Dual Induction Calibration Report

Serial-Model: DIL3-GEAR
Performed: Tue Apr 01 19:32:51 2014

Readings				References			Results	
Loop:	Air	Loop		Air	Loop		m	b
Deep	0.011	0.656	V	0.000	400.000	mmho/m	500.000	5.000
Medium	0.013	0.740	V	0.000	462.500	mmho/m	540.000	-2.000
Internal:	Zero	Cal		Zero	Cal		m	b
Deep	0.002	0.645	V	0.000	400.000	mmho/m	560.000	-1.071
Medium	0.007	0.740	V	0.000	462.500	mmho/m	540.000	-4.000

Gamma Ray Calibration Report			
Serial Number:	GR5		
Tool Model:	OPEN		
Performed:	Fri Feb 28 06:29:55 2014		
Calibrator Value:	1.0	GAPI	
Background Reading:	0.0	cps	
Calibrator Reading:	1.0	cps	
Sensitivity:	0.9000	GAPI/cps	