



**COMPLETION
& PRODUCTION
SERVICES CO.**

**DUAL
INDUCTION
LOG**

Company RL INVESTMENT, LLC.
Well HANNA #2-18
Field GURK
County GRAHAM
State KANSAS

Company RL INVESTMENT, LLC.
Well HANNA #2-18
Field GURK
County GRAHAM State KANSAS

Location: API # : 15-065-24047-0000
990' FNL & 1650' FEL
SEC 18 TWP 10S RGE 25W
Permanent Datum GROUND LEVEL Elevation 2553
Log Measured From KELLY BUSHING & A.G.L.
Drilling Measured From KELLY BUSHING
Other Services
CDL/CNL
MEL
Elevation
K.B. 2561
D.F. 2559
G.L. 2553

Date	6/11/14		
Run Number	ONE		
Depth Driller	4100		
Depth Logger	4099		
Bottom Logged Interval	4097		
Top Log Interval	00		
Casing Driller	8 5/8" @ 220		
Casing Logger	218		
Bit Size	7 7/8"		
Type Fluid in Hole	CHEMICAL MUD	CHLORIDES 3200 PPM	
Density / Viscosity	9.2/65		
pH / Fluid Loss	10.5/8.4		
Source of Sample	FLOWLINE		
Rm @ Meas. Temp	.80 @ 92F		
Rmt @ Meas. Temp	.60 @ 92F		
Rmc @ Meas. Temp	.96 @ 94F		
Source of Rmf / Rmc	MEASUREMENT		
Rm @ BHT	.63 @ 117F		
Time Circulation Stopped	2 HOURS		
Time Logger on Bottom			
Maximum Recorded Temperature	117F		
Equipment Number	4010		
Location	HAYS, KANSAS		
Recorded By	JASON CAPPELLUCCI		
Witnessed By	RICHARD BELL		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

THANK YOU FOR USING NABORS, HAYS, KS. (785) 628-6395
DIRECTIONS:
ST. PETER, KS. - NORTH EDGE TO RD. E - 3 WEST - SOUTH INTO



MAIN SECTION



Database File: 24633ddn.db
 Dataset Pathname: pass3.3
 Presentation Format: _dil2
 Dataset Creation: Wed Jun 11 23:13:54 2014 by Calc Open-Cased 090629
 Charted by: Depth in Feet scaled 1:600


0 Gamma Ray (GAPI) 150
 -100 SP (mV) 100

0 RLL3 (Ohm-m) 50
 0 RILD (Ohm-m) 50

1000 CILD (mmho/m) 0

50 RILD X10 (Ohm-m) 500
 50 RLL3 X10 (Ohm-m) 500

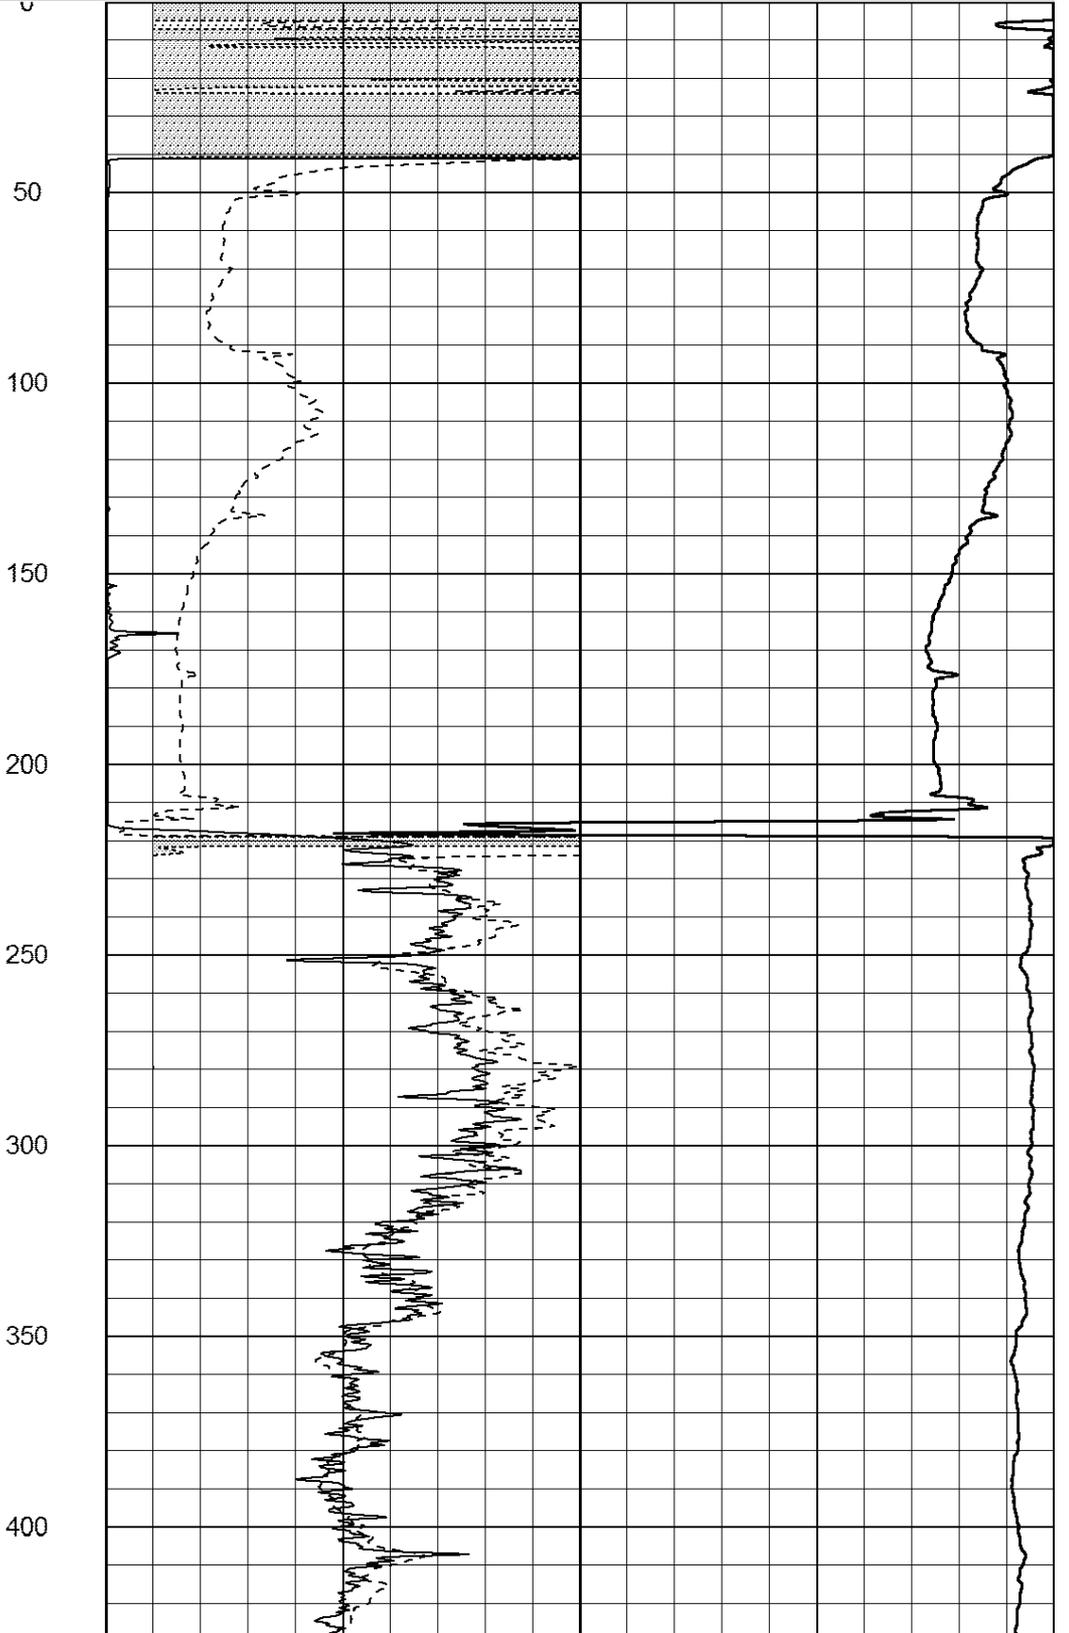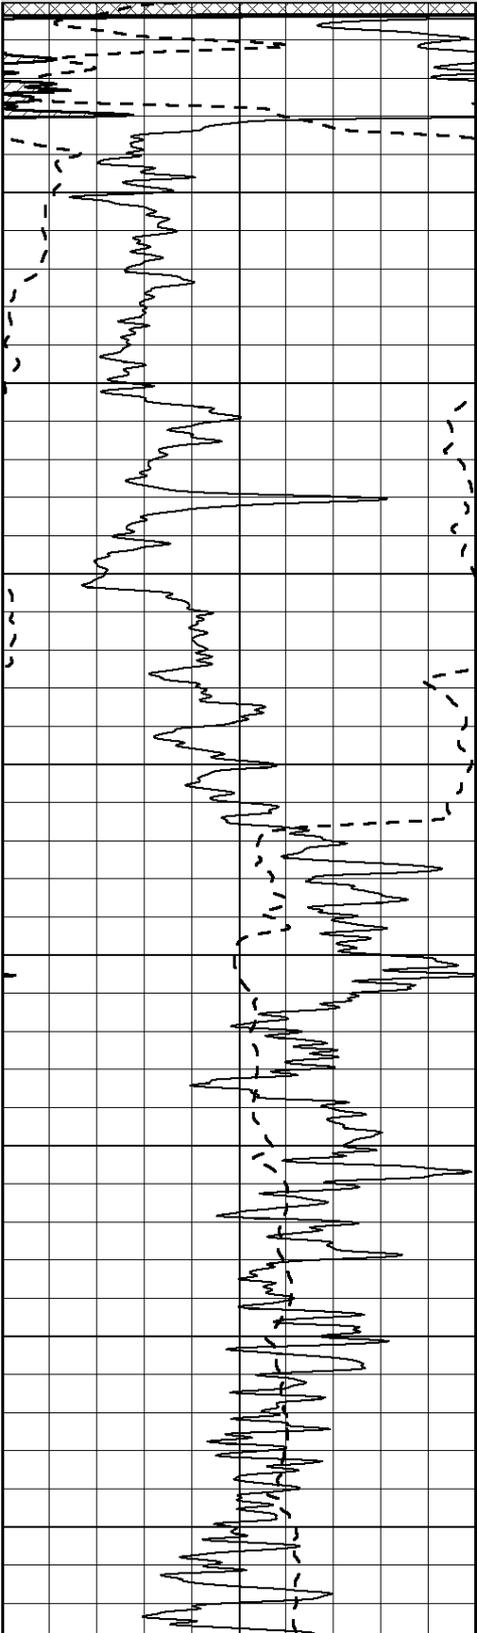

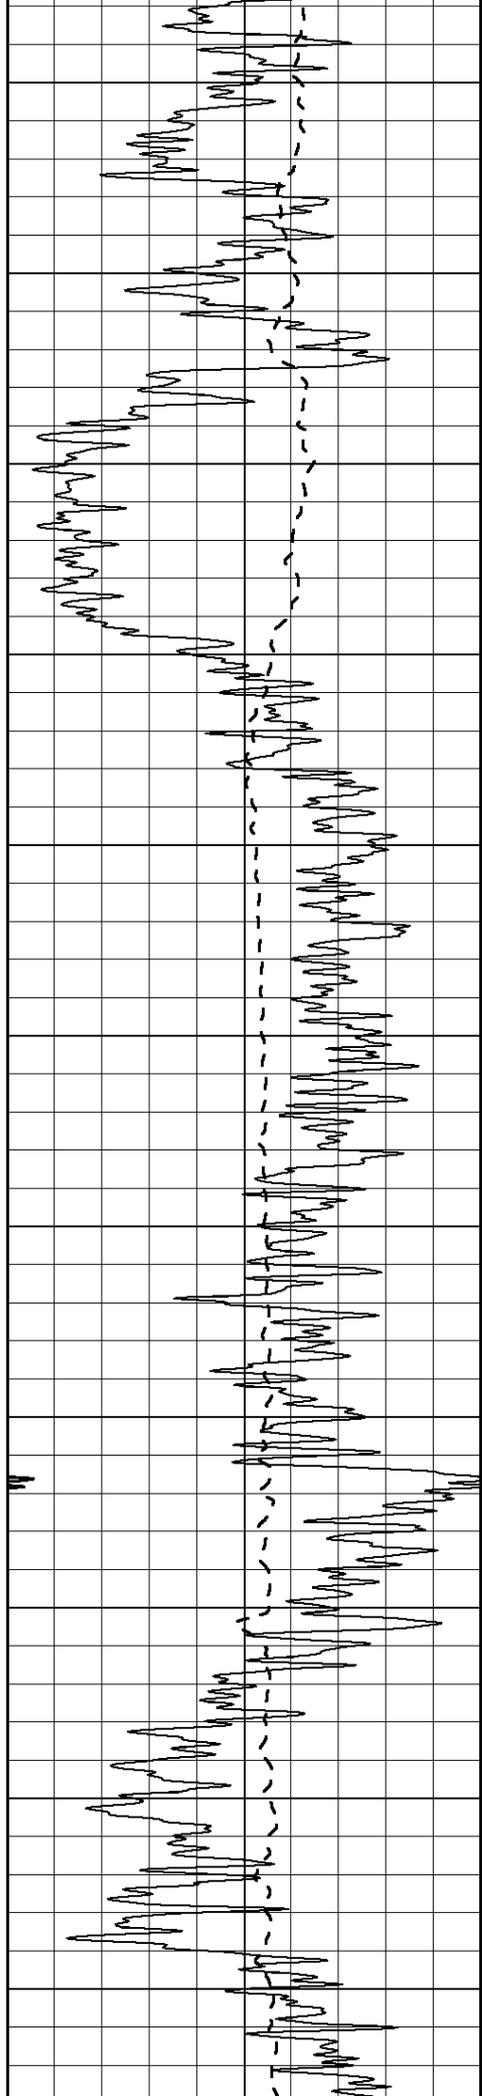

450

500

550

600

650

700



750


800

850


900



950

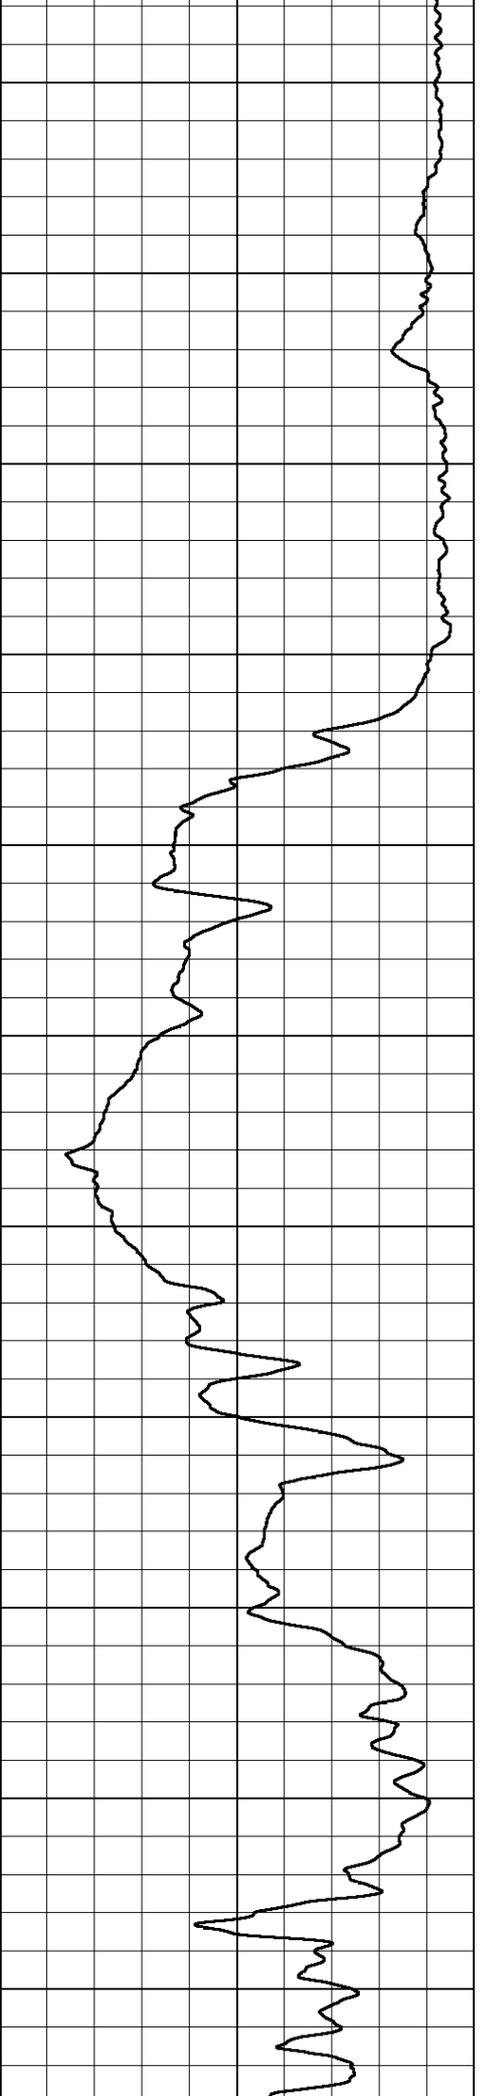
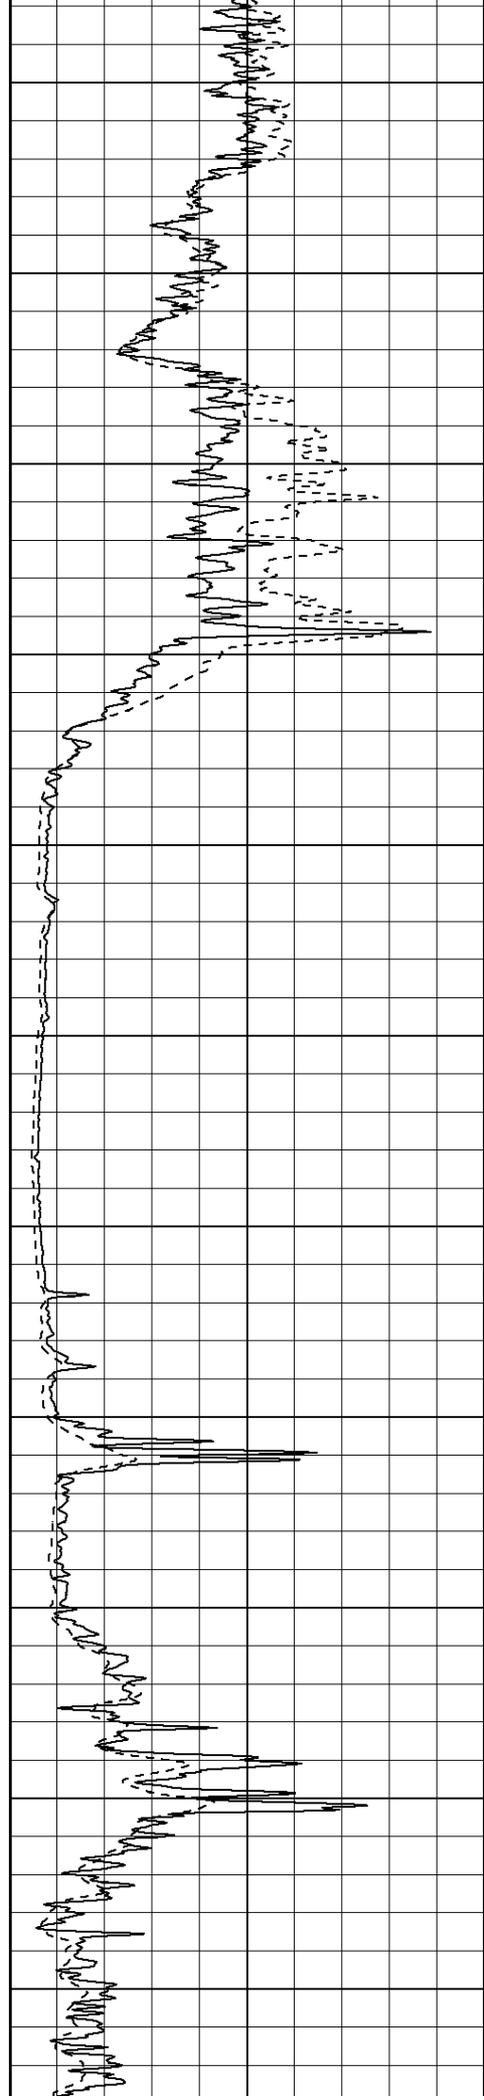



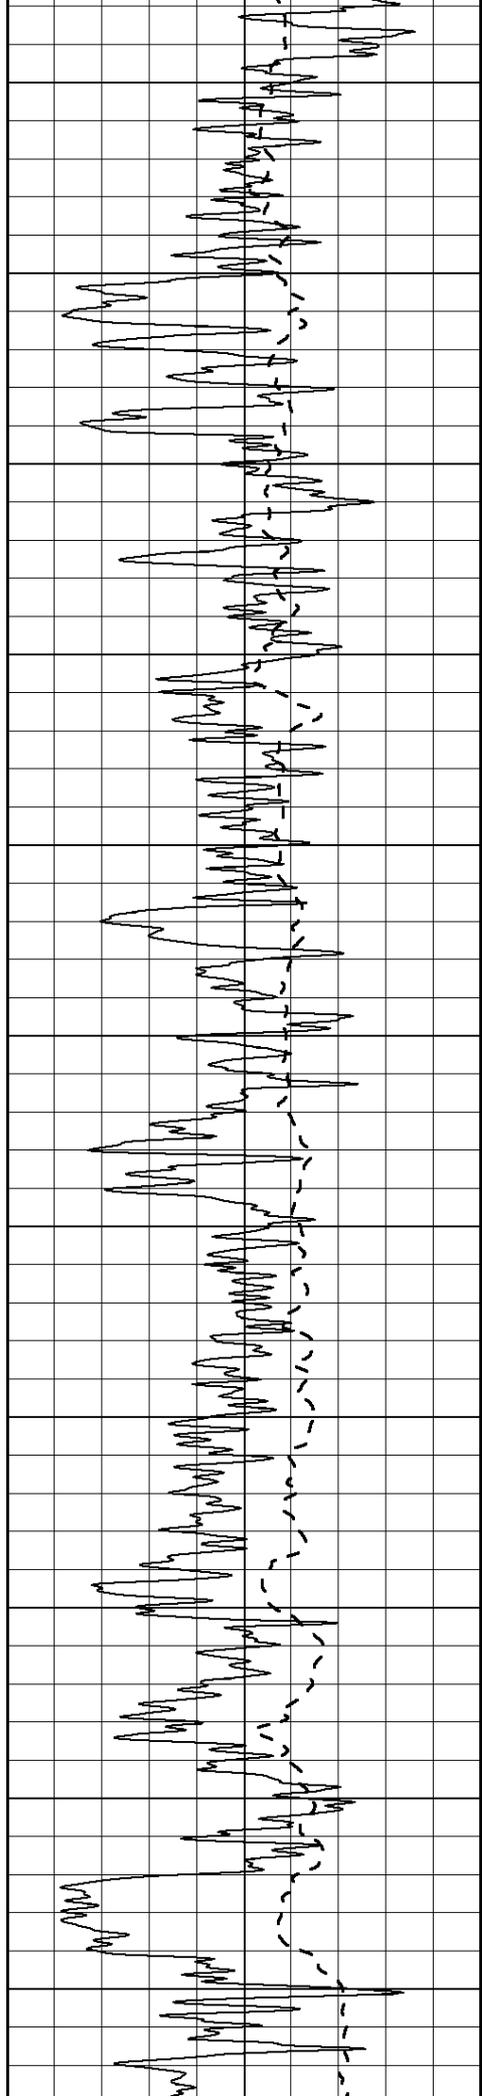



1000
1050
1100
1150
1200
1250
1300
1350
1400
1450
1500

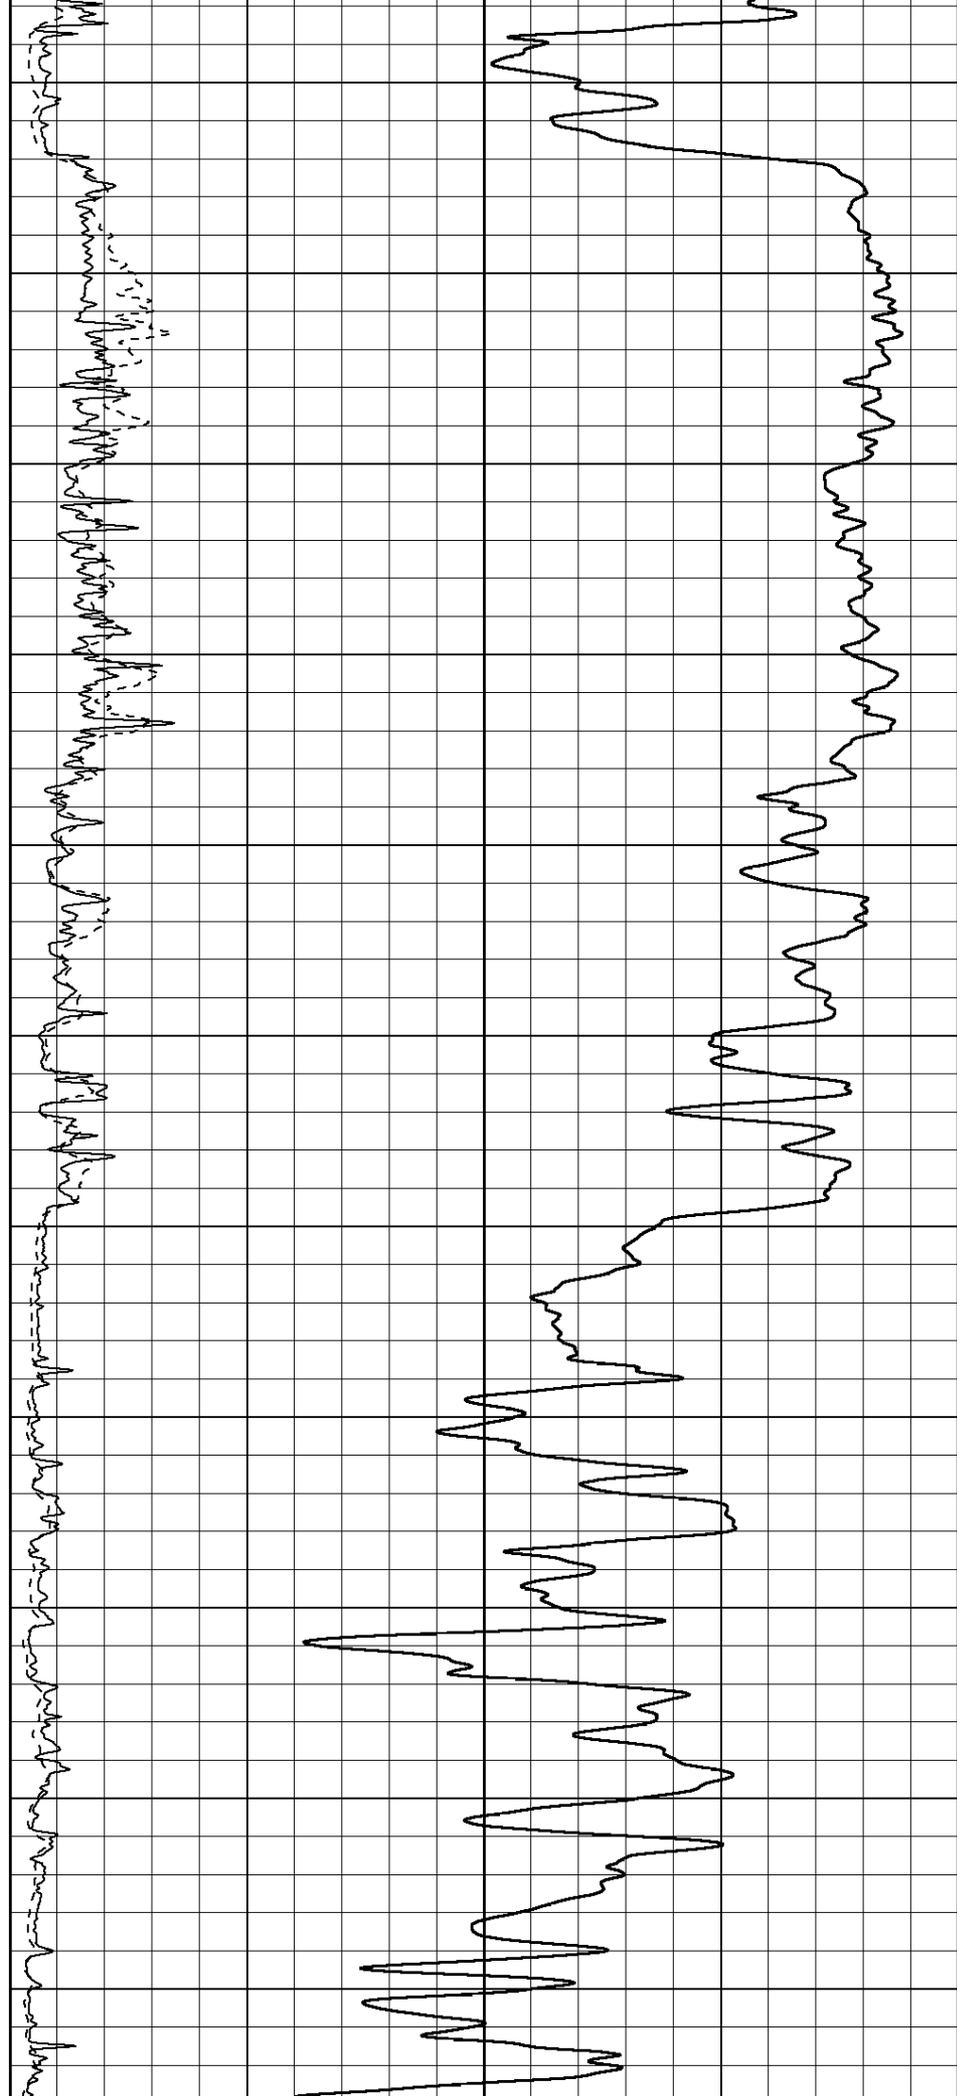

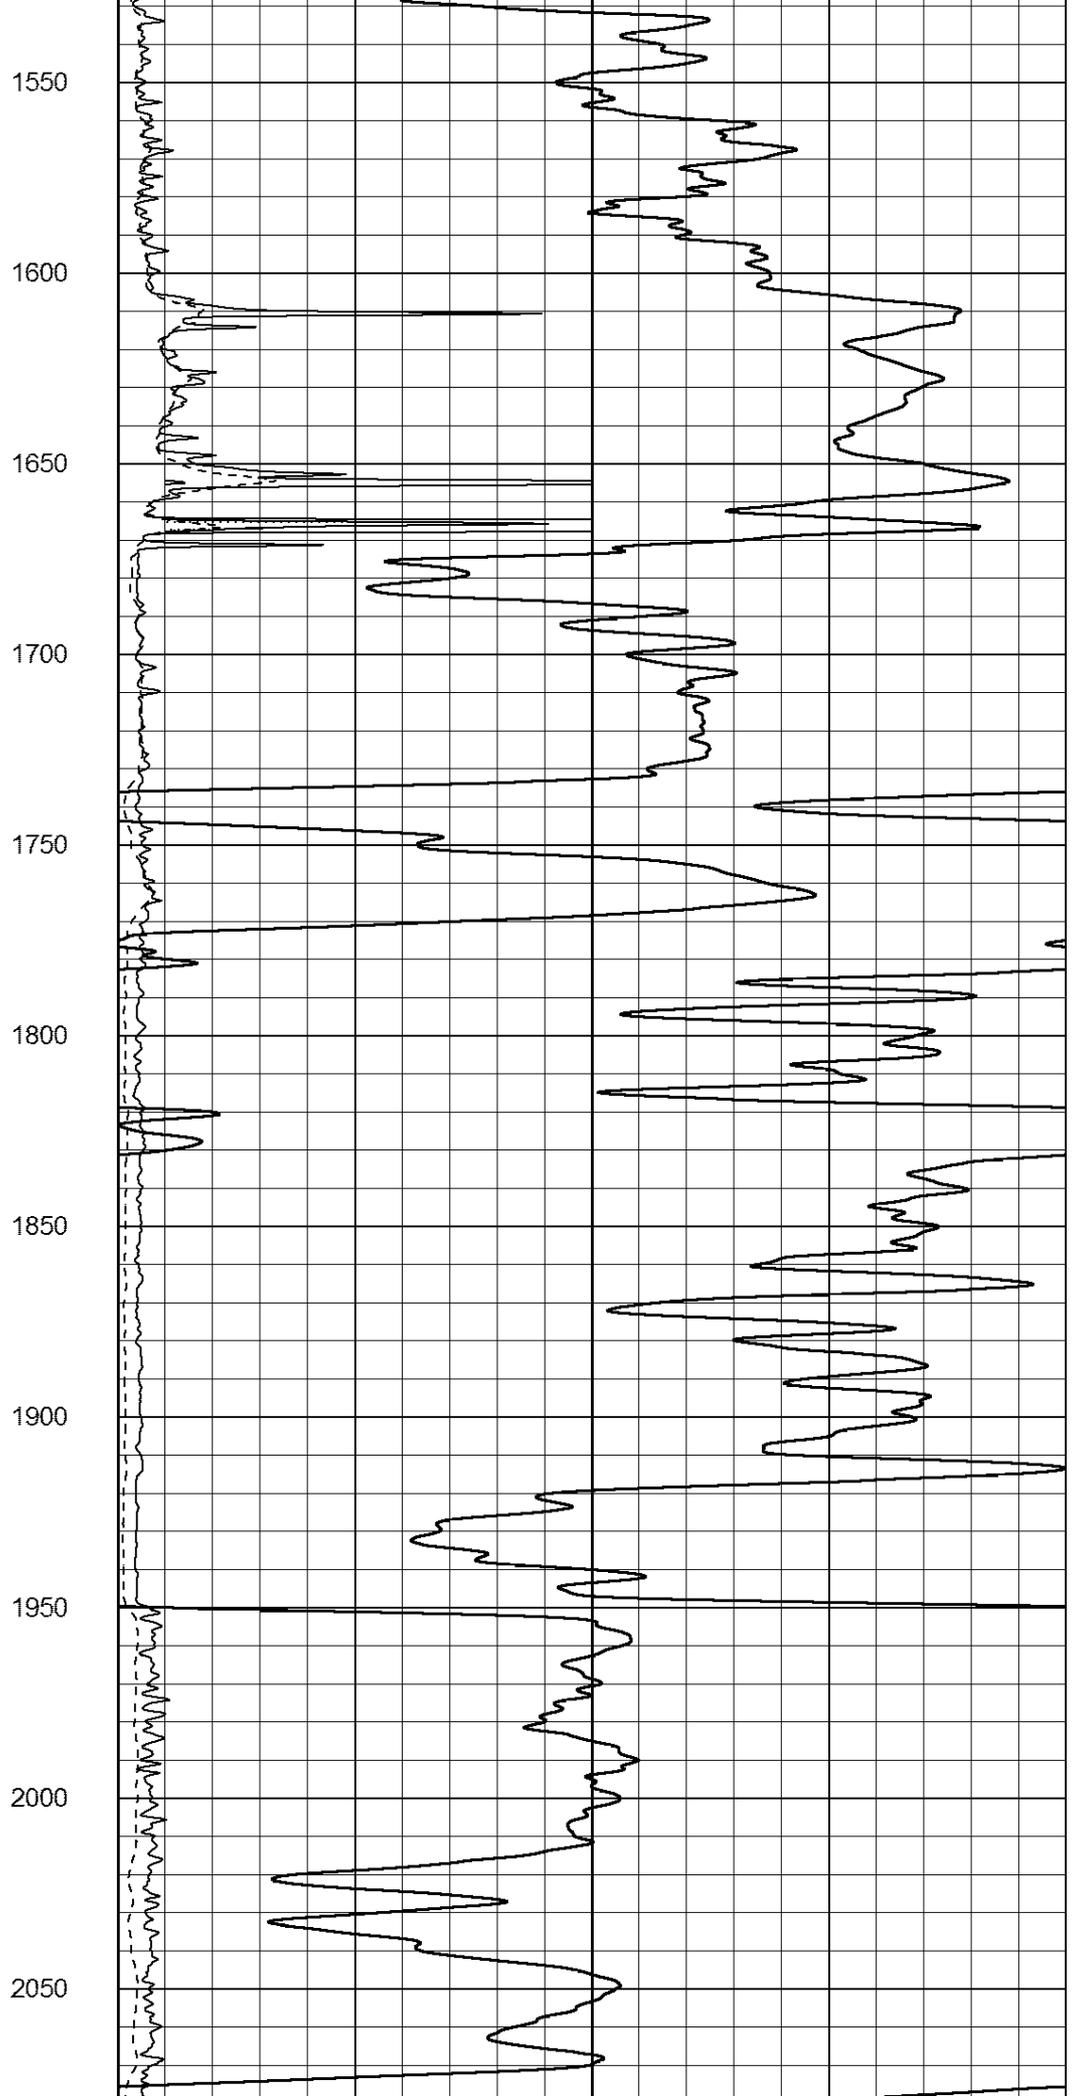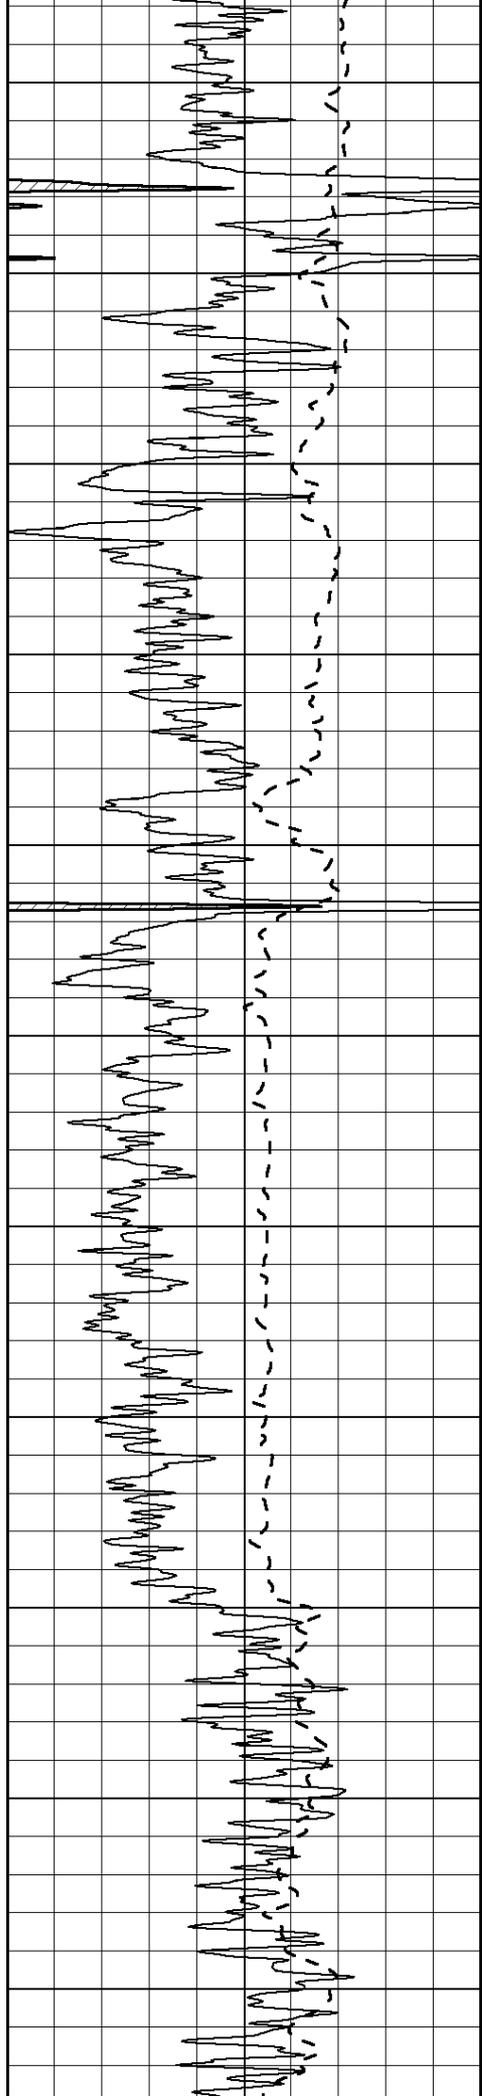

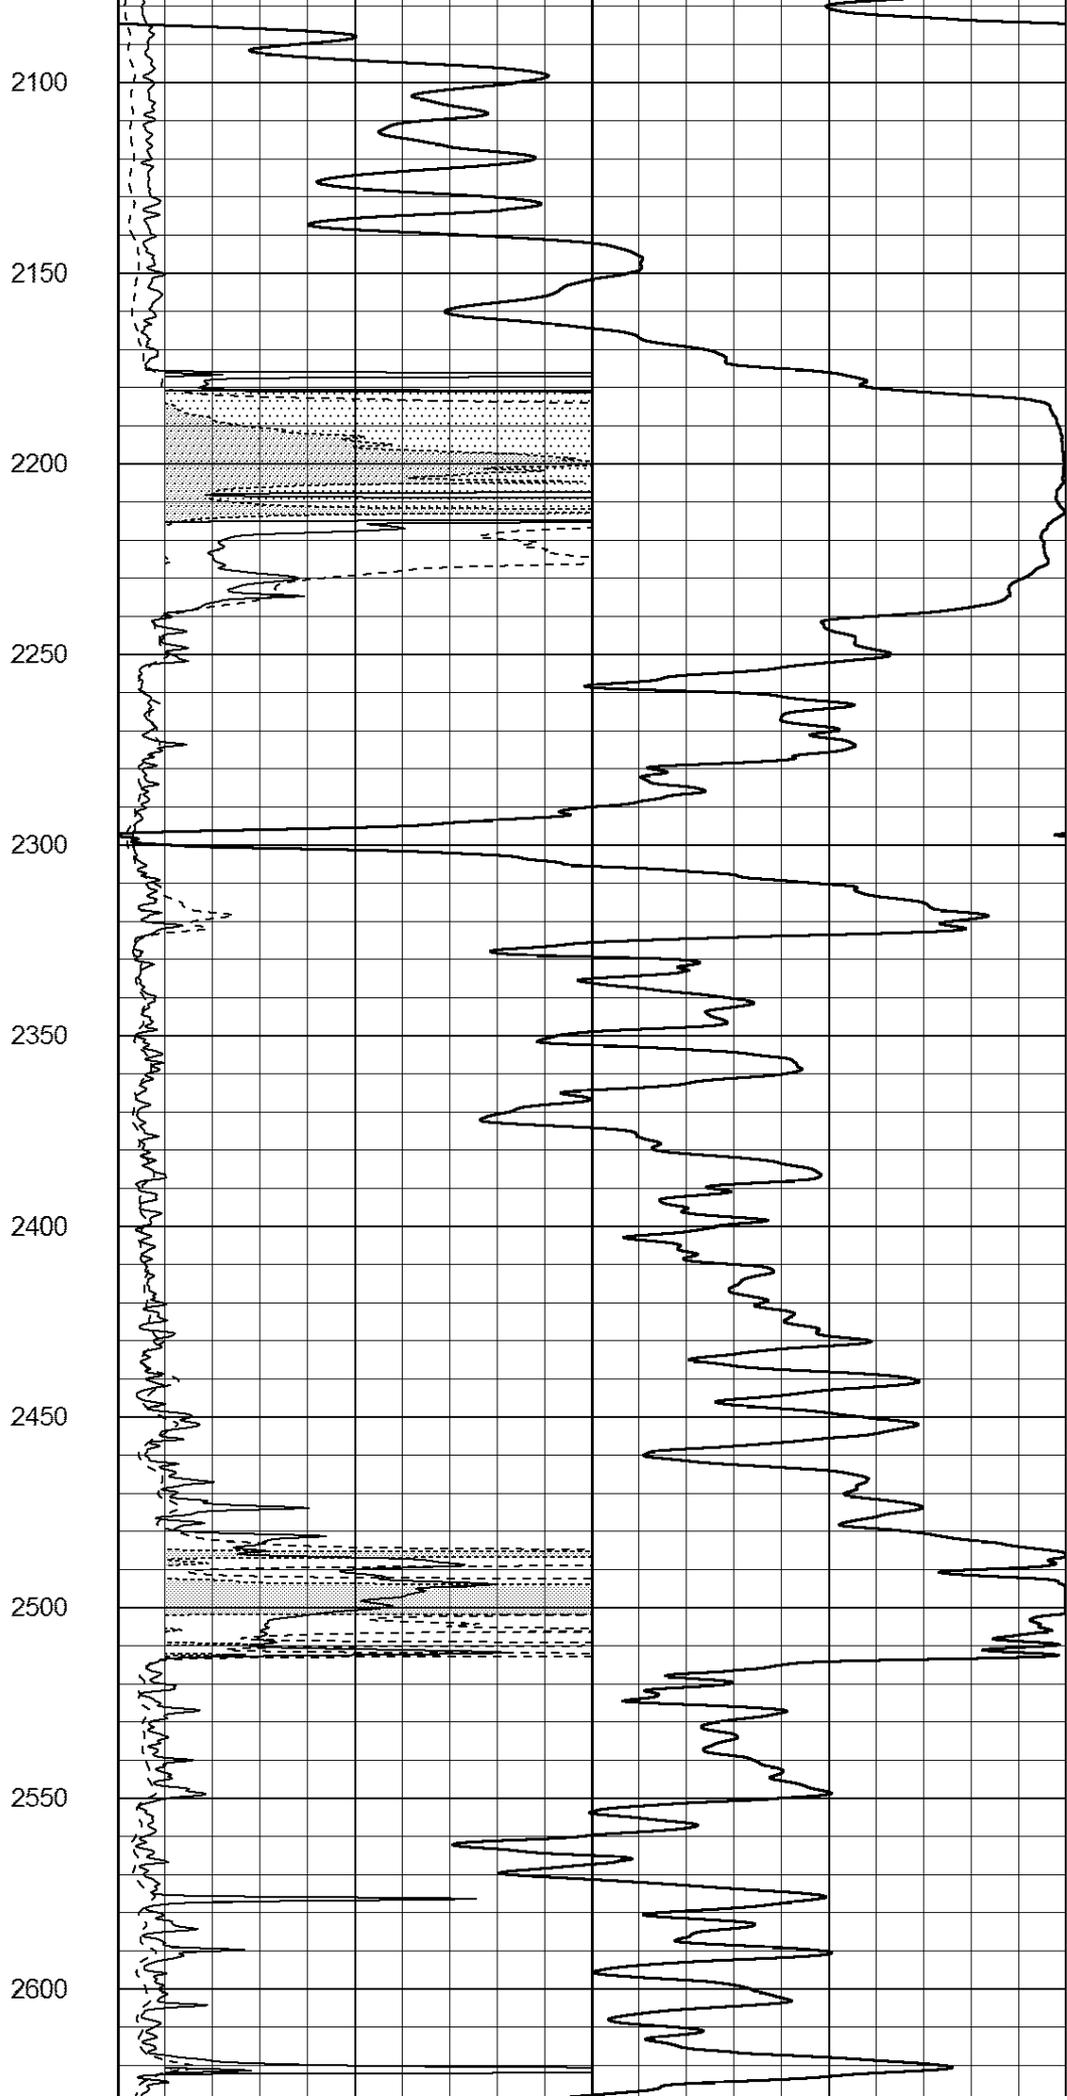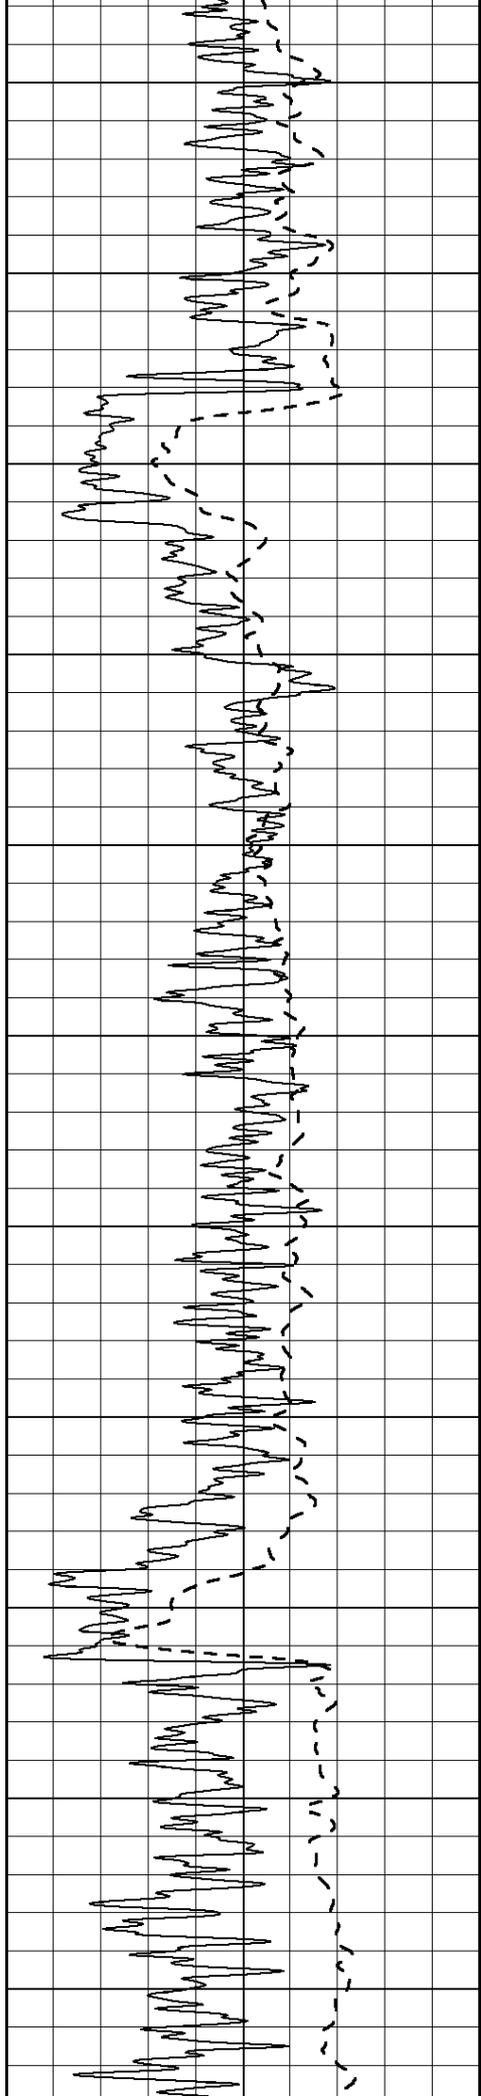

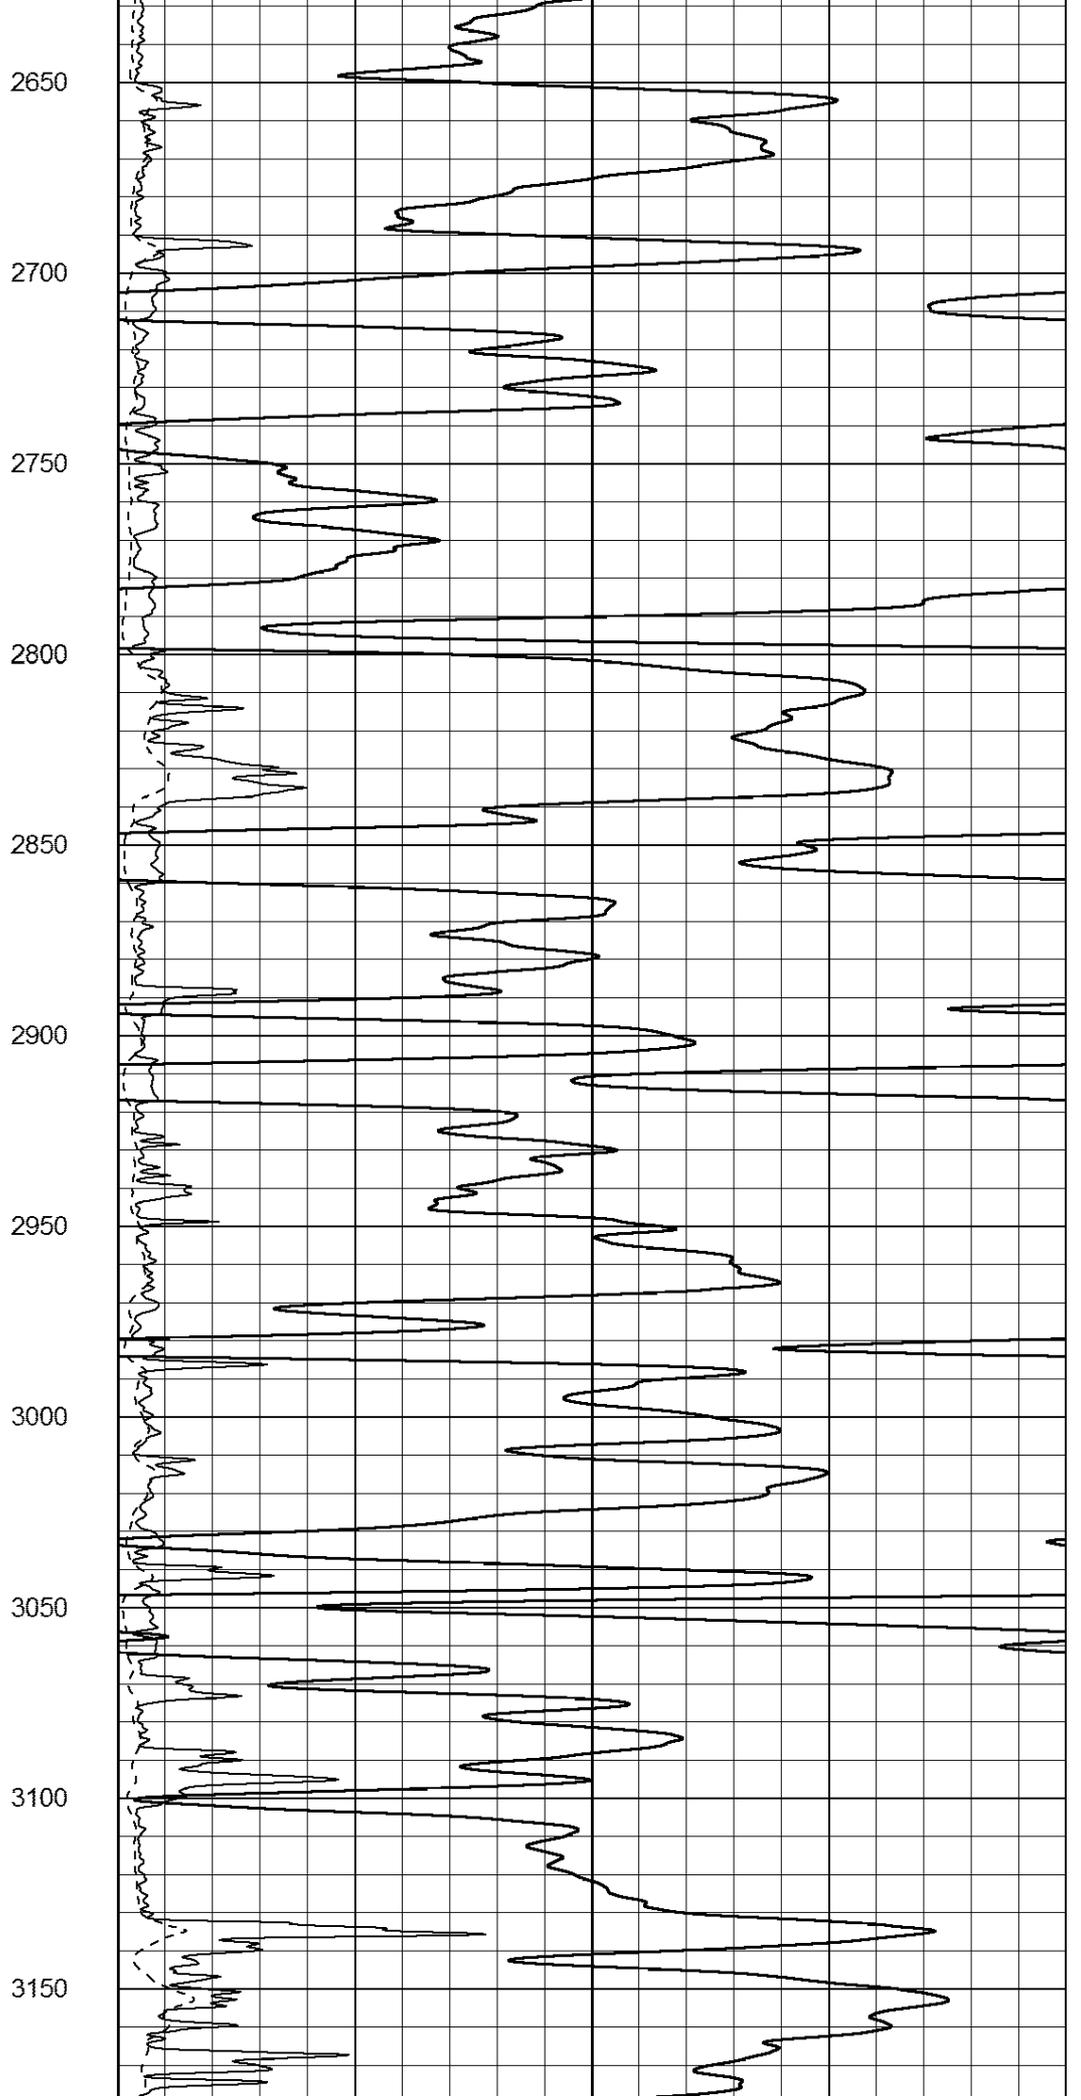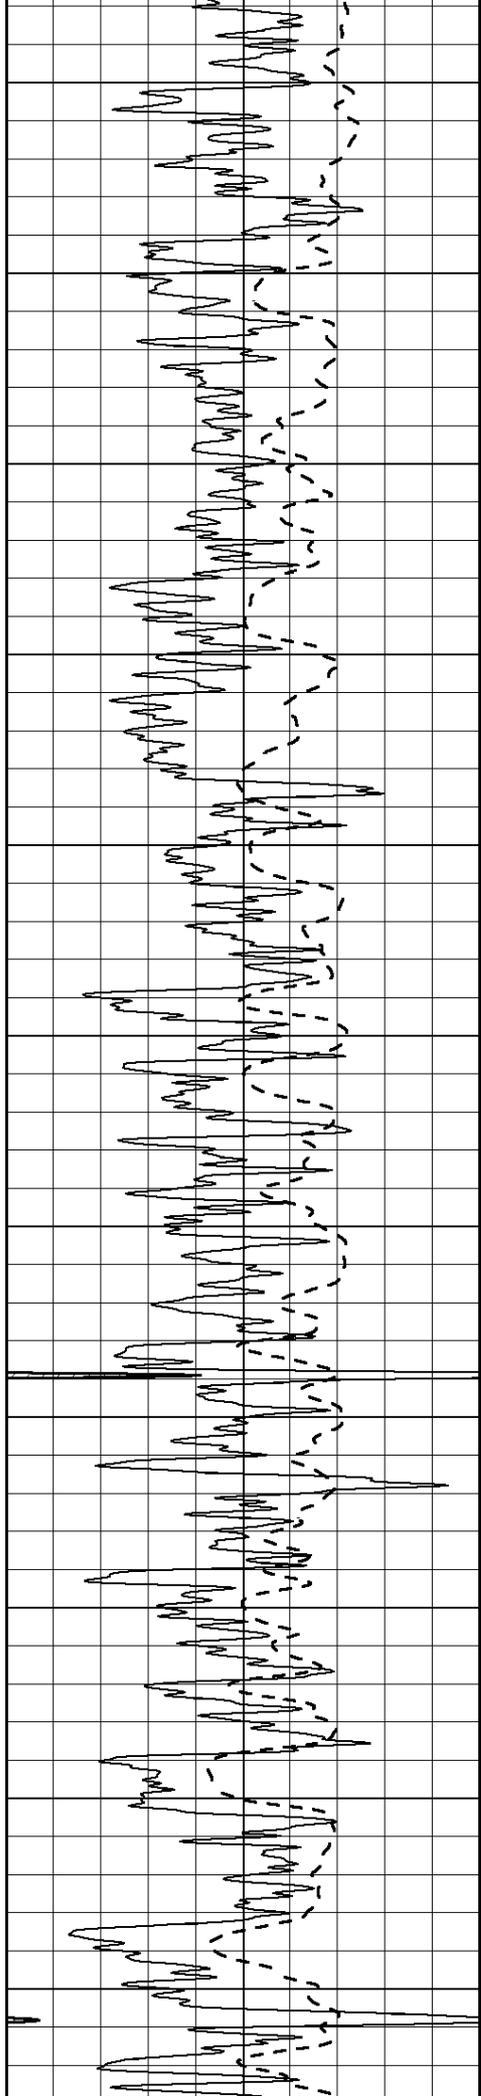

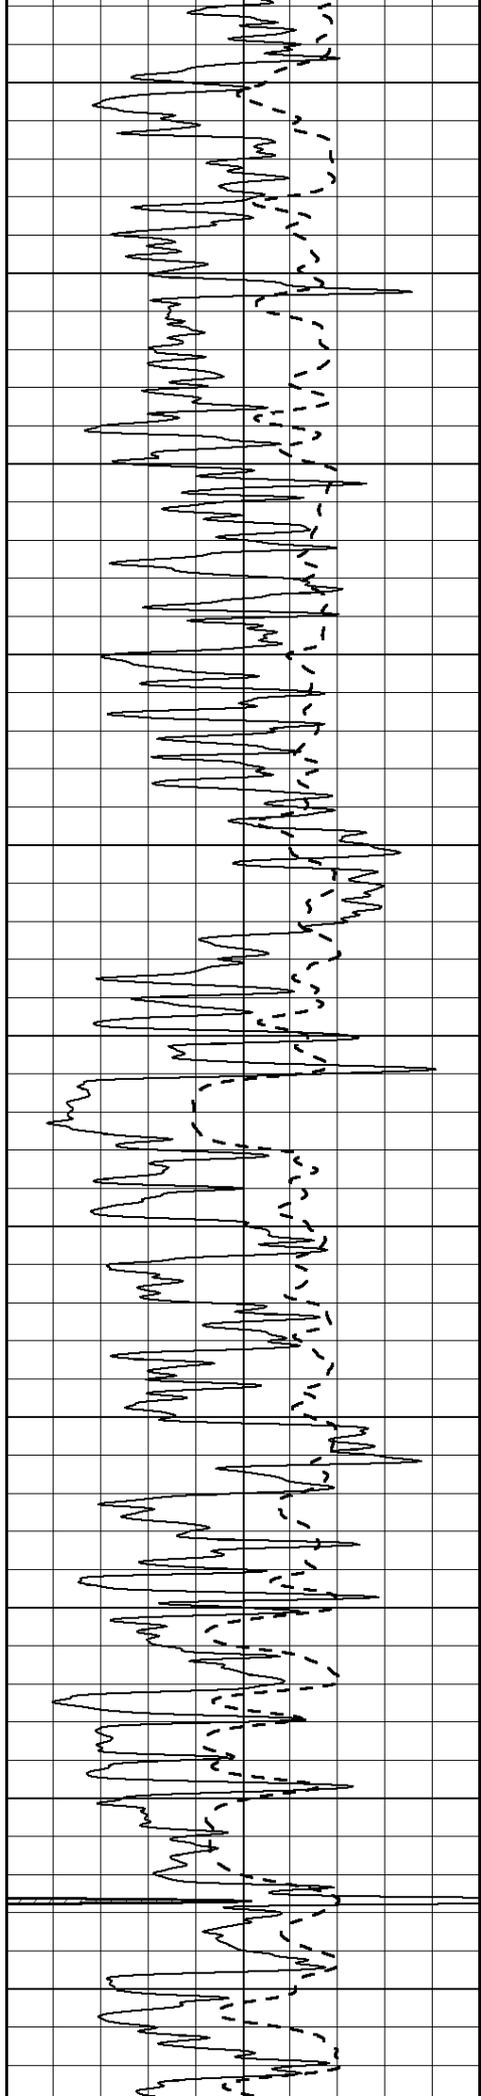

3200

3250

3300

3350

3400

3450


3500


3550

3600

3650

3700

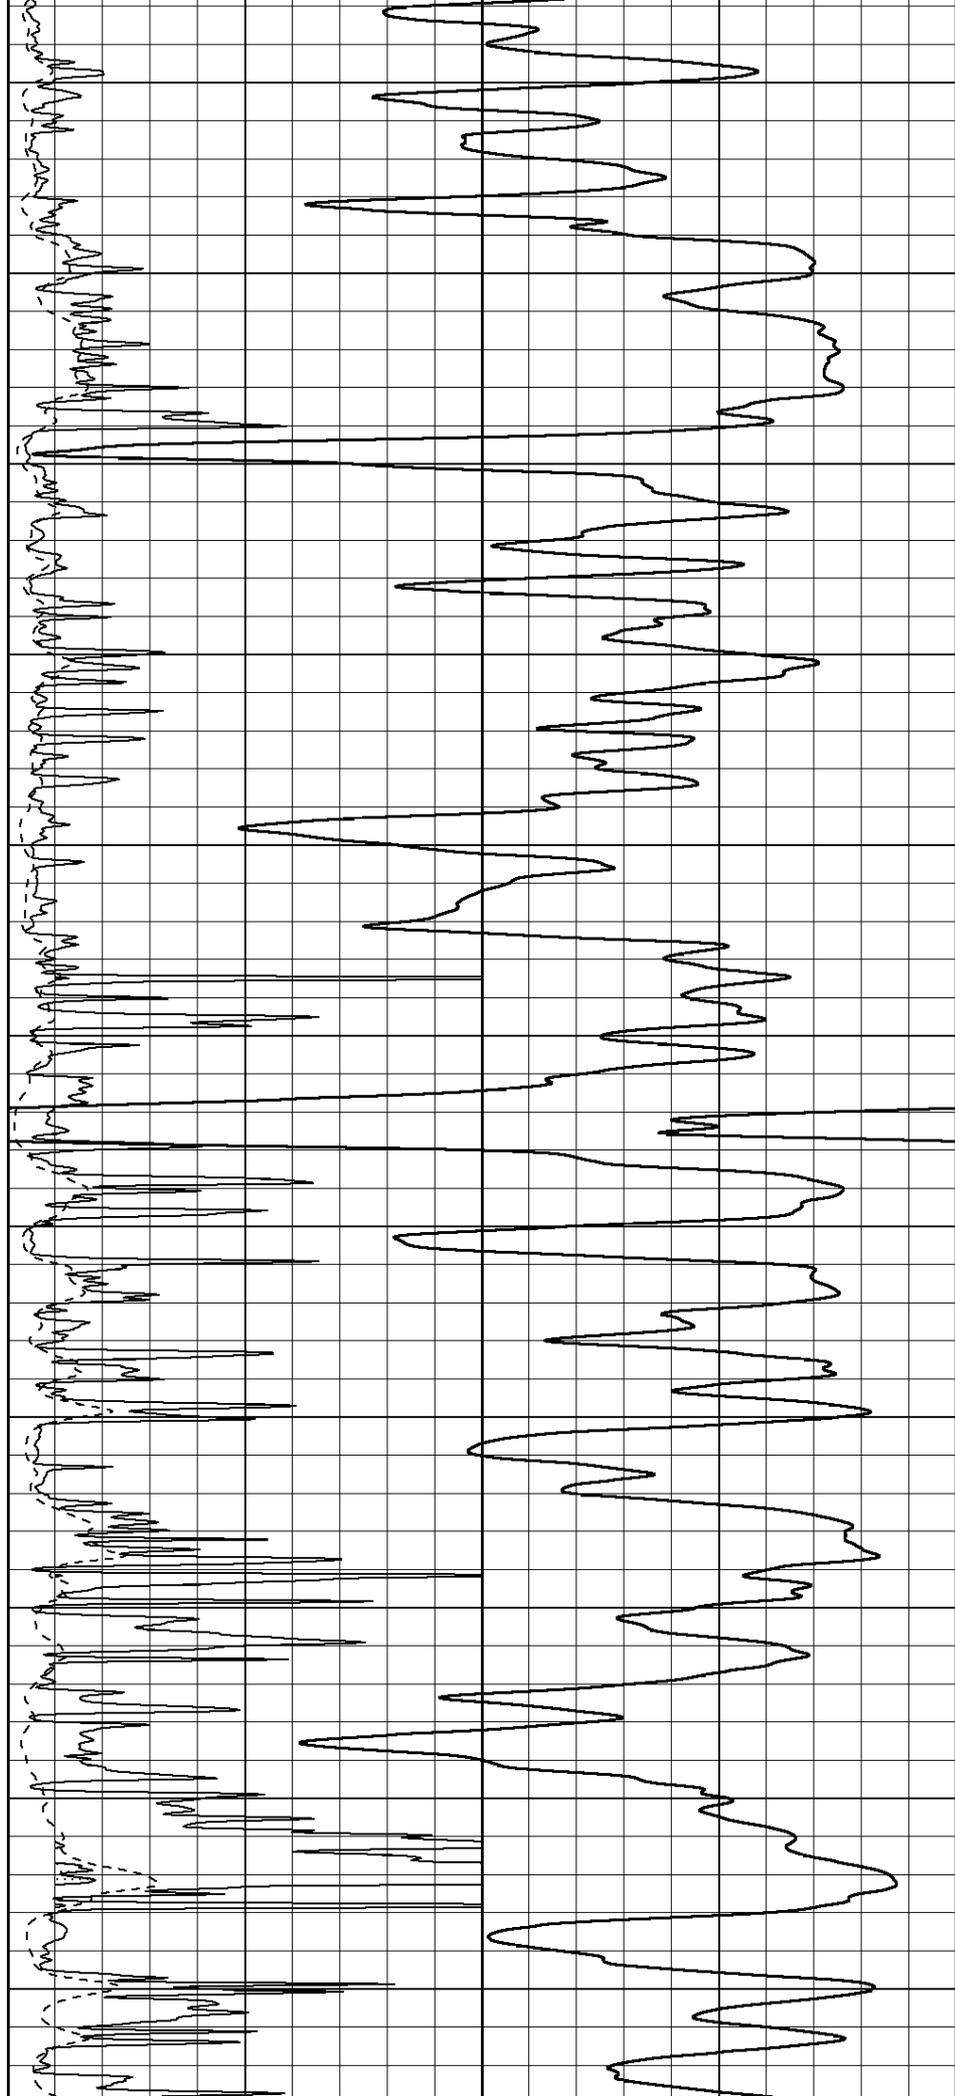

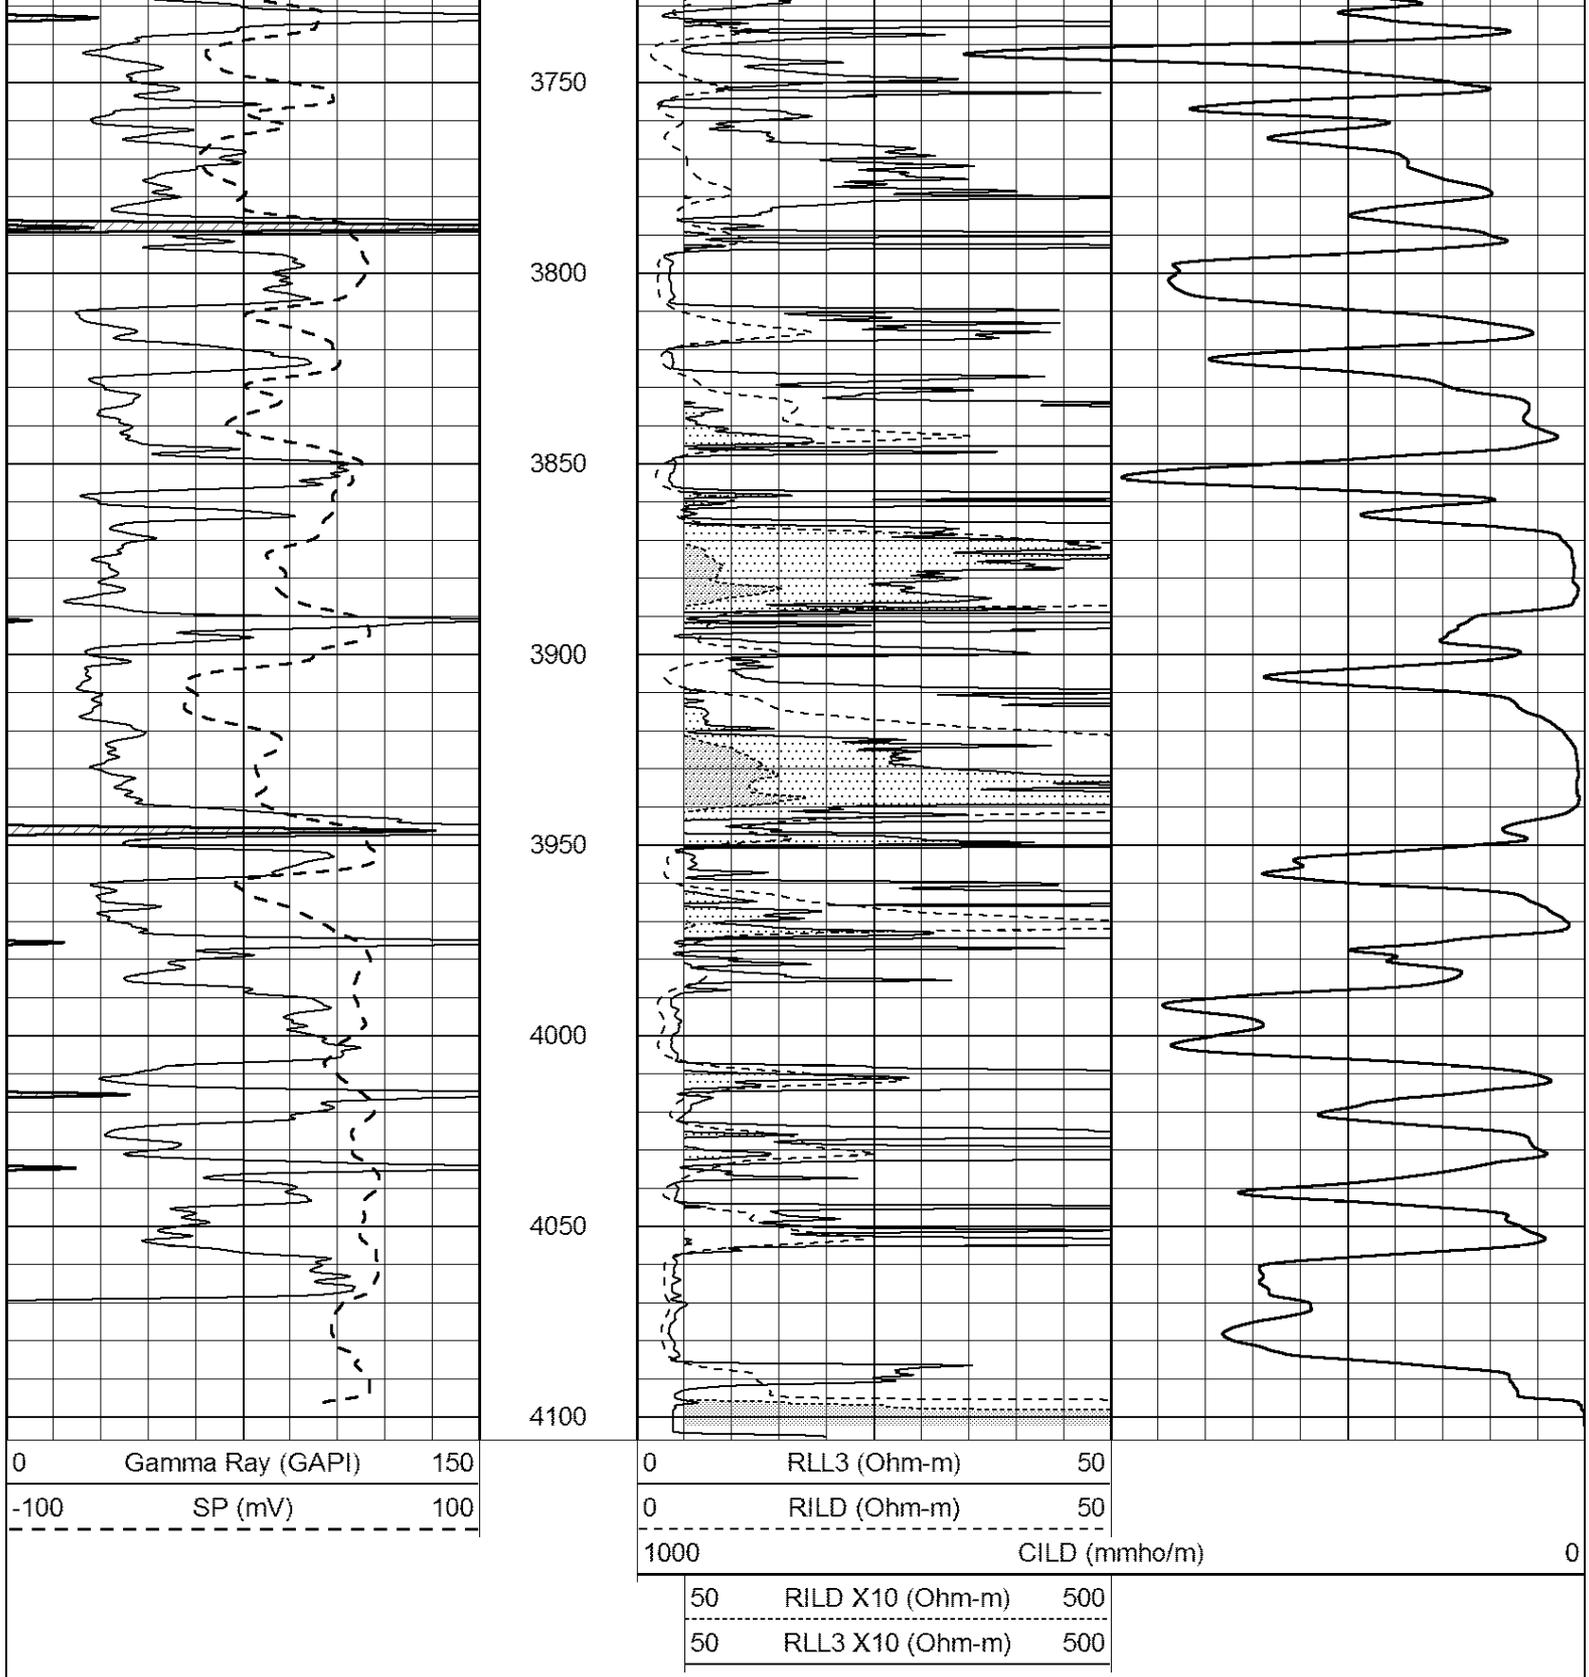


ANHYDRITE

Database File: 24633ddn.db
 Dataset Pathname: pass3.2
 Presentation Format: _dil
 Dataset Creation: Wed Jun 11 22:26:38 2014 by Calc Open-Cased 090629
 Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50
0	MINMK	20


0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000

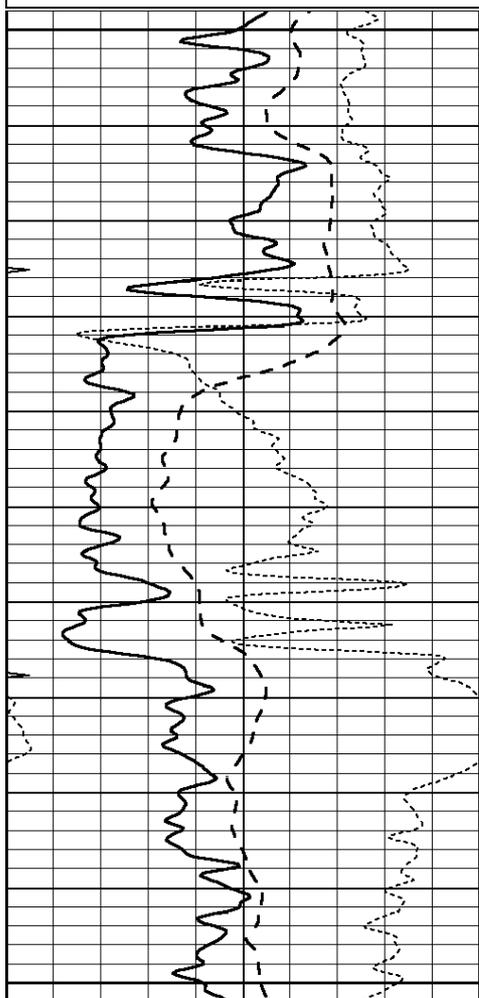

2150

2200

2250

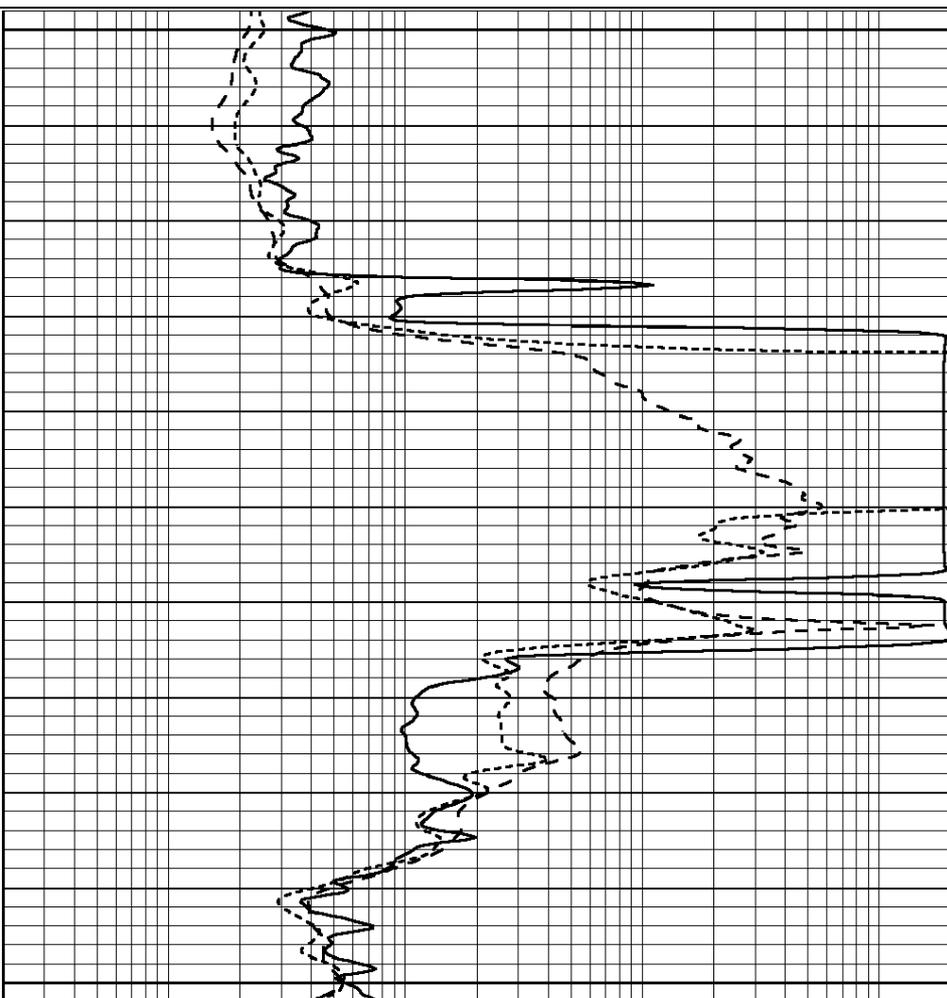

0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50
0	MINMK	20

0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000




MAIN SECTION

Database File: 24633ddn.db
 Dataset Pathname: pass3.1
 Presentation Format: _dil
 Dataset Creation: Wed Jun 11 22:10:28 2014 by Calc Open-Cased 090629
 Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50
0	MINMK	20

0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000

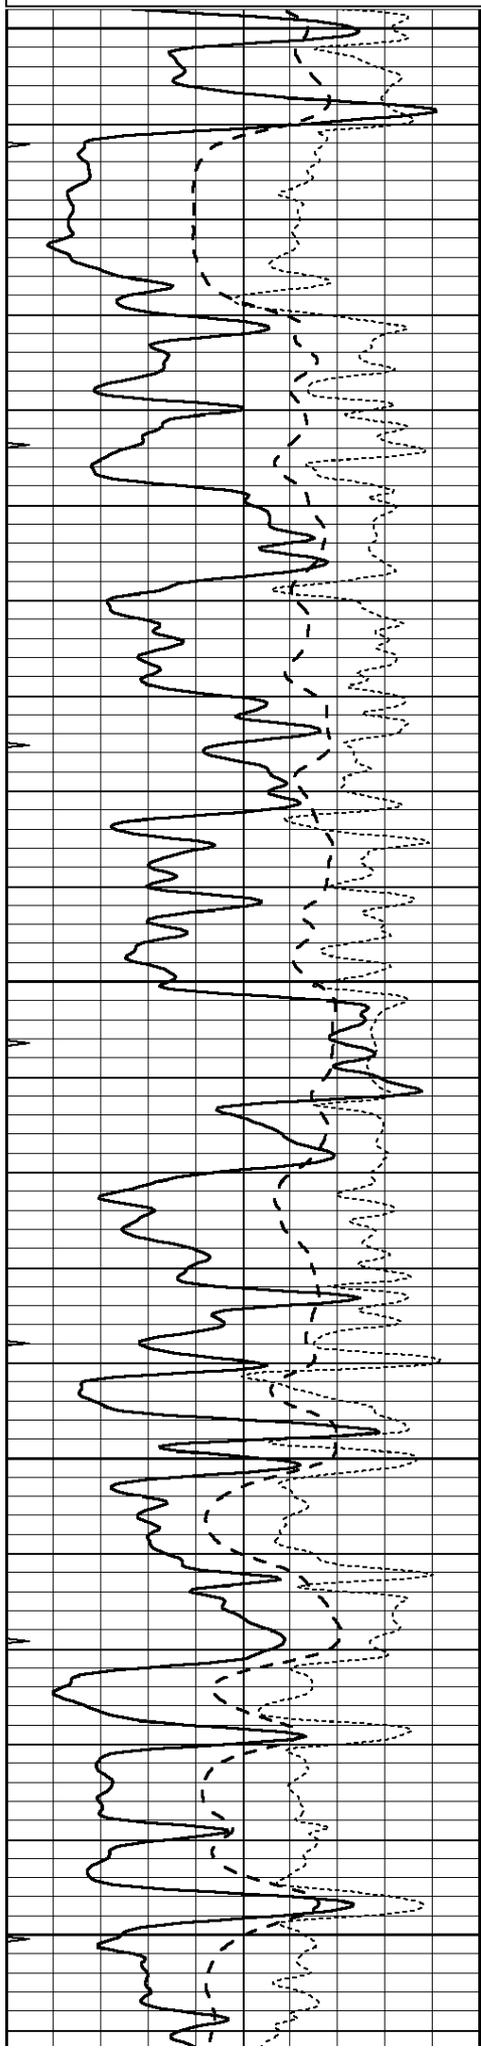


3450


3500

3550

3600

3650

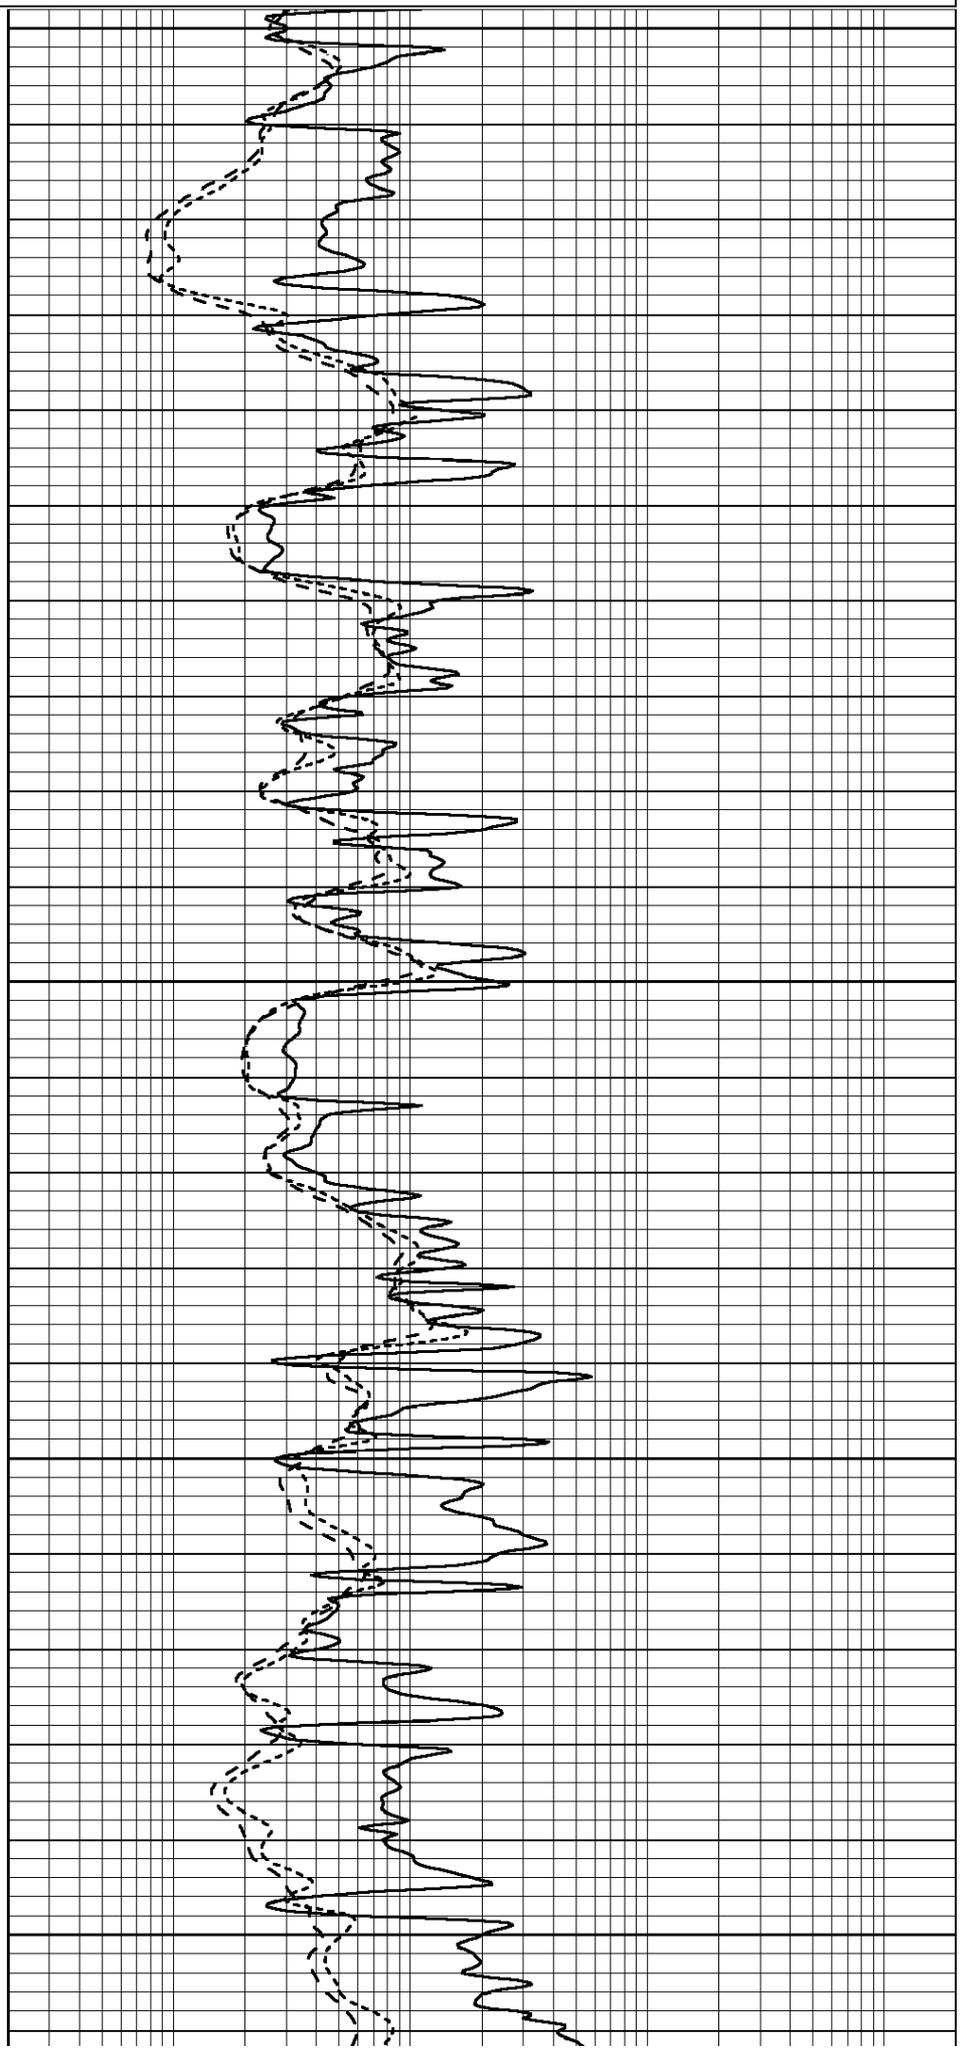

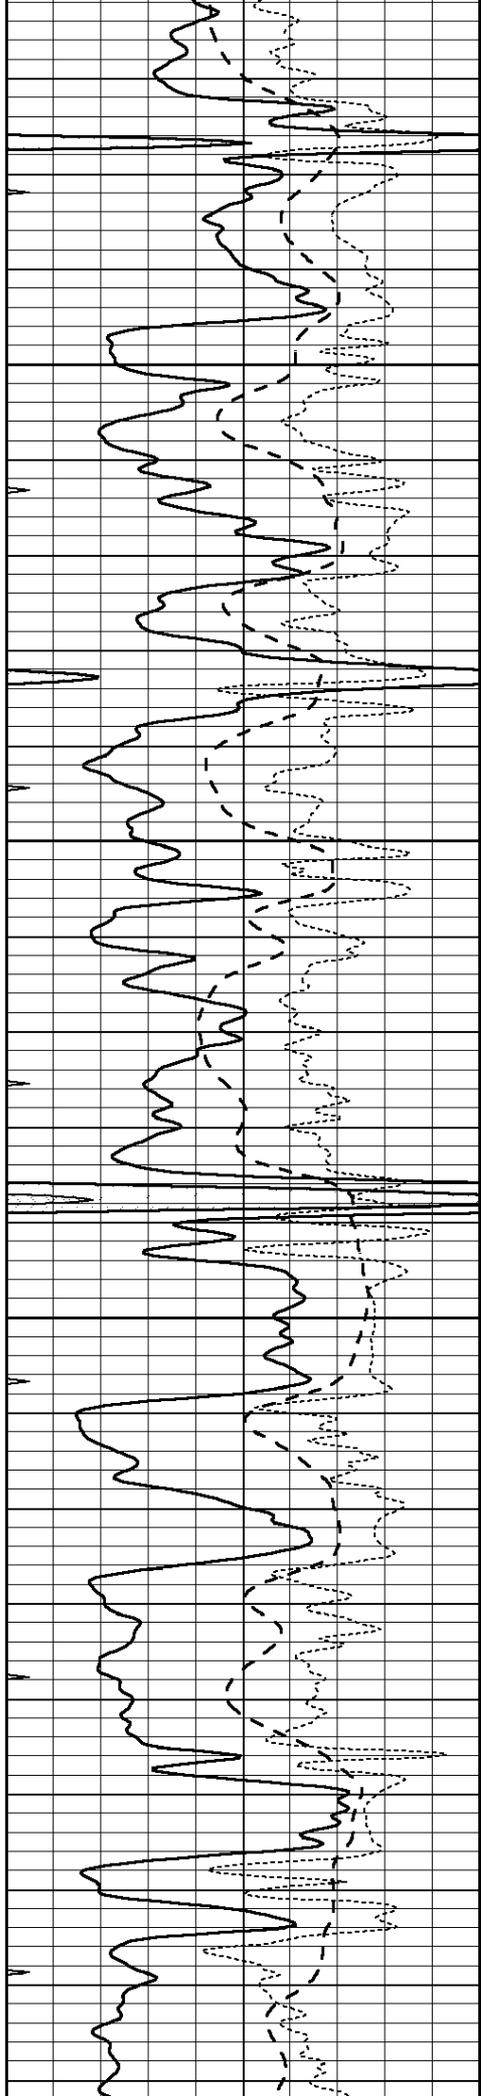




3700

3750

3800

3850

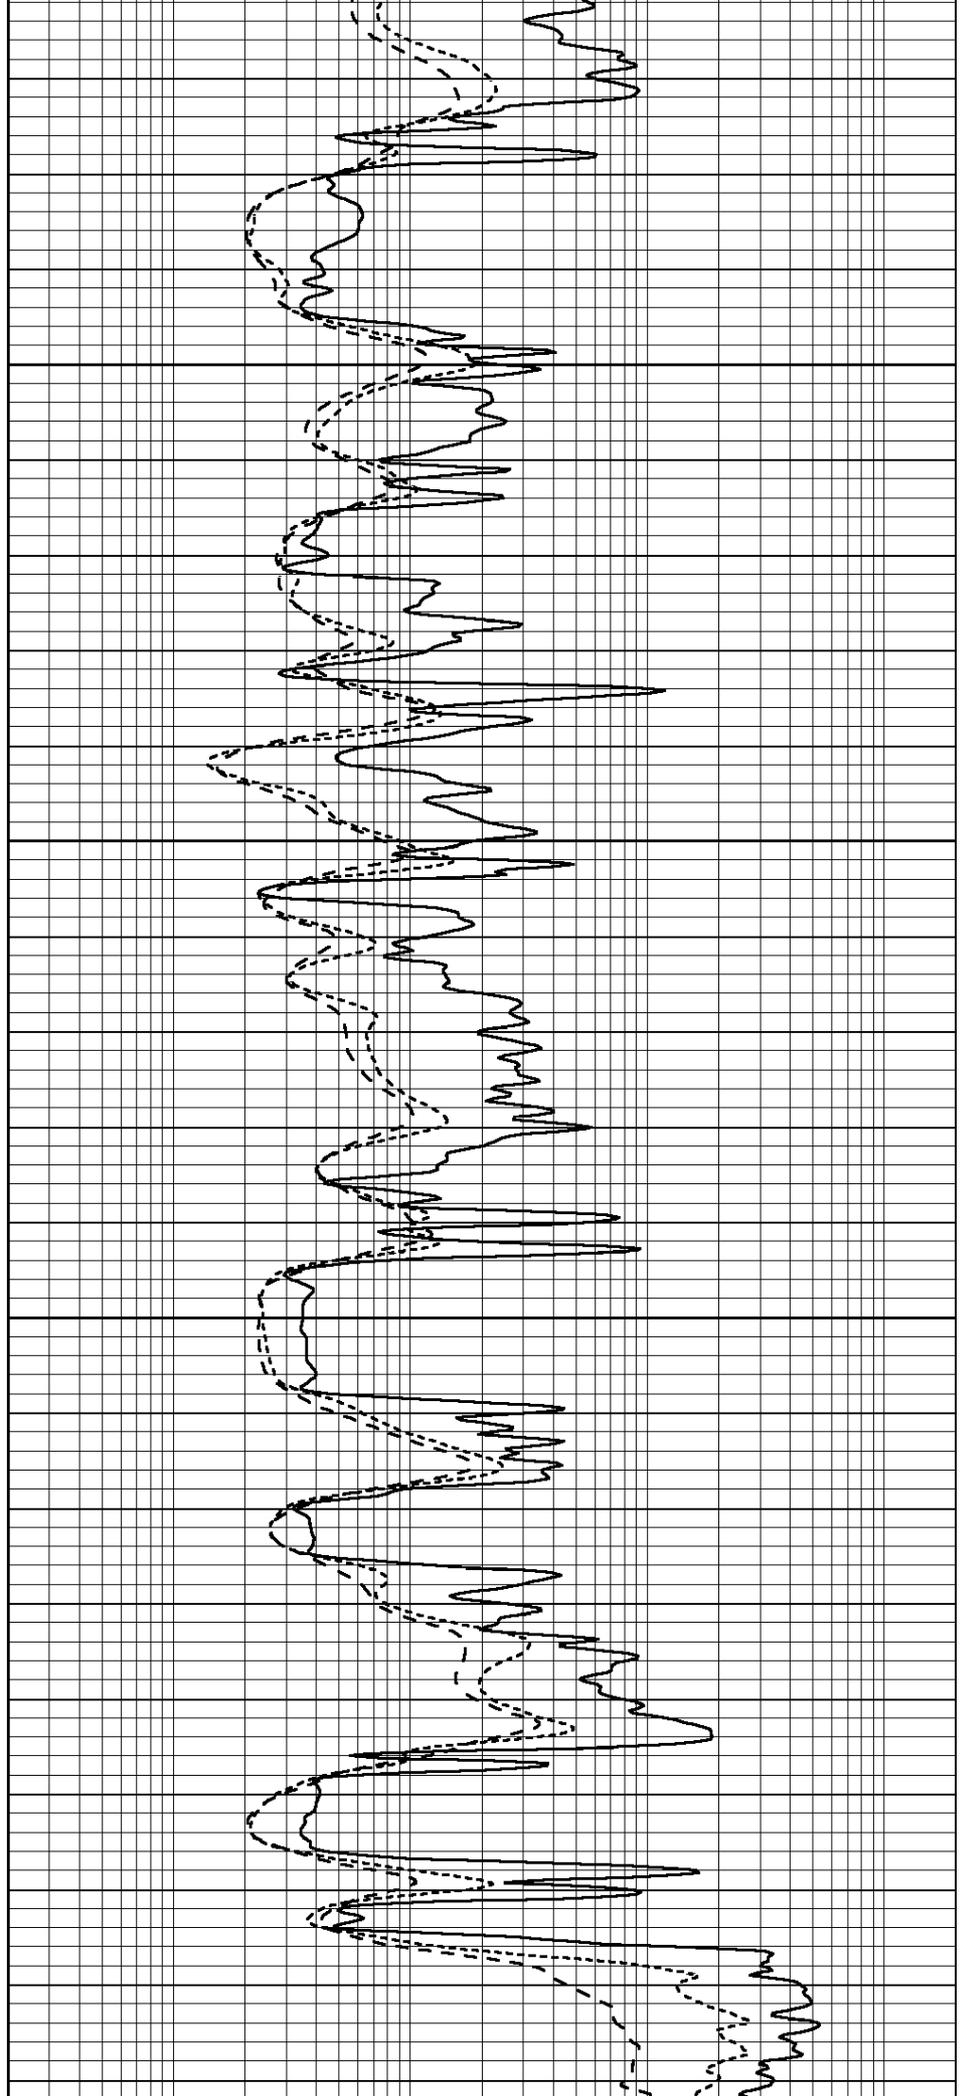

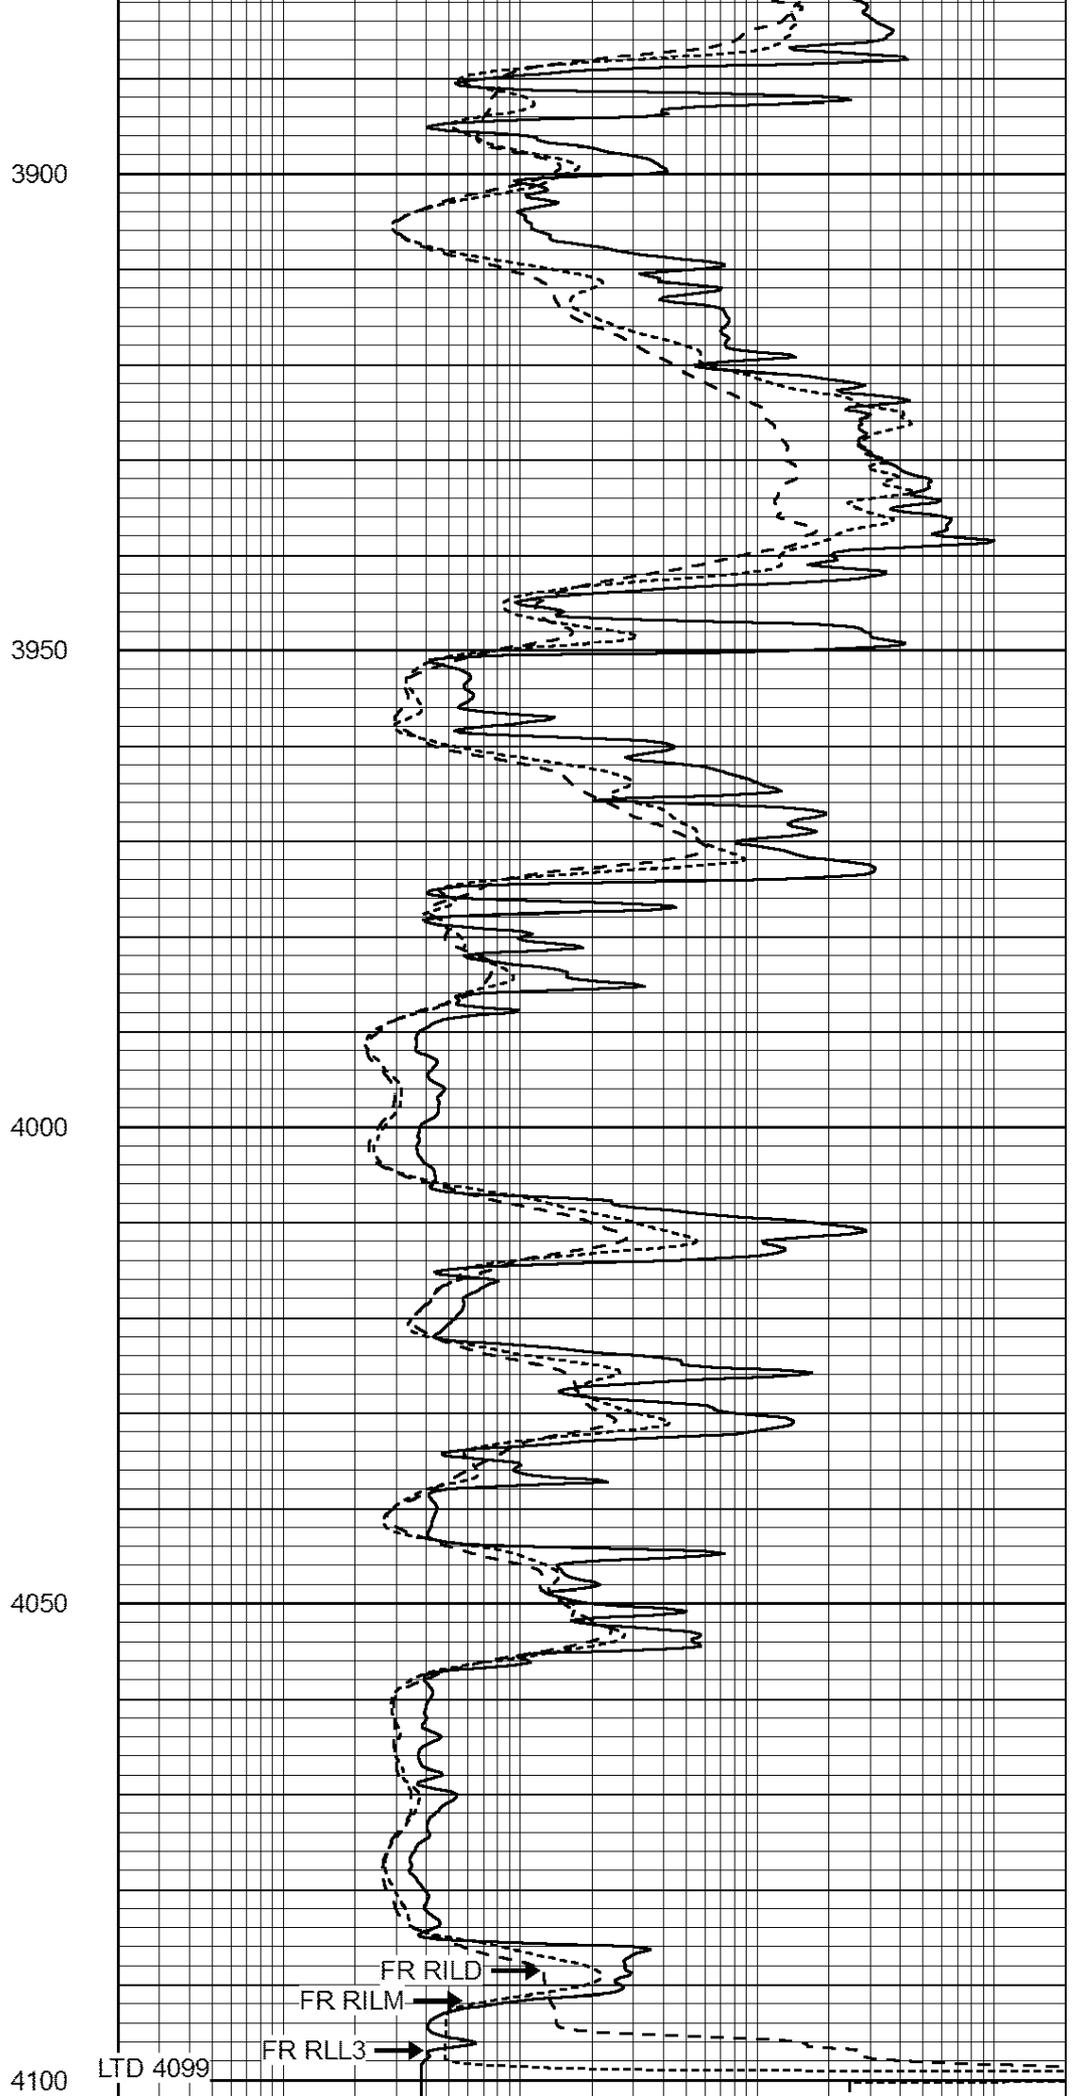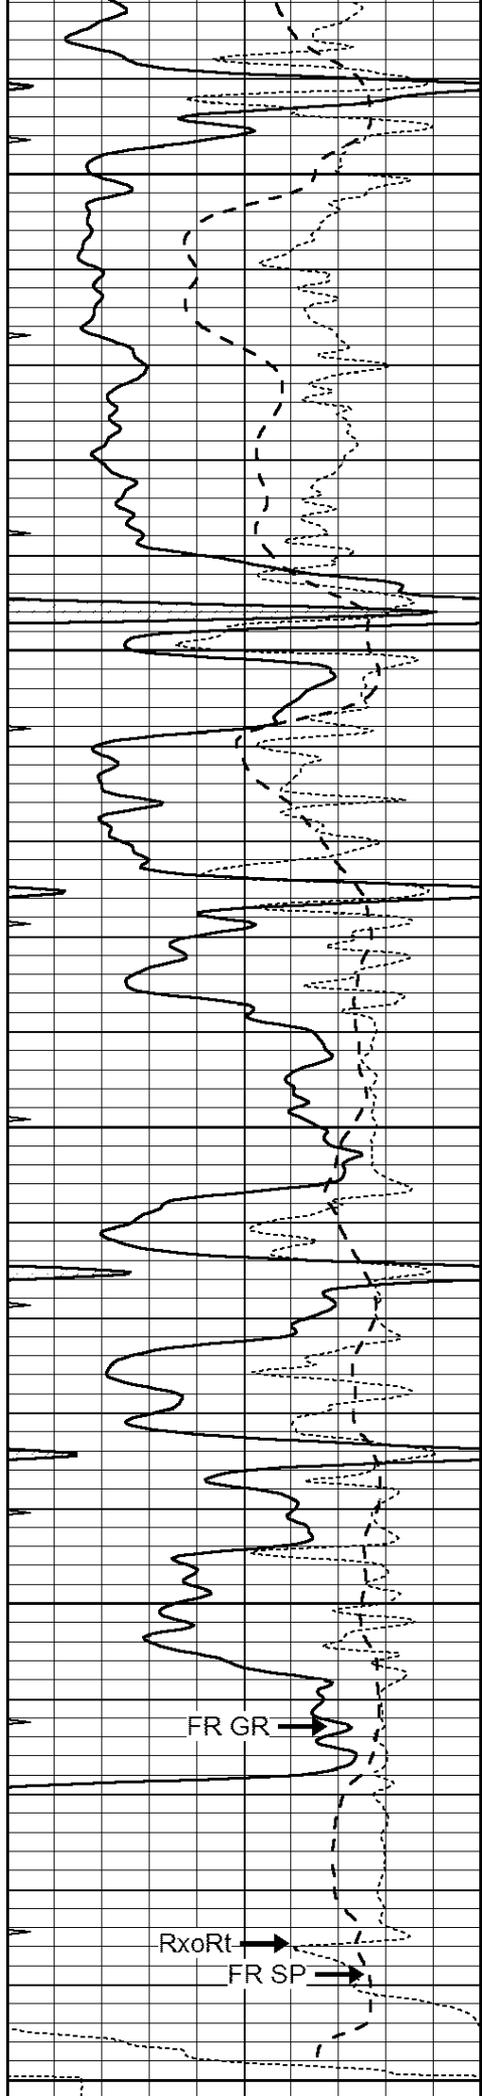

0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50
0	MINMK	20

0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000




REPEAT SECTION

Database File: 24633ddn.db
 Dataset Pathname: pass2.1
 Presentation Format: _dil
 Dataset Creation: Wed Jun 11 22:16:48 2014 by Calc Open-Cased 090629
 Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50
0	MINMK	20


0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000

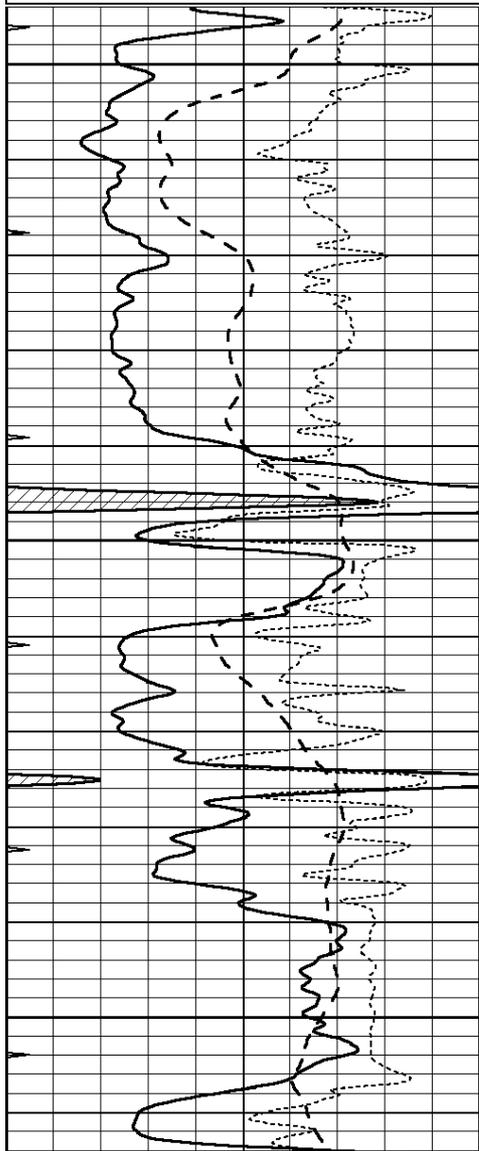


3900

3950

4000

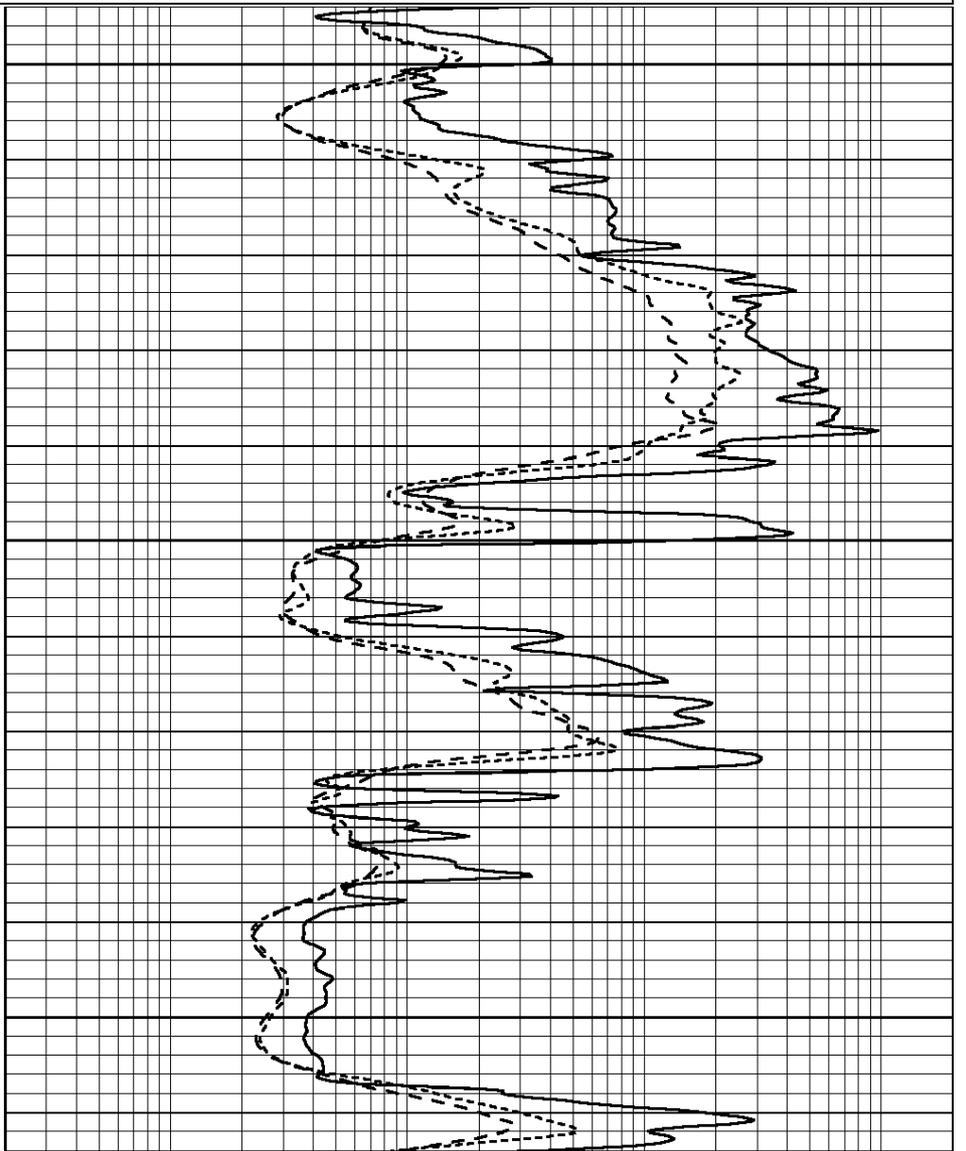

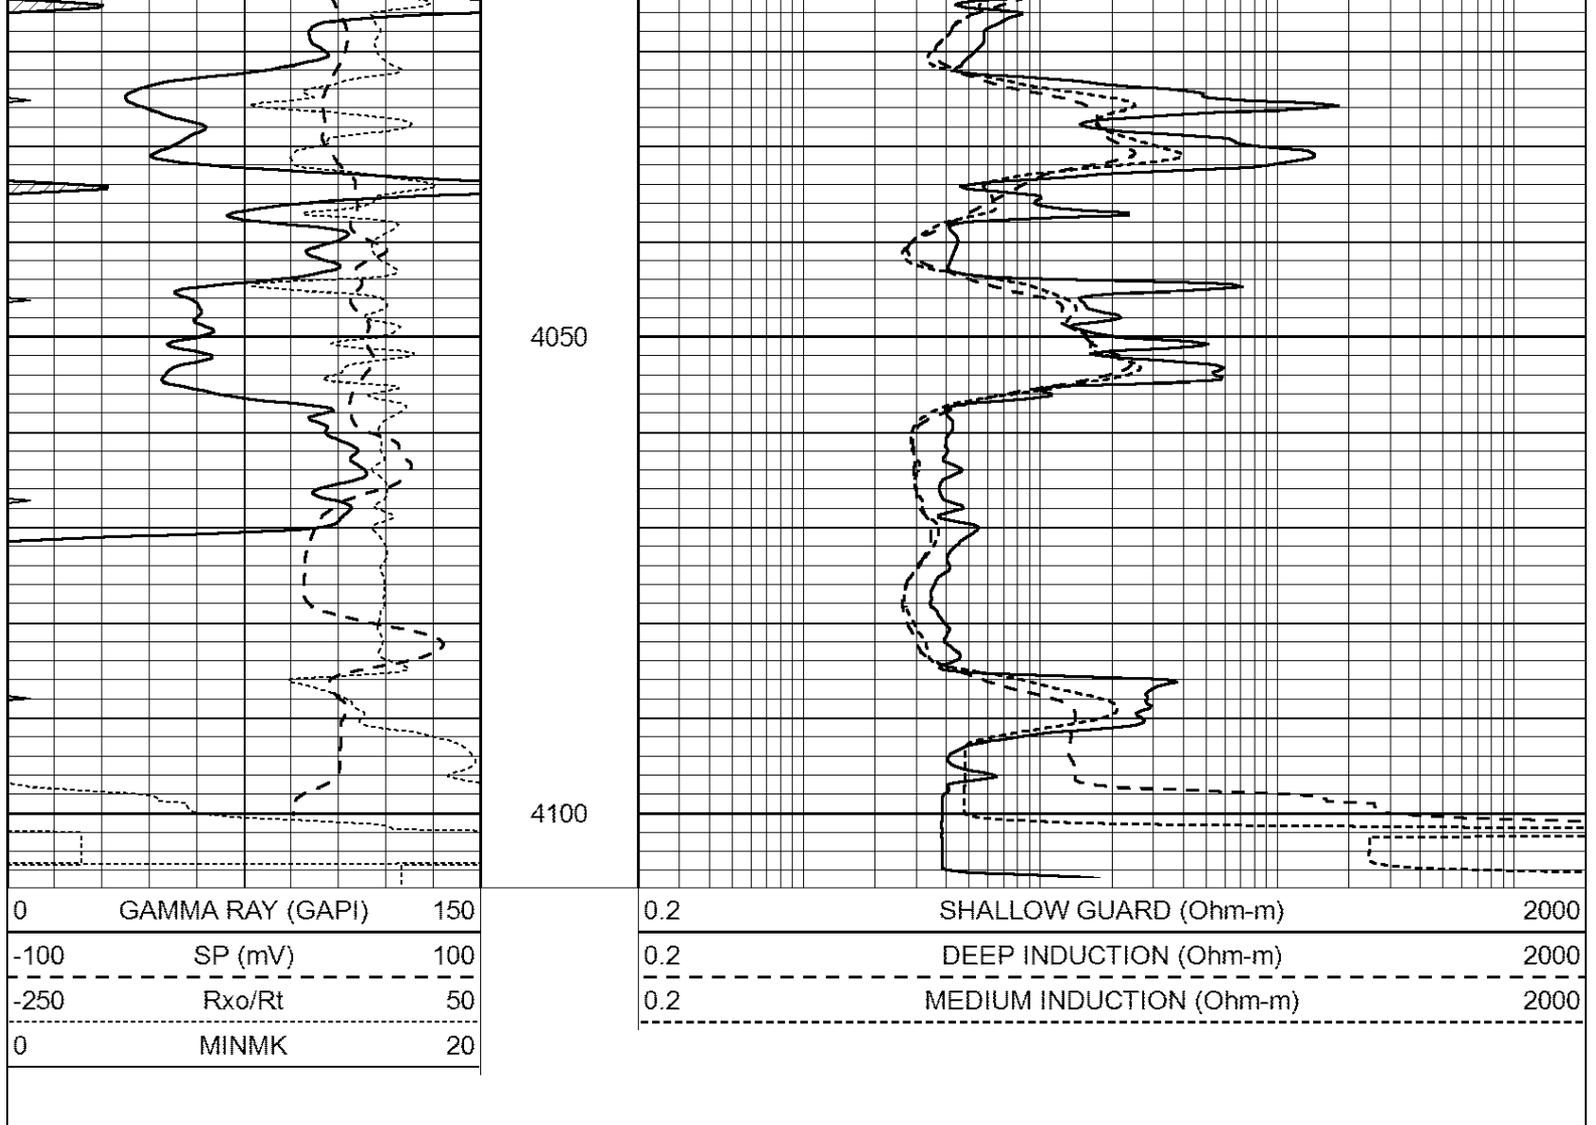

Calibration Report

Database File: 24633ddn.db
 Dataset Pathname: pass2.1
 Dataset Creation: Wed Jun 11 22:16:48 2014 by Calc Open-Cased 090629

Dual Induction Calibration Report

Serial-Model: PROBE8-DILG
 Surface Cal Performed: Fri Aug 01 06:33:19 2008
 Downhole Cal Performed: Mon Jul 28 11:08:27 2008
 After Survey Verification Performed: Mon Jul 28 11:08:27 2008

Surface Calibration

Loop:	Readings				References		Results	
	Air	Loop			Air	Loop	m	b
Deep	0.015	0.648	V	0.000	400.000	mmho/m	632.616	-9.730
Medium	0.029	0.796	V	0.000	464.000	mmho/m	605.049	-17.680
Internal:	Zero	Cal		Zero	Cal		m	b
Deep	0.017	0.657	V	0.000	400.000	mmho/m	625.153	-10.619
Medium	0.016	0.757	V	0.000	464.000	mmho/m	625.992	-9.739

Downhole Calibration

Readings		References		Results	
Zero	Cal	Zero	Cal	m'	b'

Deep	0.000	0.000	mmho/m	2.011	405.777	mmho/m	1.000	0.000
Medium	0.000	0.000	mmho/m	7.590	503.393	mmho/m	1.000	0.000
LL3		7.500	V		1500.000	Ohm-m		
		0.000	V		20.000	Ohm-m		
		-7.200	V		3800.000	mmho-m		

After Survey Verification								
	Readings			Targets			Results	
	Zero	Cal		Zero	Cal		m'	b'
Deep	0.000	0.000	mmho/m	0.000	0.000	mmho/m	0.000	0.000
Medium	0.000	0.000	mmho/m	0.000	0.000	mmho/m	0.000	0.000
LL3		1.000	Ohm-m		1.000	Ohm-m		
		0.000	Ohm-m		0.000	Ohm-m		
		1.000	mmho-m		1.000	mmho-m		

Compensated Density Calibration Report

Serial-Model:	GEAR3-GEARHART
Source / Verifier:	143 / 143
Master Calibration Performed:	Fri Jan 04 15:48:16 2013
Before Survey Verification Performed:	
After Survey Verification Performed:	

Master Calibration						
	Density			Far Detector		Near Detector
						cps
Magnesium	1.710	g/cc		935.36	501.55	cps
Aluminum	2.580	g/cc		209.32	357.01	cps
Spine Angle = 77.21			Density/Spine Ratio = 0.567			
	Size			Reading		
						V
Small Ring	8.00	in		4.29		V
Large Ring	14.00	in		6.24		V

Before Survey Verification						
	Target			Measured		
		g/cc			g/cc	
		g/cc			g/cc	
		g/cc			g/cc	

After Survey Verification						
	Target			Measured		
		g/cc			g/cc	
		g/cc			g/cc	
		g/cc			g/cc	

Compensated Neutron Calibration Report

Serial Number:	6I
Tool Model:	G

CALIBRATION						
Detector	Readings		Target	Normalization		
Short Space	1.00	cps	1.00	cps	1.0000	
Long Space	1.00	cps	1.00	cps	1.0000	

PRE-SURVEY VERIFICATION						
Detector	Readings		Measured	Target		

	Detector	Readings	Measured	Target
1)	Short Space Long Space	cps cps	pu	pu
2)	Short Space Long Space	cps cps	pu	
3)	Short Space Long Space	cps cps	pu	

POST-SURVEY VERIFICATION

	Detector	Readings	Measured	Target
1)	Short Space Long Space	cps cps	pu	pu
2)	Short Space Long Space	cps cps	pu	pu
3)	Short Space Long Space	cps cps	pu	pu

Gamma Ray Calibration Report

Serial Number:	GR6	
Tool Model:	OPEN	
Performed:	Sat May 31 01:22:06 2014	
Calibrator Value:	150.0	GAPI
Background Reading:	0.0	cps
Calibrator Reading:	276.0	cps
Sensitivity:	0.7535	GAPI/cps