


15-163-19088-00-00

STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Blitting Building
Wichita, Kansas

WELL PLUGGING RECORD

NORTH

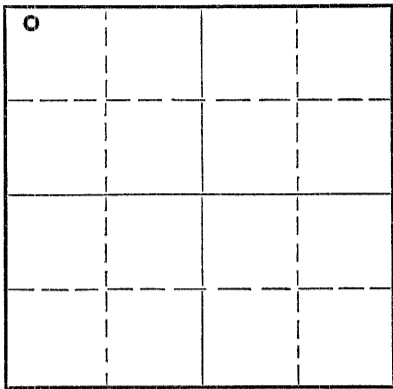

Locate well correctly on above
Section Plat

Rooks County. Sec. 17 Twp. 7S Rge. (E) 19(W)
Location as "NE/CNW $\frac{1}{4}$ /SW $\frac{1}{4}$ " or footage from lines NW/4 NW/4 NW/4
Lease Owner Petroleum, Inc.
Lease Name Kuiken Well No. 1
Office Address 305 East Third, Wichita 2, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed July 21, 1953
Application for plugging filed July 21, 1953
Application for plugging approved July 21, 1953
Plugging commenced July 21, 1953
Plugging completed July 21, 1953
Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production 19...
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Mr. Eldon Petty
Producing formation Depth to top Bottom Total Depth of Well 3473 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
				8 5/8"	192'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from...feet to...feet for each plug set.

Mudded up to 180' and set wooden plug at 180'.
Placed 1/2 sack hulls on top of plug at 180'.
Cemented and displaced 15 sacks cement through
drill pipe on to plug at 180'. Mudded up to 40'
and set second wooden plug. Placed 1/2 sack
hulls on top of plug at 40'. Filled hole to
bottom of well cellar with 10 sacks cement.

RECEIVED

STATE CORPORATION COMMISSION

07-28-1953
JUL 28 1953

Name of Plugging Contractor Garvey Drilling Company
Address R. R. #2, Great Bend, Kansas

STATE OF KANSAS, COUNTY OF SEDGWICK, SS.
W. W. Fisher (employee of owner) of the above-described well,
being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) W. W. Fisher

305 East Third, Wichita 2, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 27th day of July, 1953

My commission expires October 13, 1954 Notary Public.

17 7 190
117 75