


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

WELL PLUGGING RECORD

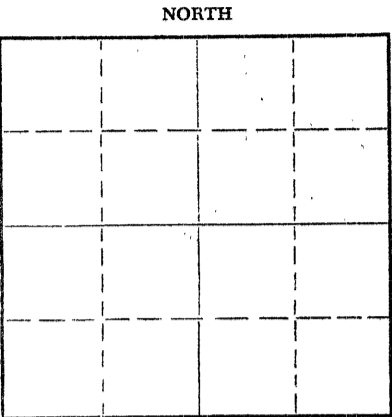

Locate well correctly on above Section Plat

Rooks County, Sec. 17 Twp. 7 Rge. 19 (E) (W)
Location as "NE/CNW/SW" or footage from lines NW NW SE
Lease Owner: Dom Pratt Oil Operations
Lease Name: Gravel #1 Well No. _____
Office Address: Hays, Kansas 67601
Character of Well (completed as Oil, Gas or Dry Hole) _____
Date well completed _____ 19____
Application for plugging filed _____ 19____
Application for plugging approved _____ 19____
Plugging commenced 9/28/69 _____ 19____
Plugging completed 10/1/69 _____ 19____
Reason for abandonment of well or producing formation: depleted.

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well: Massey
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well: 3485 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8	204'	none
				4 1/2"	3474'	1811'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Checked hole, sanded hole to 3450' and set 3 sacks of cement.
Shot pipe at 2389; 2203', 2011', 1913', 1817', worked pipe loose and pulled 58 joints. Welded collar on surface pipe.
Pumped 5 sacks hulls, 25 sacks mud and 100 sacks of cement, 5 sacks mud, 50 sacks of cement to plug well.

PLUGGING COMPLETE.

10-10-1969
RECEIVED
STATE CORPORATION COMMISSION
OCT 10 1969
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor: KNIGHT CASING PULLING CO., INC.
Address: CHASE, KANSAS

STATE OF KANSAS COUNTY OF RICE, ss.
NOEL J. KNIGHT (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Noel Knight
CHASE, KANSAS
(Address)

Subscribed AND SWORN TO before me this 6th day of October, 19 69

My commission expires

2/15/71

Margaret Madchen
Notary Public.

15-163-20116-00-00

L. J. DREILING and SONS, Inc.
VICTORIA, KANSAS

WELL LOG

Company Don E. Pratt Oil Operations
Box 390
Hays, Kansas 67601
Farm Griebel No. 1
Total Depth 3884'
Comm. 6-27-68 Comp. 7-4-68
L. J. Dreiling & Sons, Inc.
Contractor Route 2'
Victoria, Kansas 67671

Sec. 17 Twp. 7 Rng. 19
Location NW NW SE
County Rocks
Elevation: 2007' K. B.
2004' D. F.
2002' G. R.

Casing Record Cement Record Production:
204' - 8 5/8" 110 sacks cement
3474' - 4 1/2" 150 sacks cement

Figures Indicate Bottom of Formations

0'	40'	Top soil & Clay
40'	185'	Shale & Gravel
185'	204'	Blue Shale
204'	640'	Shale & Sand
640'	1030'	Shale with Sand Streaks
1030'	1245'	Sand
1245'	1290'	Shale
1290'	1522'	Shale
1522'	1556'	Anhy.
1556'	1640'	Shale
1640'	2260'	Shale & Shells
2260'	3213'	Shale & Lime
3213'	3884'	Lime
3884'	T.D.	

STATE OF KANSAS)
) ss
COUNTY OF ELLIS)

I, Leo F. Dreiling, of the L. J. Dreiling & Sons, Inc., upon oath states that the above and foregoing is a true and correct copy from the Daily Drilling Report from your Griebel #1.

Leo F. Dreiling
LEO F. DREILING

Subscribed and sworn to before me this 5th day of July 1968.

Joseph A. Hess
JOSEPH A. HESS NOTARY PUBLIC

My Commission expires: September 19, 1970



RECEIVED
STATE CORPORATION COMMISSION
JUL 25 1968
CONSERVATION DIVISION
Wichita, Kansas