

Notice: Fill out COMPLETELY and return to Conservation Division at the address below within 60 days from plugging date.

KANSAS CORPORATION COMMISSION OIL & GAS CONSERVATION DIVISION WELL PLUGGING RECORD K.A.R. 82-3-117

Form CP-4 December 2003 Type or Print on this Form Form must be Signed All blanks must be Filled

Lease Operator: White & Ellis Drilling, Inc. Address: PO Box 48848, Wichita, KS 67201-8848 Phone: (316) 263-1946 Operator License #: 5420 Type of Well: oil Docket #: [redacted] The plugging proposal was approved on: 10/07/05 by: Duane Krueger (KCC District Agent's Name) Is ACO-1 filed? [] Yes [] No If not, is well log attached? [x] Yes [] No Producing Formation(s): List All (If needed attach another sheet) Hunton Depth to Top: 2453 Bottom: 2473 T.D. 2518

API Number: 15-015-21,752-00-00 Lease Name: Auer Well Number: 4 Spot Location (QQQQ): SW - SE - SE - 325 Feet from [] North / [x] South Section Line 1095 Feet from [x] East / [] West Section Line Sec. 3 Twp. 25 S. R. 5 [x] East [] West County: Butler Date Well Completed: 6/22/81 Plugging Commenced: 10/07/05 Plugging Completed: 10/07/05

Show depth and thickness of all water, oil and gas formations.

Table with columns: Oil, Gas or Water Records (Formation, Content) and Casing Record (Surface Conductor & Production) (From, To, Size, Put In, Pulled Out). Row 1: Hunton, Oil & Water, surface, 218, 8 5/8", 218', 0. Row 2: Hunton, Oil & Water, surface, 2517, 5 1/2", 2517', 0.

Describe in detail the manner in which the well is plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same depth placed from (bottom), to (top) for each plug set.

Dropped 600 # sand, fillup 2467. Dumped 6 sx cmt w/ dump bailer. RIH w/ 271', 2 3/8" tbg, set top plug @ 272', cemented w/ 122 sx 60/40 pos, 4% gel. POH w/ 2 3/8" tbg. Pulled 5 1/2" csg slips, RIH w/ 1" tbg outside of 5 1/2" csg to 271'. Cemented w/ 42 sx, 60/40 pos, 4% gel to surface.

Name of Plugging Contractor: Phillips Well Service, Inc. License #: 5870 Address: PO Box 1263, El Dorado, KS 67042


Name of Party Responsible for Plugging Fees: White & Ellis Drilling, Inc. State of Kansas County, Butler, ss.

Dallas Flowers (Employee of Operator) or (Operator) on above-described well, being first duly sworn on oath, says: That I have knowledge of the facts statements, and matters herein contained, and the log of the above-described well is as filed, and the same are true and correct, so help me God. (Signature) Dallas Flowers (Address) PO Box 249, El Dorado, KS 67042

SUBSCRIBED and SWORN TO before me this 23 day of NOV, 2005. Rhonda L. Mosiman, Notary Public, My Commission Expires: 2/21/06

Mail to: KCC - Conservation Division, 130 S. Market - Room 2078, Wichita, Kansas 67202. RECEIVED NOV 28 2005 KCC WICHITA. RHONDA L. MOSIMAN NOTARY PUBLIC STATE OF KANSAS MY APPT. EXPIRES 2/21/06

**767 OIL HILL ROAD
EL DORADO, KANSAS 67042**



**PHONES
EL DORADO • 316/321-1397
FAX • 318/321-1398**

**WHITE & ELLIS
P.O. BOX 48848
WICHITA, KS 67201-8848**

**INVOICE NO. 9284
DATE 10/27/05**

Net 10

LEASE	WELL NO.	RATE PER HOUR	CONTRACT NO.
AWER 4			

DATE	DESCRIPTION	HOURS	AMOUNT	BALANCE DUE
	BUTLER CO 10-22 BACKFILLED PIT AND CELLAR BACKHOE 49 15% FSC	1	54.00	54.00
				8.10
				62.10
				62.10

Invoice subtotal

Invoice total

**RECEIVED
NOV 28 2005
KCC WICHITA**

Please Pay From This Invoice
Statement will be sent on request


**TERMS: NET 10 DAYS From Date of Invoice. A Service Charge of 1 1/2% Will be Added to Past Due Accounts.
(Effective Rate 18% Per Annum)**

United Cementing & Acid Company, Inc.

2510 W. 6th St.

El Dorado, Kansas 67042

316-321-4680 800-794-0187 (Fax) 316-321-4720

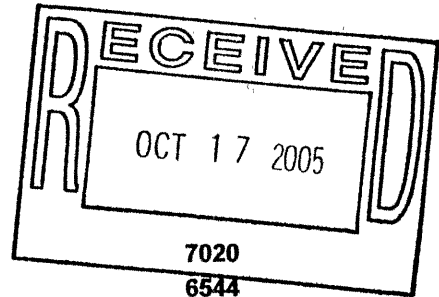

Customer:

White & Ellis Drilling, Inc.
PO Box 48848
Wichita, Kansas 67201-8848

Invoice No.
Field Ticket
Date

7020
6544
10/14/2005

PO#

Date of Job	County	State	Lease	Well No.
10/07/05	BU	KS	Auer	#4
Size of Casing	Depth Of Well	Depth Of Job	Plug Depth	Pressure
5-1/2"	2483'			
Quantity	Description	UOM	Unit Price	Total
	PLUG WELL			
164	60/40 Pozmix	sax	5.00	820.00
8	Gel	sax	10.05	80.40
600#	20/40 Sand	cwt	9.75	58.50
	1" Pipe - RENTAL			55.00
172	Bulk Charge	sax	0.98	168.56
	Drayage - MINIMUM CHARGE			94.50
5	Mileage Charge	mi	2.25	11.25
	5-1/2" Top Rubber Plug			51.00
	Cement Unit			500.00
RECEIVED				
NOV 28 2005				
KCC WICHITA				
<i>Thank you for your continued business</i>				
Taxable	*Non-Taxable	Tax Rate	Sales Tax	TOTAL DUE
1839.21	0.00	0.053	97.48	\$1,936.69

TERMS: Net 30 days from invoice date. Please pay from this invoice.

ORIGINAL INVOICE



United Cementing and Acid Co., Inc.

SERVICE TICKET

7020

✓ 6544

Oil Well Cementing & Acidizing
 (316) 321-4680 • 800-794-0187 • FAX (316) 321-4720
 2510 West 6th Street • El Dorado, KS 67042

DATE 10-7-05

COUNTY Butler

CITY _____

CHARGE TO White & Ellis

ADDRESS _____ CITY _____ ST _____ ZIP _____

LEASE & WELL NO. Quer #4 CONTRACTOR Phillips Well Serv.

KIND OF JOB Plug SEC. 3 TWP. 25 RNG. SE

DIR. TO LOC. El Dorado Haverhill Rd South, East Trnc. OLD NEW

Quantity	MATERIAL USED	Serv. Charge	
1164 SK	60/40 poz 4% gel @5.00	5820.00	500.00
8 SK	gel @10.05	80.40	
12 SK	20-40 sand (100#) @9.75 cut.	58.50	
1"	pipe rental	55.00	
1725K	BULK CHARGE	1108.50	RECEIVED
5	BULK TRK. MILES 8.16 tons	94.50	NOV 28 2005
5	PUMP TRK. MILES	11.25	KCC WICHITA
1-5 1/2"	PLUGS T.R.P.	51.00	
		97.48	SALES TAX
		1931.09	TOTAL

T.D. 2483ft.
 SIZE HOLE _____
 MAX. PRESS. _____
 PLUG DEPTH _____
 PLUG USED 1-5 1/2" T.R.P.

CSG. SET AT _____ VOLUME _____
 TBG SET AT _____ VOLUME _____
 SIZE PIPE 5 1/2" casing + 8 5/8" surface
 PKER DEPTH _____
 TIME ON LOCATION 1:00 TIME FINISHED 6:00

REMARKS: Dumped sand & cemented bottom with pulling unit. Tried to set 5 1/2" T.R.P. with sand line would not go down. Then tried pumping it down with pump would not go PST up to 2000'. Ran 2 3/4" tubing plug went. Ran tubing to 271ft. Plug 5 1/2" T.R.P. mix & pump 122 SK 60/40 poz 4% gel to surface. Pull 2 3/4" out. Pull 5 1/2" casing slip out. Ran 1" to 271ft. mix & pumped 42 SK 60/40 poz 4% gel to surface.

EQUIPMENT USED

NAME Shawn Scriber P-15 UNIT NO. _____
Jim Thomas 04 CEMENTER OR TREATER

NAME Chris Johnson B-7 UNIT NO. _____
 OWNER'S REP.

WHITE & ELLIS DRLG INC
BOX 448

#4 AUER

3-25-5E
225'S & 1095'E,
C SEC

EL DORADO, KS 67042

CONTR COMPANY TOOLS

CTY BUTLER

GEOL

FIELD EL DORADO

E 1359 KB CM 6/19/81 CARD ISSUED 11/5/81 IP P 20 BOPD & TR WTR
HUNT 2454-2455

+	+	+
+	+	+

API 15-015-21,752

SMP	TOPS	DEPTH	DATUM
KC		1963	- 604
CHER		2317	- 958
HUNT		2453	-1094
VIOLA		2474	-1115
SIMP		2512	-1153
RTD		2518	-1159

8-5/8" 218, 5 1/2" 2517

NO DST'S
MICT - CO, PF 3/2454-2455, ONFU
1475'0 & 20'W, NAT, POP, P 20 BOPD &
TR WTR

RECEIVED
NOV 28 2005
KCC WICHITA

INDEPENDENT OIL & GAS SERVICE
WICHITA, KANSAS