

TO: STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-047-20036-00-00
Spot: SWNESW Sec/Twnshp/Rge: 15-25S-16W
1650 feet from S Section Line, 1650 feet from W Section Line
Lease Name: JULIAN A Well #: 1
County: EDWARDS Total Vertical Depth: 4527 feet

Operator License No.: 5427
Op Name: LAUCK, D.R. OIL CO., INC.
Address: 221 S. BROADWAY, STE 400
WICHITA, KS 67202

String	Size	Depth (ft)	Pulled (ft)	Comment
PROD	5.5	4530	1952	WITH 150 SX CMT
SURF	8.625	328	0	WITH 225 SX CMT

#147¹³

Well Type: OIL UIC Docket No: _____ Date/Time to Plug: 11/09/2005 9:30 AM
Plug Co. License No.: 6901 Plug Co. Name: D S & W WELL SERVICING, INC.
Proposal Rcvd. from: VERNON PFLUGHOEFT Company: D S & W WELL SERVICING, INC. Phone: (620) 587-3361

Proposed Plugging Method: SAND TO 4270' & 4 SX CMT. PUMP GEL SPACER & 50 SX CMT AT 1050'. PLUG AT 360' WITH 50 SX CMT. PLUG AT 40' WITH 10 SX CMT.

Plugging Proposal Received By: JERRY W. STAPLETON WitnessType: COMPLETE (100%)
Date/Time Plugging Completed: 11/09/2005 3:00 PM KCC Agent: JERRY W. STAPLETON

Actual Plugging Report:

SAND TO 4270' & 4 SX CMT WITH DUMP BAILER. 1ST PLUG PULL CASING TO 1400'. PUMP 10 SX GEL & 50 SX CMT. 2ND PLUG PULL CASING TO 690' & PUMP 50 SX CMT. 3RD PLUG PULL CASING TO 360' & PUMP 50 SX CMT. SHUT DOWN TALLY ON PIPE WAS 250' OFF. WAIT ON CMT. 4TH PLUG RAN TUBING TO 260' & CIRCULATED CMT TO SURFACE.

Perfs:


Top	Bot	Thru	Comments
4360	4370		
4346	4348		
4320	4328		

RECEIVED
NOV 30 2005
KCC WICHITA

Remarks: USED 60/40 POZMIX 6% GEL BY ALLIED.

Plugged through: CSG

District: 01

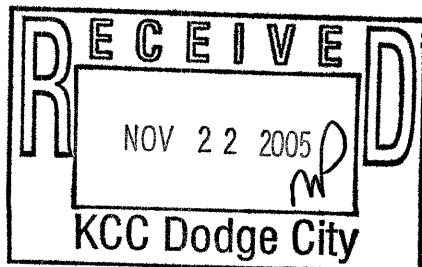

Signed Jerry W. Stapleton PIR T/H
(TECHNICIAN)

INVOICED

DATE 11-30-05
VV. NO 2006060797

Form GP-273