



NABORS

**COMPLETION
& PRODUCTION
SERVICES CO.**

DUAL INDUCTION LOG

Company		CITATION OIL & GAS CORPORATION	
Well	BARRY "D" #7		
Field	BARRY		
County	ROOKS	State	KANSAS
Location:	AP1 # : 15-163-24205-0000		Other Services CDL/CNL/PE MEL/SON/FF
SEC 11 TWP 9S RGE 19W		Elevation	
Permanent Datum	GROUND LEVEL	Elevation	2021
Log Measured From	KELLY BUSHING 8' A.G.L.		
Drilling Measured From	KELLY BUSHING		
Date	5/28/14		
Run Number	ONE		
Depth Driller	3540		
Depth Logger	3540		
Bottom Logged Interval	3538		
Top Log Interval	00		
Casing Driller	8 5/8"@1410'		
Casing Logger	1406		
Bit Size	7 7/8"		
Type Fluid in Hole	CHEMICAL MUD	CHLORIDES 2,000 PPM	
Density / Viscosity	9.1/5.1		
pH / Fluid Loss	10.0/7.6		
Source of Sample	FLOWLINE		
Rim @ Meas. Temp	.950@75F		
Rinf @ Meas. Temp	.713@75F		
Rmc @ Meas. Temp	1.14@75F		
Source of Rinf / Rmc	MEASUREMENT		
Rim @ BHT	.636@112F		
Time Circulation Stopped	2 HOURS		
Time Logger on Bottom	4:15 A.M.		
Maximum Recorded Temperature	112F		
Equipment Number	4854		
Location	HAYS, KANSAS		
Recorded By	JEFF LUEBBERS		
Witnessed By	ED GLASSMAN	BRYAN GOTTFRIED	

<<< Fold Here >>>


All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.


Comments

THANK YOU FOR USING "NABORS" HAYS, KANSAS (785) 628-6395
DIRECTIONS
ZURICH, KS., 4N. ON BLKTOP TO "RD. T", 2E., S. INTO

Database File: 24161pe.db
Dataset Pathname: pass3.6
Presentation Format: dil2
Dataset Creation: Wed May 28 10:54:03 2014
Charted by: Depth in Feet scaled 1:600

0	Gamma Ray (GAPI)	150	0	RLL3 (Ohm-m)	50
-100	SP (mV)	100	0	RILD (Ohm-m)	50
-----			CILD (mmho/m)		
			1000		0
			50	RILD X10 (Ohm-m)	500
			50	RLL3 X10 (Ohm-m)	500

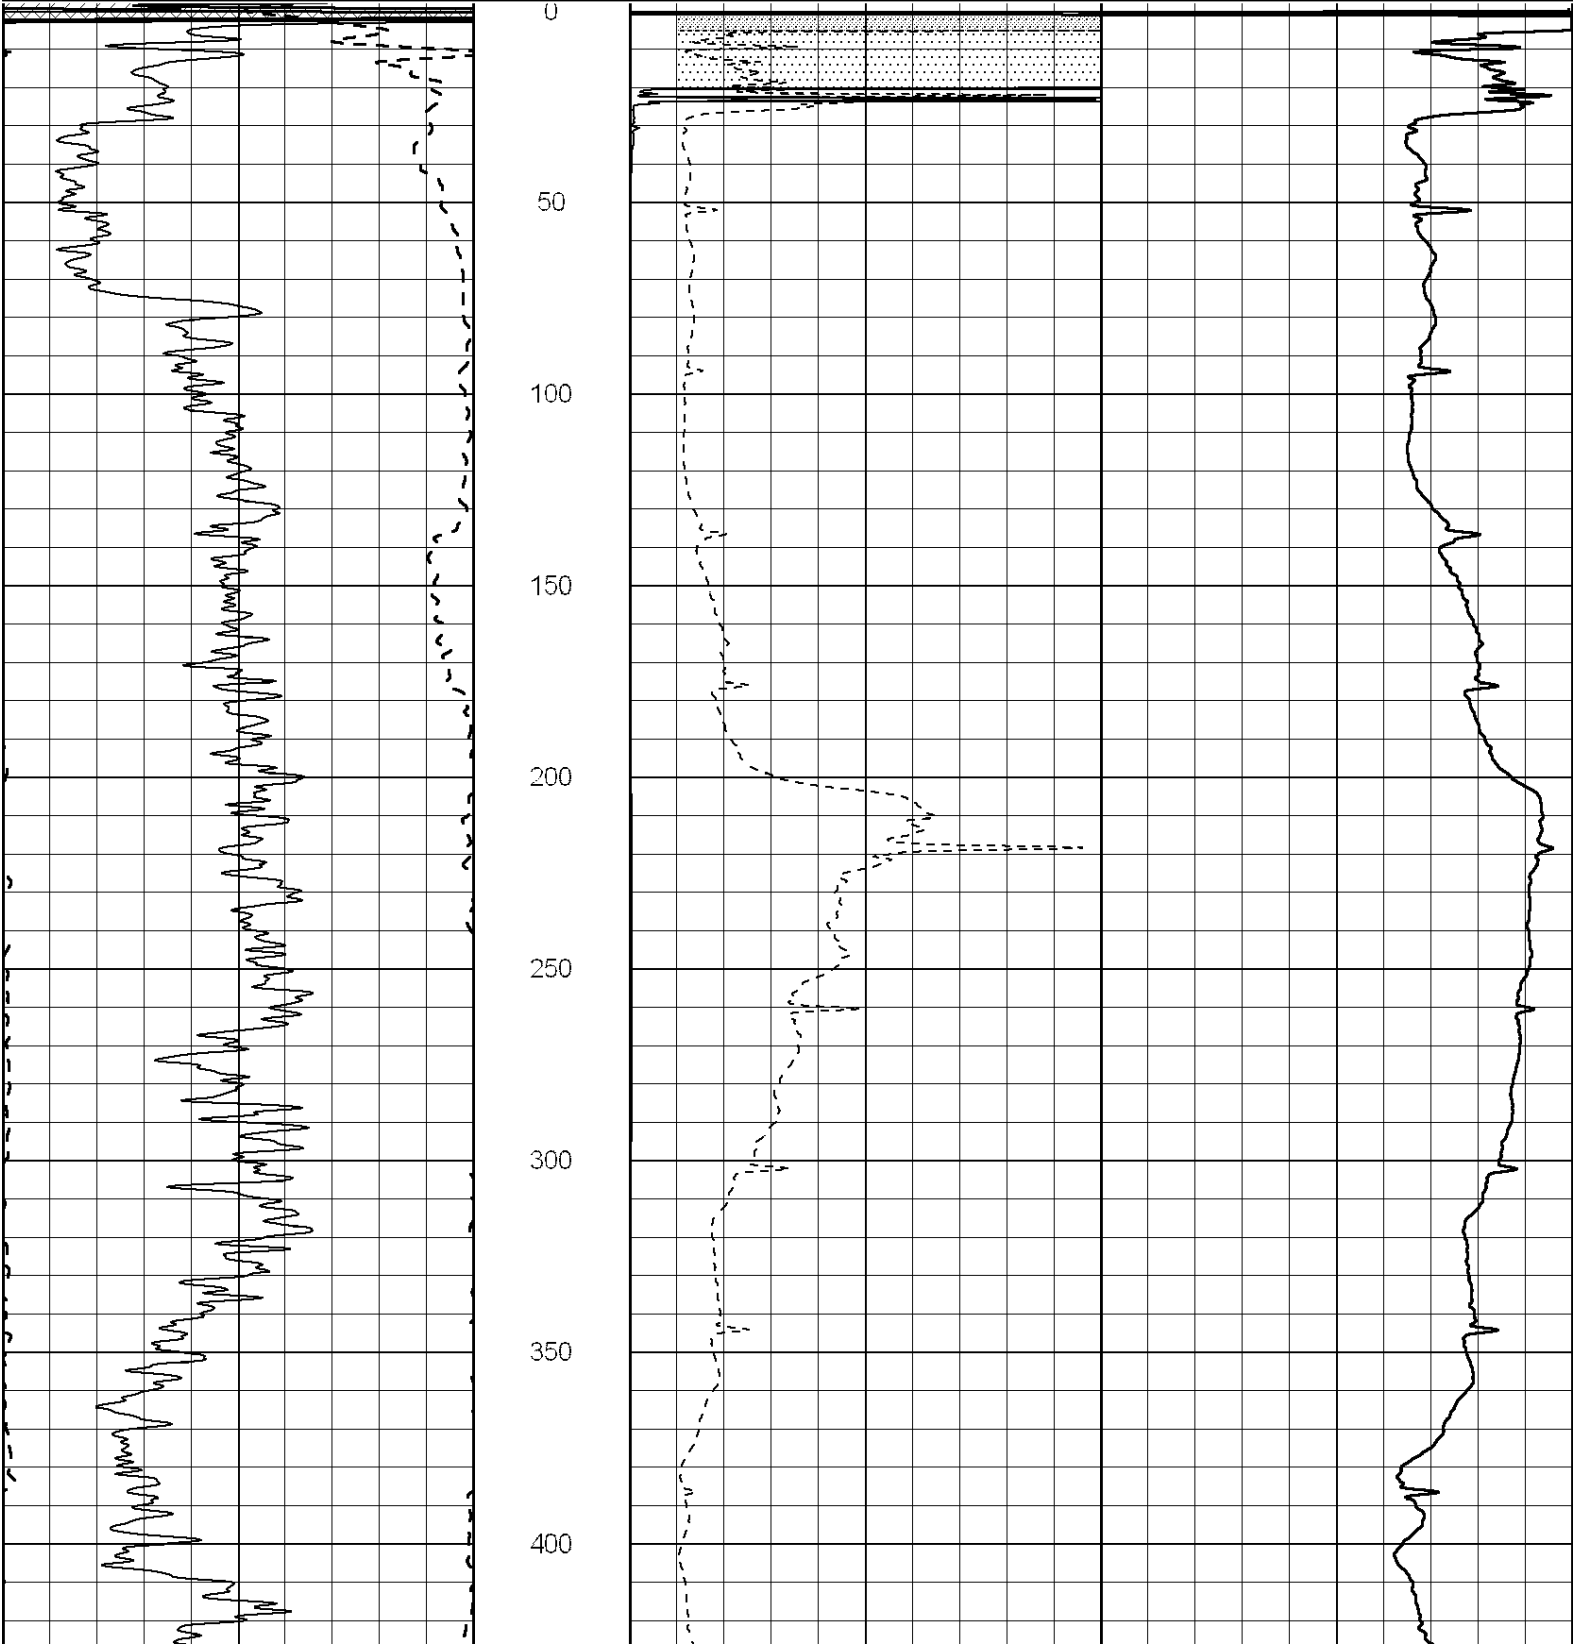

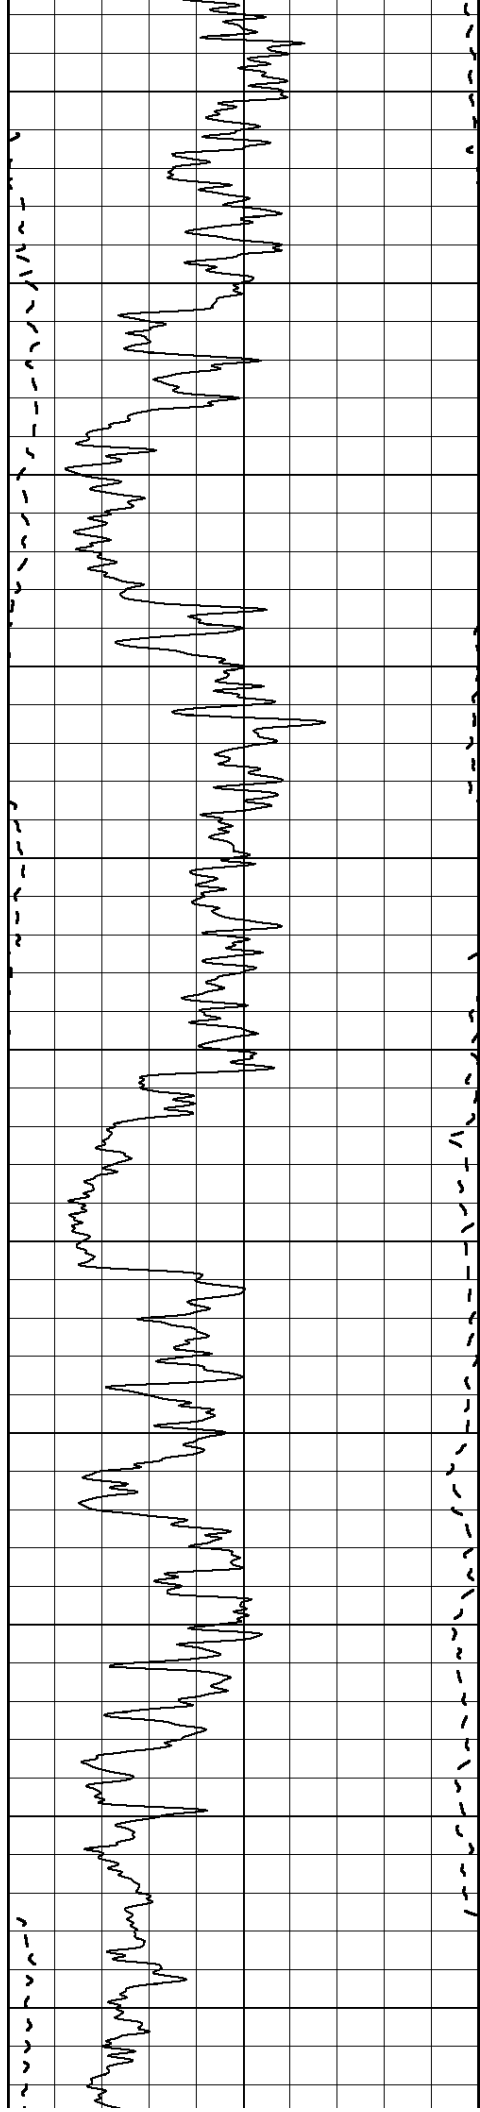

450

500

550

600

650

700


750


800

850

900

950

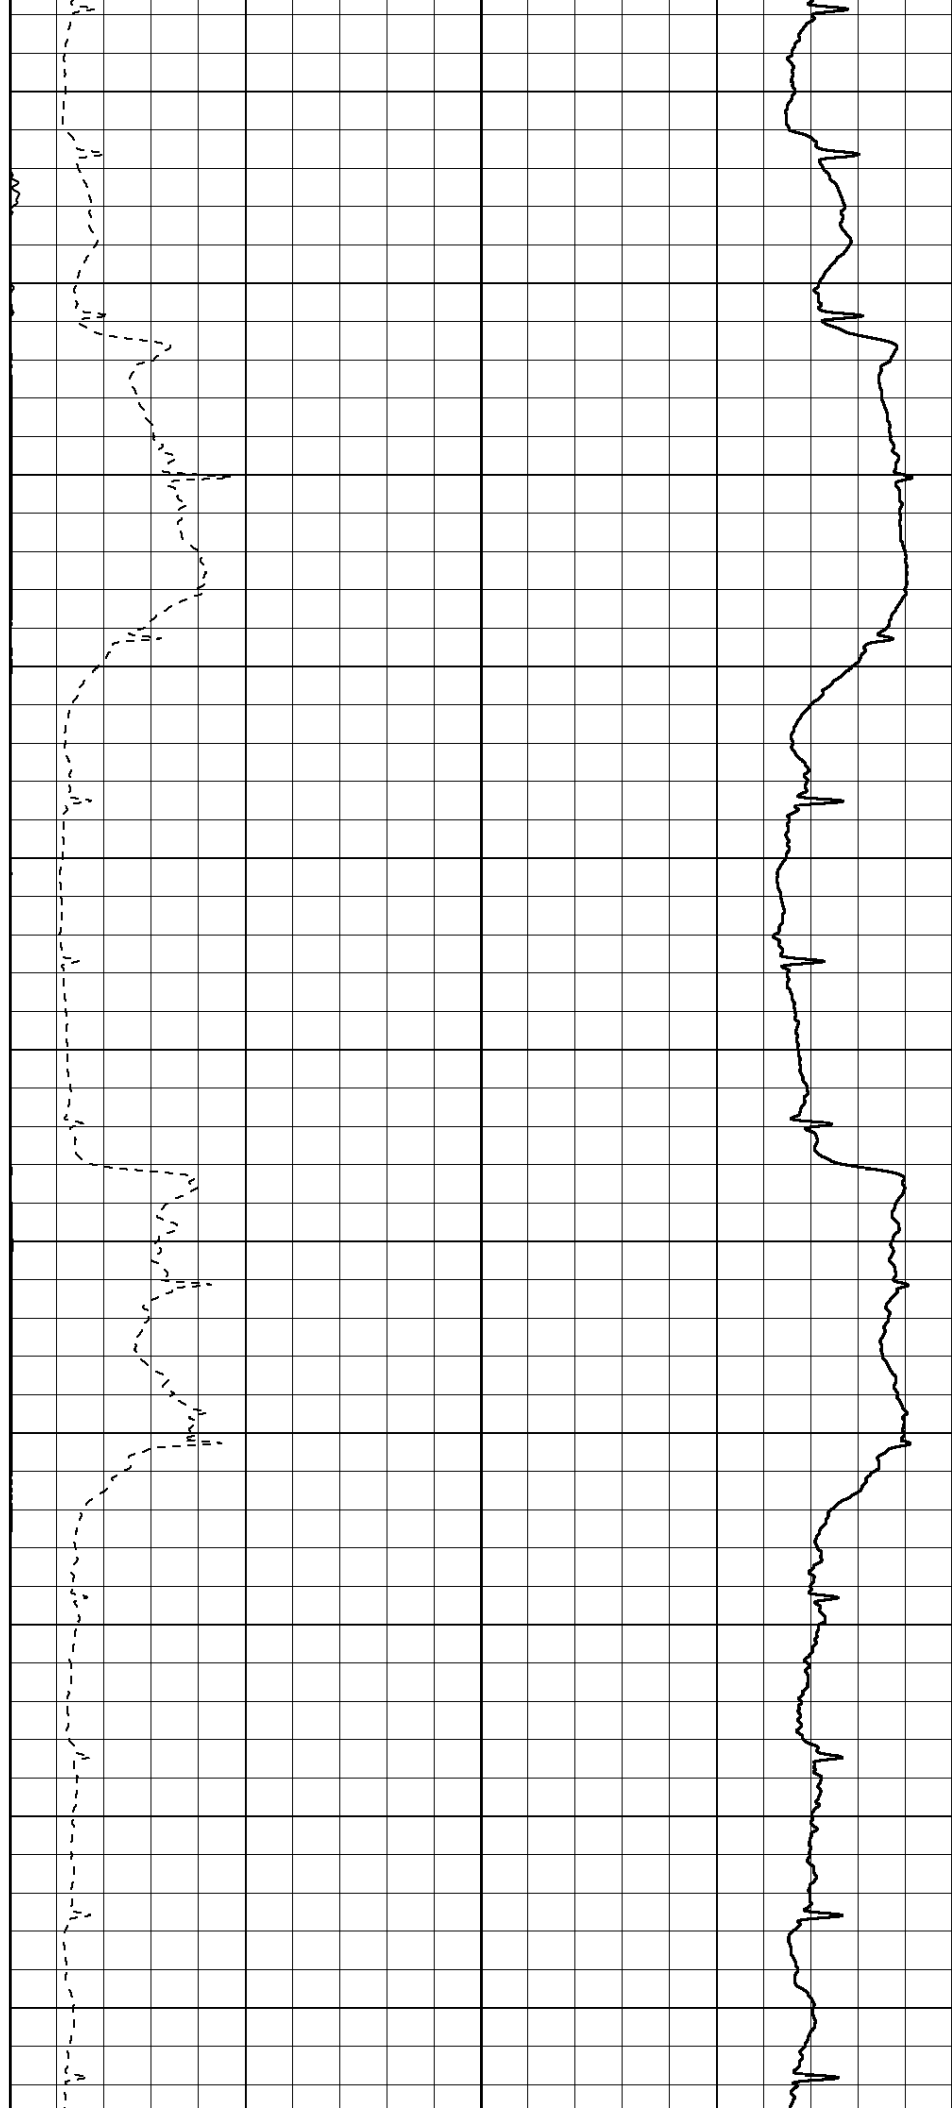

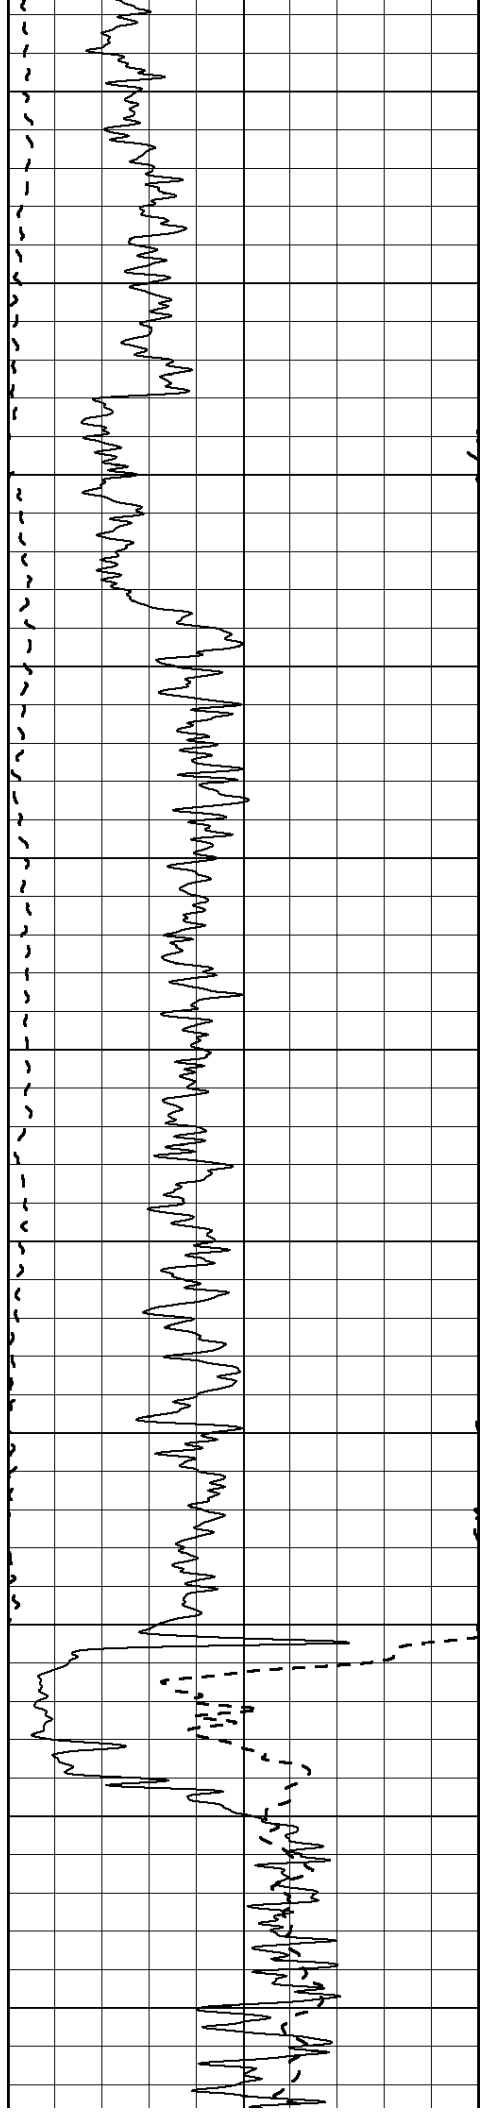

1000

1050

1100

1150

1200

1250


1300



1350


1400

1450

1500

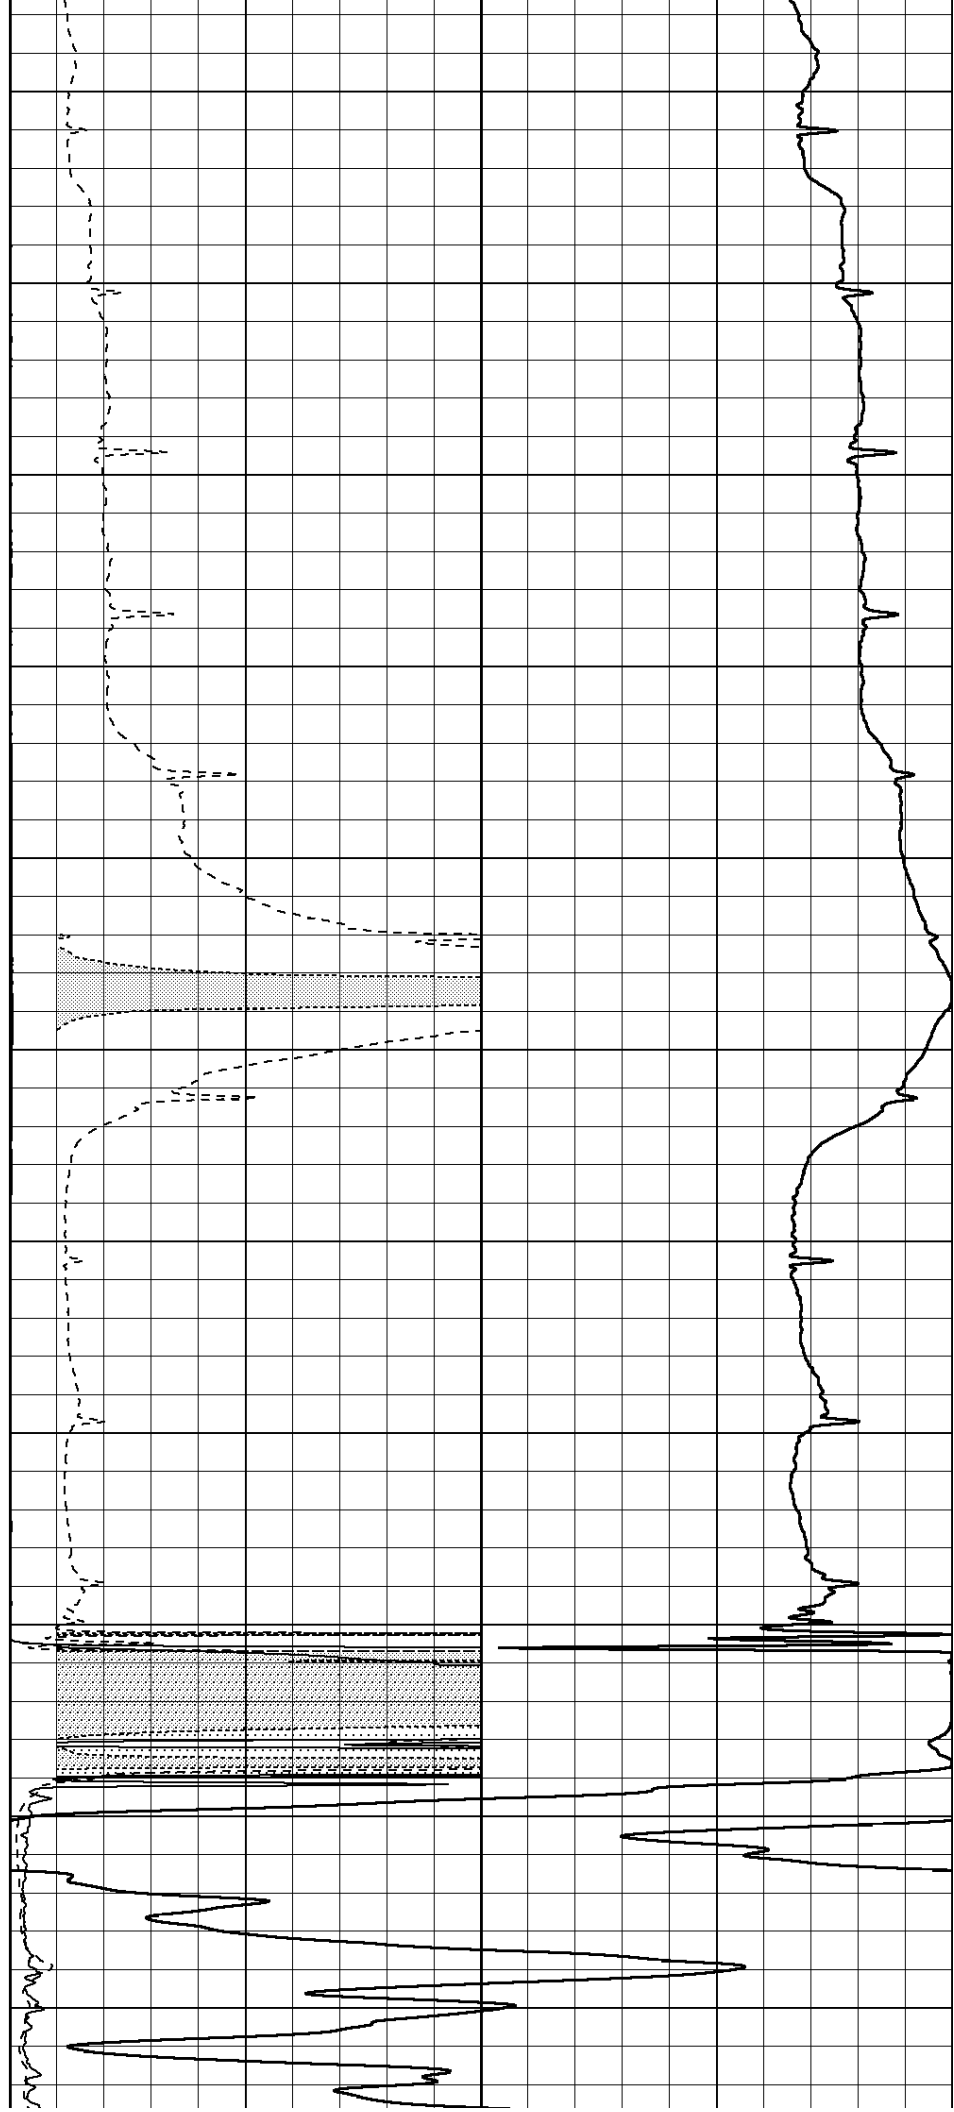

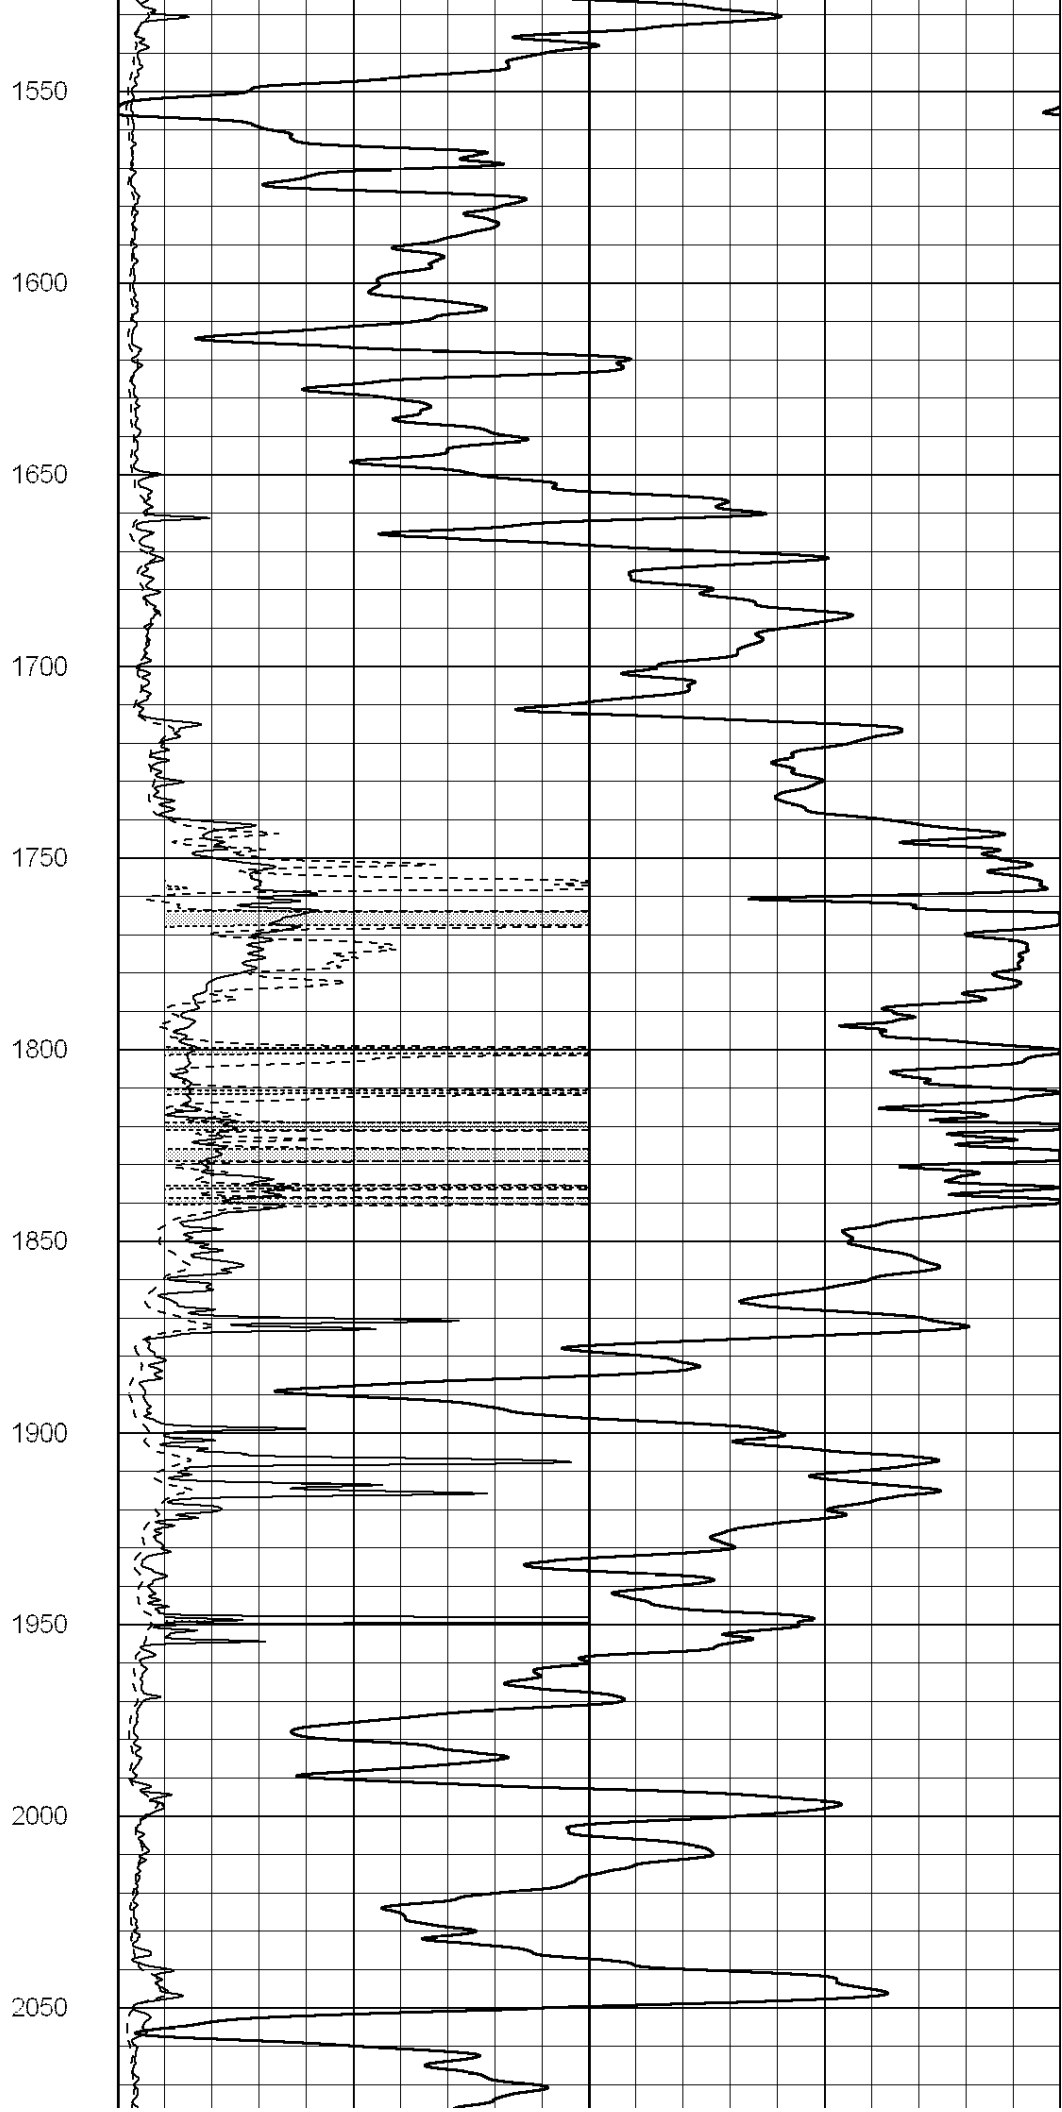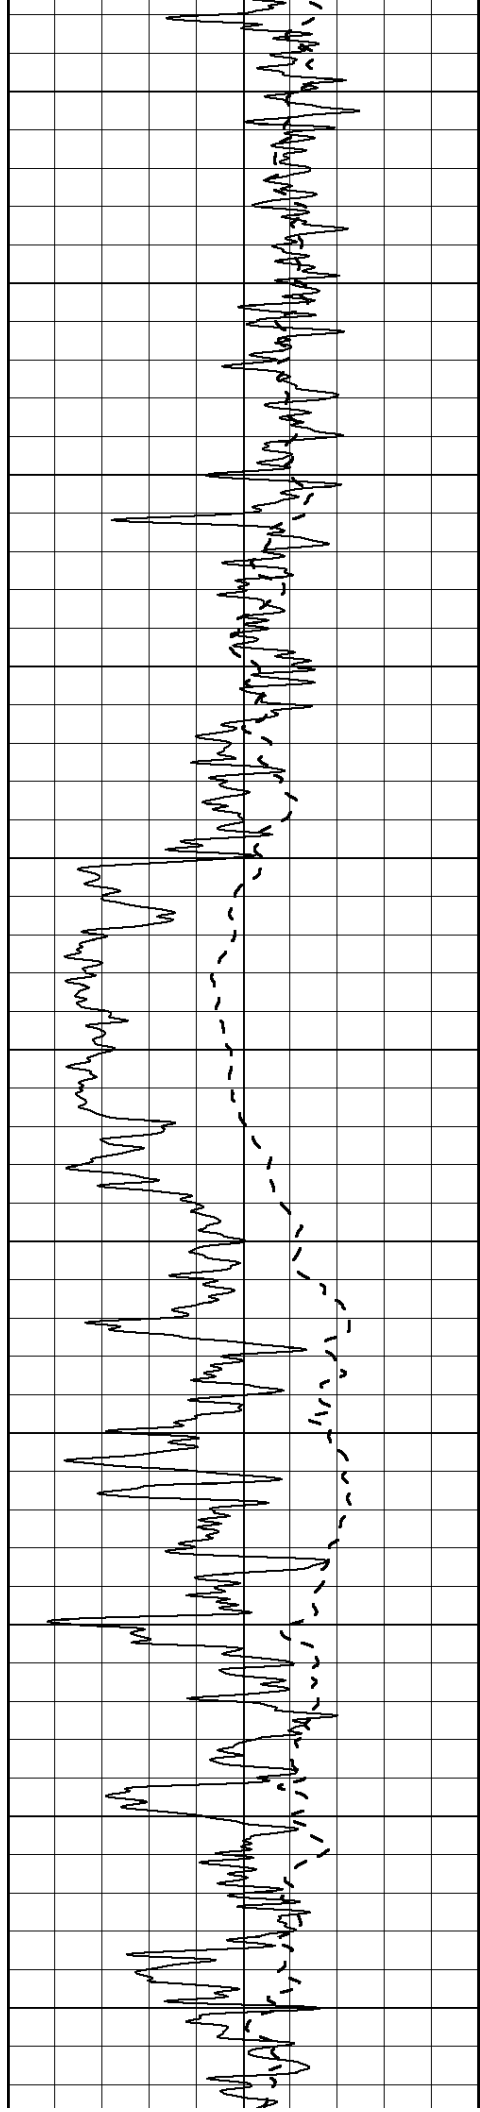

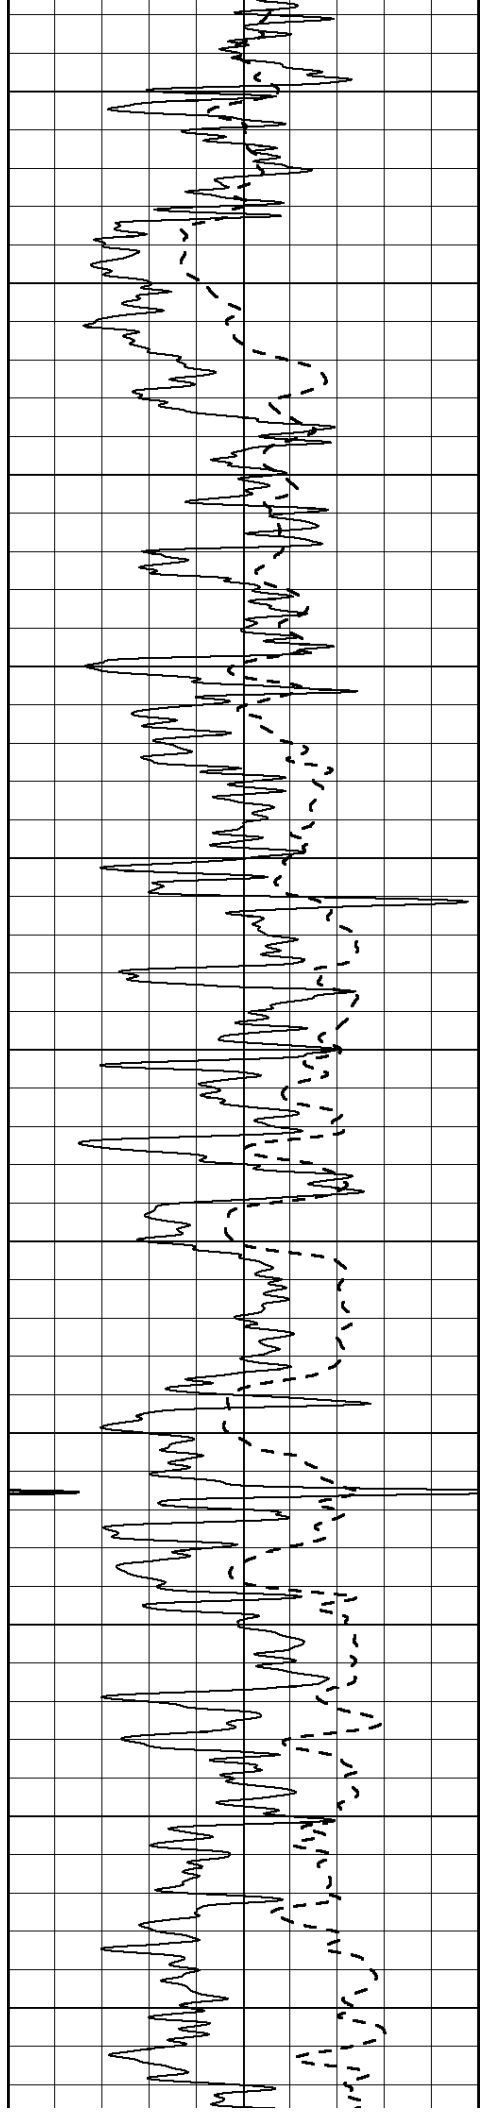

2100

2150

2200

2250

2300

2350


2400


2450

2500

2550

2600

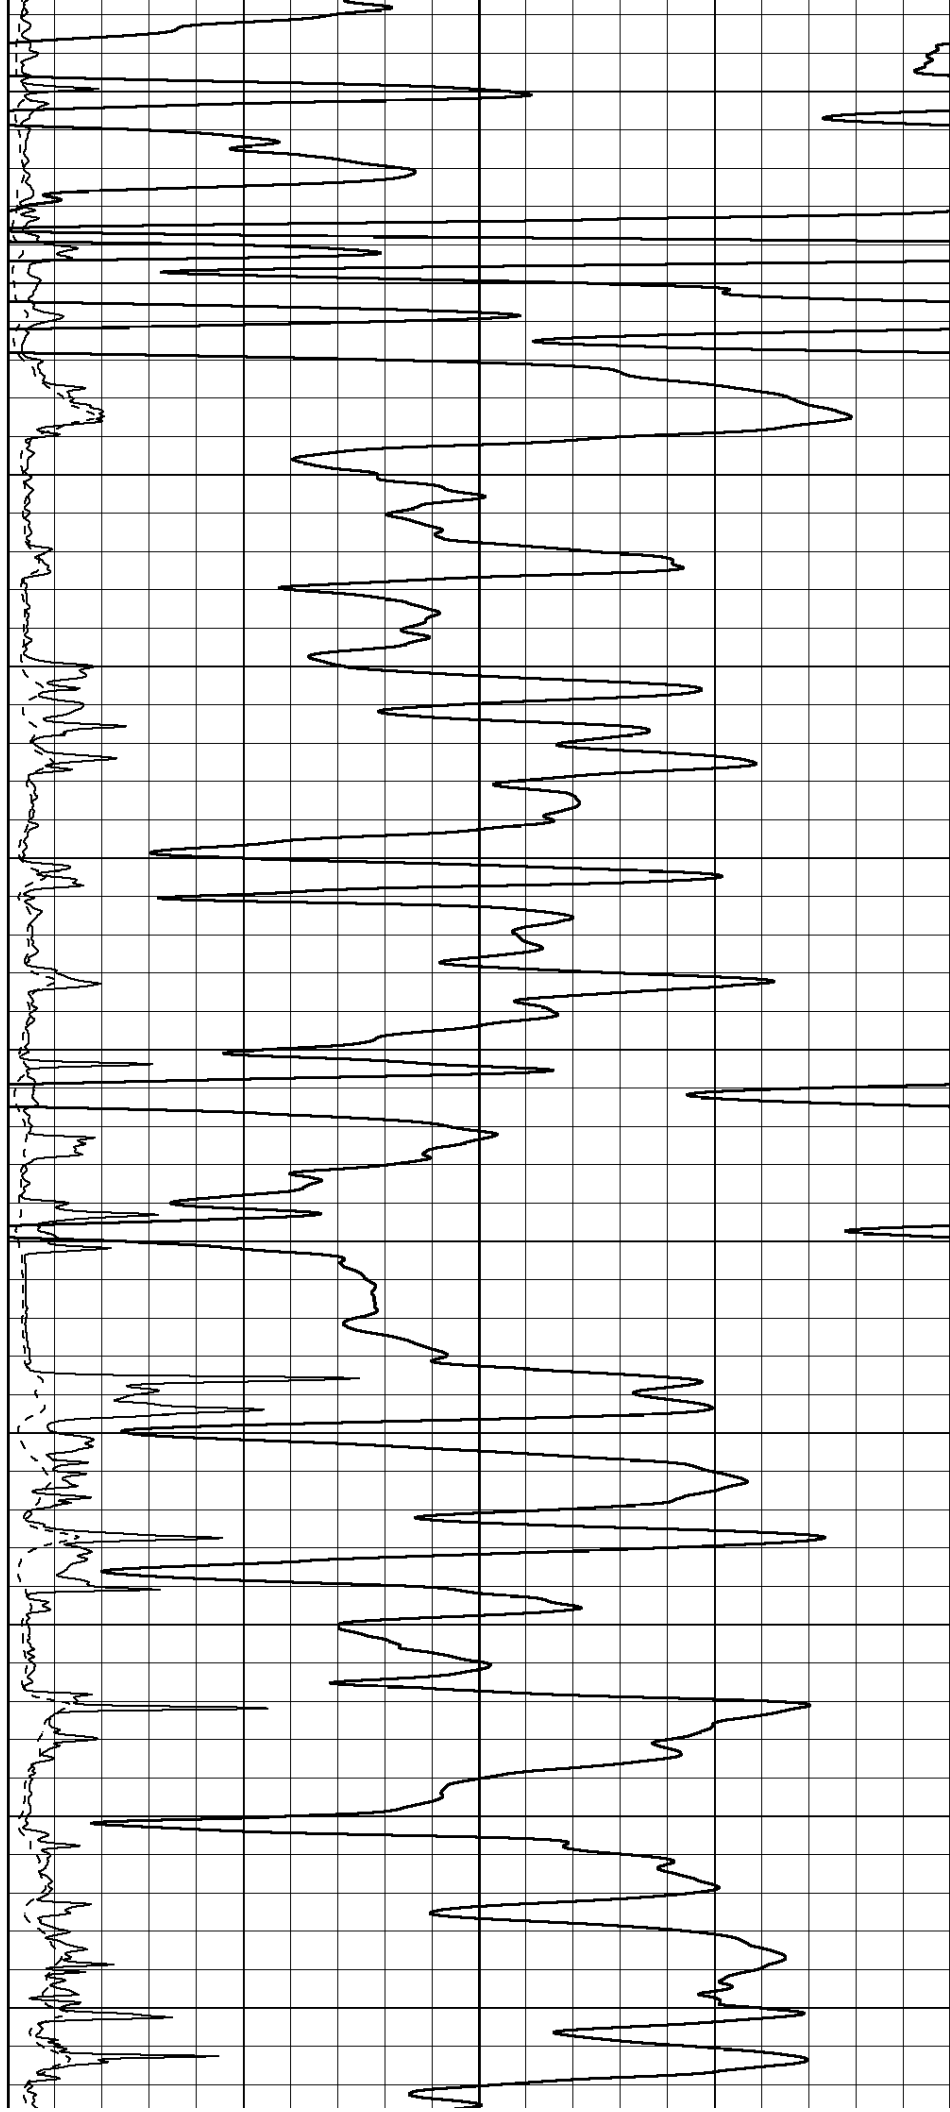

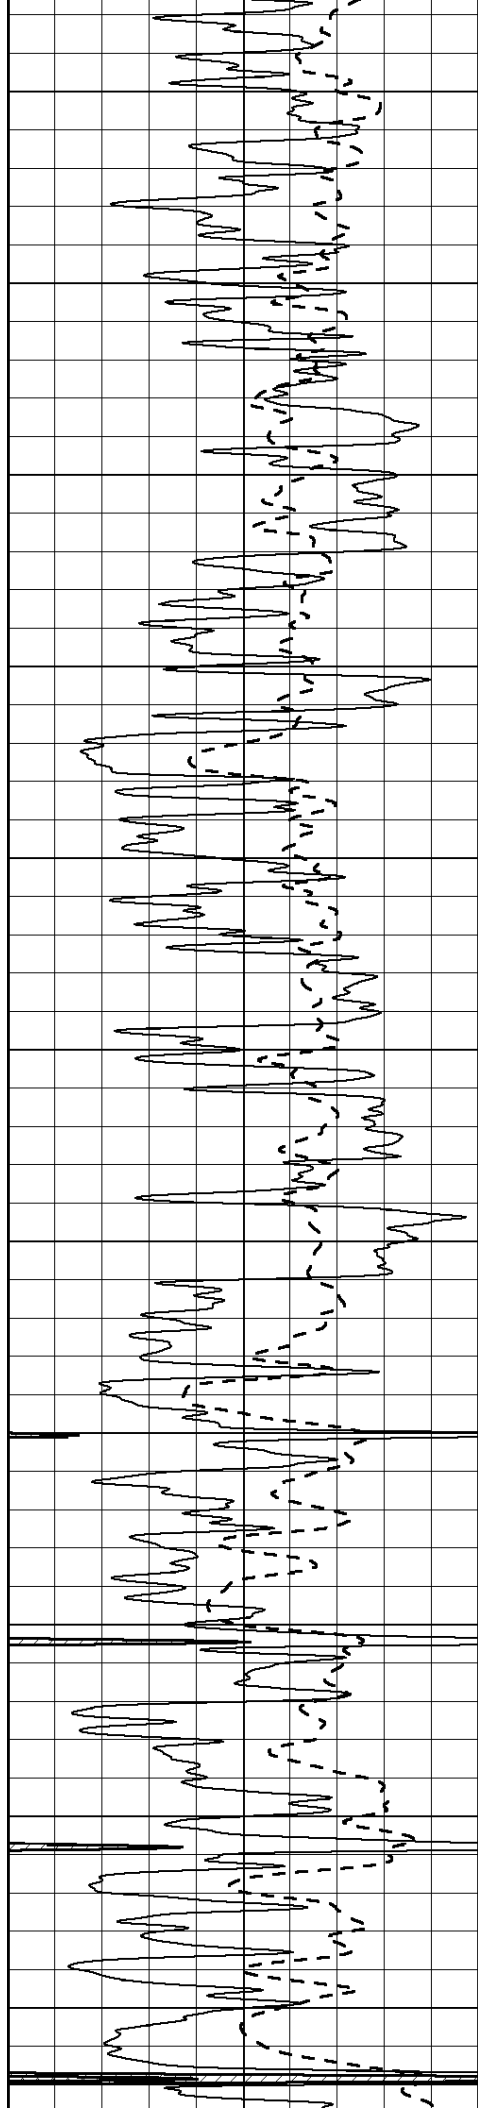

2650

2700

2750

2800

2850

2900


2950


3000

3050

3100

3150

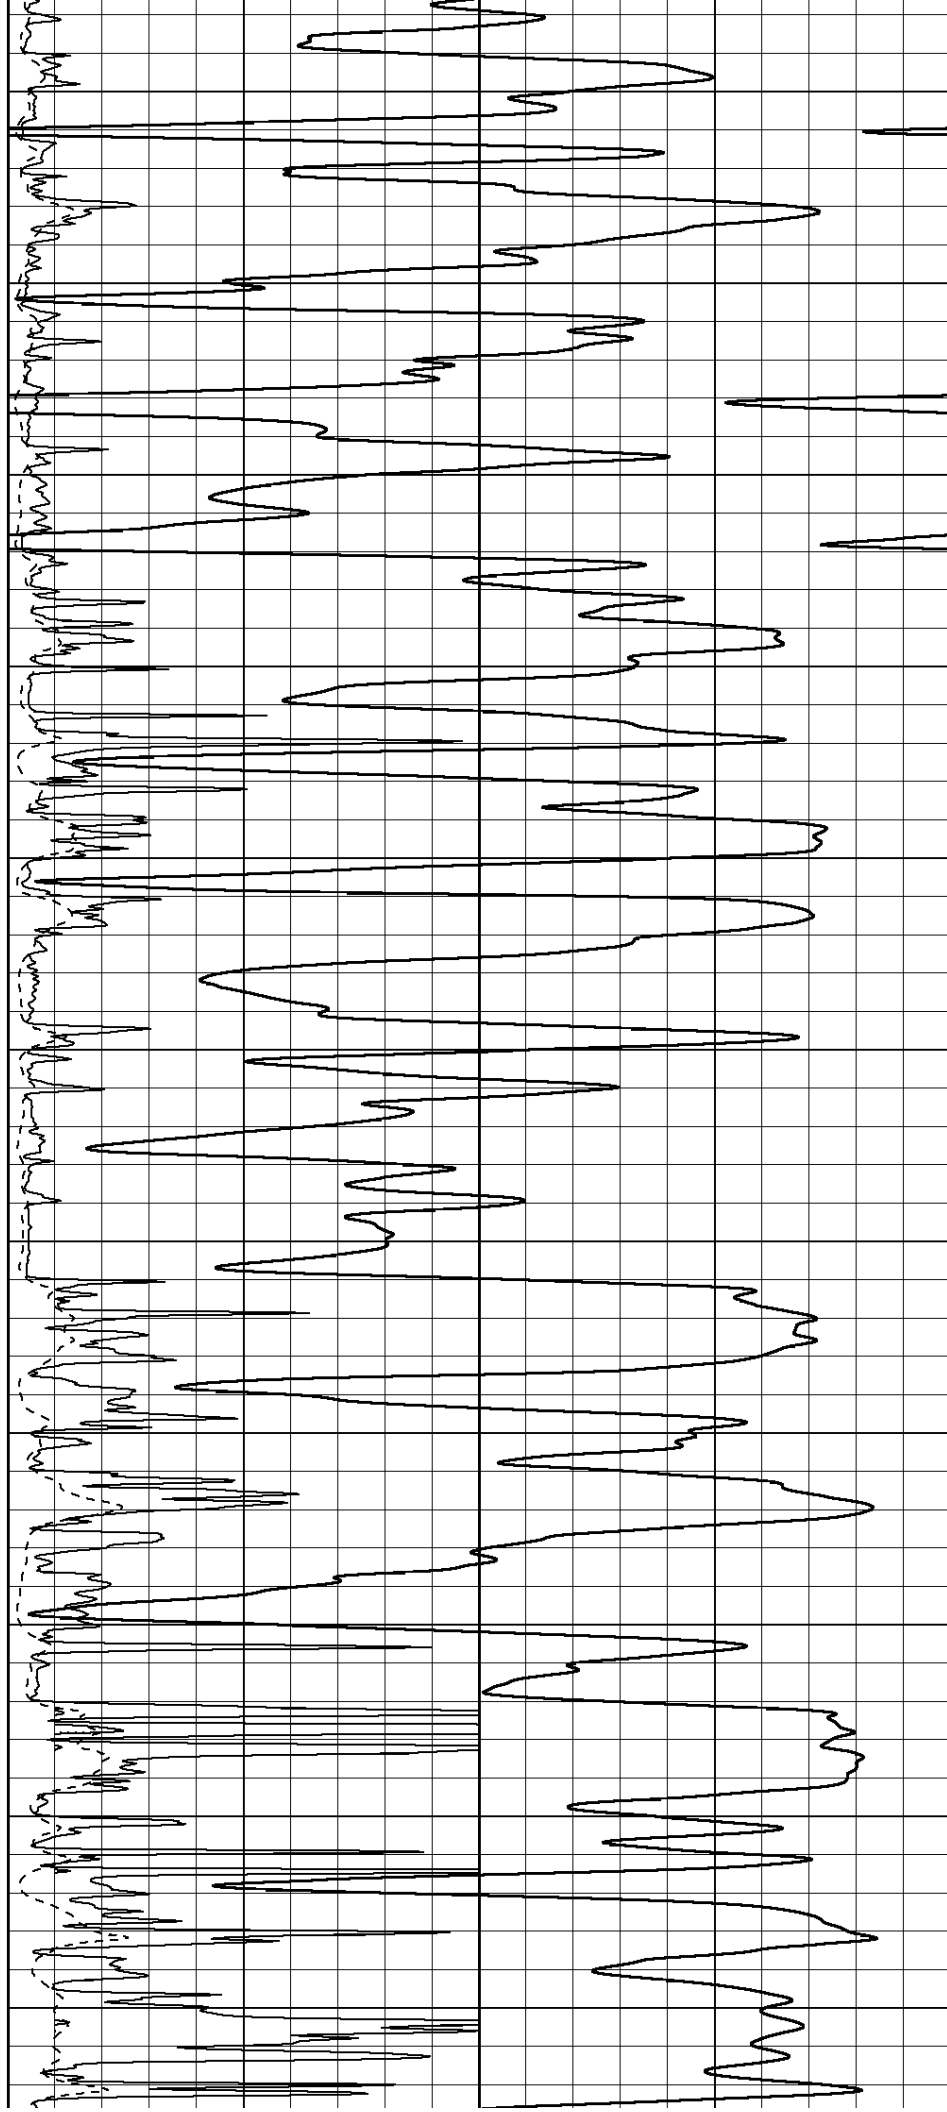

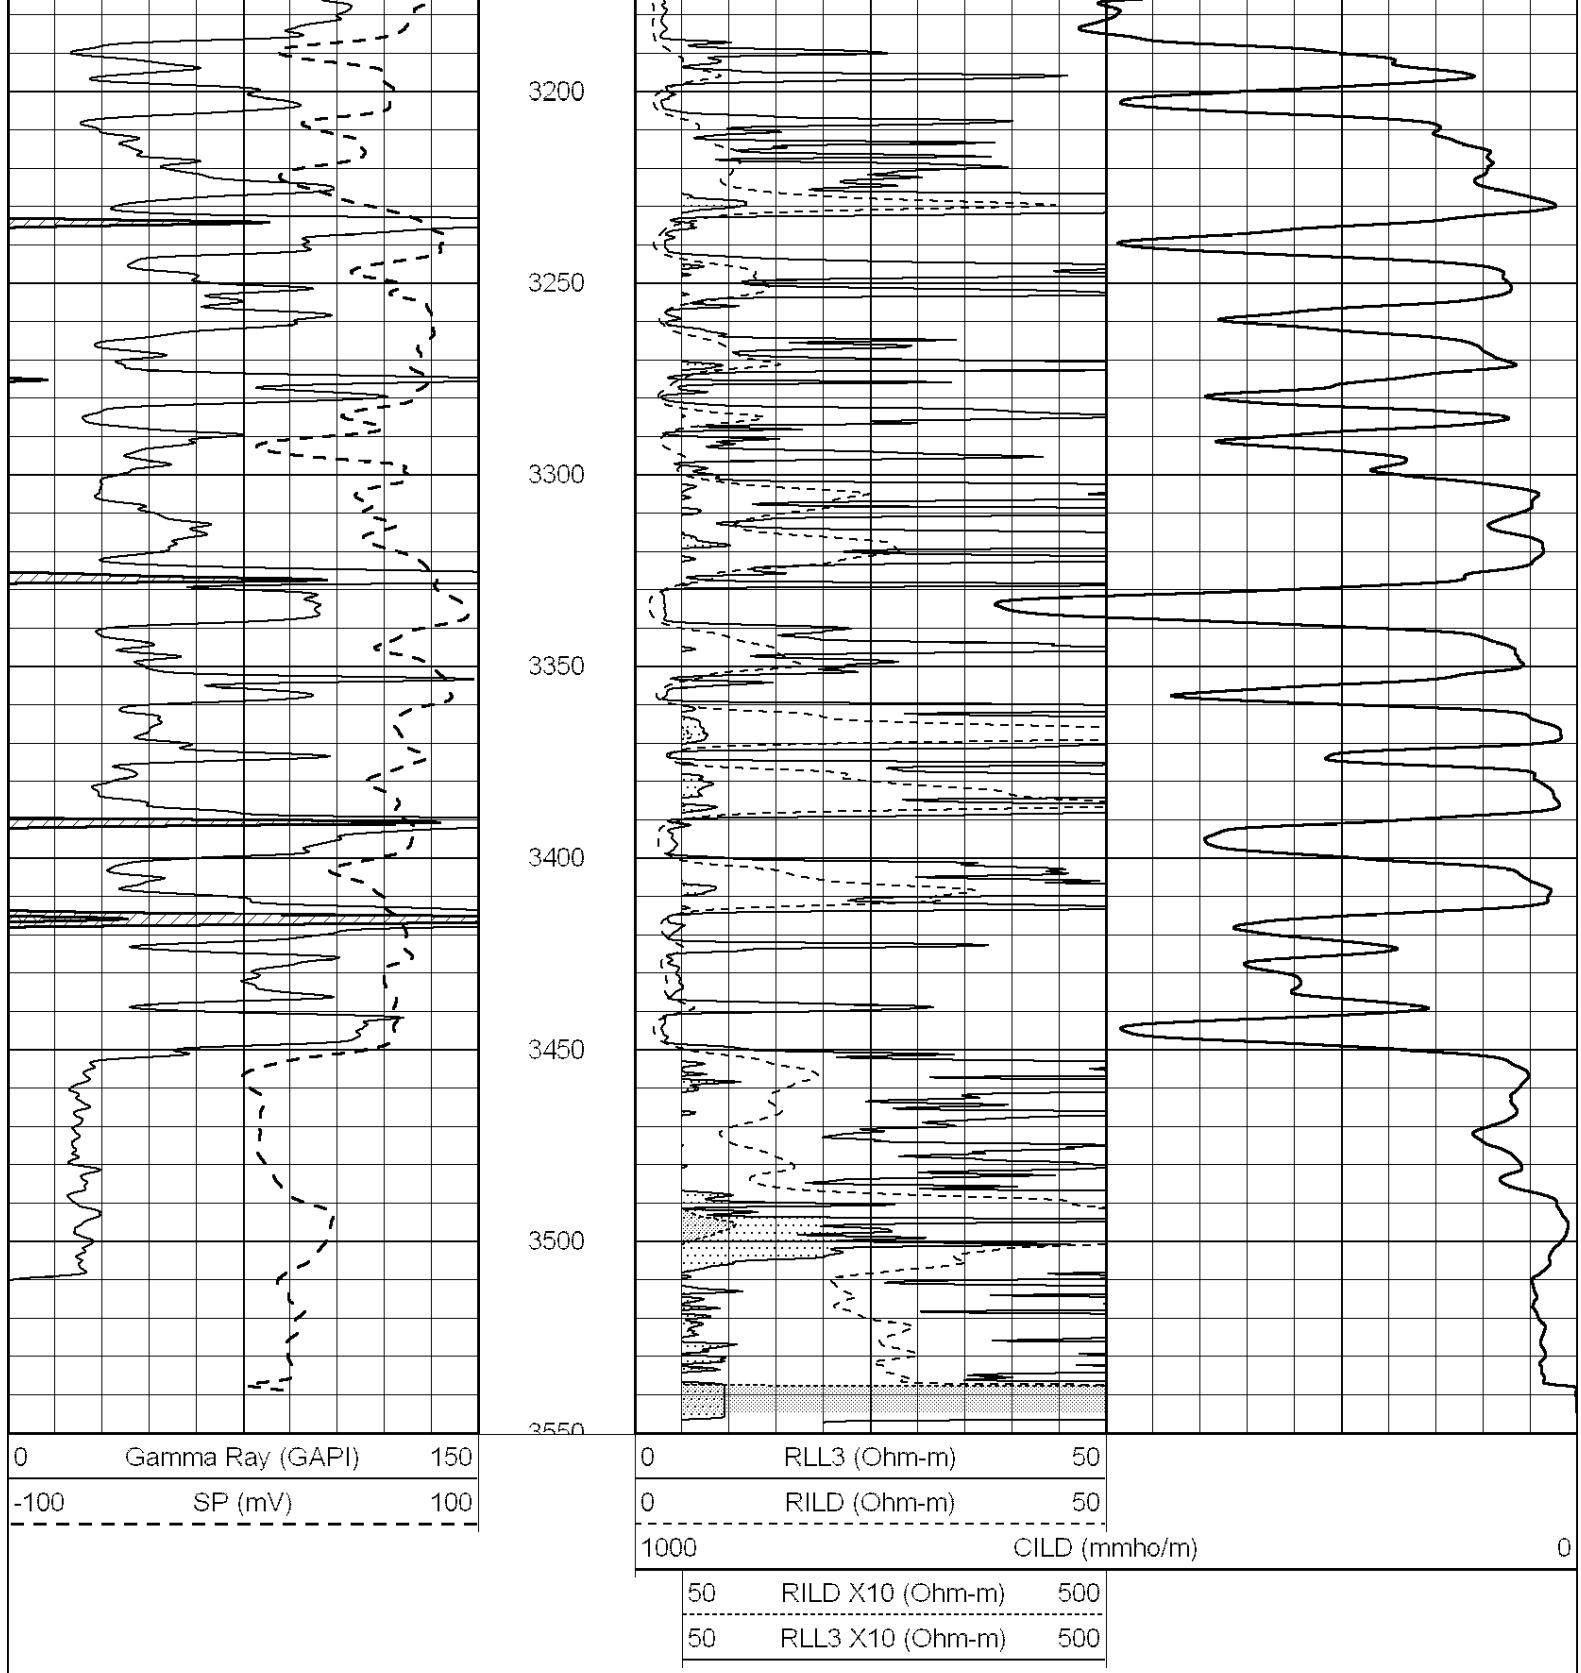


NABORS

**COMPLETION
& PRODUCTION
SERVICES CO.**

ANHYDRITE


Database File: 24161pe.db
 Dataset Pathname: pass3.4
 Presentation Format: _dil
 Dataset Creation: Wed May 28 10:02:22 2014 by Calc SOC 120430
 Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50
0	MINMK	20

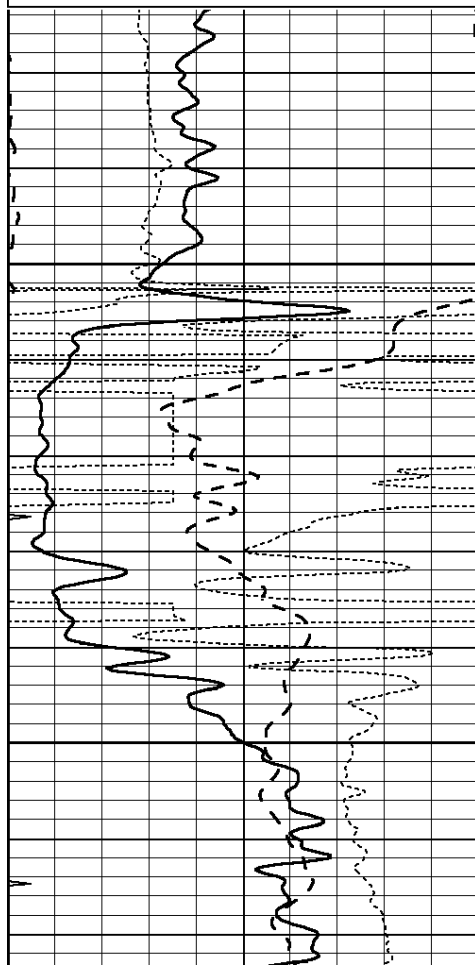

0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50
0	MINMK	20

0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000

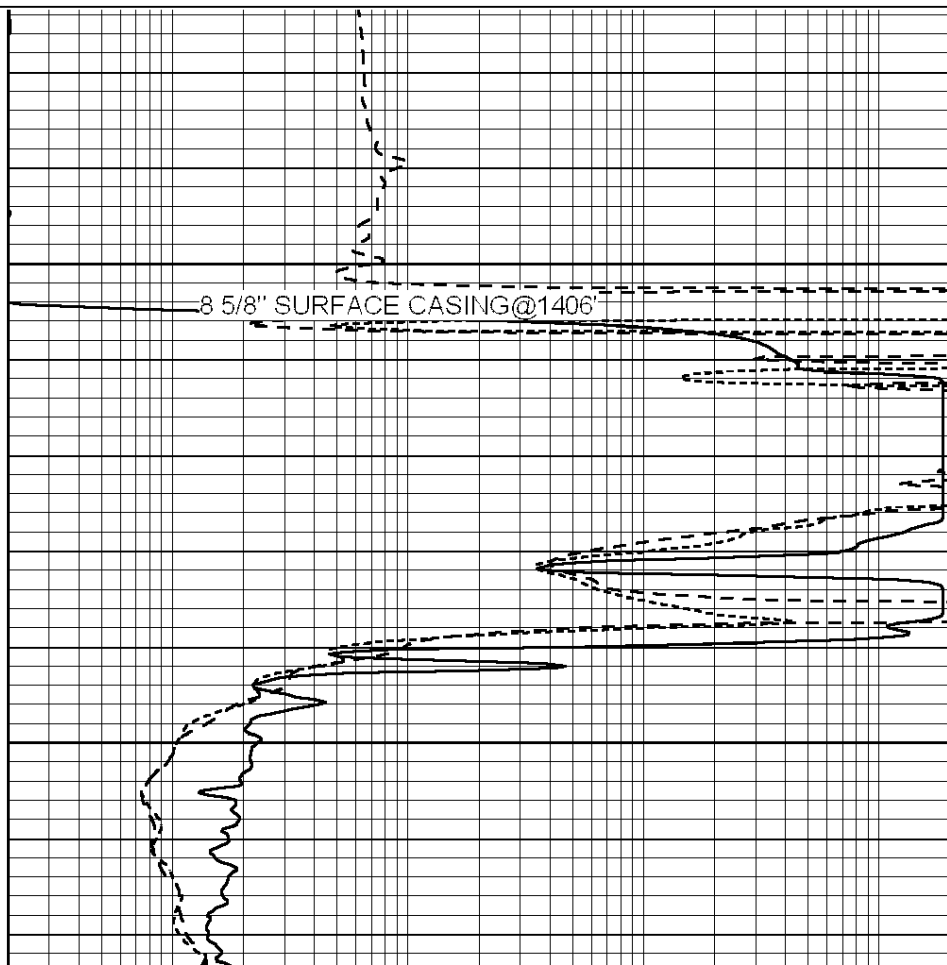

0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000




MAIN SECTION

Database File: 24161pe.db
 Dataset Pathname: pass3.6
 Presentation Format: _dil
 Dataset Creation: Wed May 28 10:54:03 2014
 Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50
0	MINMK	20

0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000

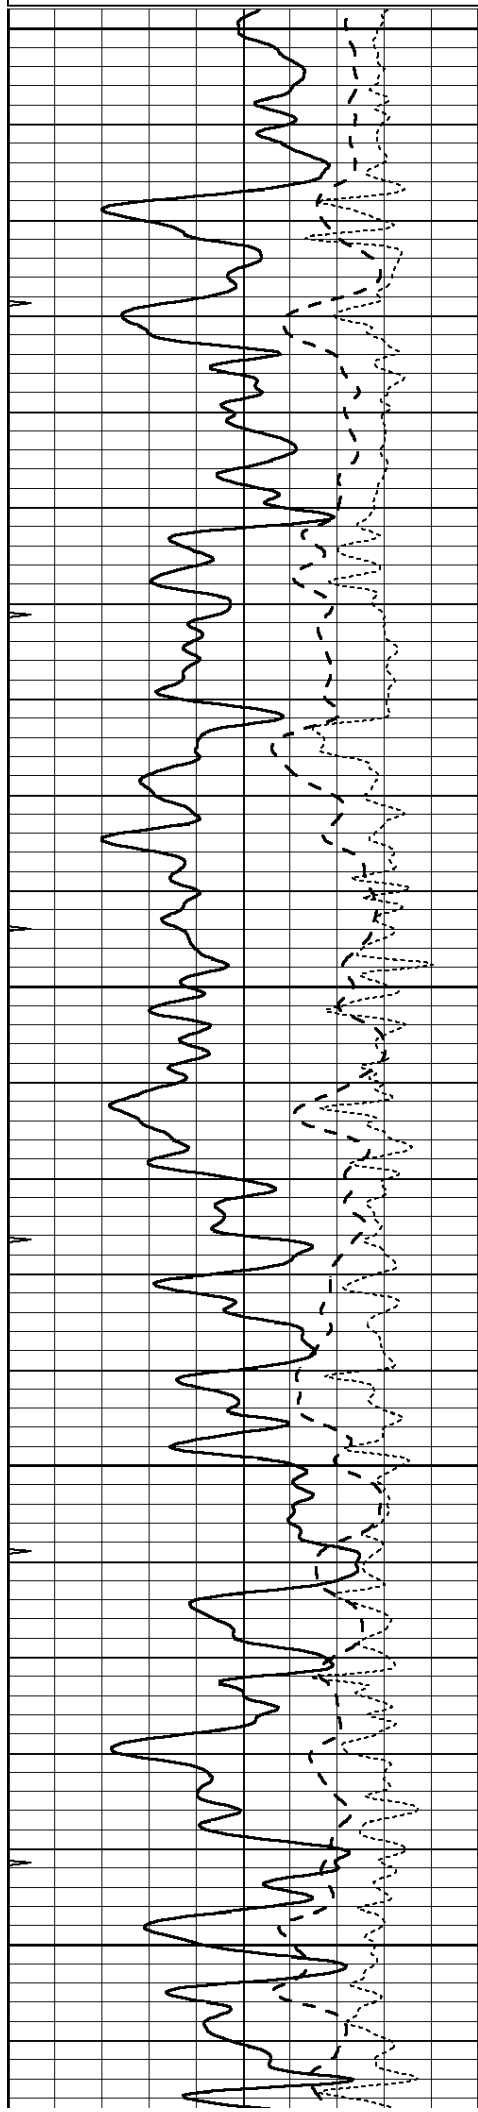


2500


2550

2600

2650

2700

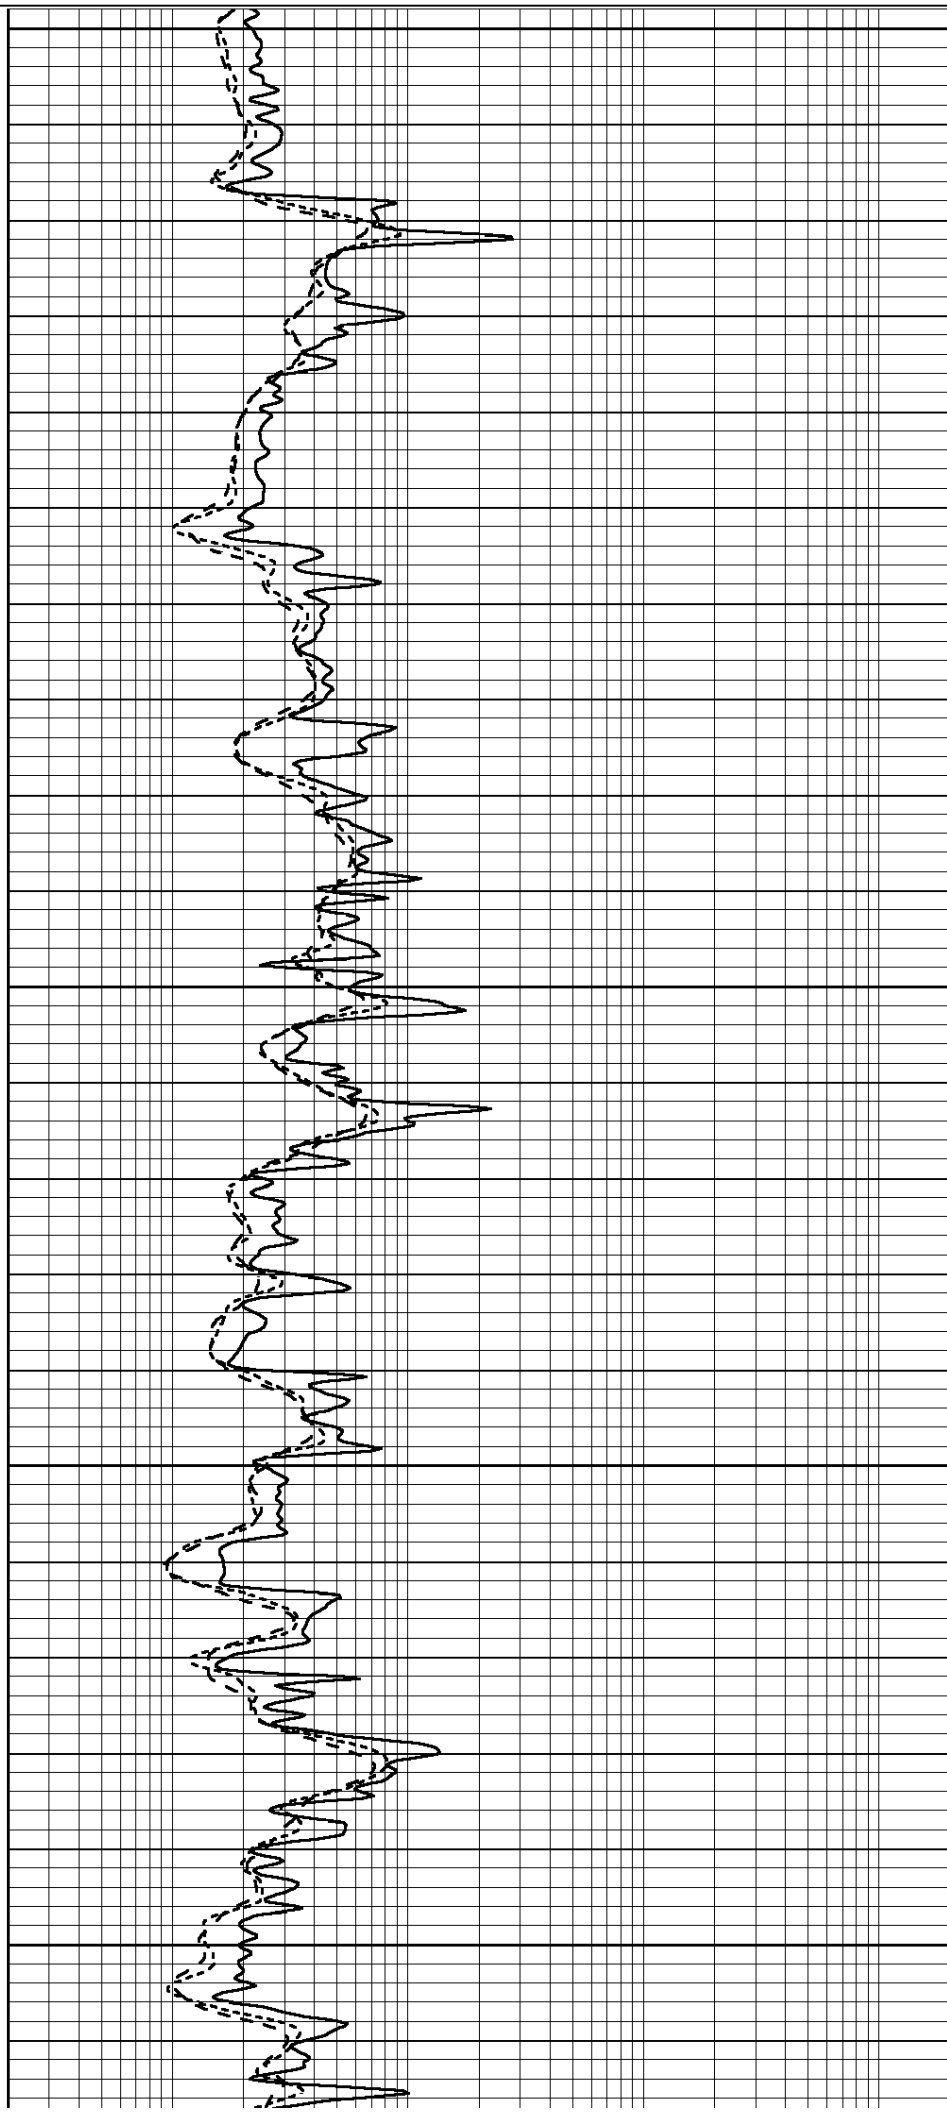

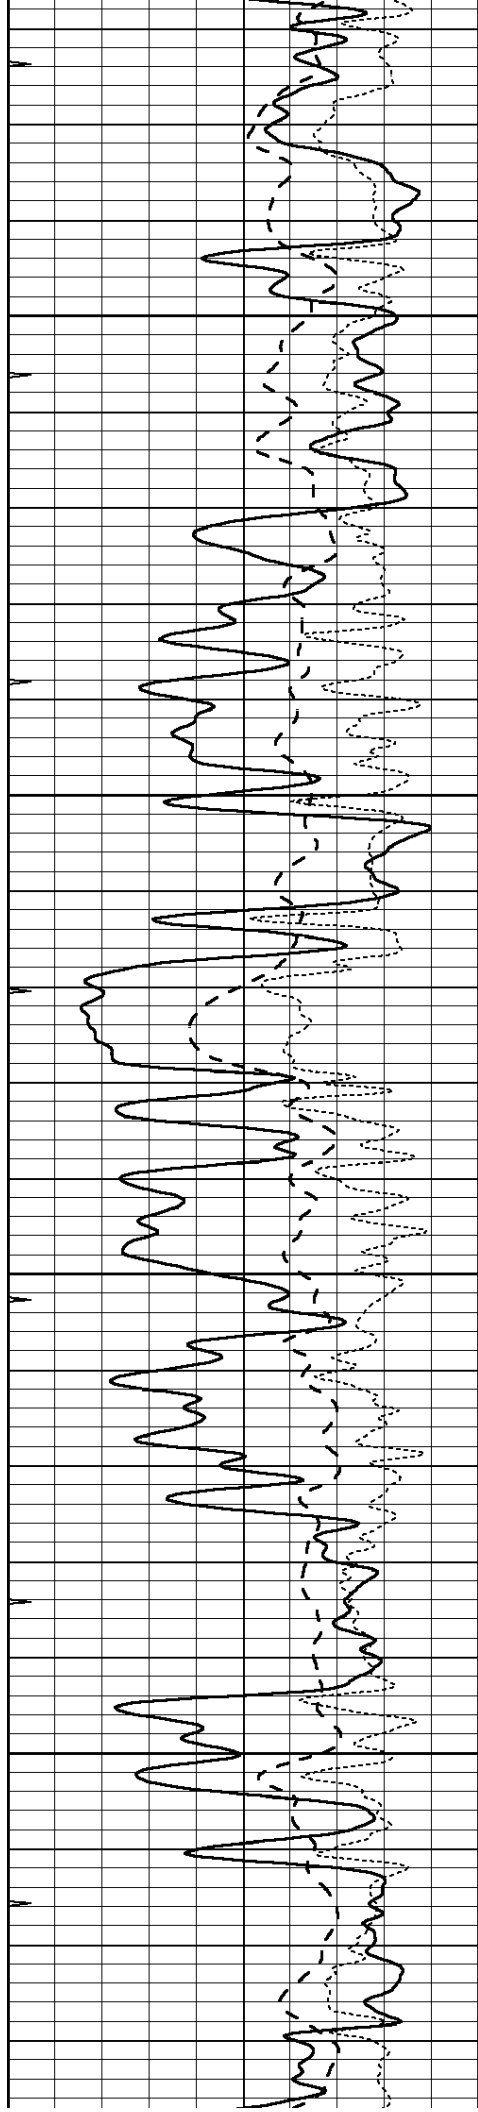



2750

2800

2850

2900

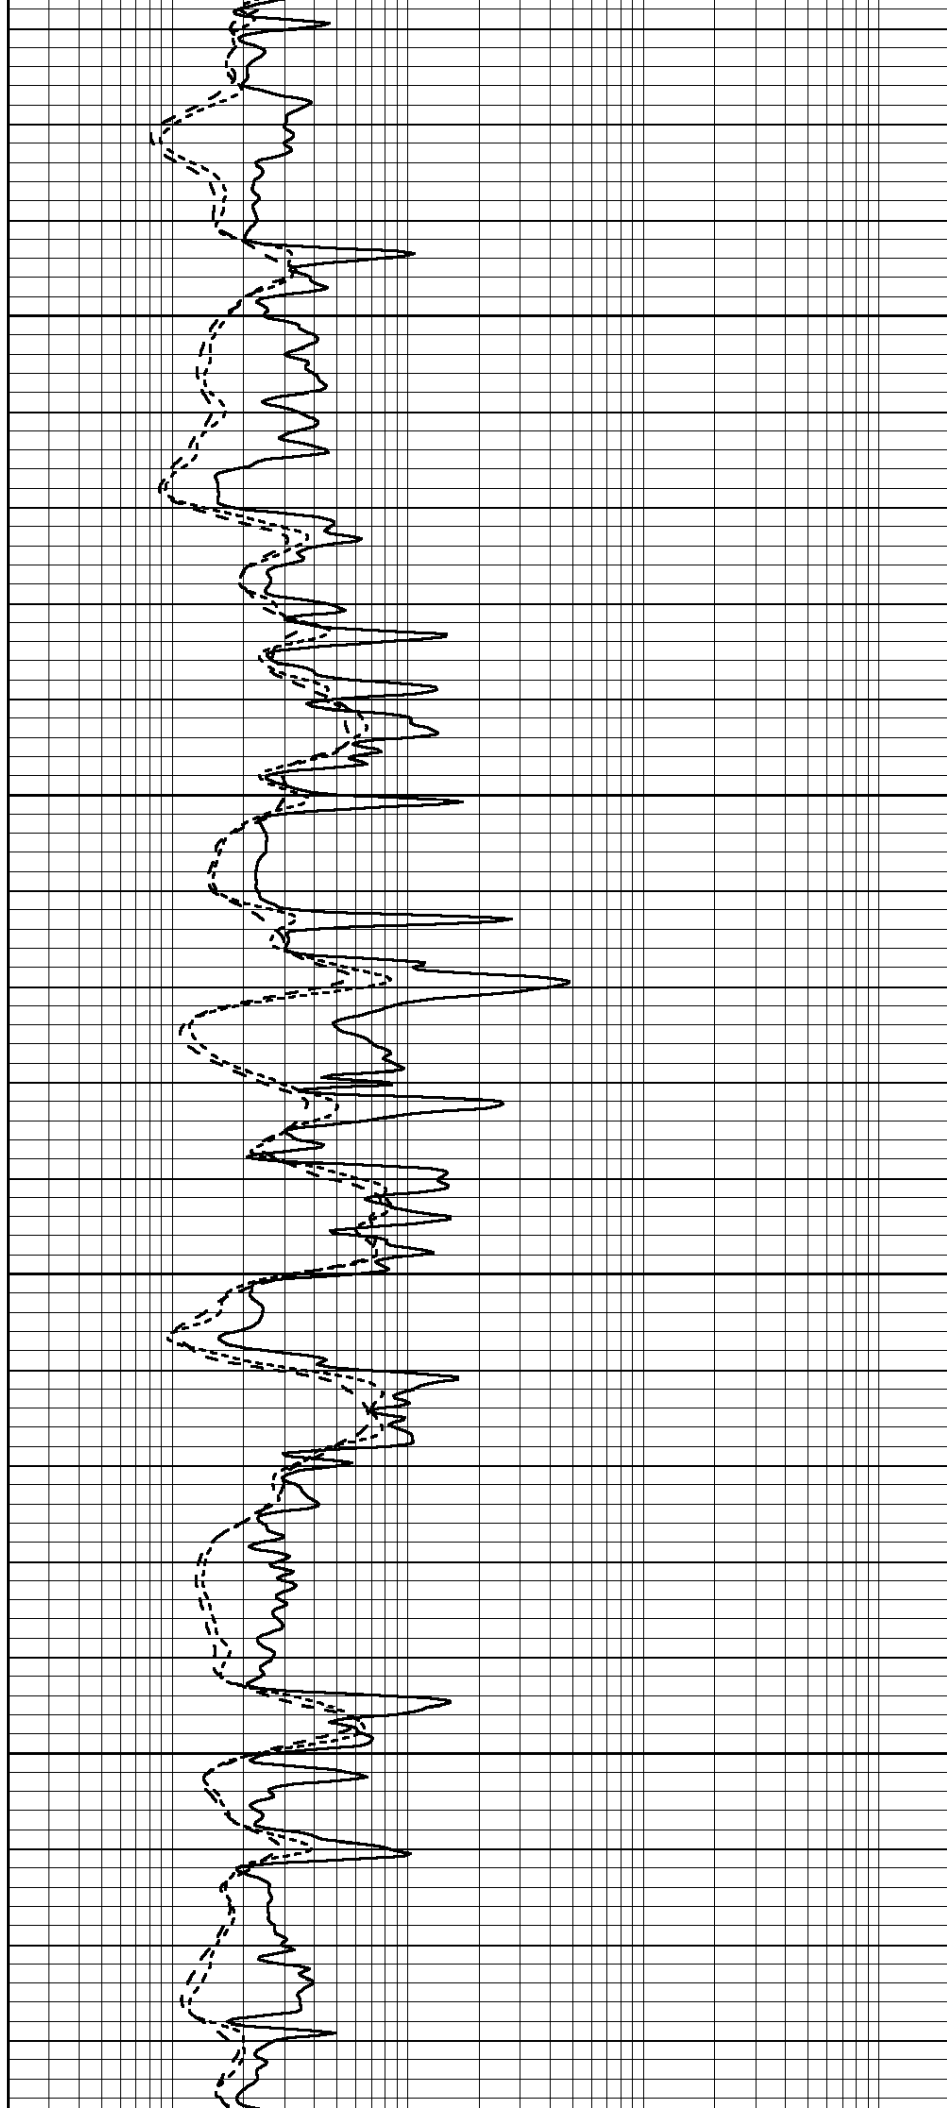

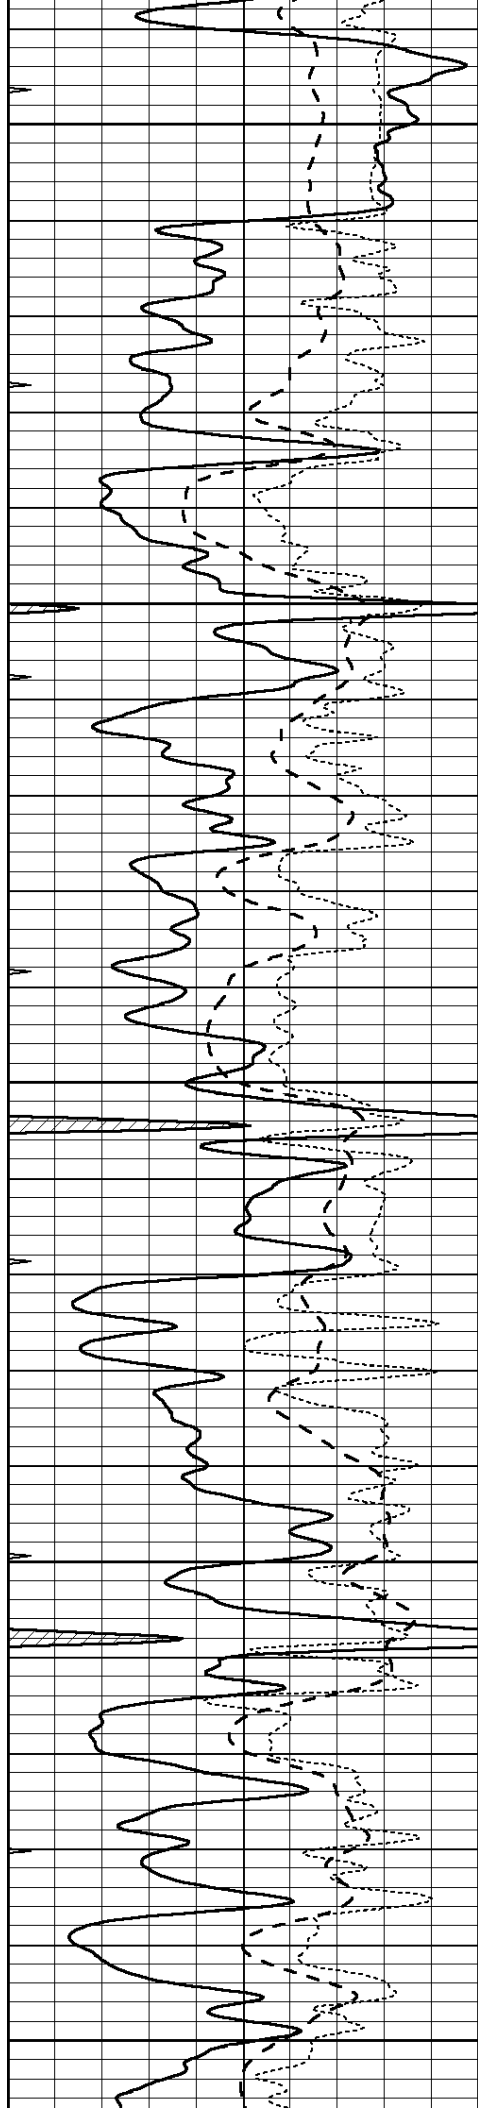


2950


3000

3050

3100

3150

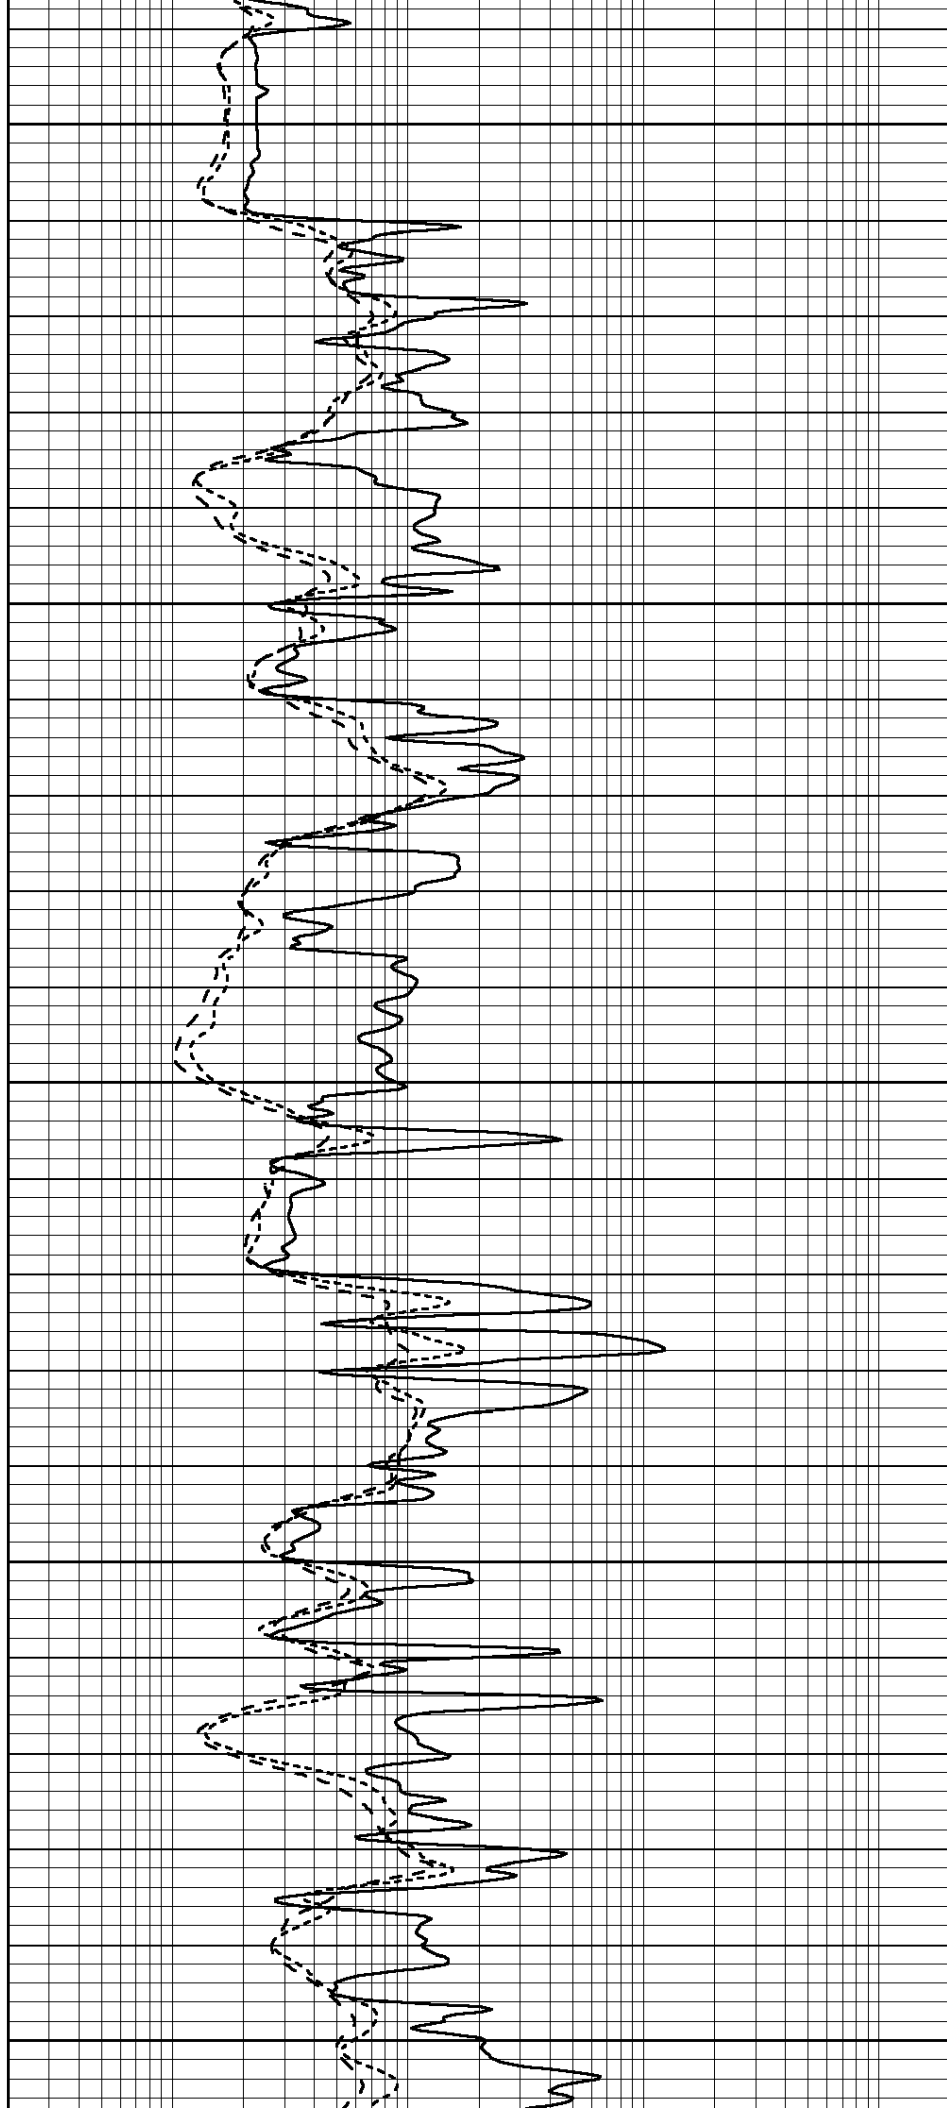

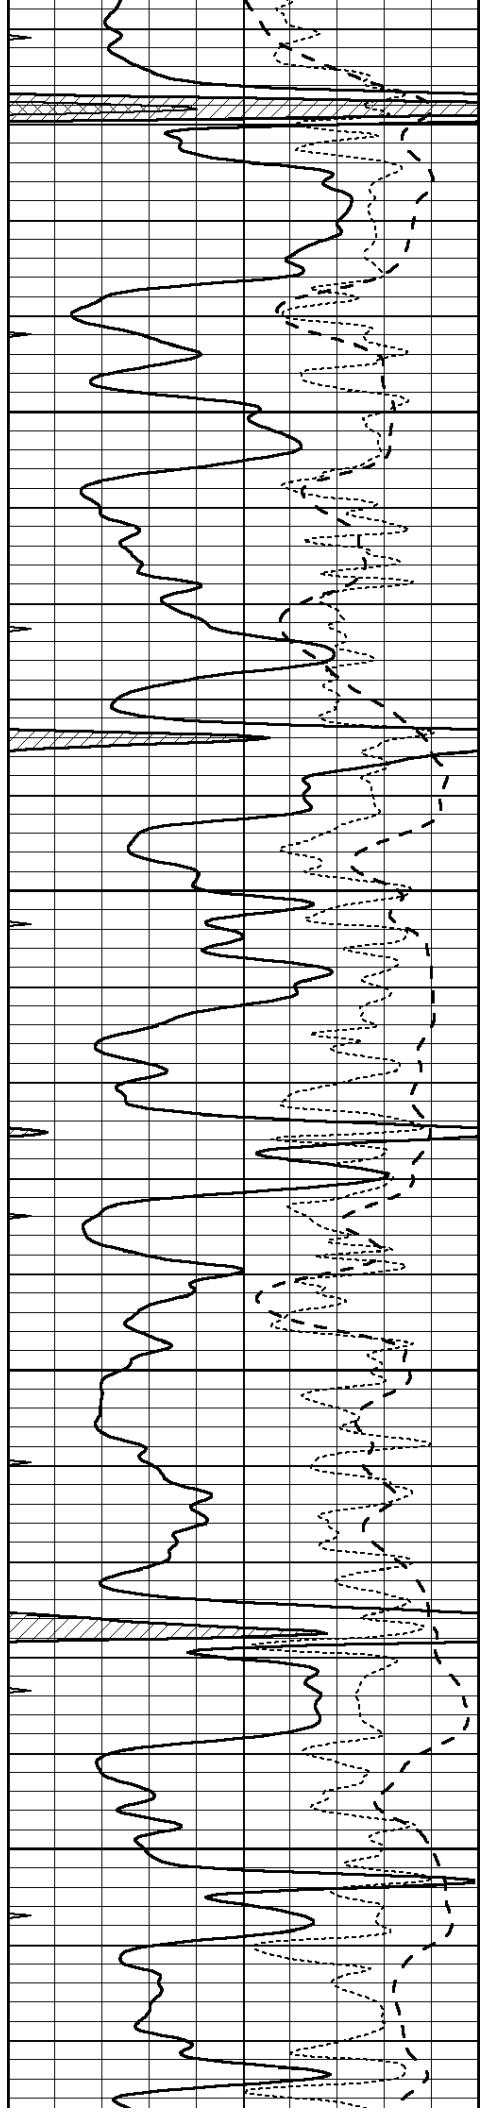



3200

3250

3300

3350

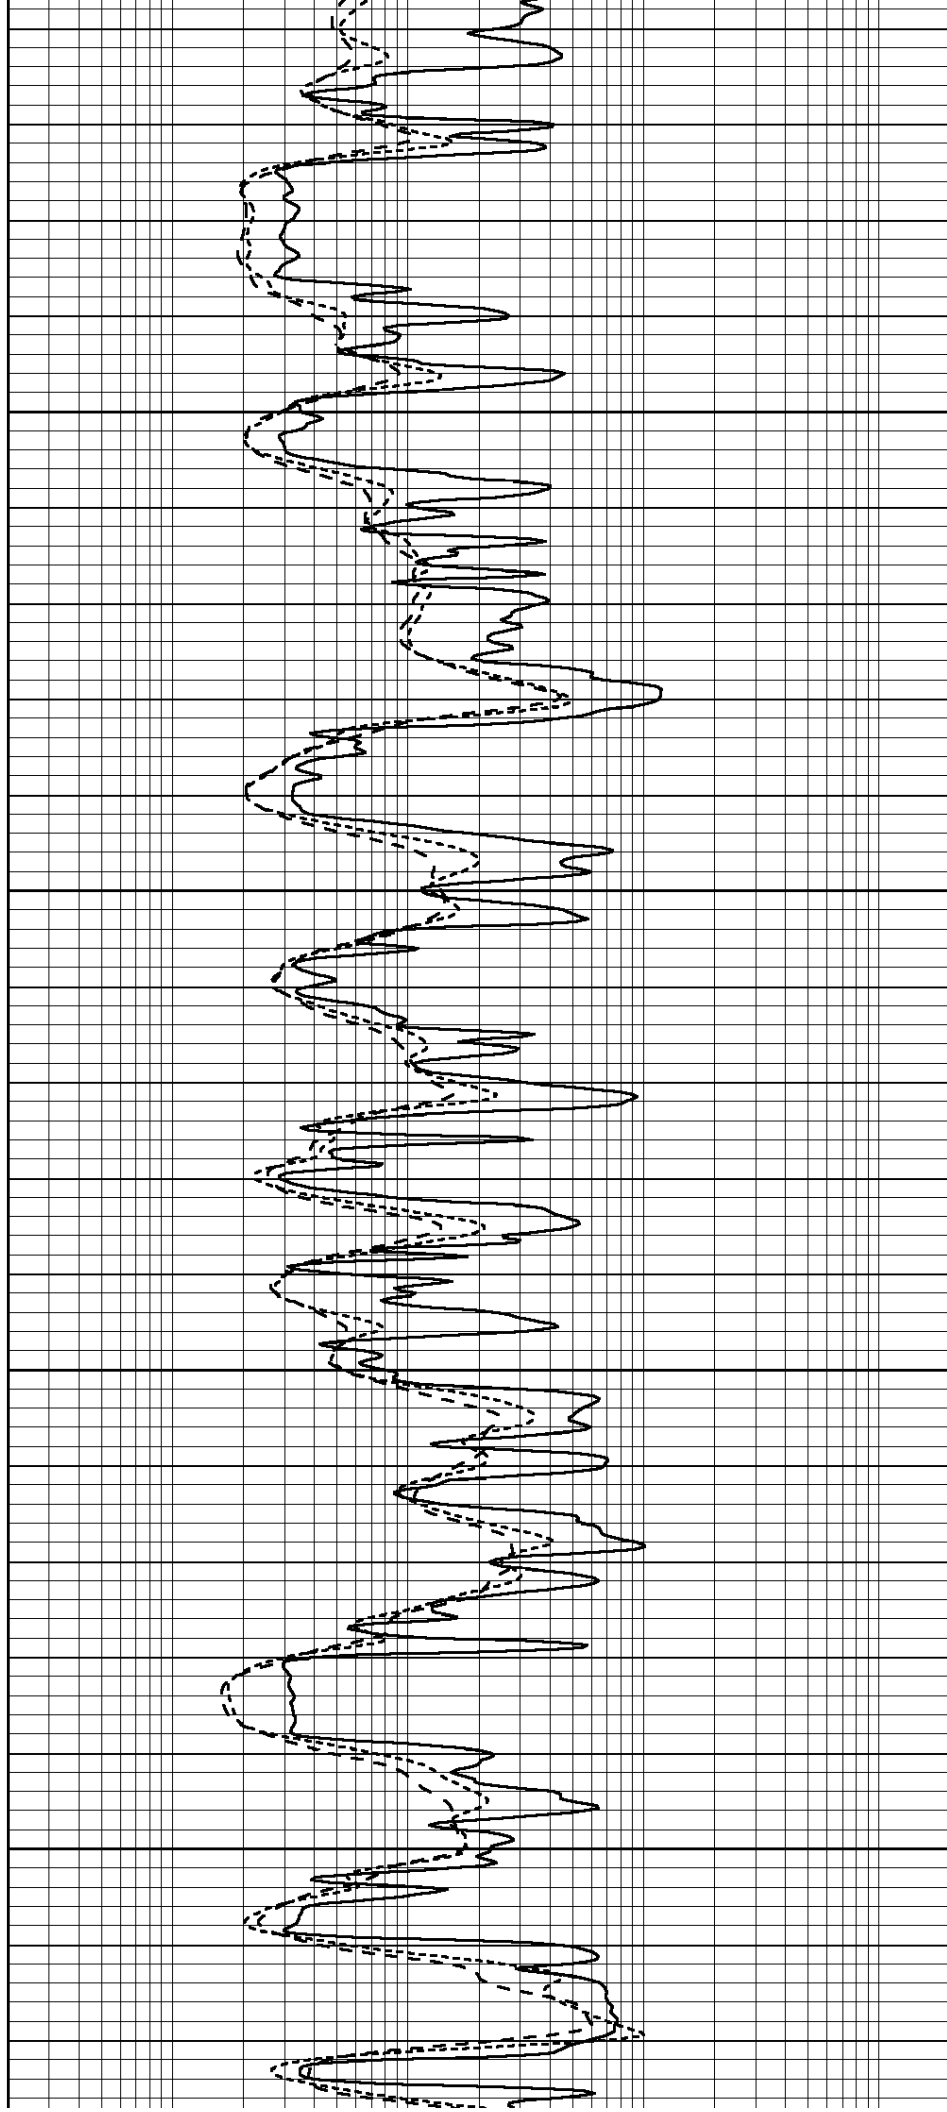

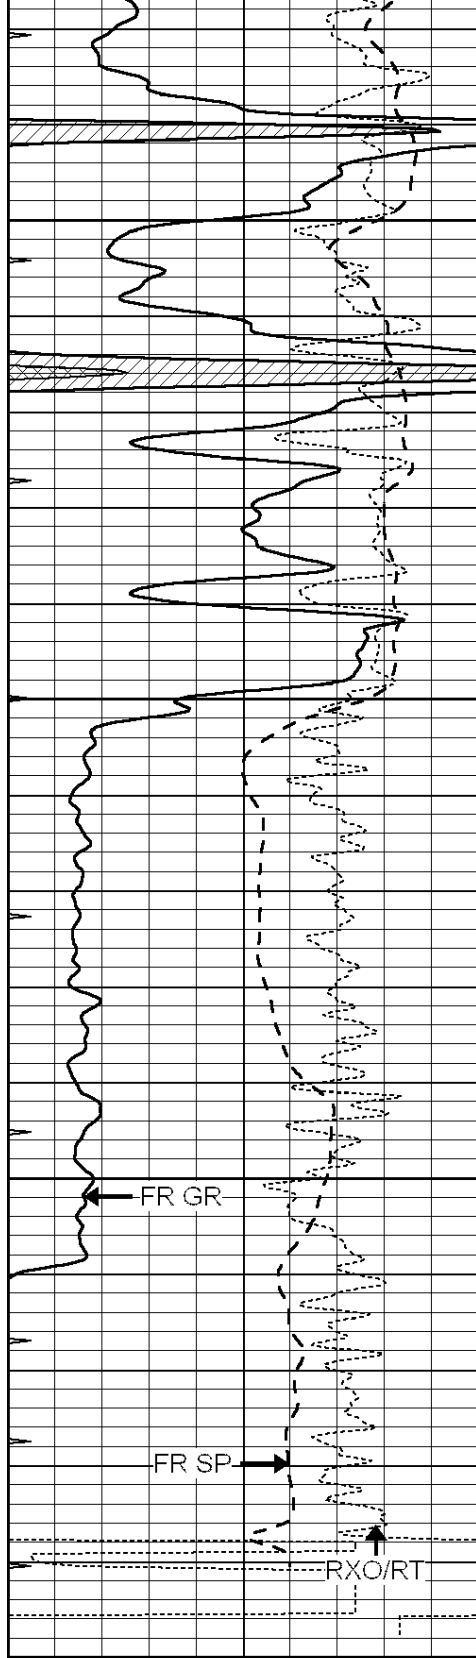

3400


3450

3500

LTD 3540

3550

0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50
0	MINMK	20

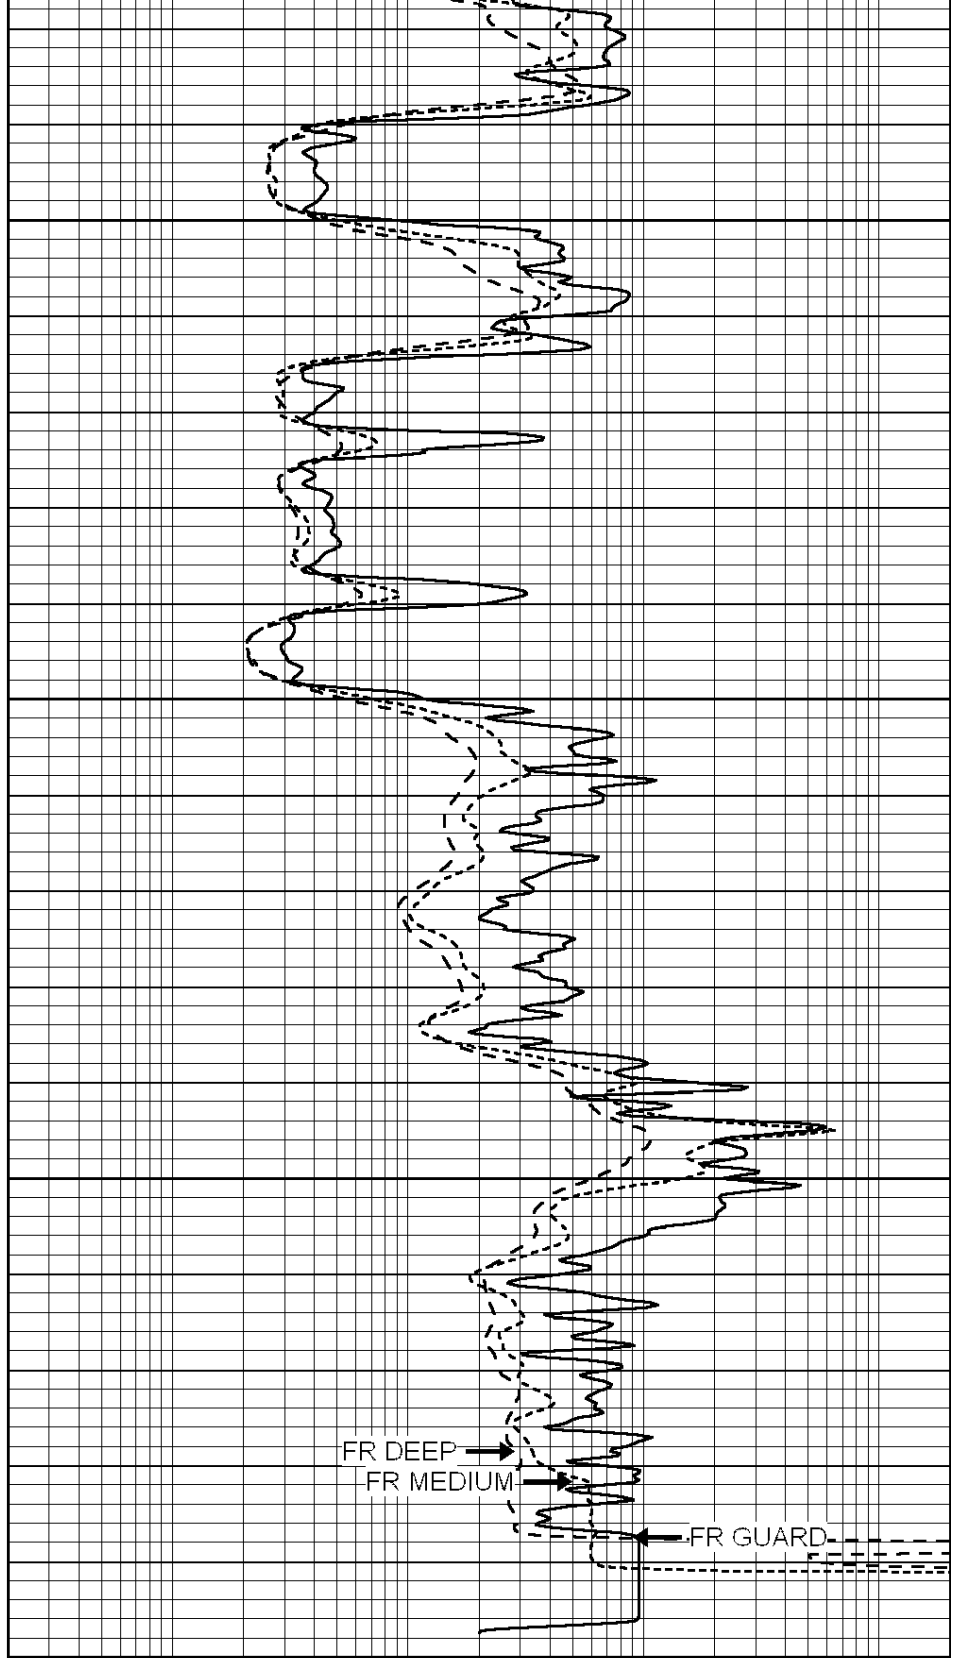

0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000

Database File:

24161pe.db

Dataset Pathname:

pass2.3

Presentation Format:

_dil

Dataset Creation:



Wed May 28 04:26:18 2014 by Calc SOC 120430


Charted by:

Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50
0	MINMK	20

0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000

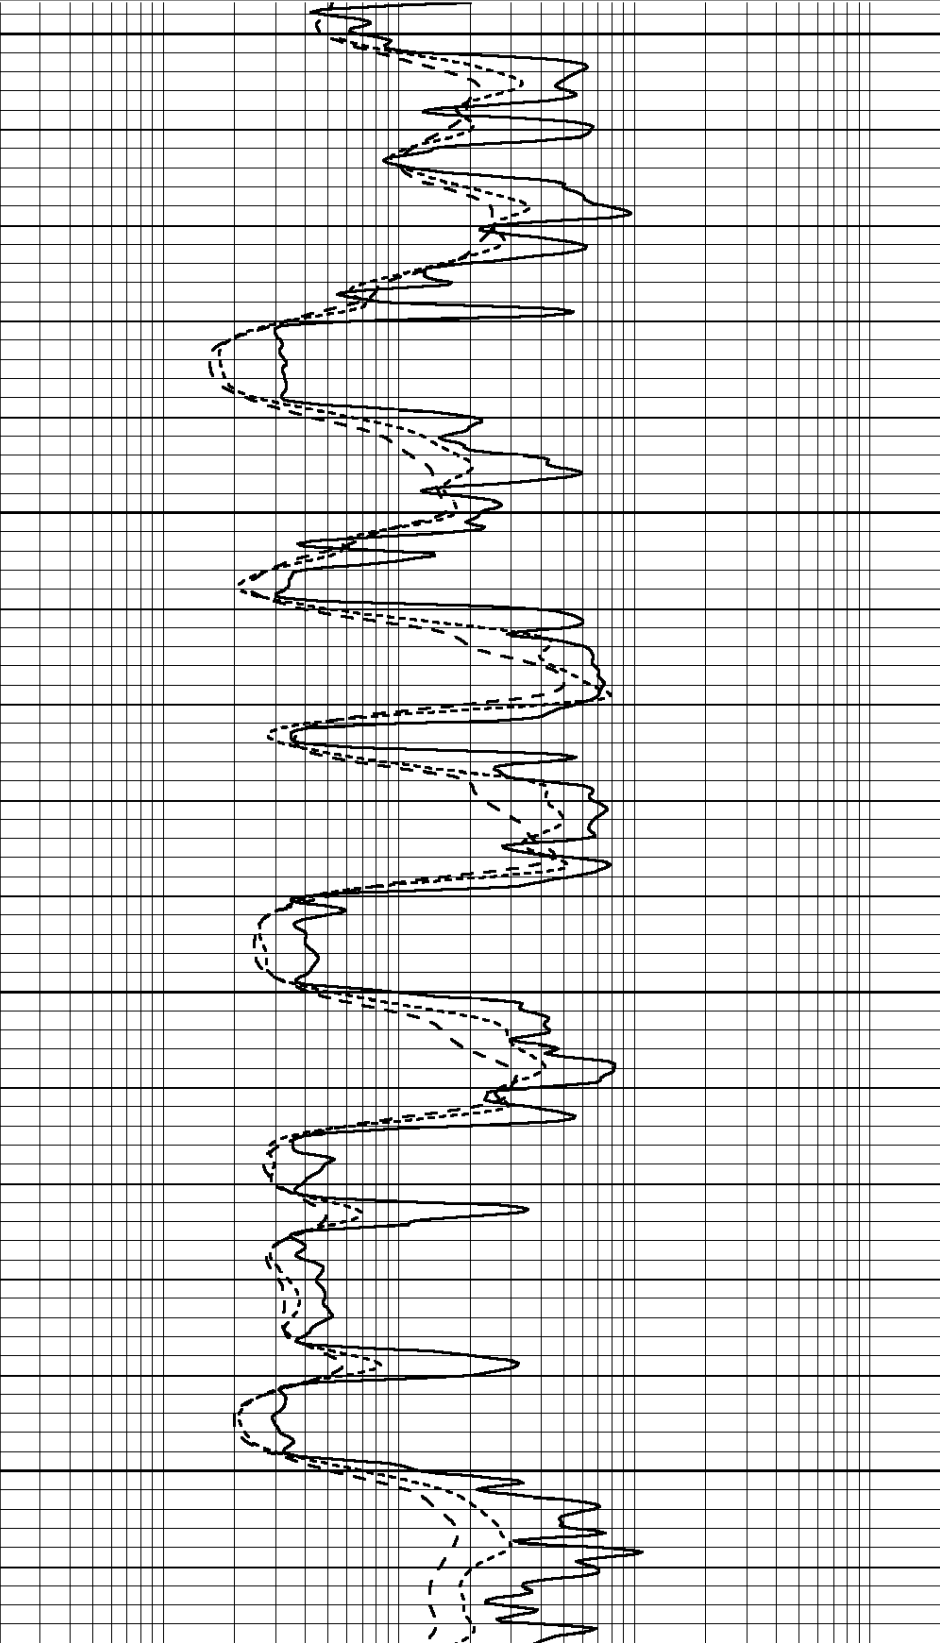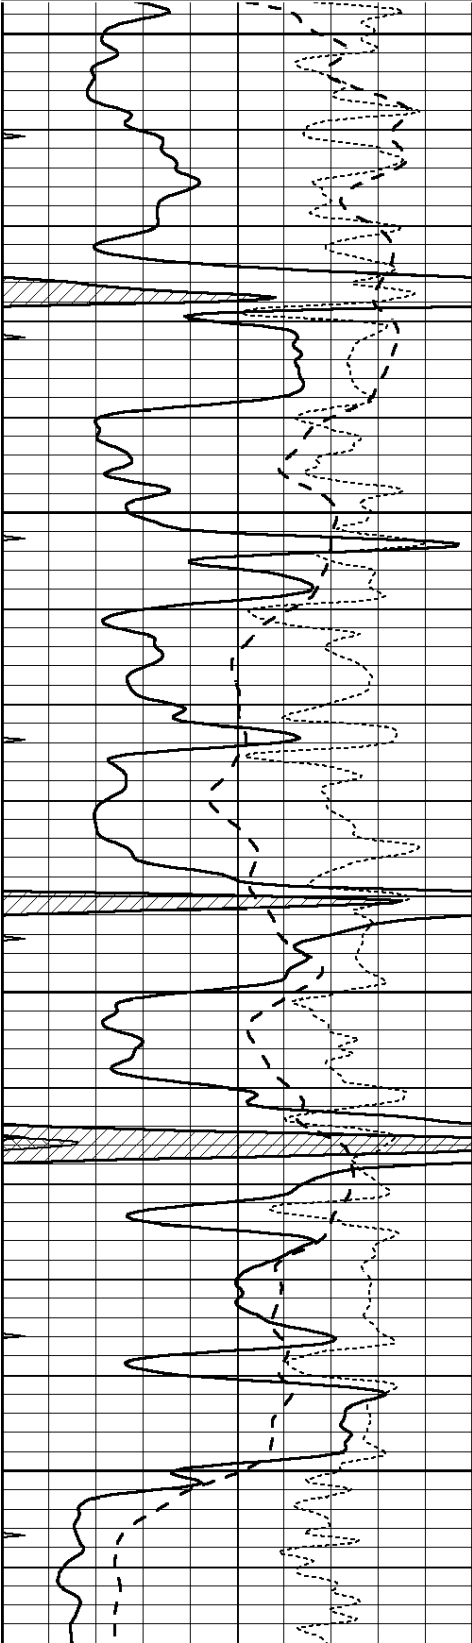

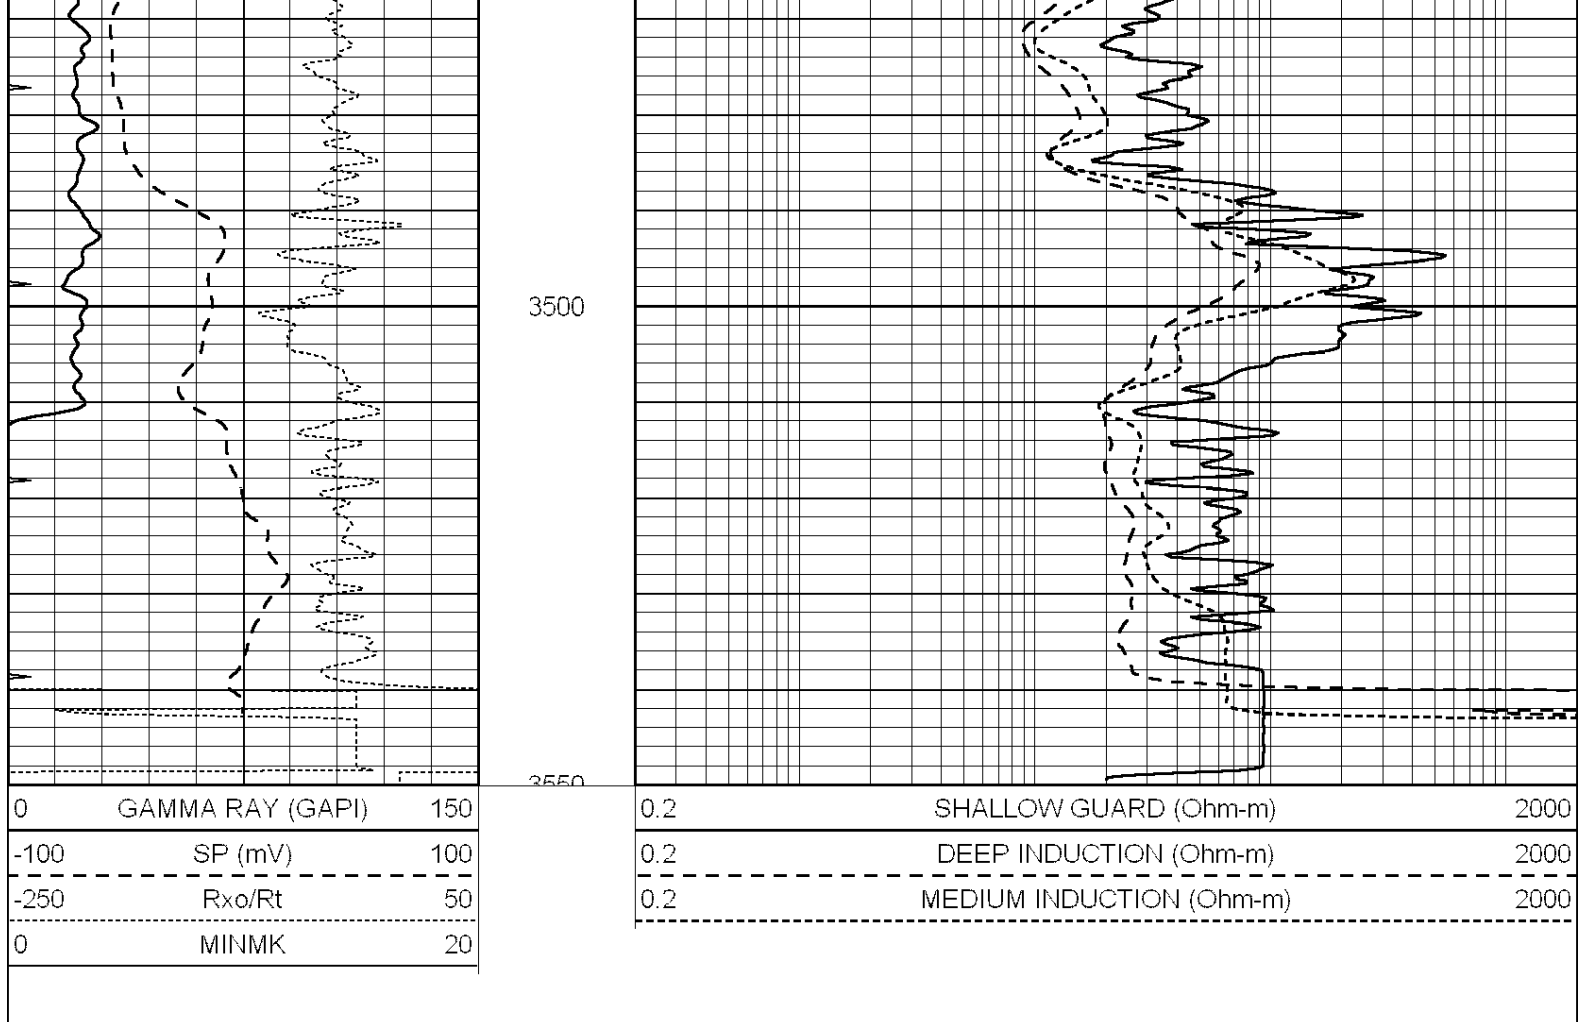

Calibration Report								
Database File:	24161pe.db							
Dataset Pathname:	pass3.3							
Dataset Creation:	Wed May 28 10:01:54 2014 by Calc SOC 120430							
Dual Induction Calibration Report								
Serial-Model:			PROBE9-DILG					
Surface Cal Performed:			Wed May 28 08:45:00 2014					
Downhole Cal Performed:			Mon Jul 28 12:02:56 2008					
After Survey Verification Performed:			Mon Jul 28 12:02:56 2008					
Surface Calibration								
Readings				References			Results	
Loop:	Air	Loop		Air	Loop		m	b
Deep	-0.014	0.629	V	0.000	400.000	mmho/m	680.000	-15.000
Medium	0.039	0.728	V	0.000	464.000	mmho/m	650.000	-18.000
Internal:	Zero	Cal		Zero	Cal		m	b
Deep	0.011	0.610	V	0.000	400.000	mmho/m	667.135	-7.256
Medium	0.005	0.712	V	0.000	464.000	mmho/m	655.677	-3.102
Downhole Calibration								
Readings				References			Results	
	Zero	Cal		Zero	Cal		m'	b'
Deep	0.000	0.000	mmho/m	14.508	388.384	mmho/m	1.000	0.000
Medium	0.000	0.000	mmho/m	166.367	504.400	mmho/m	1.000	0.000
LL3		7.500	V		1400.000	Ohm-m		
		0.000	V		20.000	Ohm-m		

	0.000	V		20.000	Ohm-m			
	-7.200	V		4000.000	mmho-m			
After Survey Verification								
	Readings			Targets			Results	
	Zero	Cal		Zero	Cal		m'	b'
Deep	0.000	0.000	mmho/m	0.000	0.000	mmho/m	0.000	0.000
Medium	0.000	0.000	mmho/m	0.000	0.000	mmho/m	0.000	0.000
LL3		1.000	Ohm-m		1.000	Ohm-m		
		0.000	Ohm-m		0.000	Ohm-m		
		1.000	mmho-m		1.000	mmho-m		

Litho Density Calibration Report Serial: 003N Model: PRB								
---	--	--	--	--	--	--	--	--

Master Calibration			Performed Tue Sep 08 14:14:44 2009					
	Background	Magnesium		Aluminum		Sandstone		
Window 1	2042.6	12312.8		4225.8		13758.4		cps
Window 2	1855.8	10134.7		3624.2		11113.1		cps
Window 3	1639.4	6760.2		2716.3		7260.3		cps
Window 4	466.4	469.2		466.1		476.5		cps
Long Space	0.0	8278.9		1768.4		9257.4		cps
Short Space	2.2	2377.3		1544.1		2574.2		cps
Rho		1.7100		2.5900		1.3800		g/cc
Pe		0.0000		2.5700		1.5500		
Rib Angle	: 44.4	Rib Slope	: 0.979	Density/Spine Ratio			: 0.549	
Spine Angle	: 74.4	Spine Slope	: 3.577	Spine Intercept			: -18.8	

Before Survey Verification			Performed Wed Dec 31 18:00:00 1969					
Window 1	0.0	0.0		0.0		0.0		cps
Window 2	0.0	0.0		0.0		0.0		cps
Window 3	0.0	0.0		0.0		0.0		cps
Window 4	0.0	0.0		0.0		0.0		cps
Long Space	0.0	0.0		0.0		0.0		cps
Short Space	0.0	0.0		0.0		0.0		cps
Measured Rho		0.0000		0.0000		0.0000		g/cc
Measured Correction		0.0000		0.0000		0.0000		g/cc
Measured Pe				0.0000		0.0000		

After Survey Verification			Performed Wed Dec 31 18:00:00 1969					
Window 1	0.0	0.0		0.0		0.0		cps
Window 2	0.0	0.0		0.0		0.0		cps
Window 3	0.0	0.0		0.0		0.0		cps
Window 4	0.0	0.0		0.0		0.0		cps
Long Space	0.0	0.0		0.0		0.0		cps
Short Space	0.0	0.0		0.0		0.0		cps
Measured Rho		0.0000		0.0000		0.0000		g/cc
Measured Correction		0.0000		0.0000		0.0000		g/cc
Measured Pe				0.0000		0.0000		

Compensated Neutron Calibration Report								
Serial Number:				070808				
Tool Model:				Probe				

PRE-SURVEY VERIFICATION			
Detector	Readings	Measured	Target
Short Space	cps		
Long Space	cps	pu	pu
POST-SURVEY VERIFICATION			
Detector	Readings	Measured	Target
Short Space	cps		
Long Space	cps	pu	pu
Gamma Ray Calibration Report			
Serial Number:	070558		
Tool Model:	OPEN_GR		
Performed:	Thu May 15 06:08:02 2014		
Calibrator Value:	1.0	GAPI	
Background Reading:	0.0	cps	
Calibrator Reading:	1.0	cps	
Sensitivity:	0.2800	GAPI/cps	