



NABORS

**COMPLETION
& PRODUCTION
SERVICES CO.**

MICRO LOG

Company	VINCENT OIL CORPORATION	Company	VINCENT OIL CORPORATION
Well	MALONE #3-21	Well	MALONE #3-21
Field		Field	
County	FORD	County	FORD
State	KANSAS	State	KANSAS
Location:	API # : 15-057-20924-0000 1400' FSL & 330' FEL	Other Services CDL/CNL/PE DIL/SON	
Permanent Datum Log Measured From Drilling Measured From	SEC 21 TWP 28S RGE 23W GROUND LEVEL Elevation 2487 KELLY BUSHING 12' A.G.L. KELLY BUSHING	Elevation K.B. 2499 D.F. 2497 G.L. 2487	
Date	2/28/14		
Run Number	TWO		
Depth Driller	5644		
Depth Logger	5649		
Bottom Logged Interval	5631		
Top Log Interval	4150		
Casing Driller	8 5/8" @ 660'		
Casing Logger	660		
Bit Size	7 7/8"		
Type Fluid in Hole	CHEMICAL MUD	CHLORIDES 7000 PPM	
Density / Viscosity	9.5/58		
pH / Fluid Loss	10.0/8.0		
Source of Sample	FLOWLINE		
Rm @ Meas. Temp	.70 @ 70F		
Rmt @ Meas. Temp	.52 @ 70F		
Rmc @ Meas. Temp	.84 @ 70F		
Source of Rmt / Rmc	MEASUREMENT		
Rm @ BHT	.37 @ 130F		
Time Circulation Stopped	2 HOURS		
Time Logger on Bottom			
Maximum Recorded Temperature	130F		
Equipment Number	4010		
Location	HAYS, KANSAS		
Recorded By	JASON CAPELLUCCI		
Witnessed By	KEN LEBLANC		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

THANK YOU FOR USING NABORS, HAYS, KS. (785) 628-6395
DIRECTIONS:
FORD, KS. - SOUTH ON RD. 125 TO WILBURN RD. - 4 WEST TO RD 121 - 2 1/2 NORTH
WEST INTO ON NORTH SIDE OF TANK BATTERY

Database File:

24003pe.db

Dataset Pathname:

pass9.1

Presentation Format:

_micro


Dataset Creation:


Sat Mar 01 03:02:39 2014 by Calc Open-Cased 090629

Charted by:

Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0 0	MEL2.0 (Ohm-m)	40
0	MINMK	20	TBHV			
			0 (ft3)	10		

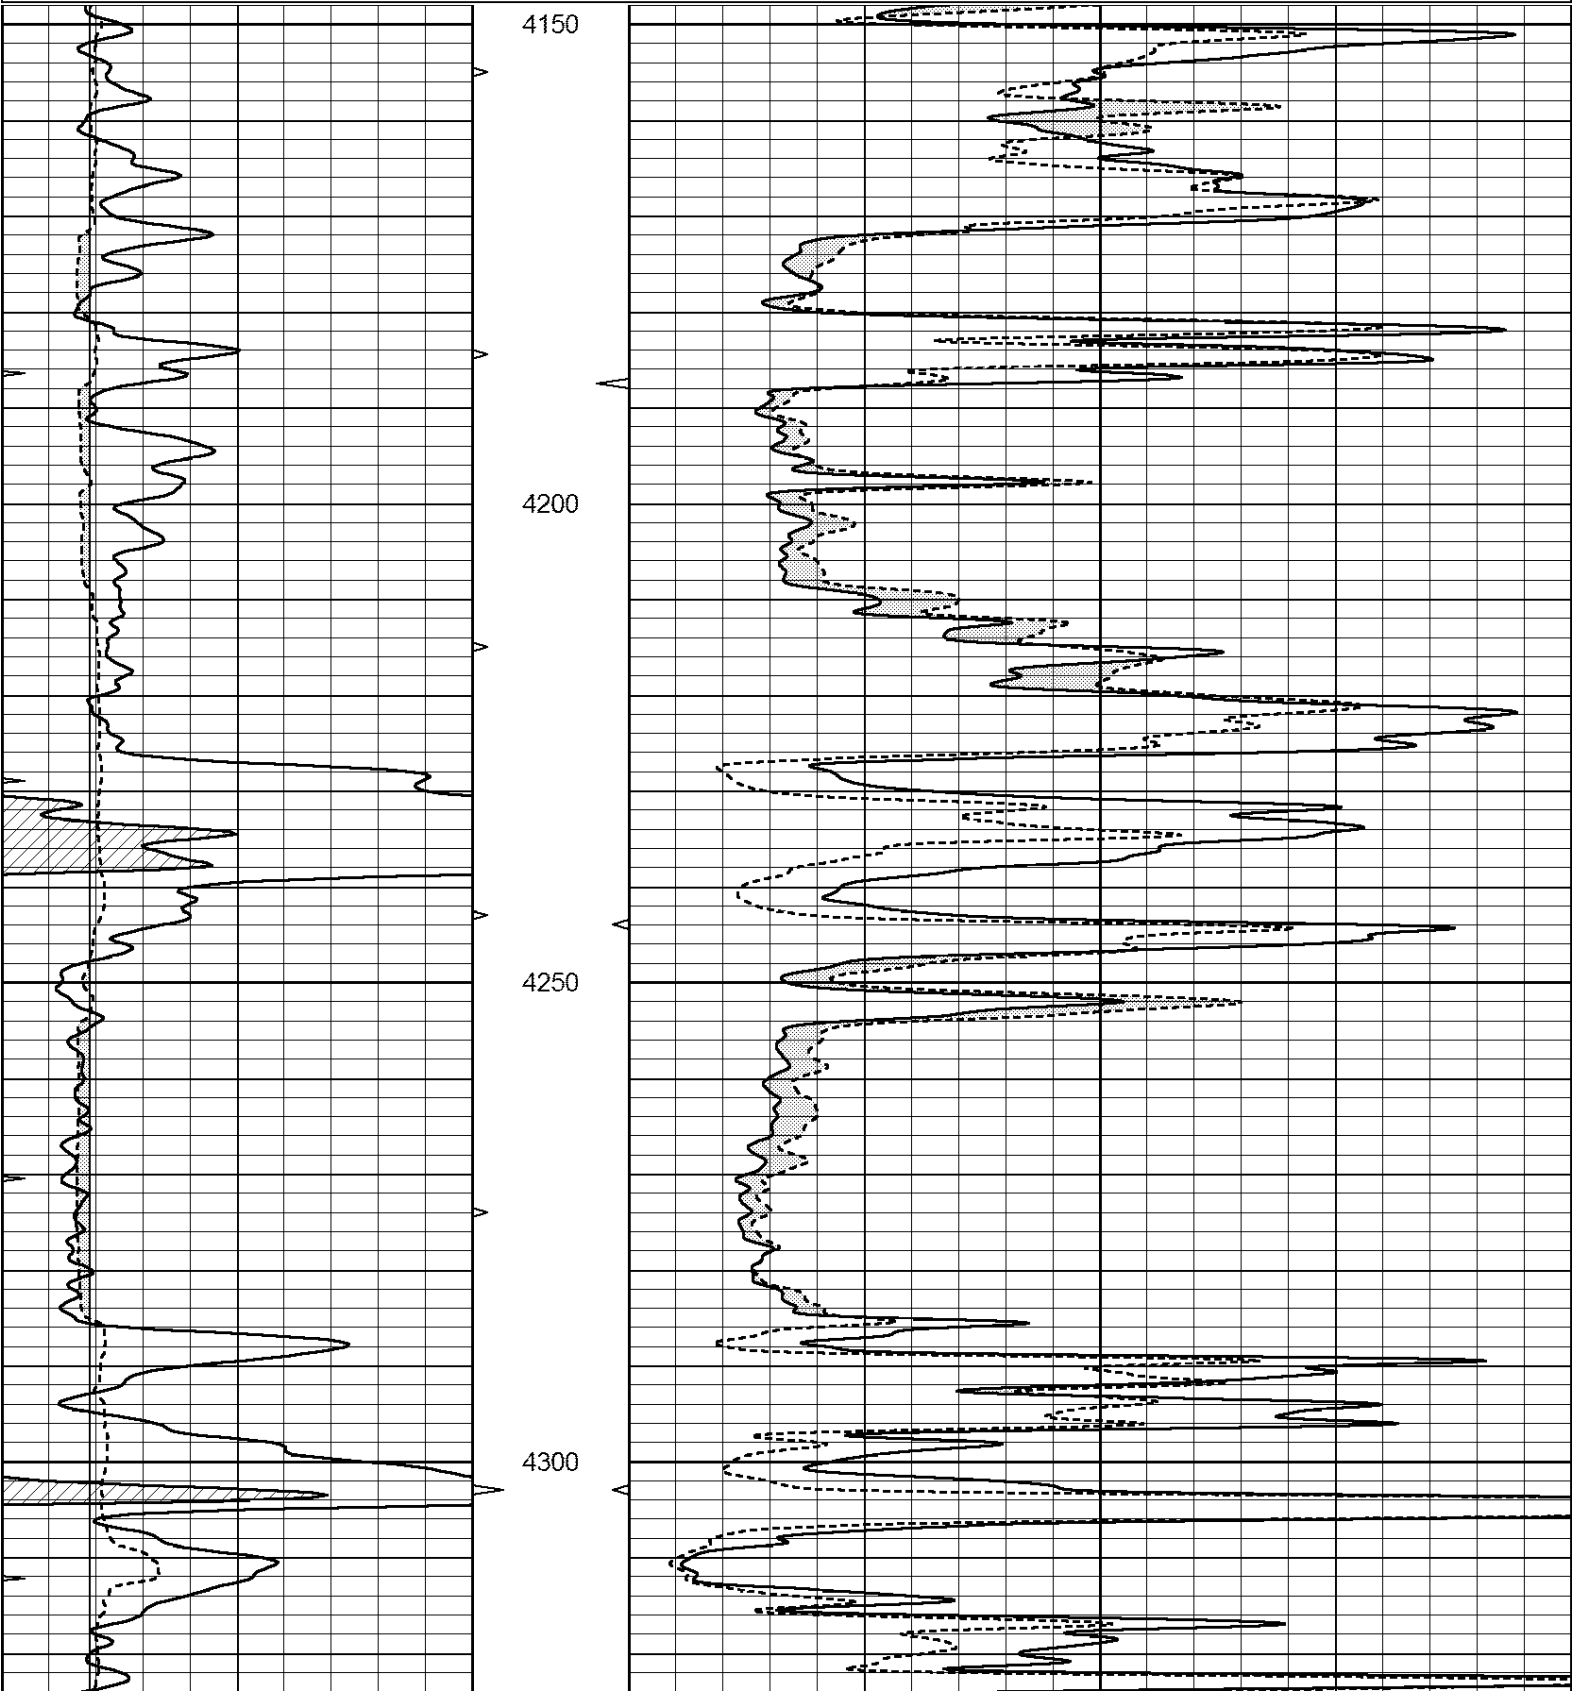

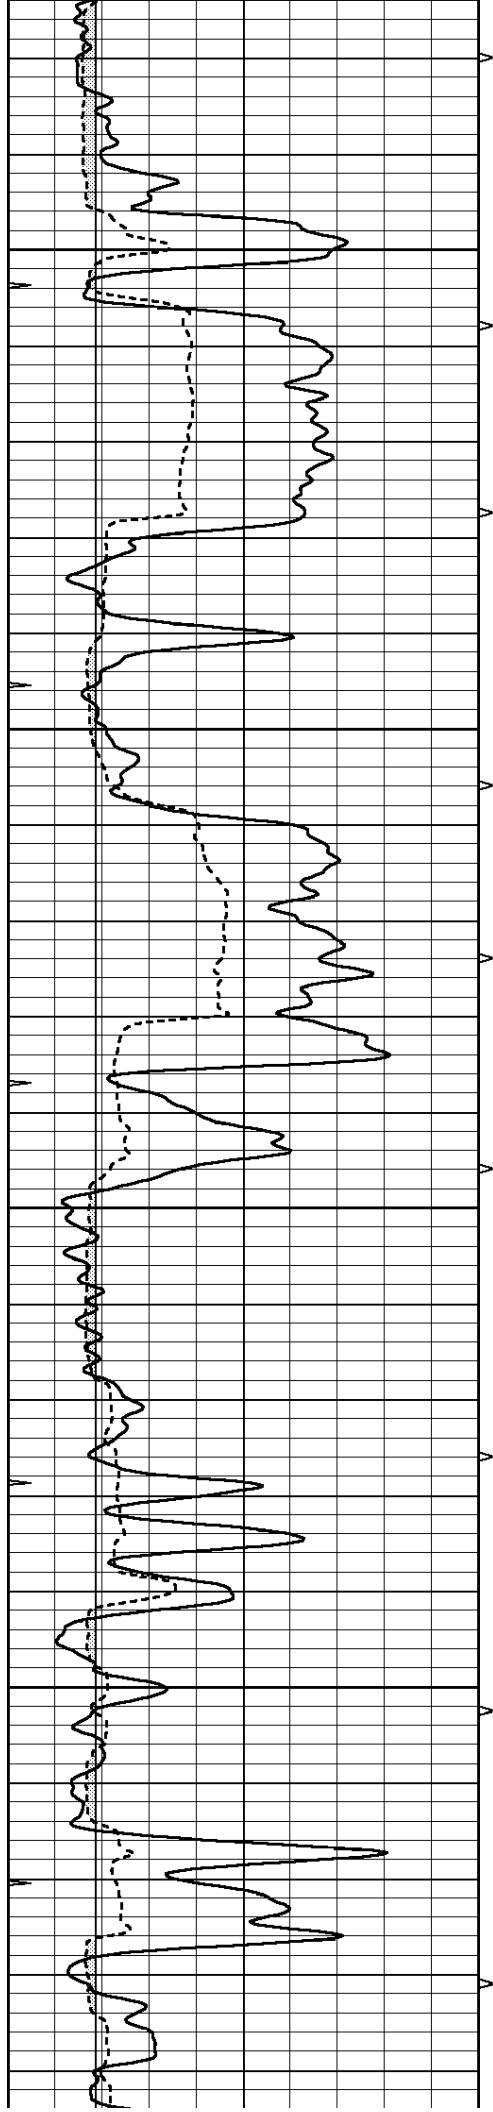




4350


4400

4450

4500

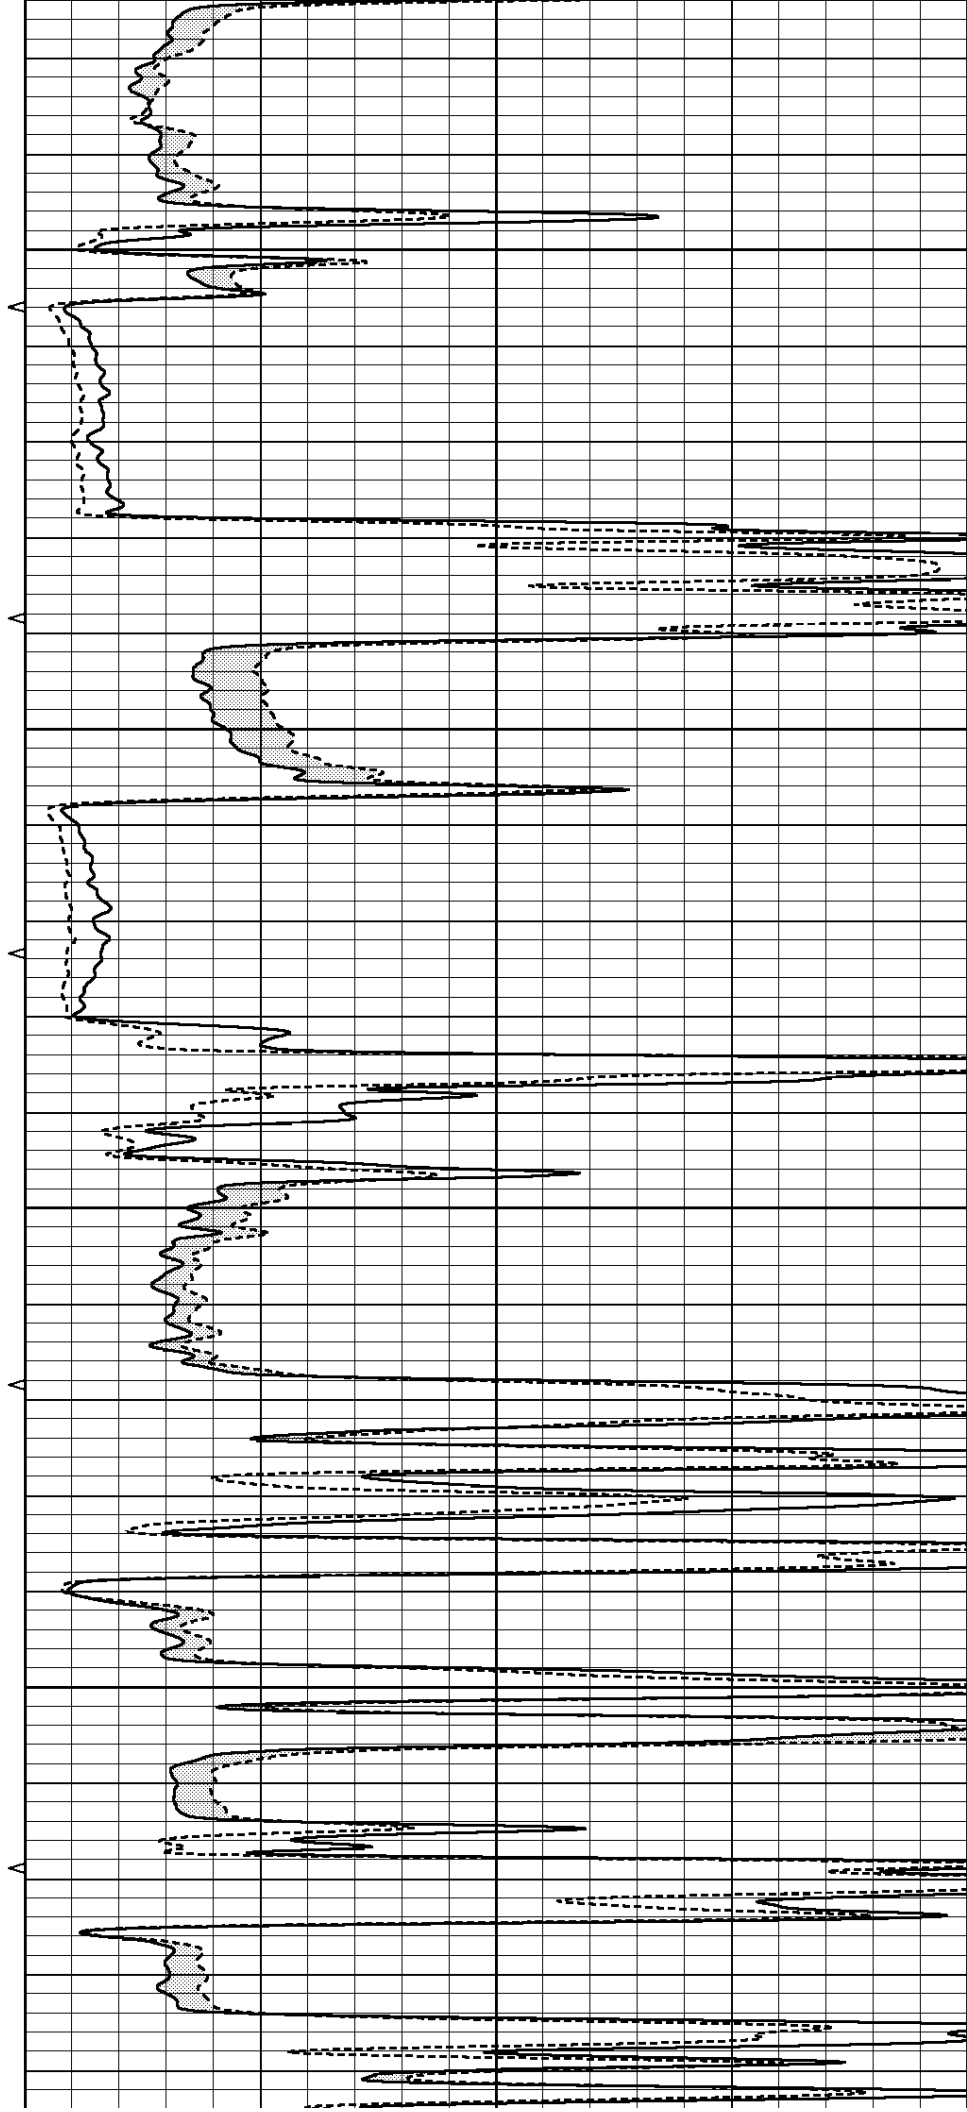

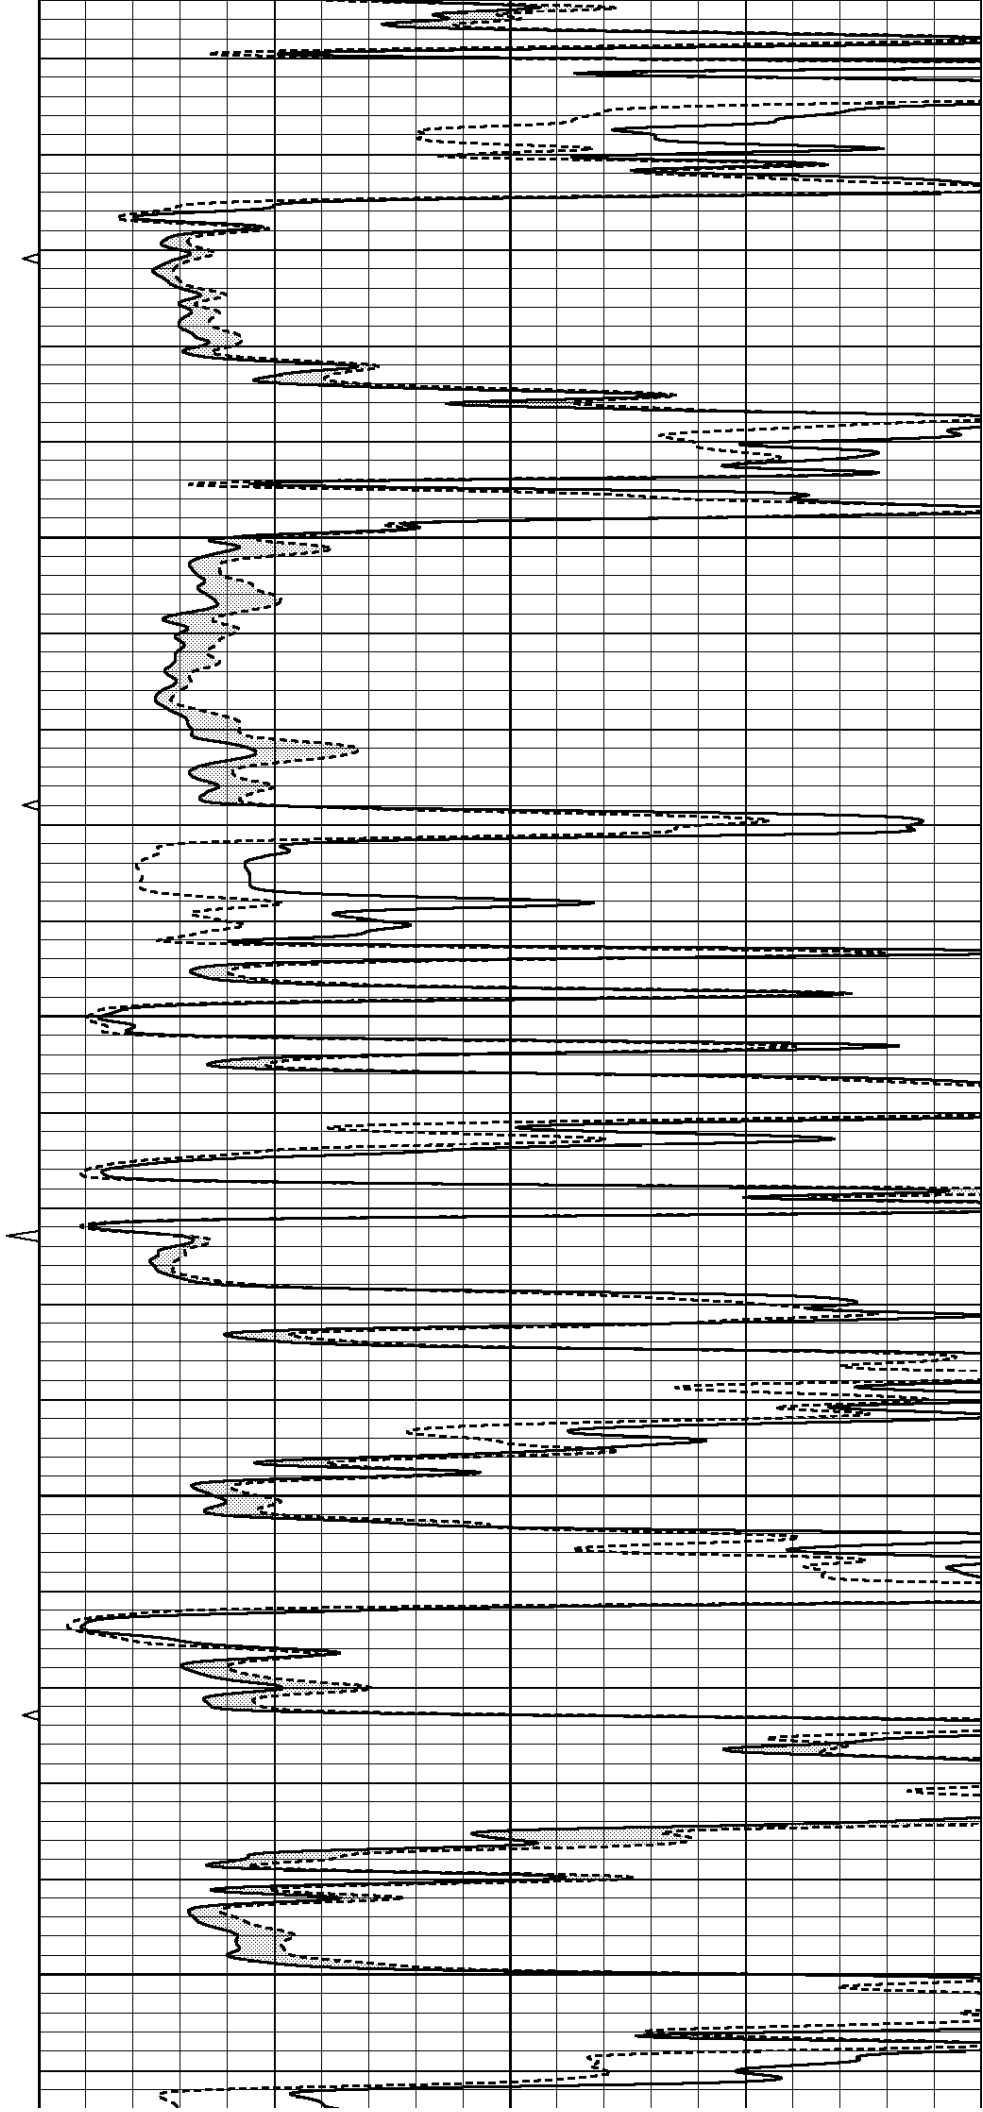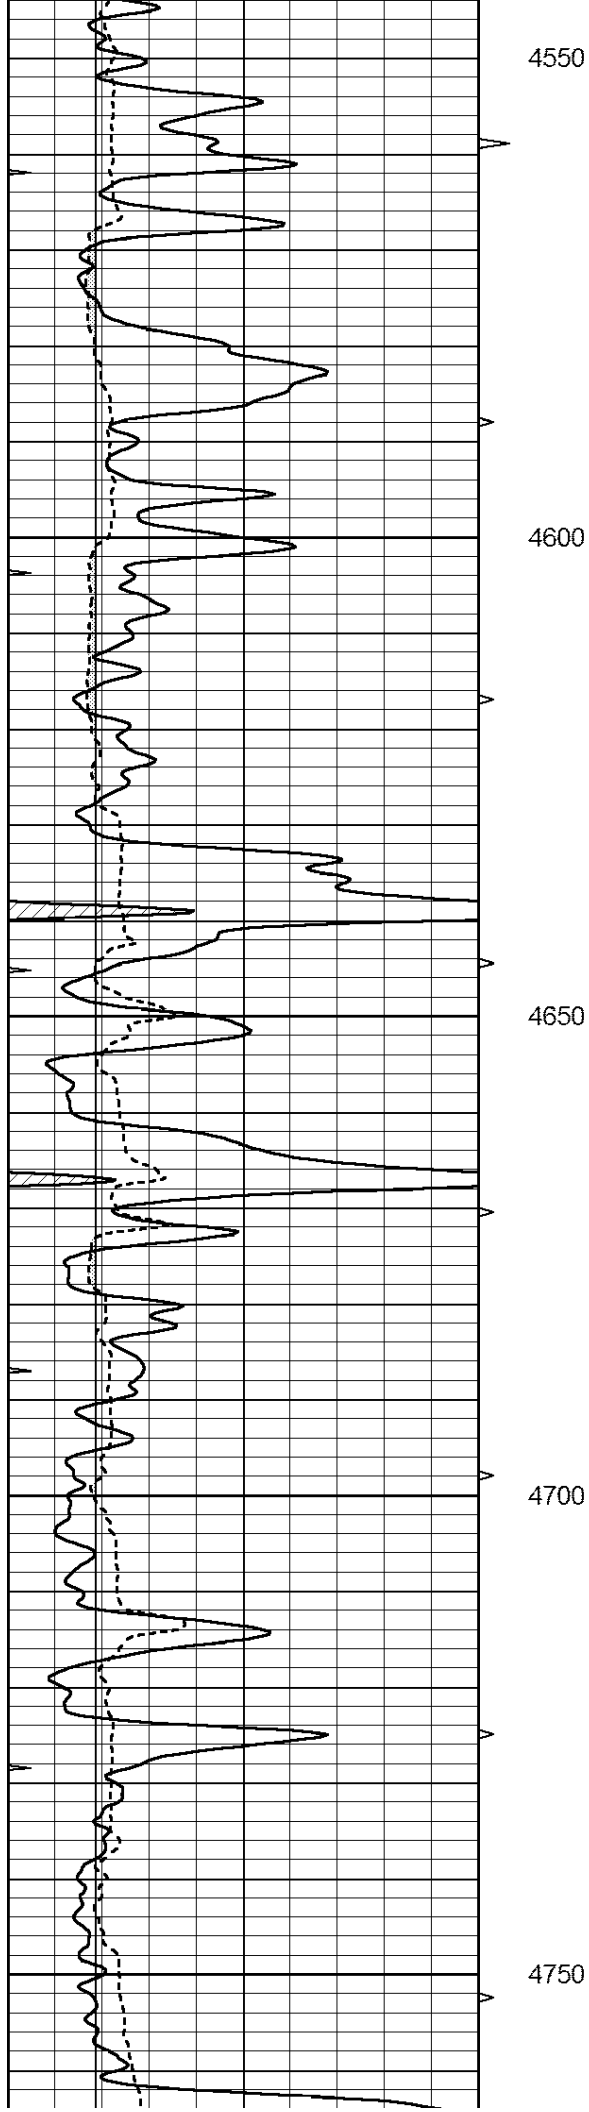

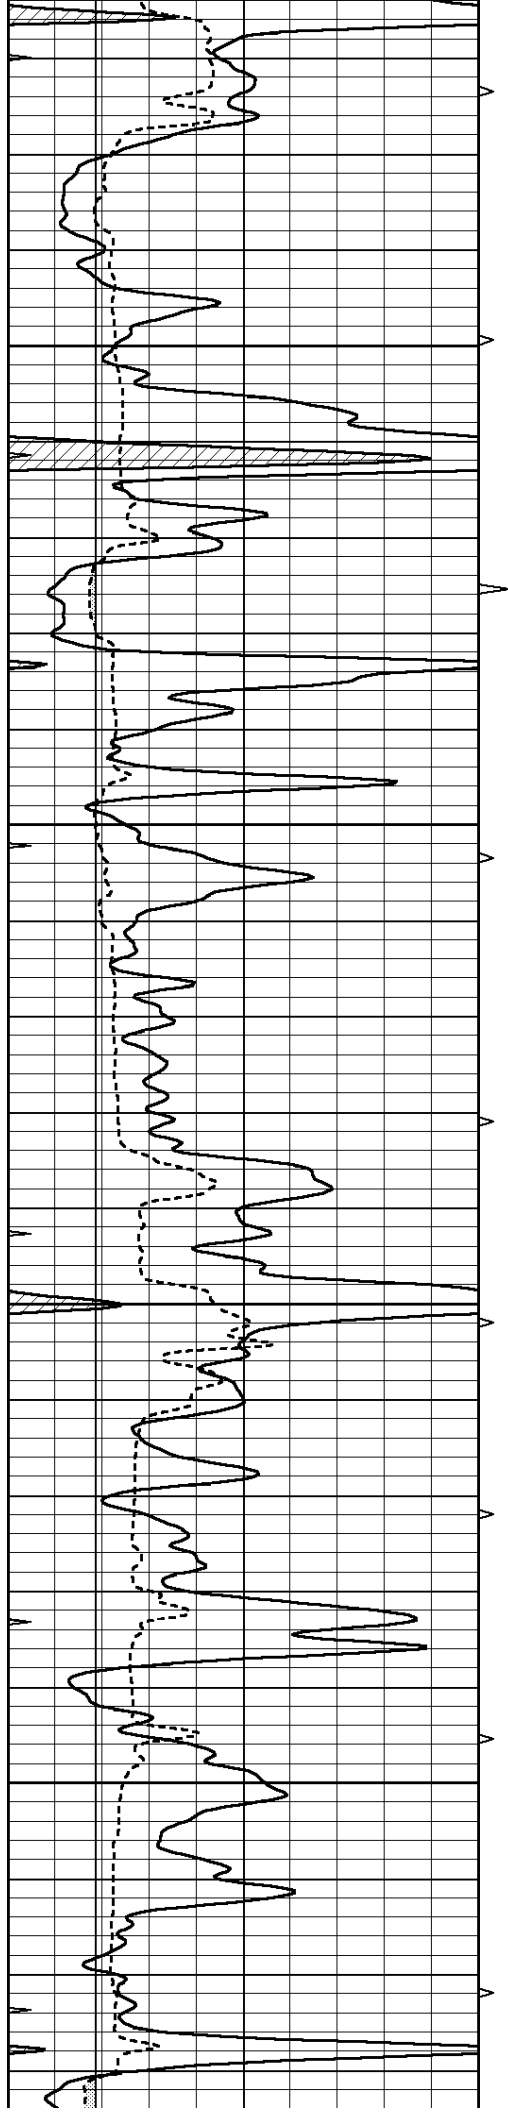



4800

4850

4900

4950

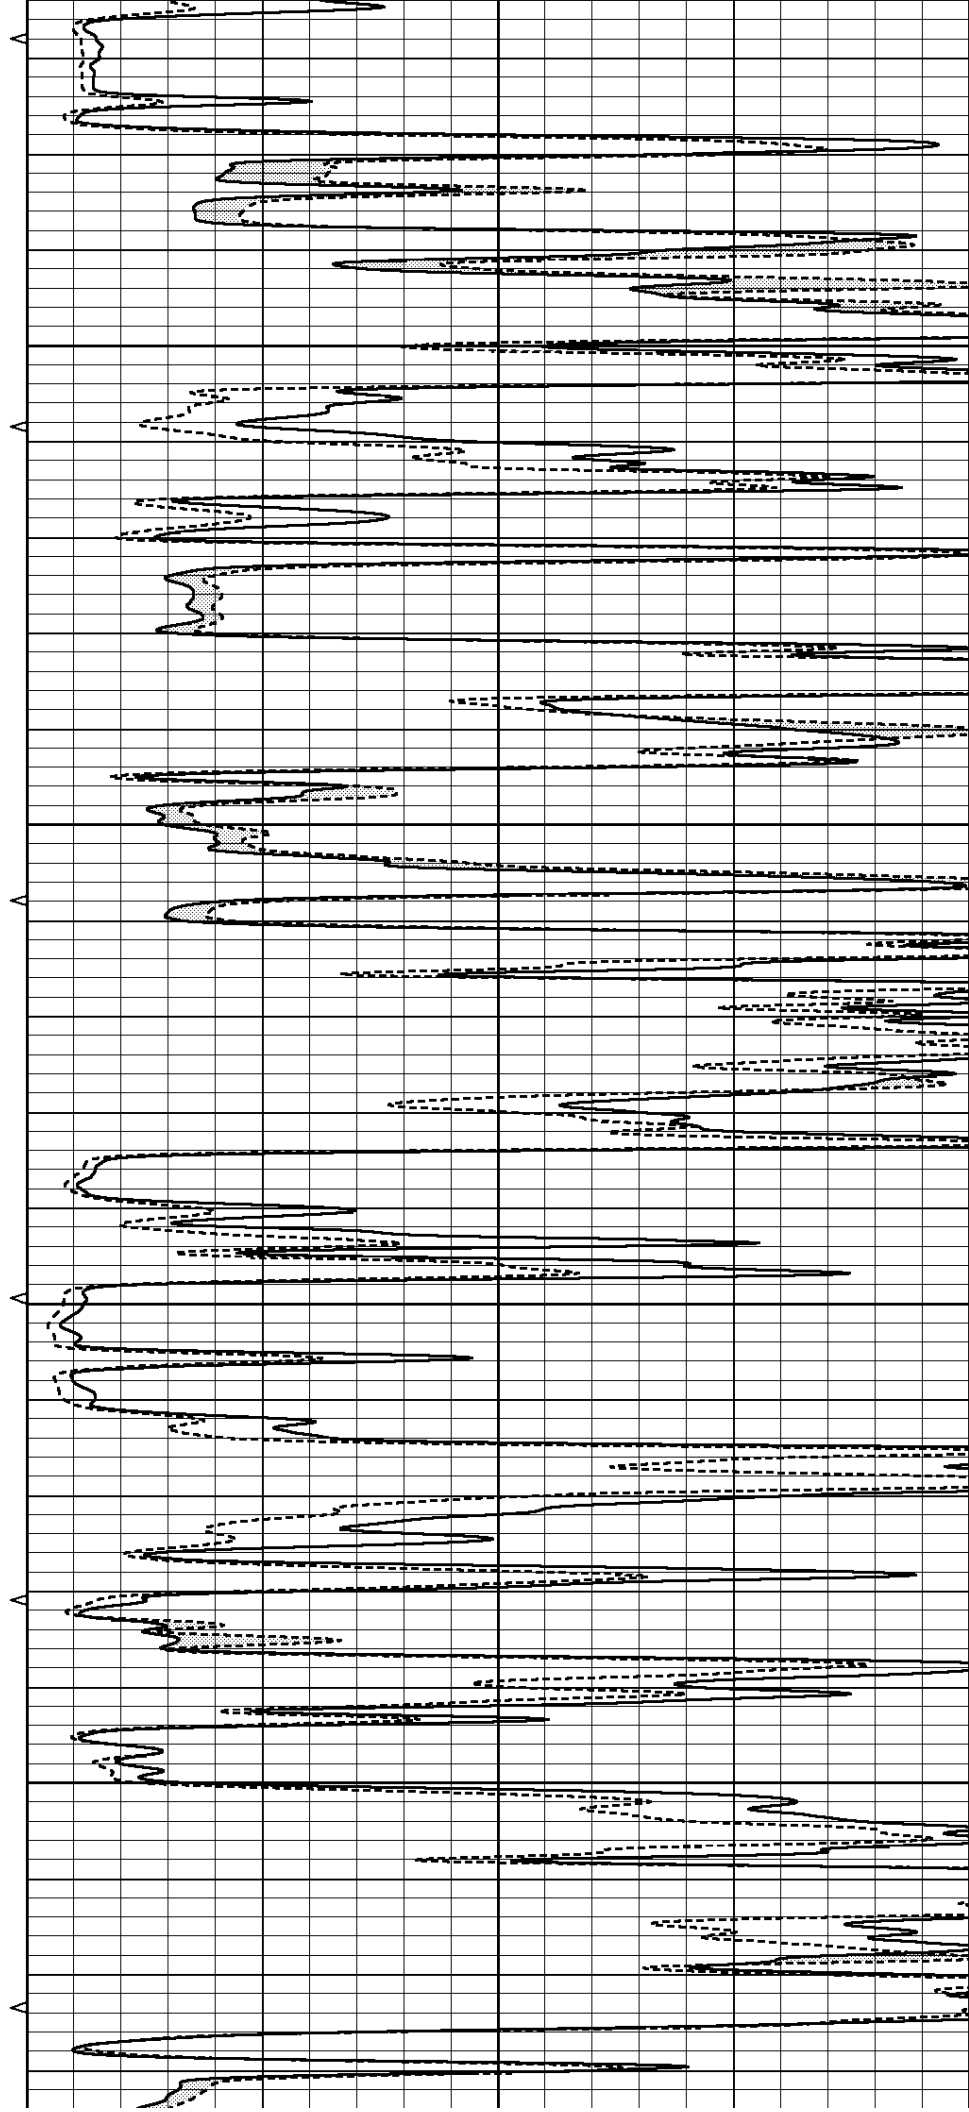

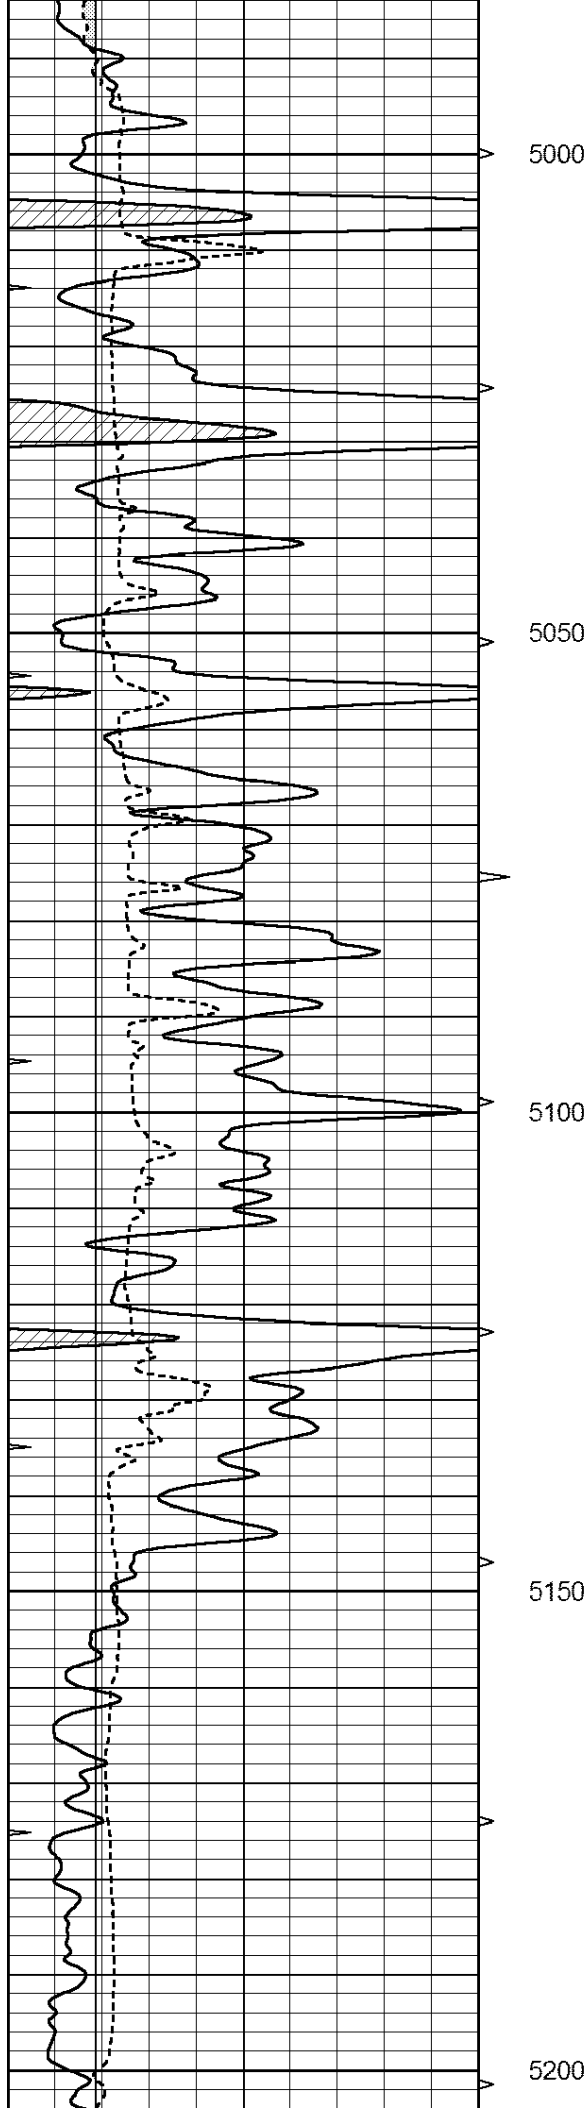


5000


5050

5100

5150

5200

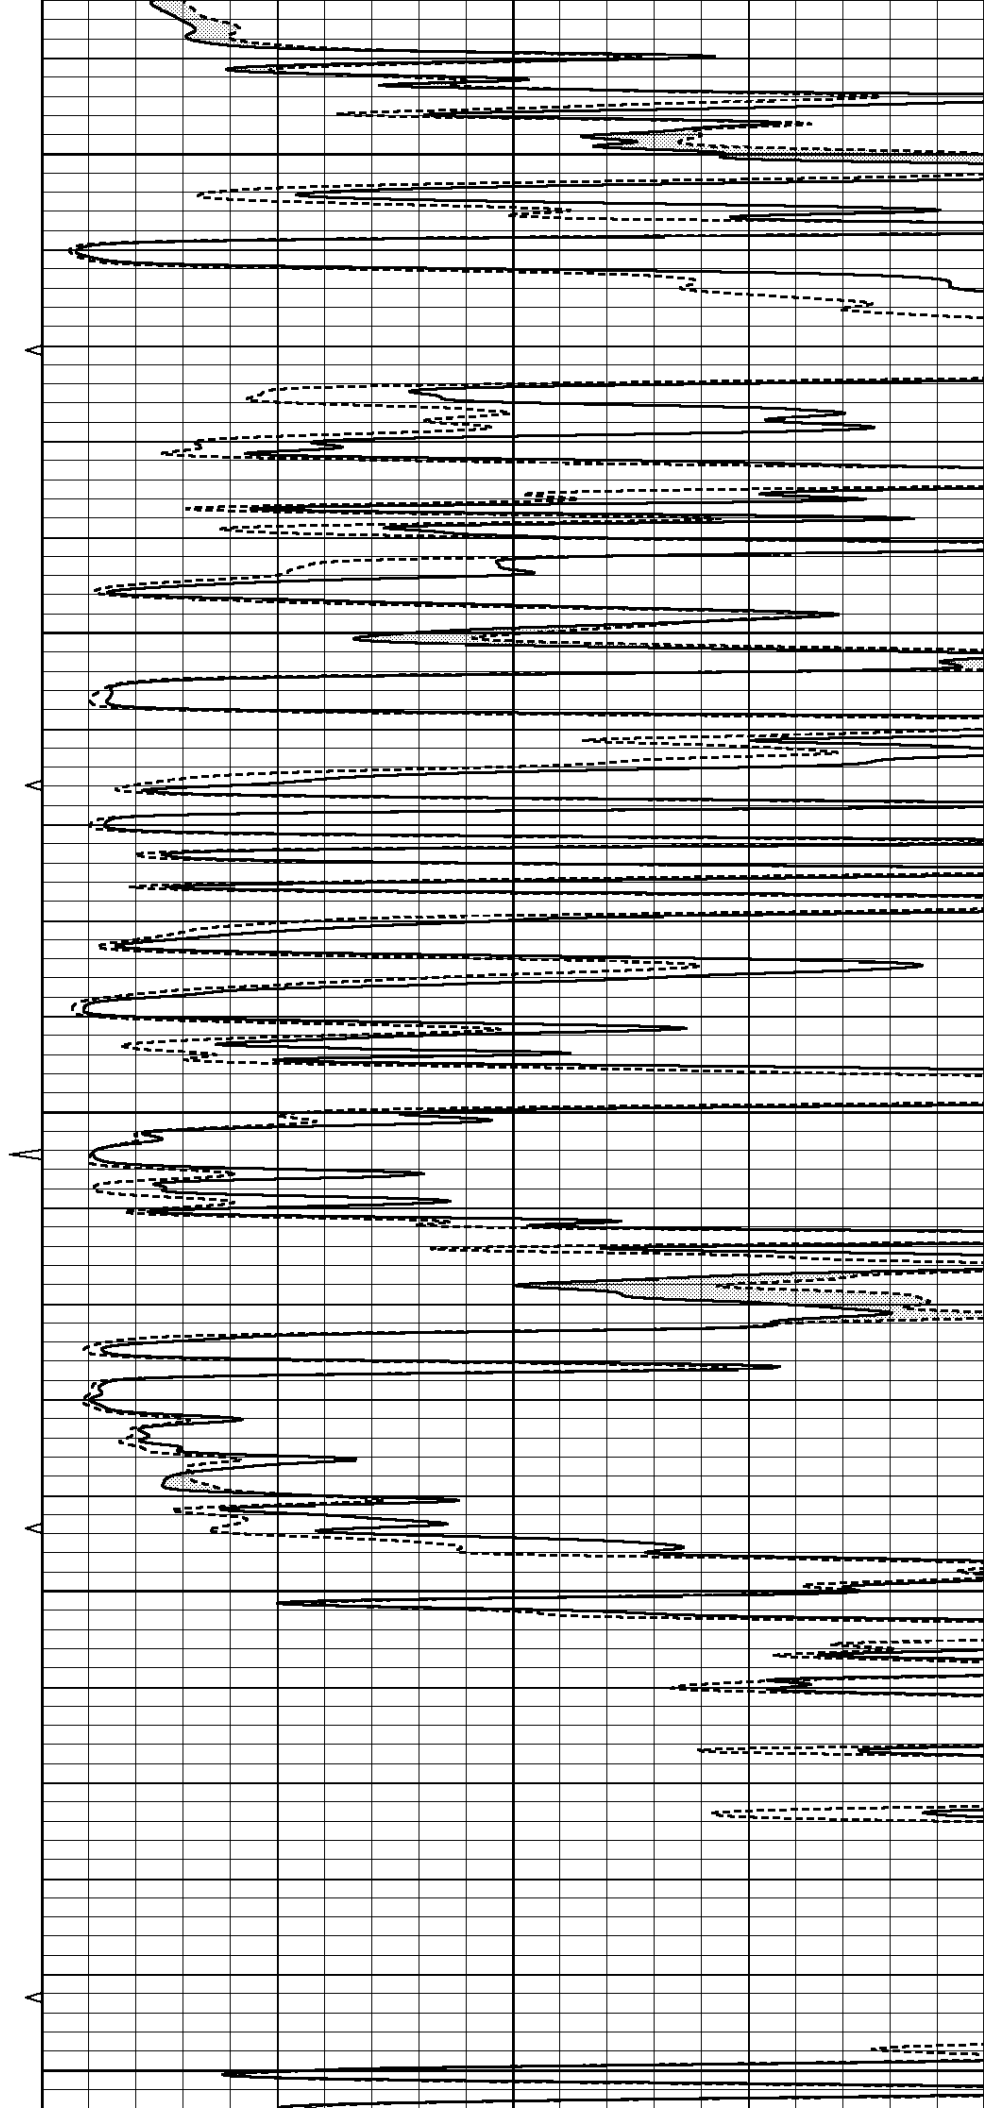

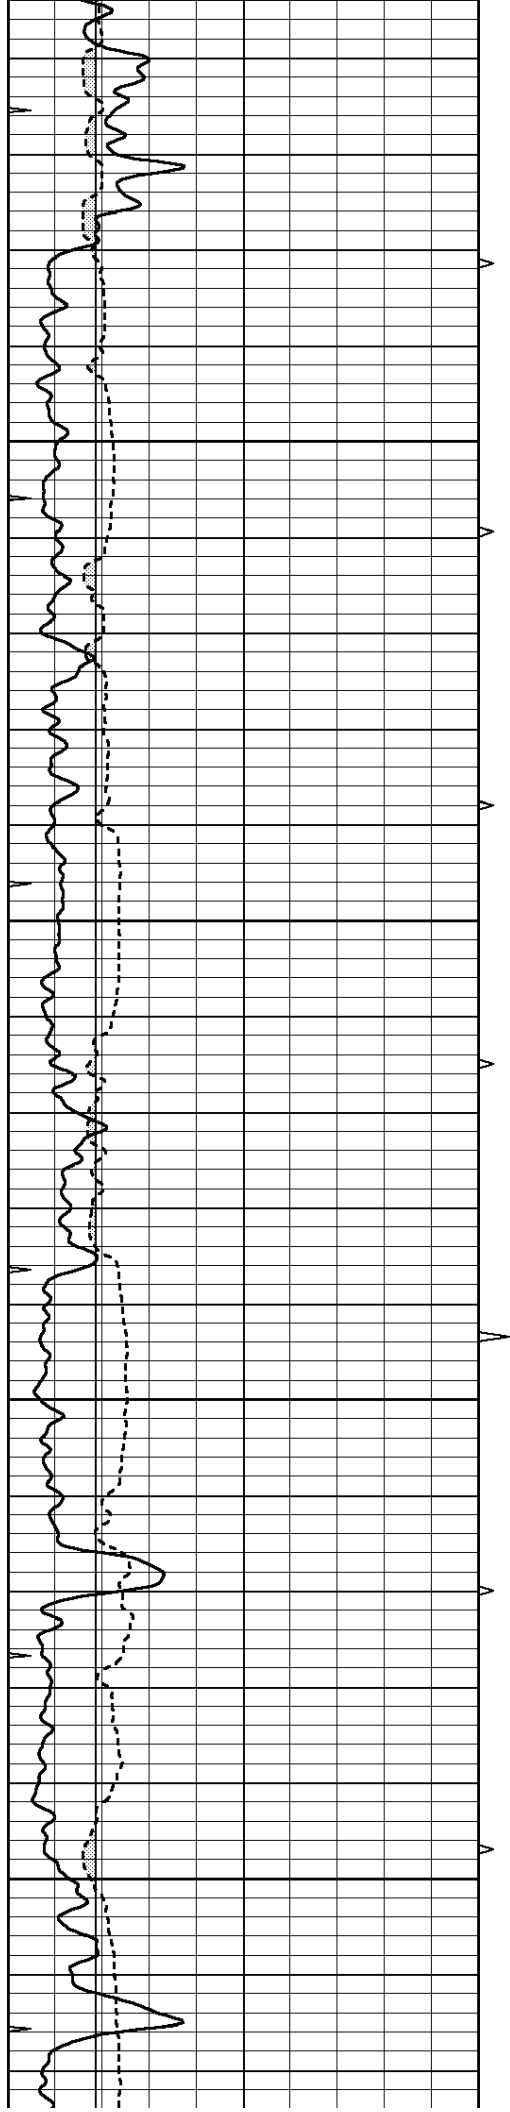



5250


5300

5350

5400

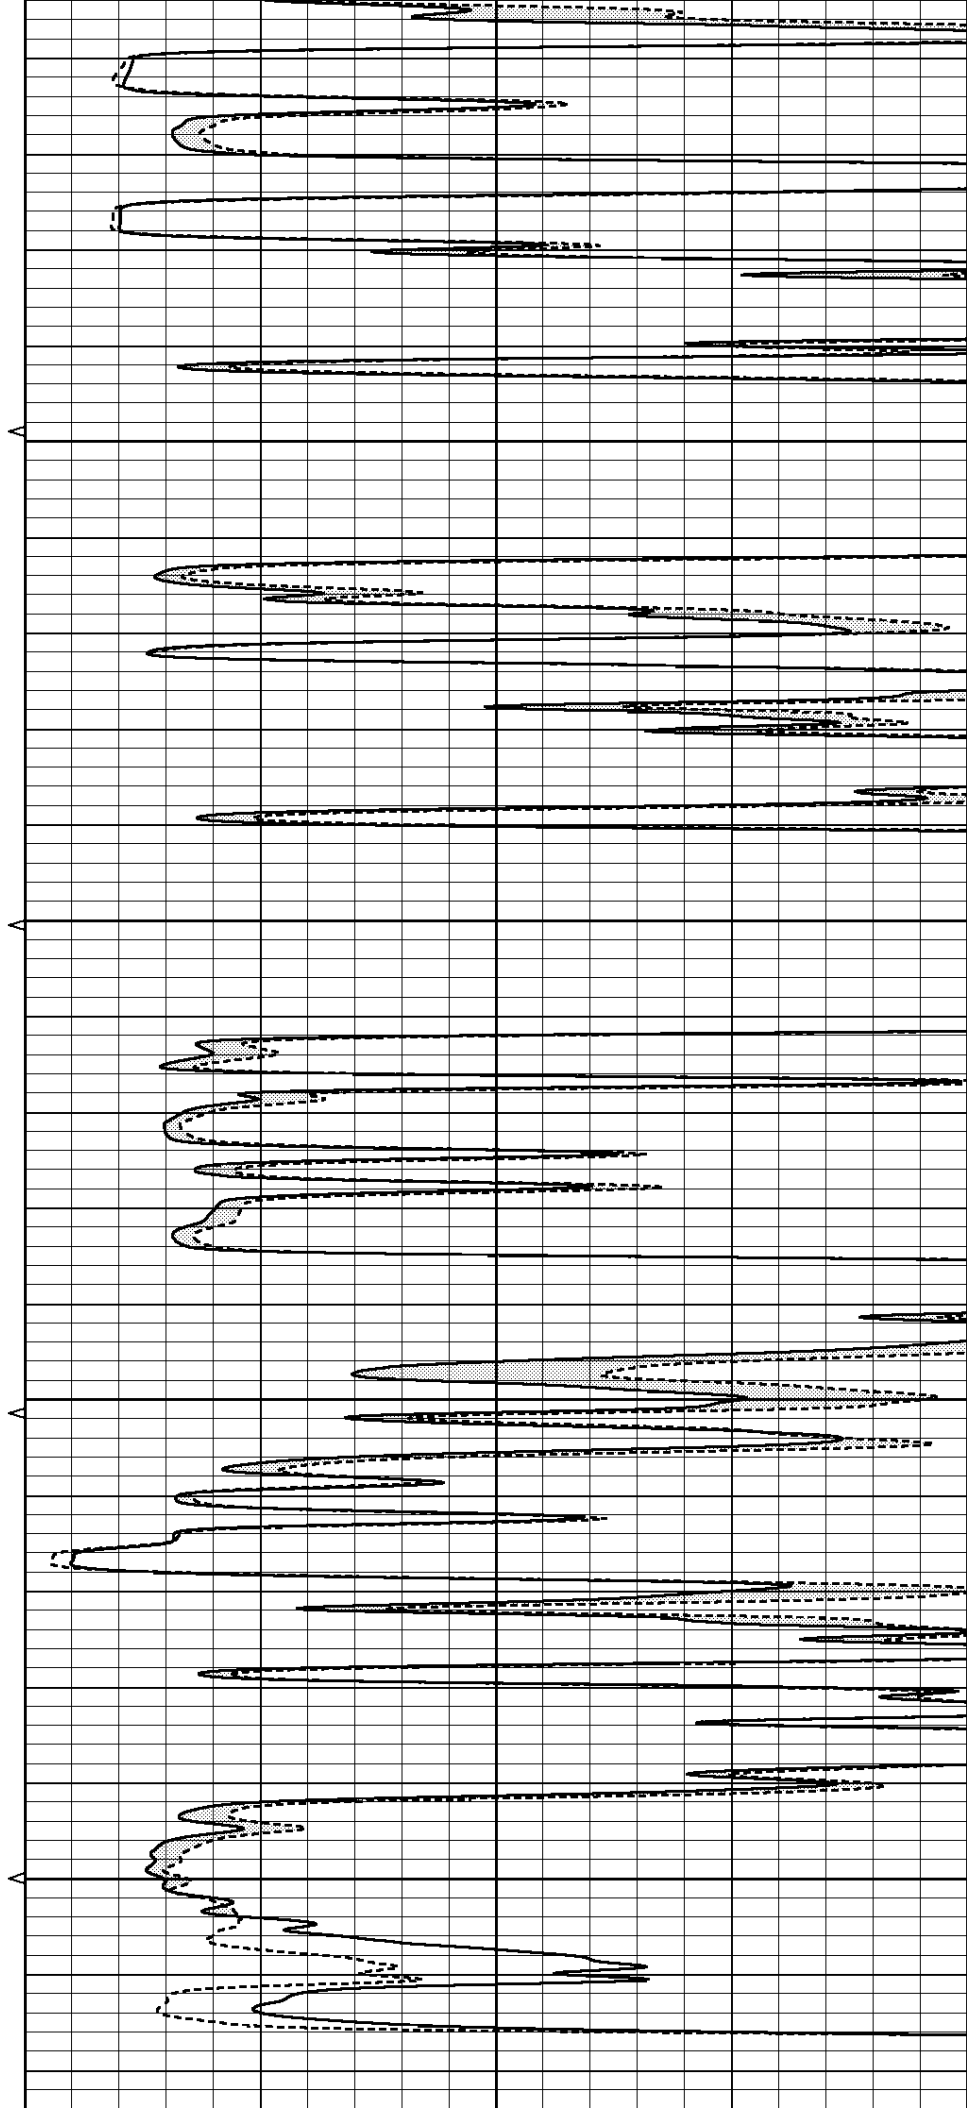

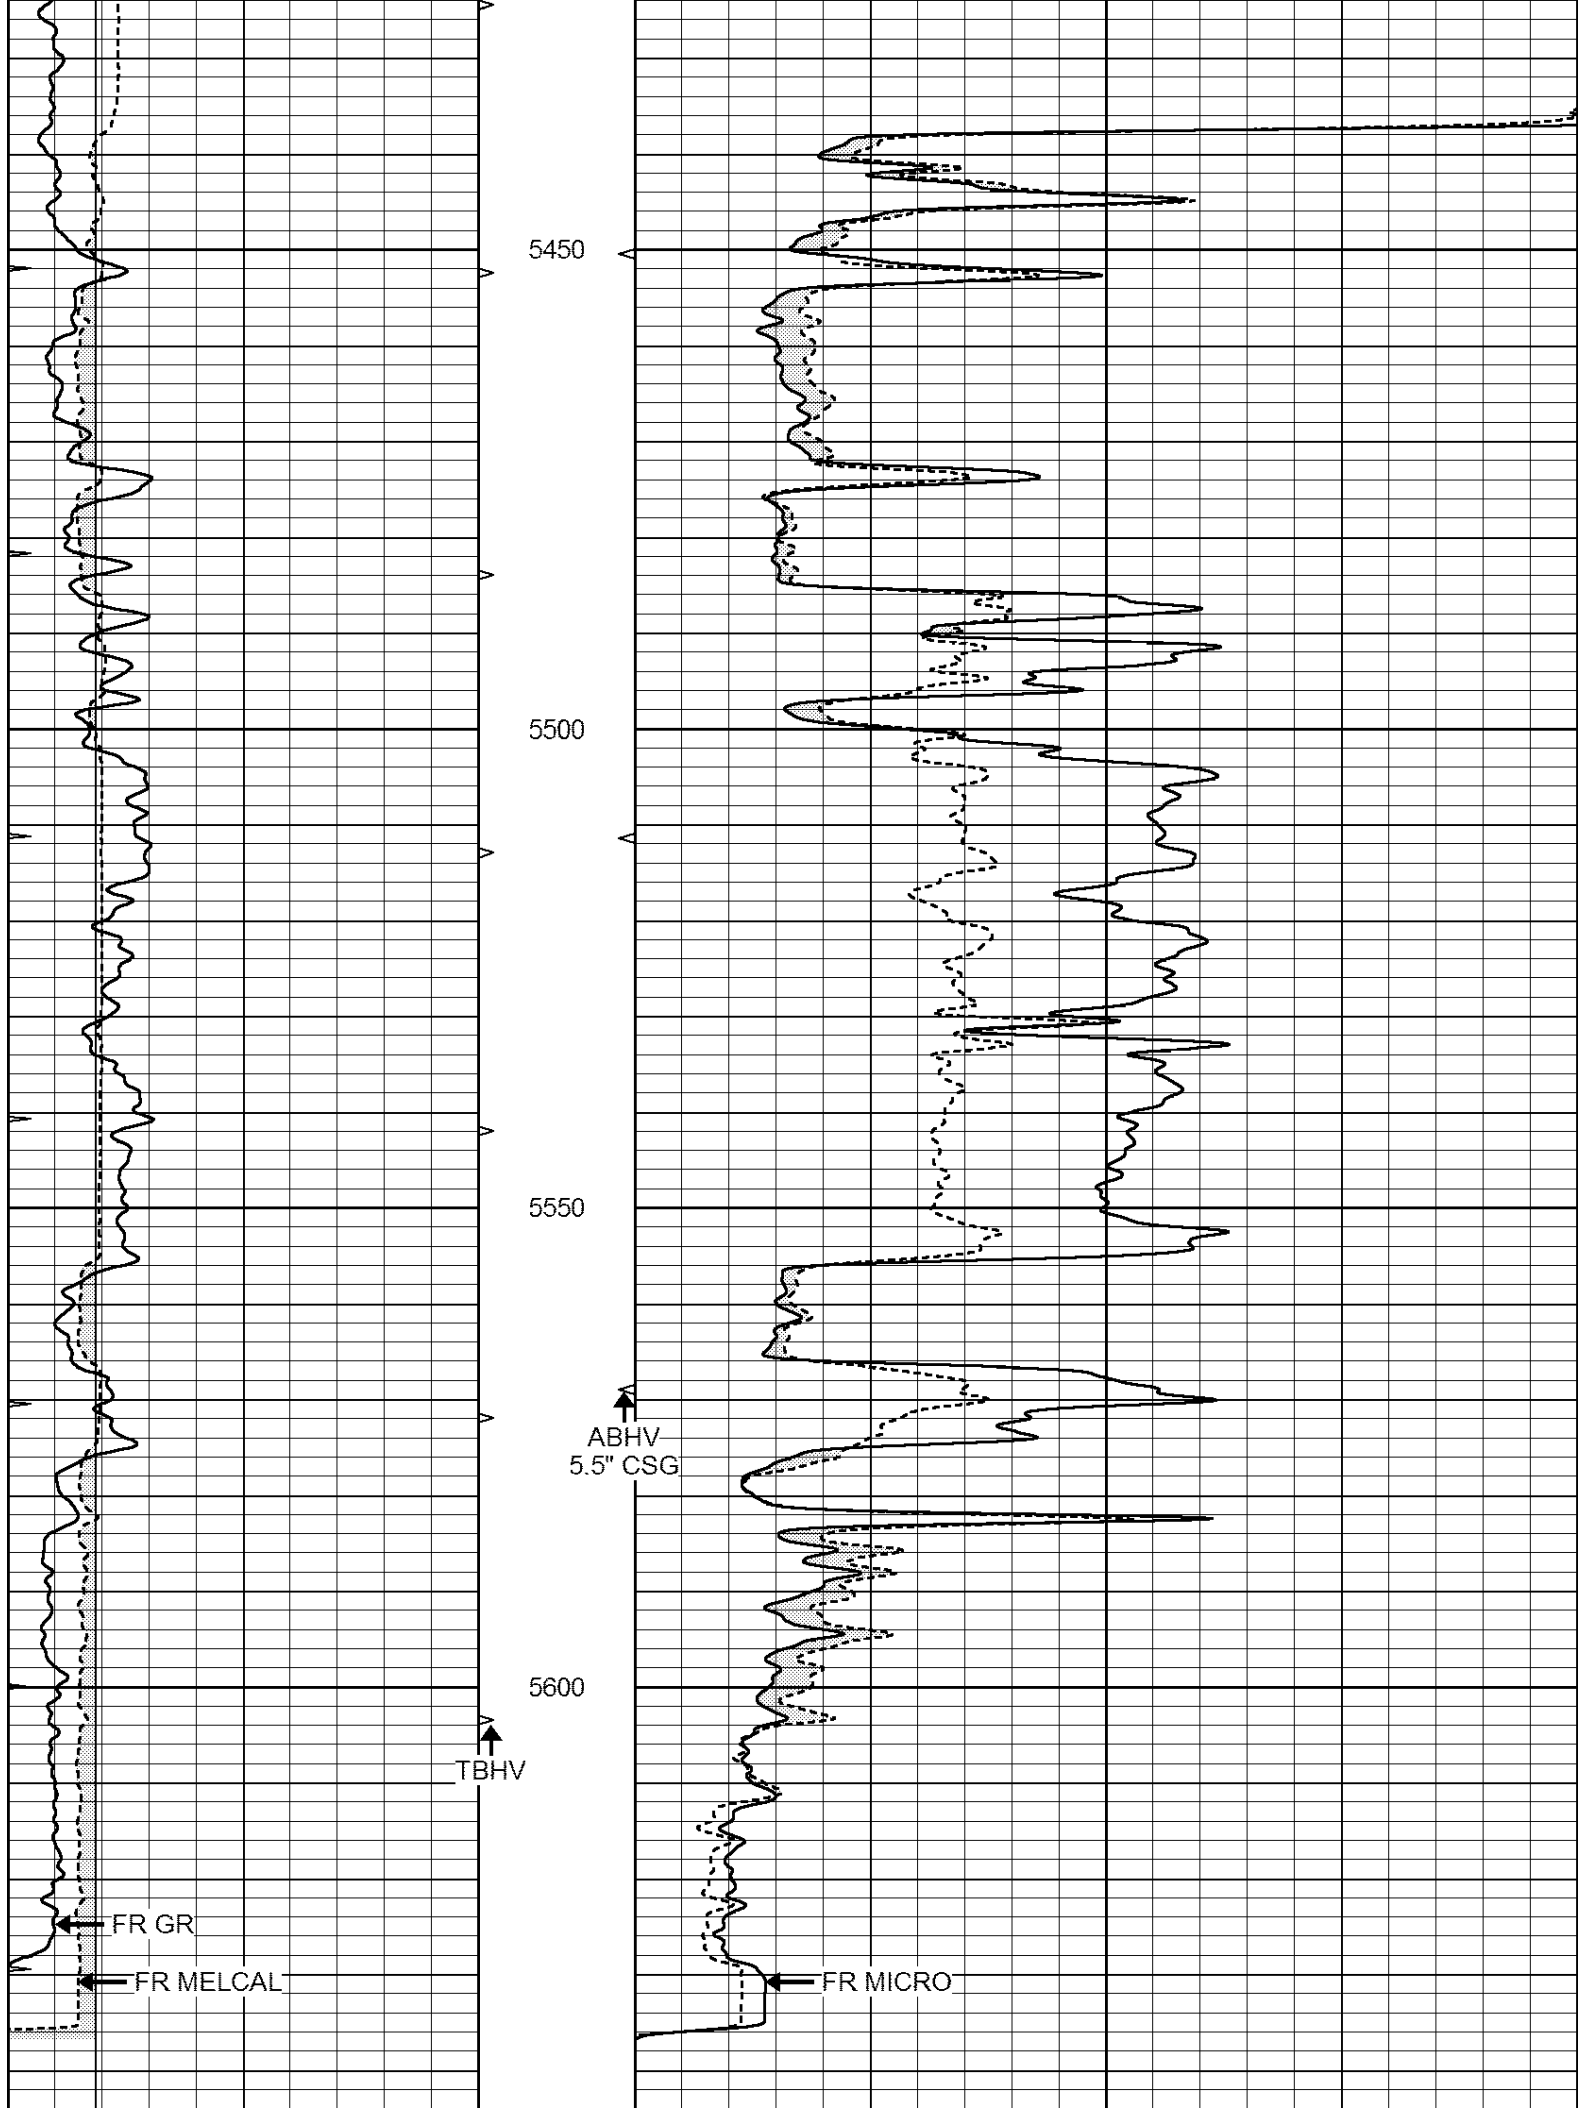

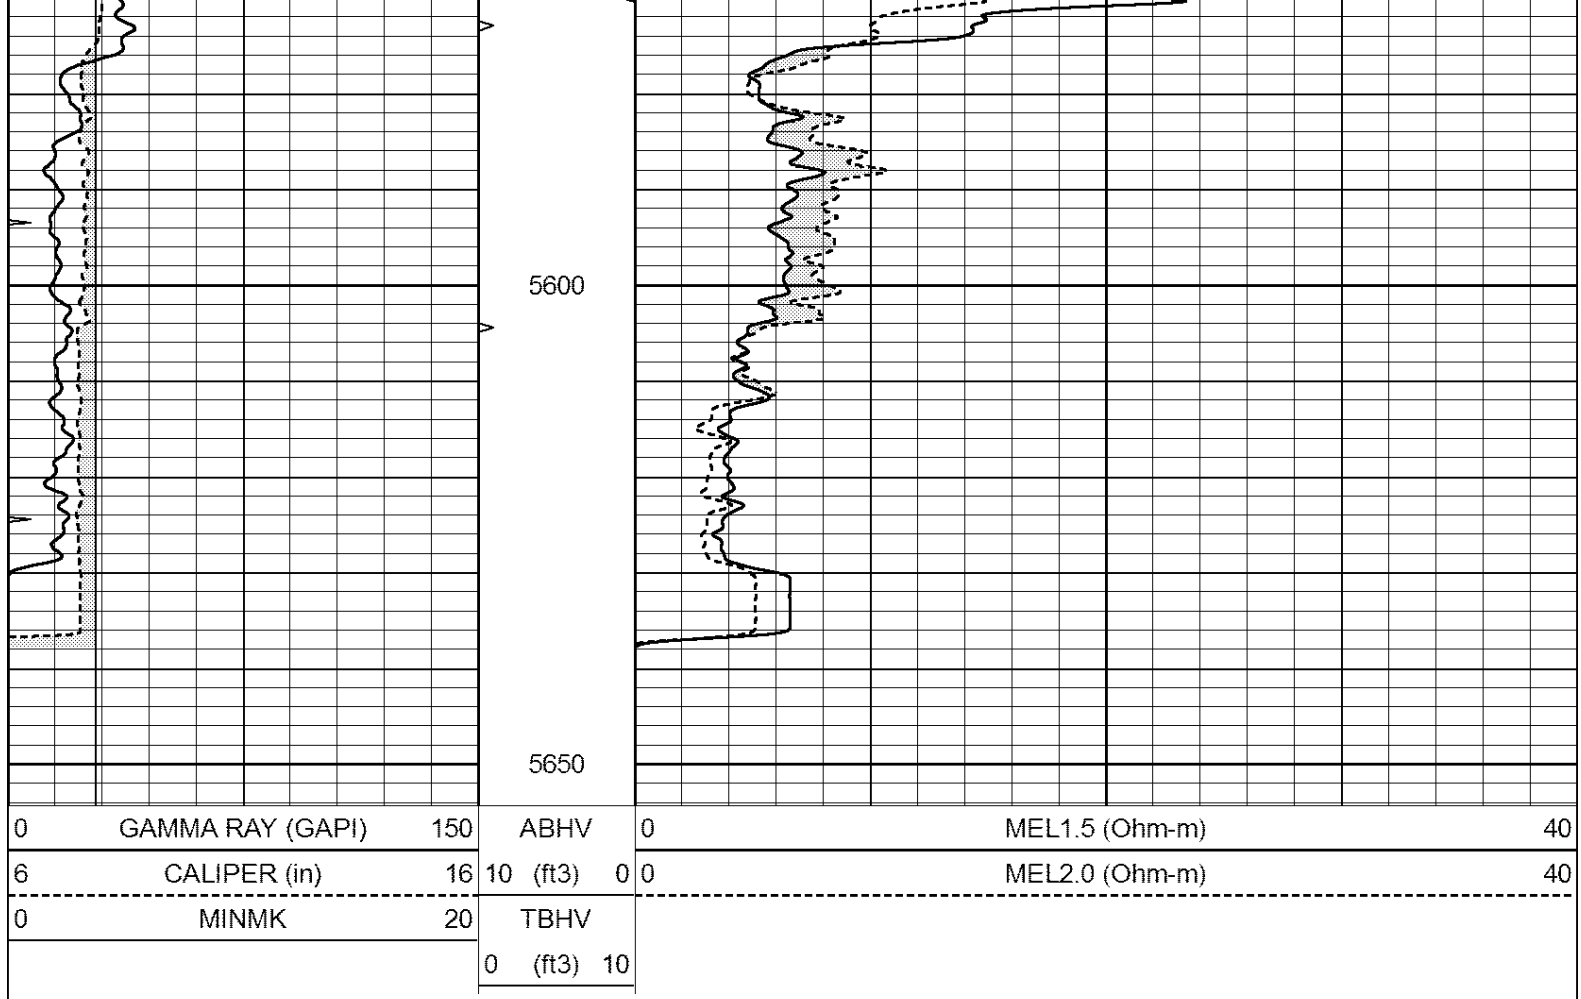

Calibration Report

Database File: 24003pe.db
 Dataset Pathname: pass8.1
 Dataset Creation: Sat Mar 01 02:42:39 2014 by Calc Open-Cased 090629

MICRO Calibration Report

Serial Number:	MICRO6	
Tool Model:	PROBE	
Performed:	Tue Feb 25 23:12:20 2014	
Caliper Calibration:	Gain=5.542	Offset=-0.820
References	Low Cal	High Cal
Readings	8.000	14.000
	1.431	2.513
1.5" Calibration:	Gain=38.075	Offset=0.000
References	Low Cal	High Cal
Readings	0.000	20.000
	0.004	1.196
2" Calibration:	Gain=44.000	Offset=-0.600
References	Low Cal	High Cal
Readings	0.000	20.000
	0.006	0.913

Gamma Ray Calibration Report

Serial Number: GR6
 Tool Model: OPEN
 Performed: Fri Nov 29 08:34:37 2013

Calibrator Value:	150.0	GAPI
Background Reading:	0.0	cps
Calibrator Reading:	276.0	cps
Sensitivity:	0.6035	GAPI/cps