

TO:  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION - PLUGGING  
130 SOUTH MARKET, SUITE 2078  
WICHITA, KANSAS 67202

API Well Number: 15-109-20756-00-00  
Spot: NESENW Sec/Twnshp/Rge: 11-13S-32W  
1700 feet from N Section Line, 2299 feet from W Section Line  
Lease Name: GUNN Well #: 2-11  
County: LOGAN Total Vertical Depth: 4740 feet

Operator License No.: 7311  
Op Name: SHAKESPEARE OIL CO., INC.  
Address: 202 WEST MAIN ST.  
SALEM, IL 62881

String	Size	Depth (ft)	Pulled (ft)	Comment
SURF	8.625	213		

#154<sup>05</sup>

Well Type: DH UIC Docket No: \_\_\_\_\_ Date/Time to Plug: 12/05/2005 5:30 AM  
Plug Co. License No.: 30606 Plug Co. Name: MURFIN DRILLING CO., INC.  
Proposal Rcvd. from: GREG UNRUH Company: MURFIN DRILLING CO., INC. Phone: (316) 267-3241

Proposed Plugging Method: Order 200 sxs 60/40 pozmix - 6% gel with 1/4# flocele per sack.  
Space all plugs with heavy drilling mud through drill pipe.

Plugging Proposal Received By: HERB DEINES WitnessType: NONE  
Date/Time Plugging Completed: 12/05/2005 1:30 PM KCC Agent: HERB DEINES

Actual Plugging Report:

1st. Plug at 2525' w/25 sxs.  
2nd. Plug at 1825' w/100 sxs.  
3rd. Plug at 275' w/40 sxs.  
4th. Plug at 40' w/10 sxs.  
Rathole with 15 sxs.  
Mousehole with 10 sxs.

Perfs:


RECEIVED  
DEC 07 2005  
KCC WICHITA

Remarks: ALLIED CEMENTING COMPANY.

Plugged through: DP

District: 04

Signed \_\_\_\_\_

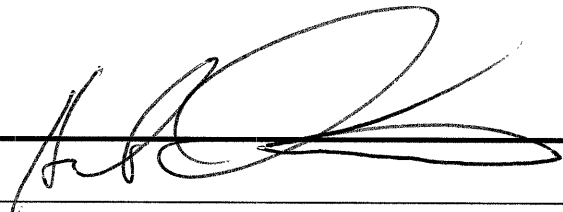

(TECHNICIAN)

INVOICED

DATE 12-8-05

INV. NO. 2006060824

Form CP-2/3

DEC 05 2005