


Use All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

WELL PLUGGING RECORD

15-163-00223-00-00

NORTH

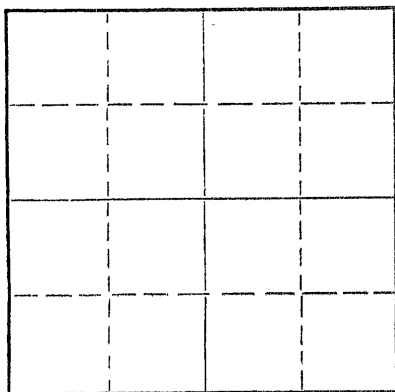

Locate well correctly on above
Section Plat

ROOKS County. Sec. 8 Twp. 7 Rge. 19 (E) (W)
Location as "NE/CNW/SW" or footage from lines. NE NE NW
Lease Owner MORGENSTERN & SPECTER
Lease Name GRIEBEL Well No. 1
Office Address Russell, Kans
Character of Well (completed as Oil, Gas or Dry Hole) oil
Date well completed 12-11-48 19
Application for plugging filed 5-14-62 19
Application for plugging approved 5-15-62 19
Plugging commenced MAY. 20. 1962 19
Plugging completed JUNE. 5. 1962 19
Reason for abandonment of well or producing formation failure to produce profitably
If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well ELDON PETTY, HAYS, KANSAS
Producing formation Kansas City Depth to top 3187 Bottom 3410 Total Depth of Well 3456 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	216'	none
				5 1/2"	3454'	1008 ft.

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

PLUGGED, BACK WITH SAND TO 3150 FEET, DUMPED 4- SACKS CEMENT.
CIRCULATED MUD AT 550 FEET, PUMPED 20- SACKS CEMENT.
PUMPED 20- SACKS CEMENT AT 180 FEET, SET A ROCK BRIDGE AT 40- FEET.
DUMPED TEN SACKS CEMENT.

RECEIVED
STATE CORPORATION COMMISSION

JUN 15 1962

CONSERVATION DIVISION
Wichita, Kansas

6-15-62

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor LYNCH CASING PULLING COMPANY. NO. 457
Address R. RT. 4. GREAT BEND. KANSAS

STATE OF Kansas, COUNTY OF Russell, ss.
Morgenstern & Specter (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Morgan Specter
Russell, Kansas
(Address)

SUBSCRIBED AND SWORN to before me this 9th day of June, 1962

My commission expires Dec. 1, 1964

Elsie Coady
Elsie Coady Notary Public.

