

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-055-00841-00-00
Spot: E2NE Sec/Twnshp/Rge: 8-24S-32W
70 feet from N Section Line, 1320 feet from E Section Line
Lease Name: SLOAN Well #: 1
County: FINNEY Total Vertical Depth: 2616 feet

Operator License No.: 5952
Op Name: BP AMERICA PRODUCTION COMPANY
Address: 2225 WEST OKLAHOMA AVENUE
ULYSSES, KS 67880

String	Size	Depth (ft)	Pulled (ft)	Comment
PROD	5.5	2614	0	WITH 300 SX CMT
SURF	8.625	946		WITH 50 SX CMT

Well Type: GAS UIC Docket No: _____ Date/Time to Plug: 12/01/2005 11:30 AM
Plug Co. License No.: 99997 Plug Co. Name: HALLIBURTON ENERGY SERVICES
Proposal Rcvd. from: JOE EUDEY Company: BP AMERICA Phone: (620) 356-6981

Proposed Plugging Method: PUMP 500-800# HULLS ON BOTTOM. FILL 5 1/2" CASING FROM 2608' TO 0'. CHECK BACKSIDE.

Plugging Proposal Received By: JIM HOLLAND WitnessType: COMPLETE (100%)
Date/Time Plugging Completed: 12/01/2005 12:25 PM KCC Agent: STEVE DURRANT

Actual Plugging Report:

1ST PLUG PUMP DOWN 5 1/2" CASING WITH 800# HULLS & 285 SX CMT. 2ND PLUG PUMP 5 SX CMT DOWN 8 5/8" ANNULUS. SHUT IN AT 400#. **GAS LINE FROM WELL HEAD TO INTERCONNECT WAS FILLED WITH CEMENT**.

Perfs:


Top	Bot	Thru	Comments
2590	2608		
2526	2566		

RECEIVED
DEC 14 2005
KCC WICHITA

Remarks: USED 60/40 POZMIX 6% GEL BY HALLIBURTON.

Plugged through: CSG

District: 01

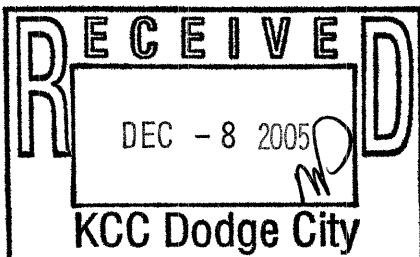

Signed

Steve Durrant

(TECHNICIAN)

INVOICED

DATE 12-14-05
INV NO 2006060859