

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-071-20601-00-00
Spot: SE Sec/Twnshp/Rge: 3-20S-40W
1320 feet from S Section Line, 1320 feet from E Section Line
Lease Name: HARRIS Well #: 2-3
County: GREELEY Total Vertical Depth: 2965 feet

Operator License No.: 4894
Op Name: HORSESHOE OPERATING, INC.
Address: 110 W. LOUISIANA, SUITE 200
MIDLAND, TX 79701

String	Size	Depth (ft)	Pulled (ft)	Comment
PROD	4.5	2965	0	WITH 700 SX CMT
SURF	8.625	281		WITH 200 SX CMT

Well Type: GAS UIC Docket No: _____ Date/Time to Plug: 11/29/2005 2:30 PM
Plug Co. License No.: 99996 Plug Co. Name: ALLIED CEMENT COMPANY
Proposal Rcvd. from: DAVE OLSON Company: HORSESHOE OPERATING Phone: (620) 376-8190

Proposed Plugging Method: PUMP 400# HULLS & 190 SX CMT. CHECK BACKSIDE WITH 50 SX CMT.

Plugging Proposal Received By: KEN JEHLIK WitnessType: COMPLETE (100%)
Date/Time Plugging Completed: 11/29/2005 3:30 PM KCC Agent: KEN JEHLIK

Actual Plugging Report:

PUMP 400# HULLS IN 40 SX CMT. PUMP 125 SX CMT DOWN 4 1/2" CASING TO SURFACE. PRESSURED TO 1300# & HOLDING. PUMP 10 SX CMT DOWN 4 1/2" X 8 5/8" ANNULUS. PRESSURED TO 200# & HOLDING.

Perfs:


Top	Bot	Thru	Comments
2839	2849		
2829	2869		

RECEIVED
DEC 14 2005
KCC WICHITA

Remarks: USED 60/40 POZMIX 6% GEL BY ALLIED.

Plugged through: CSG

District: 01

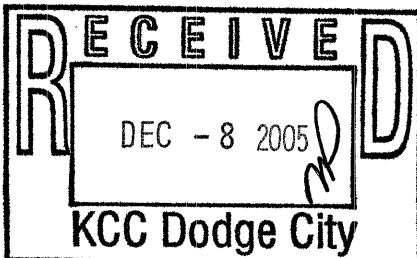

Signed

Ken Jehlik
(TECHNICIAN)

INVOICED
DATE 12.14.05
WEL. NO. 2006060862

Form 62-273