

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-019-24130-00-00
Spot: Sec/Twnshp/Rge: 22-34S-13E
4100 feet from S Section Line, 4800 feet from E Section Line
Lease Name: SULLIVAN Well #: 11
County: CHAUTAUQUA Total Vertical Depth: 800 feet

Operator License No.: 9722
Op Name: G & J OIL COMPANY, INC.
Address: RT. 1, BOX 212
CANEY, KS 67333

String	Size	Depth (ft)	Pulled (ft)	Comment
PROD	4.5	800	0	

#35⁰⁰

Well Type: OIL UIC Docket No: _____ Date/Time to Plug: 09/06/2005 8:00 AM
Plug Co. License No.: 32884 Plug Co. Name: ELMORE'S INC.
Proposal Rcvd. from: JOHN ELMORE Company: ELMORES, INC. Phone: (620) 249-2519

Proposed
Plugging
Method:

TO RUN 1" & PUMP CEMENT & GEL FOR BOTTOM & TOP PLUGS.

Plugging Proposal Received By: RON ROWE WitnessType: PARTIAL
Date/Time Plugging Completed: 09/06/2005 5:00 PM KCC Agent: RON ROWE

Actual Plugging Report:

Perfs:

RAN 1" HYDRIL INSIDE 4.5" CASING TO 800', GELLED HOLE & PUMPED 10 SACKS CEMENT FOR BOTTOM PLUG. PULLED 1" TO 350' & PUMPED/CIRCULATED CEMENT TO SURFACE. PULLED 1" & TOPPED-OFF WELL. USED TOTAL OF 45 SACKS CEMENT & 1 SACK GEL.

RECEIVED
KCC DISTRICT #3

DEC 6 2005

RR

CHANUTE, KS


RECEIVED
DEC 09 2005
KCC WICHITA

Remarks: PLUGGED ABANDONED OIL WELL.

Plugged through: TBG

District: 03

Signed

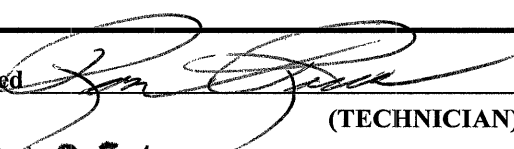

(TECHNICIAN)

INVOICED

DATE

12.9.05

INV. NO.

2006060840