

HALLIBURTON

ARRAY COMPENSATED TRUE RESISTIVITY LOG

BEREXCO LLC.
FAYE 1-18
WILDCAT
FINNEY
KANSAS

COMPANY BEREXCO LLC.
WELL FAYE 1-18
FIELD/BLOCK WILDCAT
COUNTY FINNEY
STATE KANSAS

API No. 15-055-22291-00-00
Location 335' FSL 437' FEL

Sect. 18 Twp. 26S Rge. 33W

Other Services:
MICRO
DSNT/SDLT
XRMI

COMPANY
WELL
FIELD/BLOCK
COUNTY
STATE

Permanent Datum Log measured from KB
Drilling measured from KB
Elev. 2911.0 ft
D.F. 2921.0 ft
G.L. 2911.0 ft

Date	25-Apr-14	Run No.	ONE
Depth - Driller	5330.00 ft	Depth - Logger	5326.0 ft
Bottom - Logged Interval	5316.0 ft	Top - Logged Interval	1742.0 ft
Casing - Driller	8.625 in	Casing - Logger	1742.0 ft
Bit Size	7.875 in	Type Fluid in Hole	Water Based Mud
Density	9.3 ppg	Viscosity	46.00 s/qt
PH	10.50 pH	Fluid Loss	8.0 cphm
Source of Sample	MUD PIT	Rm @ Meas. Temperature	0.900 ohmm @ 87.00 degF
Rmf @ Meas. Temperature	0.74 ohmm @ 85.00 degF	Rmc @ Meas. Temperature	1.050 ohmm @ 87.00 degF
Source Rmf	MEASURED	Rmc	MEASURED
Rm @ BHT	0.64 ohmm @ 125.0 degF	Time Since Circulation	4.0000 hr
Time on Bottom	25-Apr-14 20:42	Max. Rec. Temperature	125.0 degF @ 5326.0 ft
Equipment	11454566	Location	LIBERAL
Recorded By	THOMAS K HYDE	Witnessed By	P. WILSON

Fold here

Service Ticket No.: 901297703 API Serial No.: 15-055-22291-00-00 PGM Version: WL INSITE R4.2.0 (Build 2)

CHANGE IN MUD TYPE OR ADDITIONAL SAMPLE				RESISTIVITY SCALE CHANGES			
Date	Sample No.			Type Log	Depth	Scale Up Hole	Scale Down Hole
Depth-Driller							
Type Fluid in Hole							
Density	Viscosity						
Ph	Fluid Loss						
Source of Sample				RESISTIVITY EQUIPMENT DATA			
Rm @ Meas. Temp	@		@	Run No.	Tool Type & No.	Pad Type	Tool Pos.
Rmf @ Meas. Temp.	@		@	ONE	ACRT	N/A	1.5" S.O.
Rmc @ Meas. Temp.	@		@		I10811256		
Source Rmf	Rmc				S10800784		
Rm @ BHT	@		@				
Rmf @ BHT	@		@				
Rmc @ BHT	@		@				

EQUIPMENT DATA							
GAMMA		ACOUSTIC		DENSITY		NEUTRON	
Run No.	ONE	Run No.		Run No.		Run No.	
Serial No.	10811258	Serial No.		Serial No.		Serial No.	
Model No.	GTET	Model No.		Model No.		Model No.	
Diameter	3.625"	No. of Cent.		Diameter		Diameter	
Detector Model No.	T-102	Spacing		Log Type		Log Type	
Type	SCINT			Source Type		Source Type	
Length	8"	LSA [Y/N]		Serial No.		Serial No.	
Distance to Source	10'	FWDA [Y/N]		Strength		Strength	

LOGGING DATA

GENERAL			GAMMA		ACOUSTIC		DENSITY			NEUTRON				
Run No.	Depth		Speed	Scale		Scale		Matrix	Scale		Matrix	Scale		Matrix
	From	To	ft/min	L	R	L	R		L	R		L	R	
ONE	5326	1742	REC	0	150									

DIRECTIONAL INFORMATION

Maximum Deviation @ KOP @

Remarks: ANNULAR HOLE VOLUME CALCULATED FOR 5.5 INCH CASING

LCM REPORTED AT 2 PPB

CHLORIDES REPORTED AT 2400 MG/L

TODAY'S CREW F. VILLA E. ZAPIEN K. PIDDINGTON

THANK YOU FOR CHOOSING HALLIBURTON ENERGY SERVICES LIBERAL, KANSAS 620-624-8123


HALLIBURTON DOES NOT GUARANTEE THE ACCURACY OF ANY INTERPRETATION OF THE LOG DATA, CONVERSION OF LOG DATA TO PHYSICAL ROCK PARAMETERS OR RECOMMENDATIONS WHICH MAY BE GIVEN BY HALLIBURTON PERSONNEL OR WHICH APPEAR ON THE LOG OR IN ANY OTHER FORM. ANY USER OF SUCH DATA, INTERPRETATIONS, CONVERSIONS, OR RECOMMENDATIONS AGREES THAT HALLIBURTON IS NOT RESPONSIBLE EXCEPT WHERE DUE TO GROSS NEGLIGENCE OR WILLFUL MISCONDUCT, FOR ANY LOSS, DAMAGES, OR EXPENSES RESULTING FROM THE USE THEREOF.


HALLIBURTON





Plot Time: 26-Apr-14 00:19:30
 Plot Range: 1730 ft to 5329.75 ft
 Data: FAYE_1-18\Well Based\DAQ-0001-003\
 Plot File: \\-LOCAL-ACRT\ACRT_2.lib


2 INCH MAIN LOG

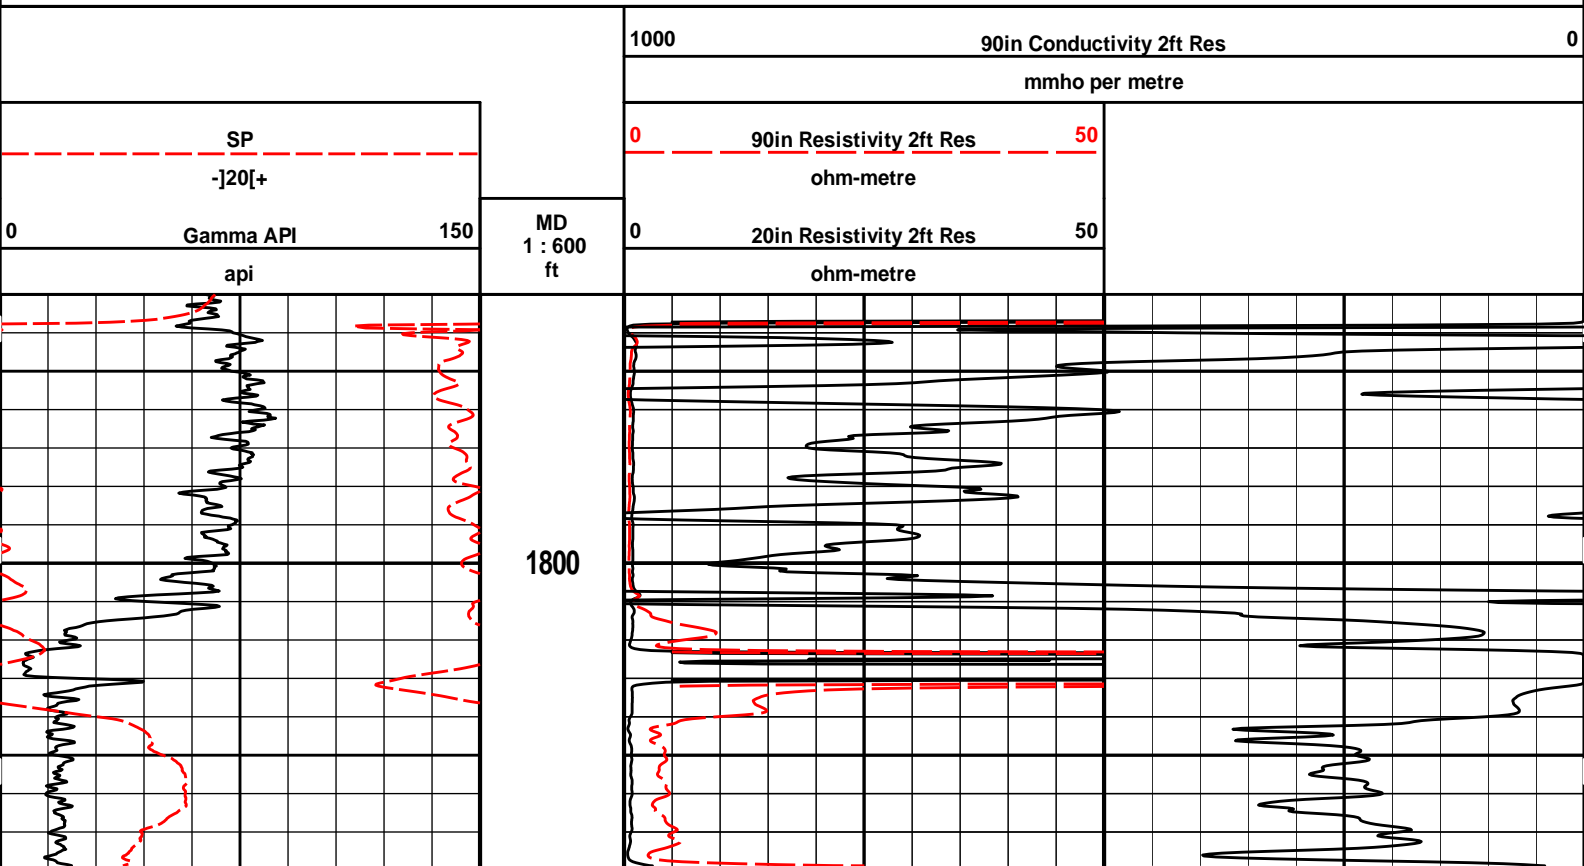


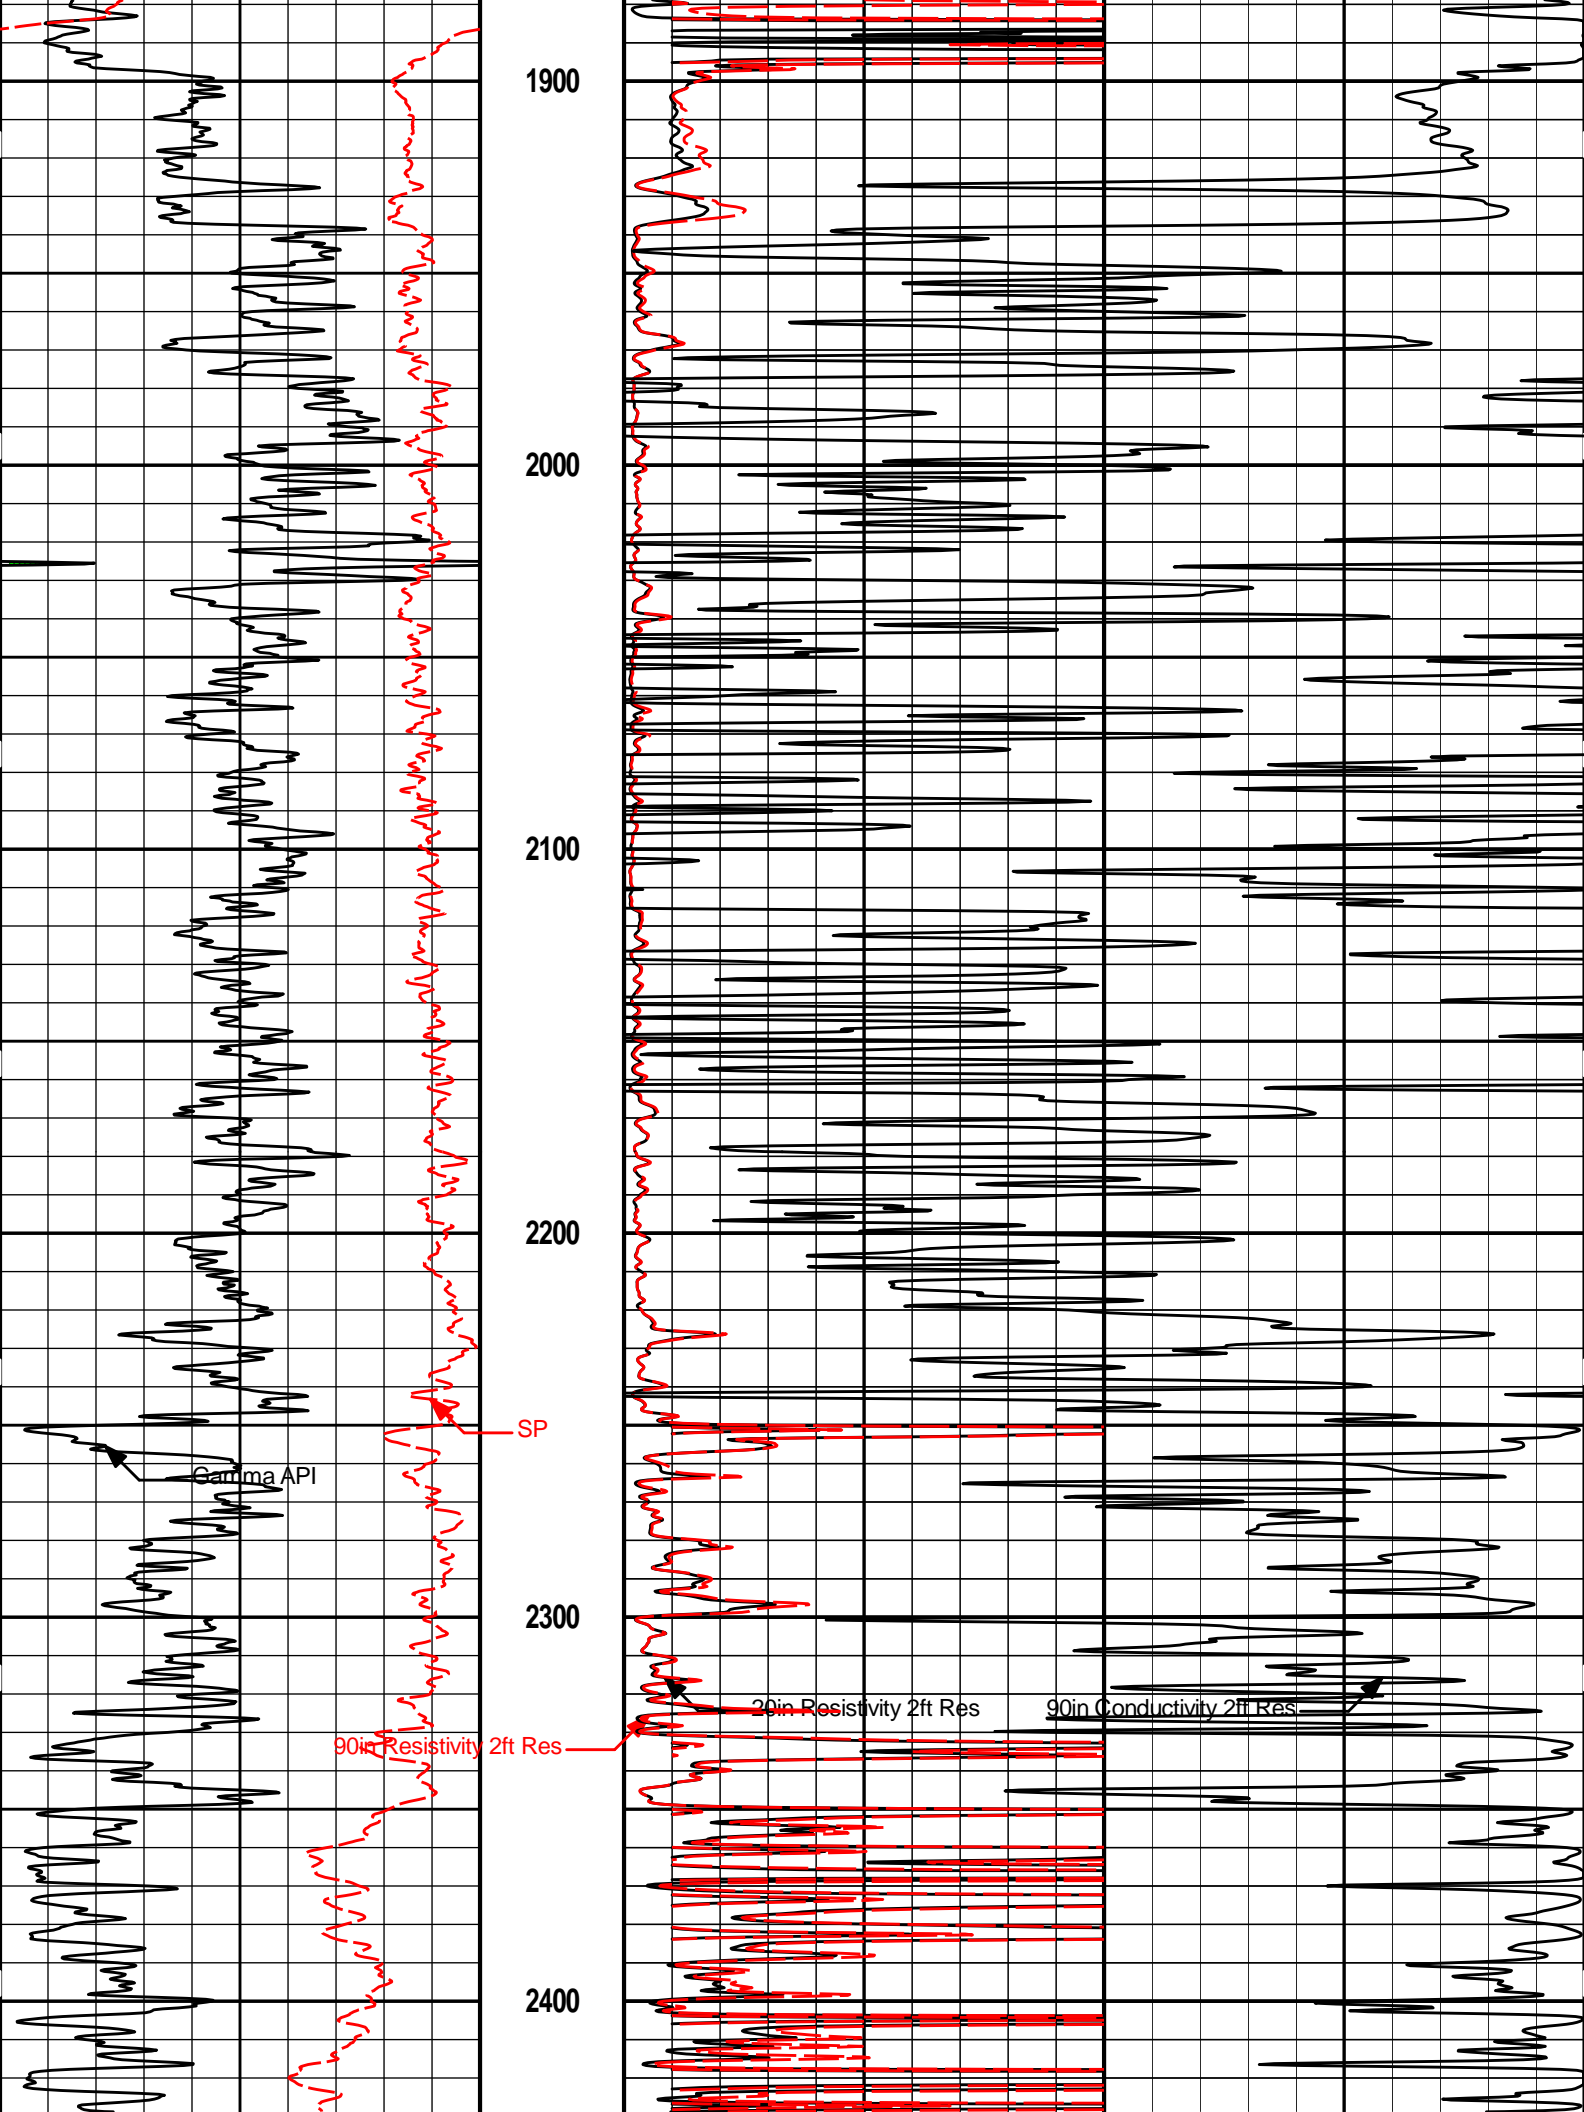


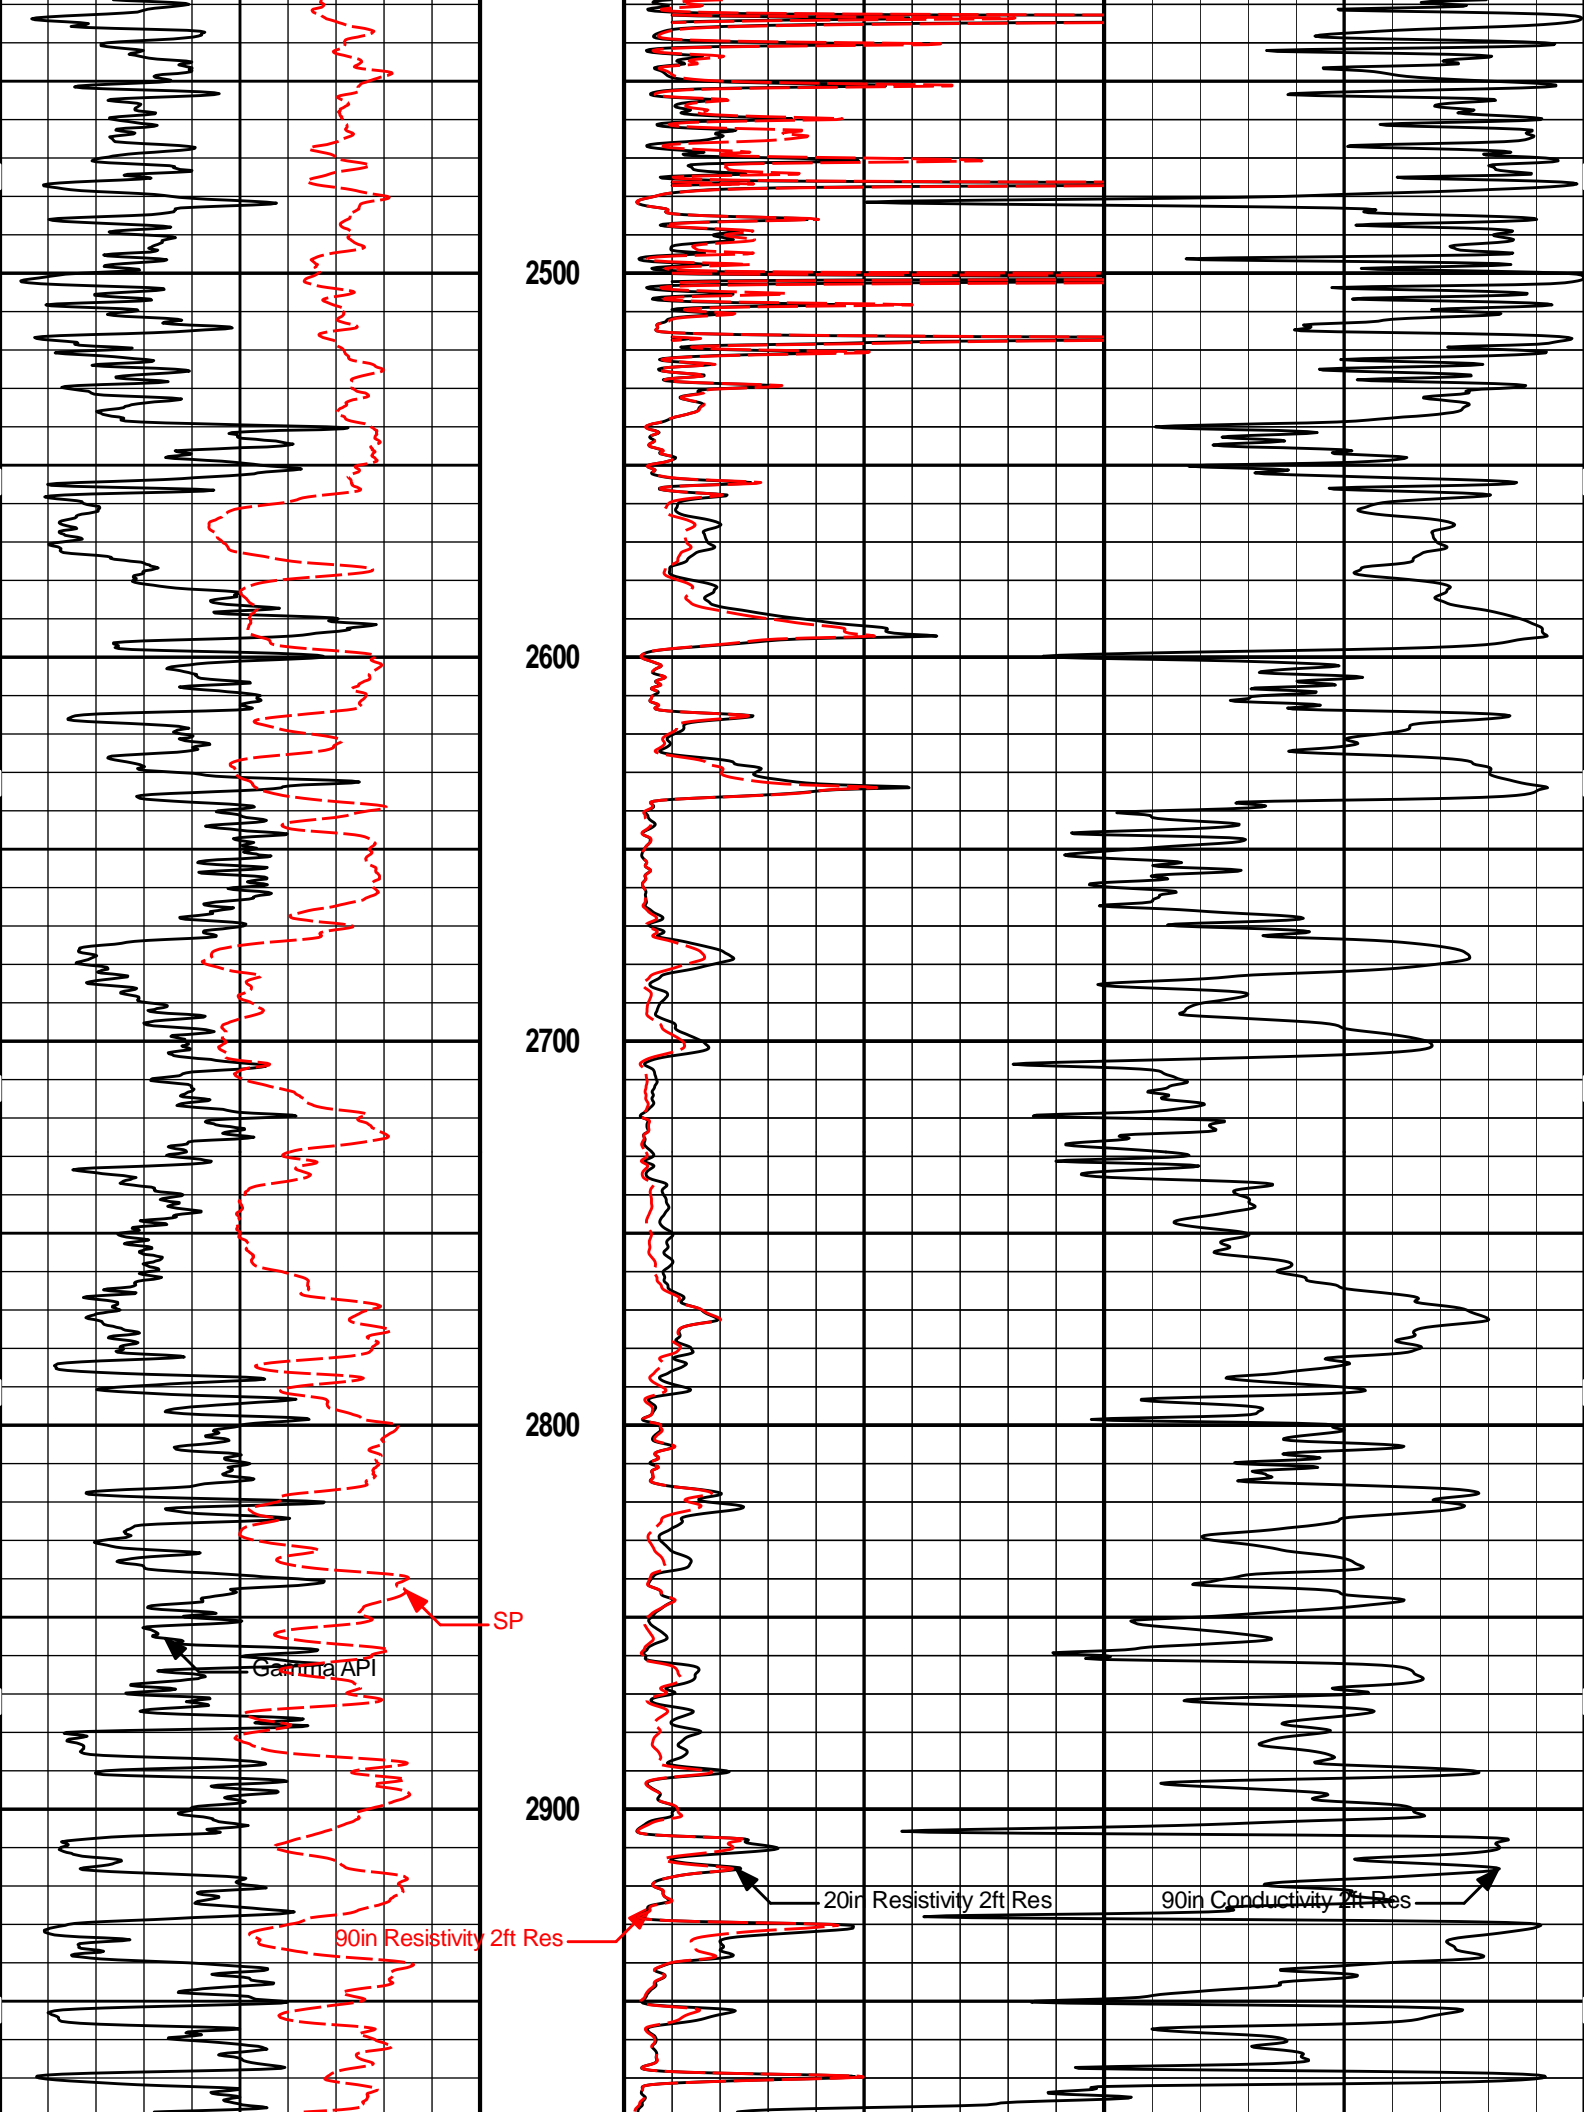


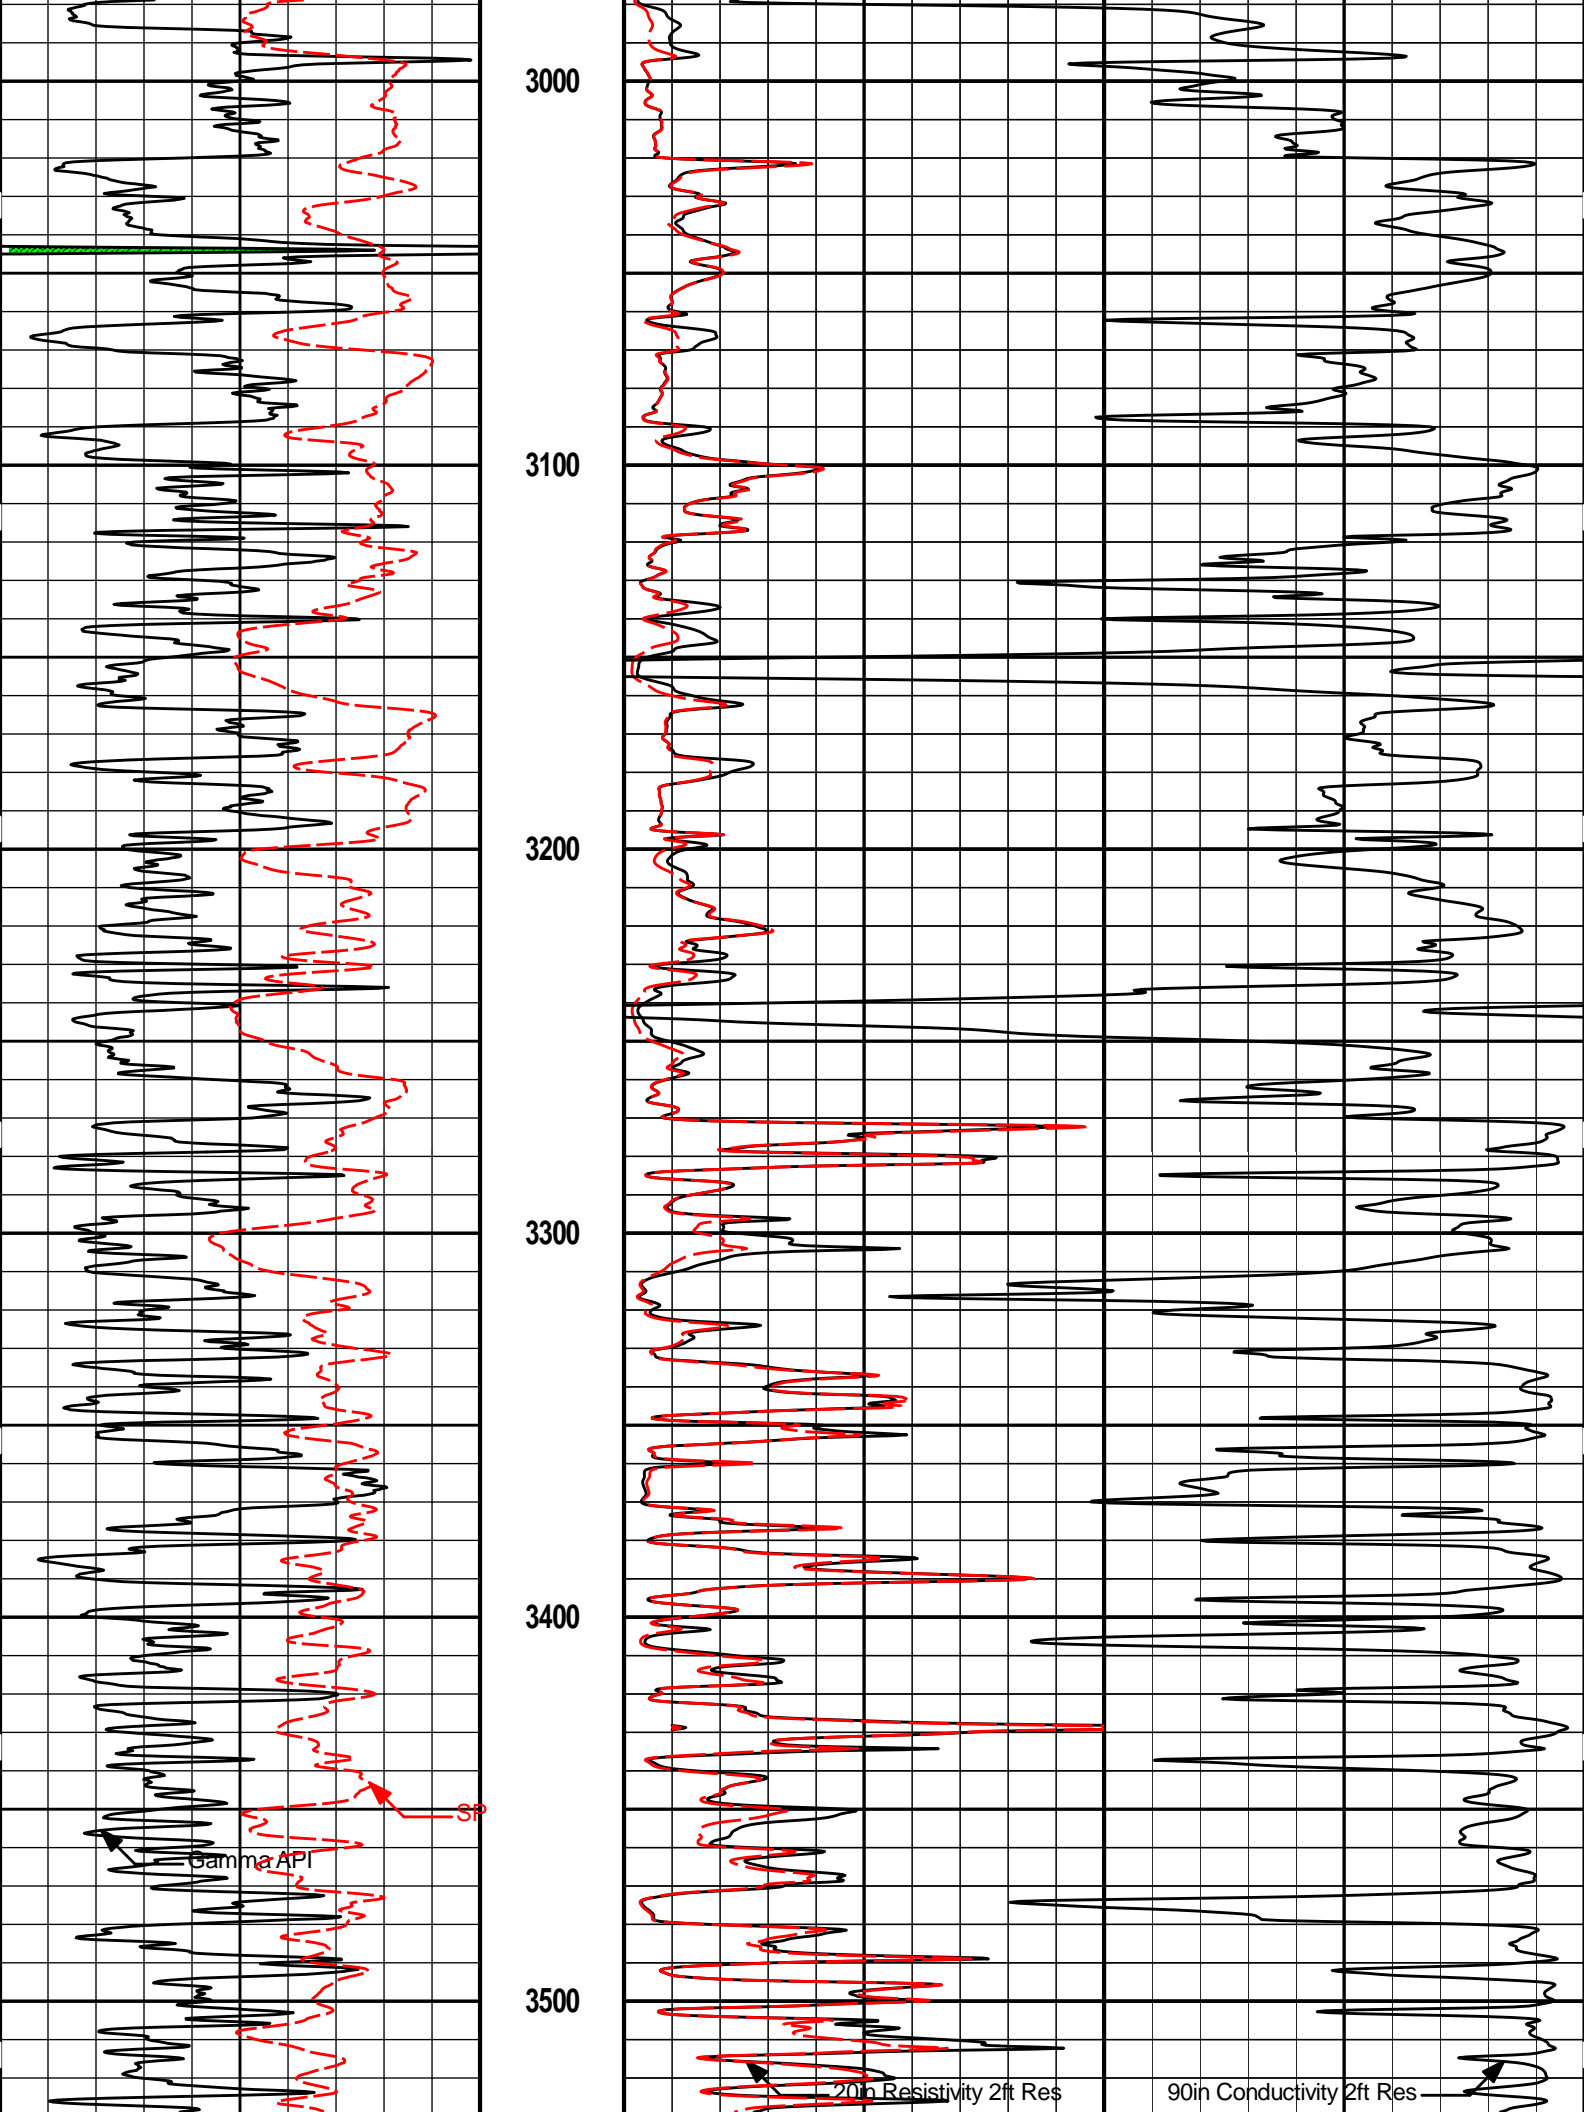

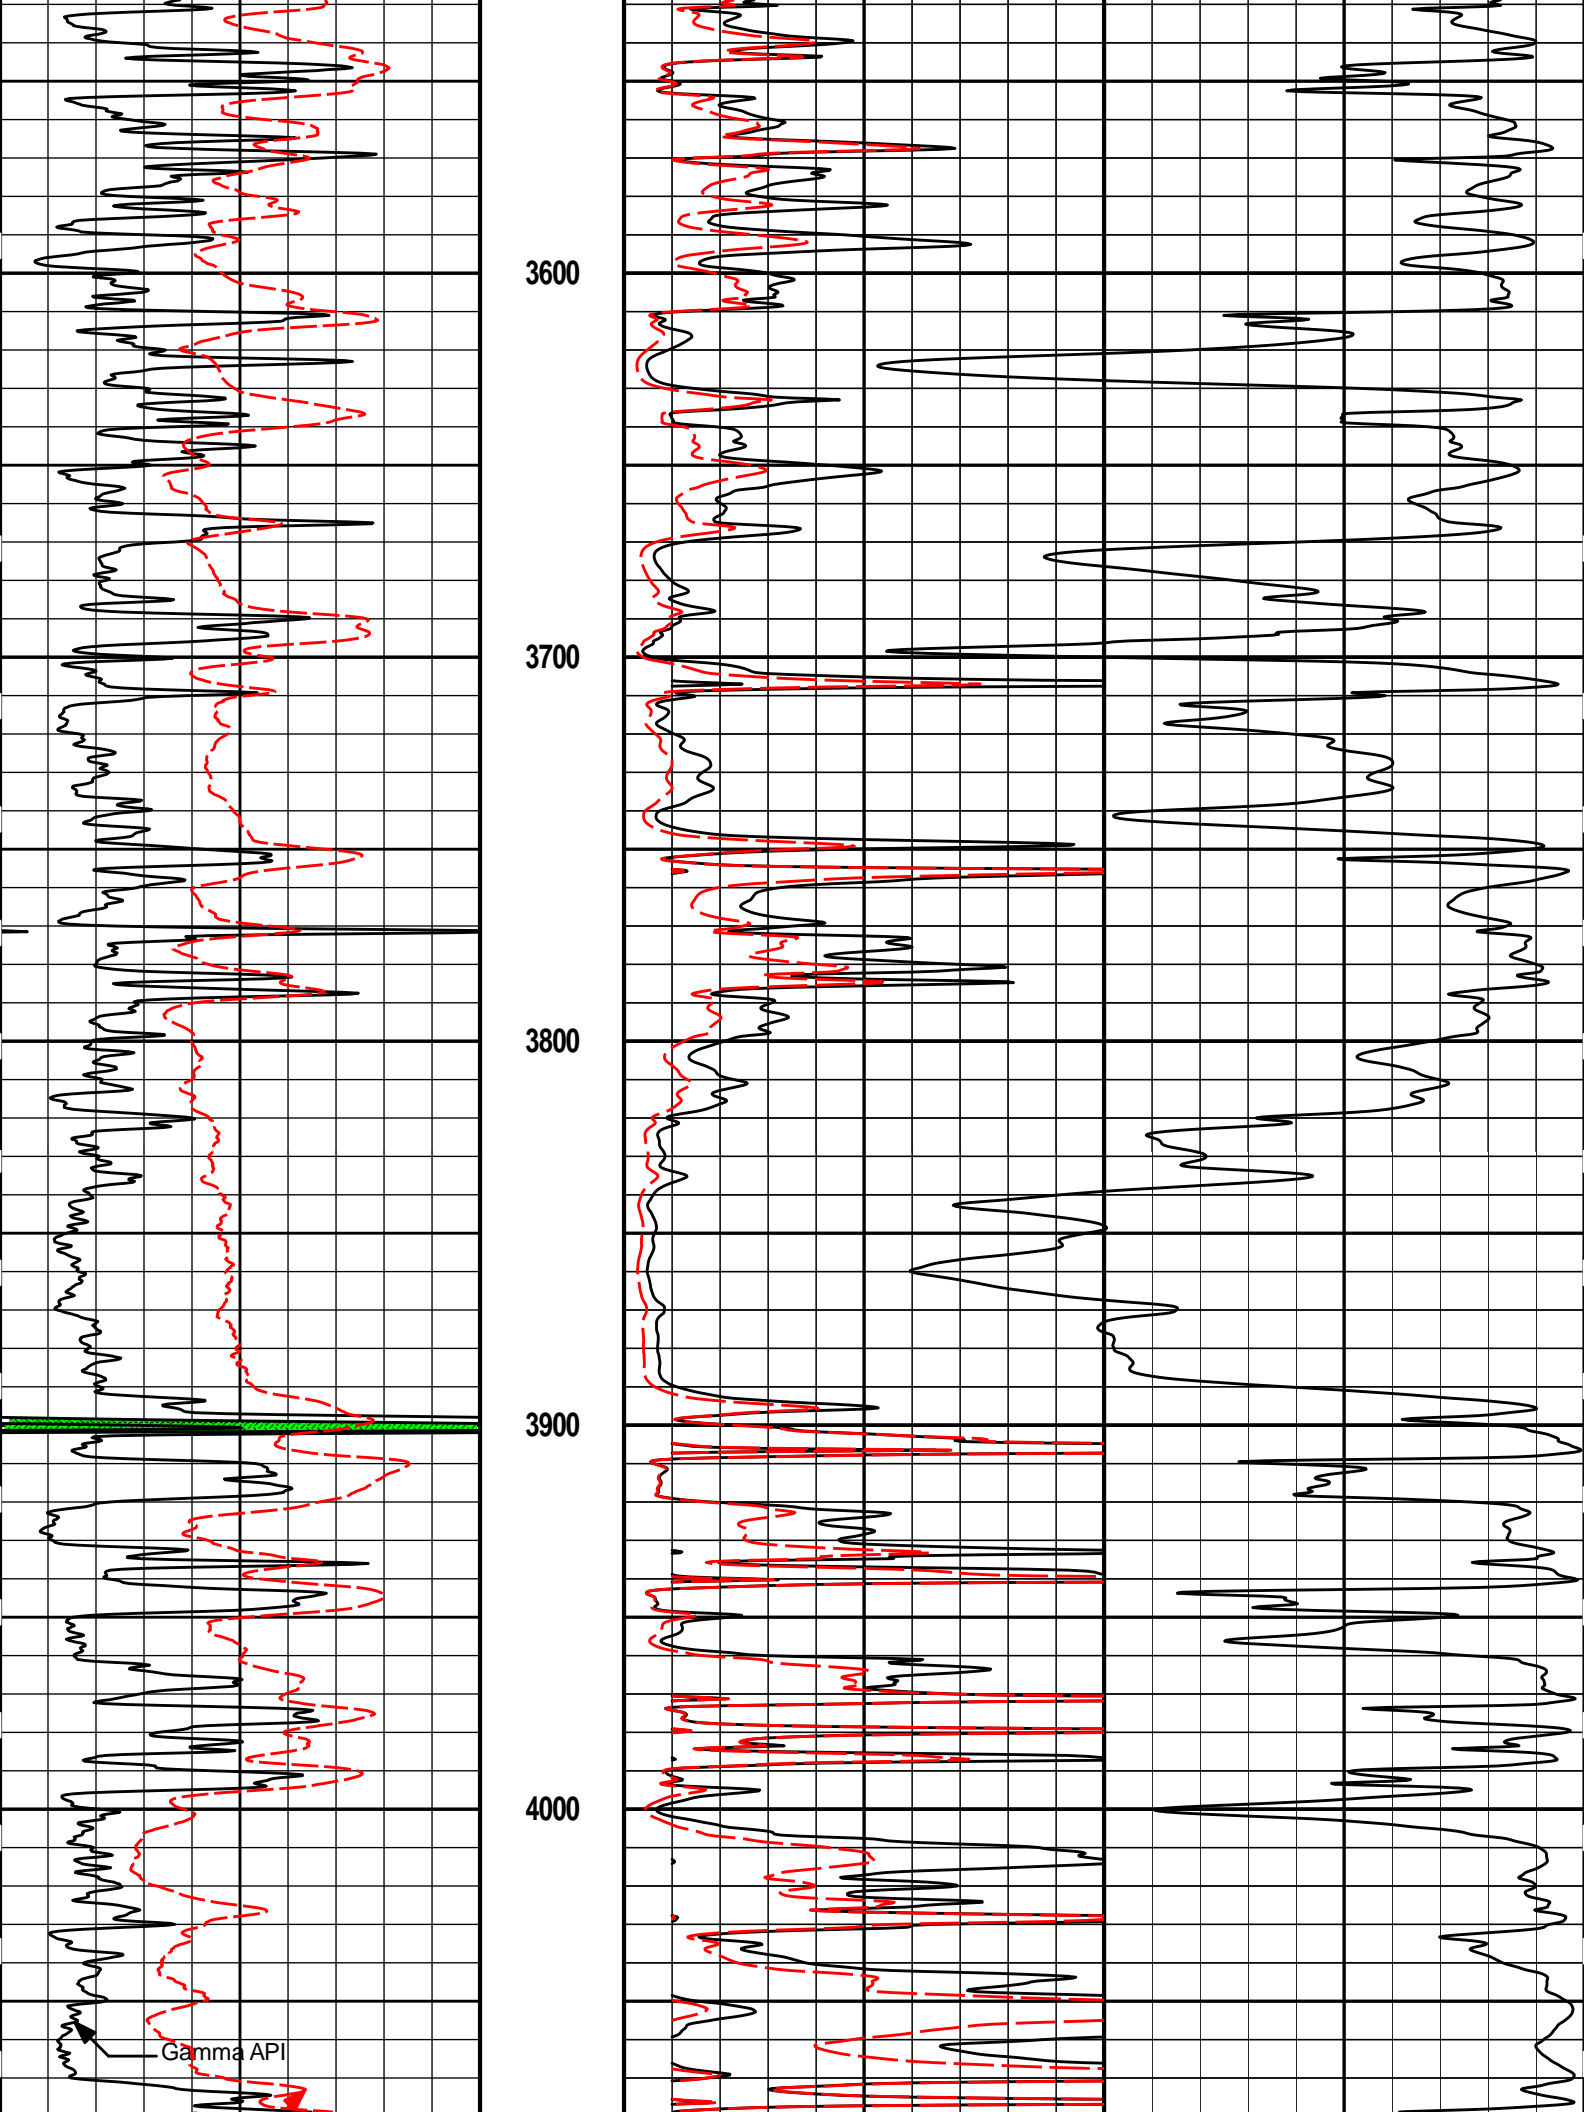

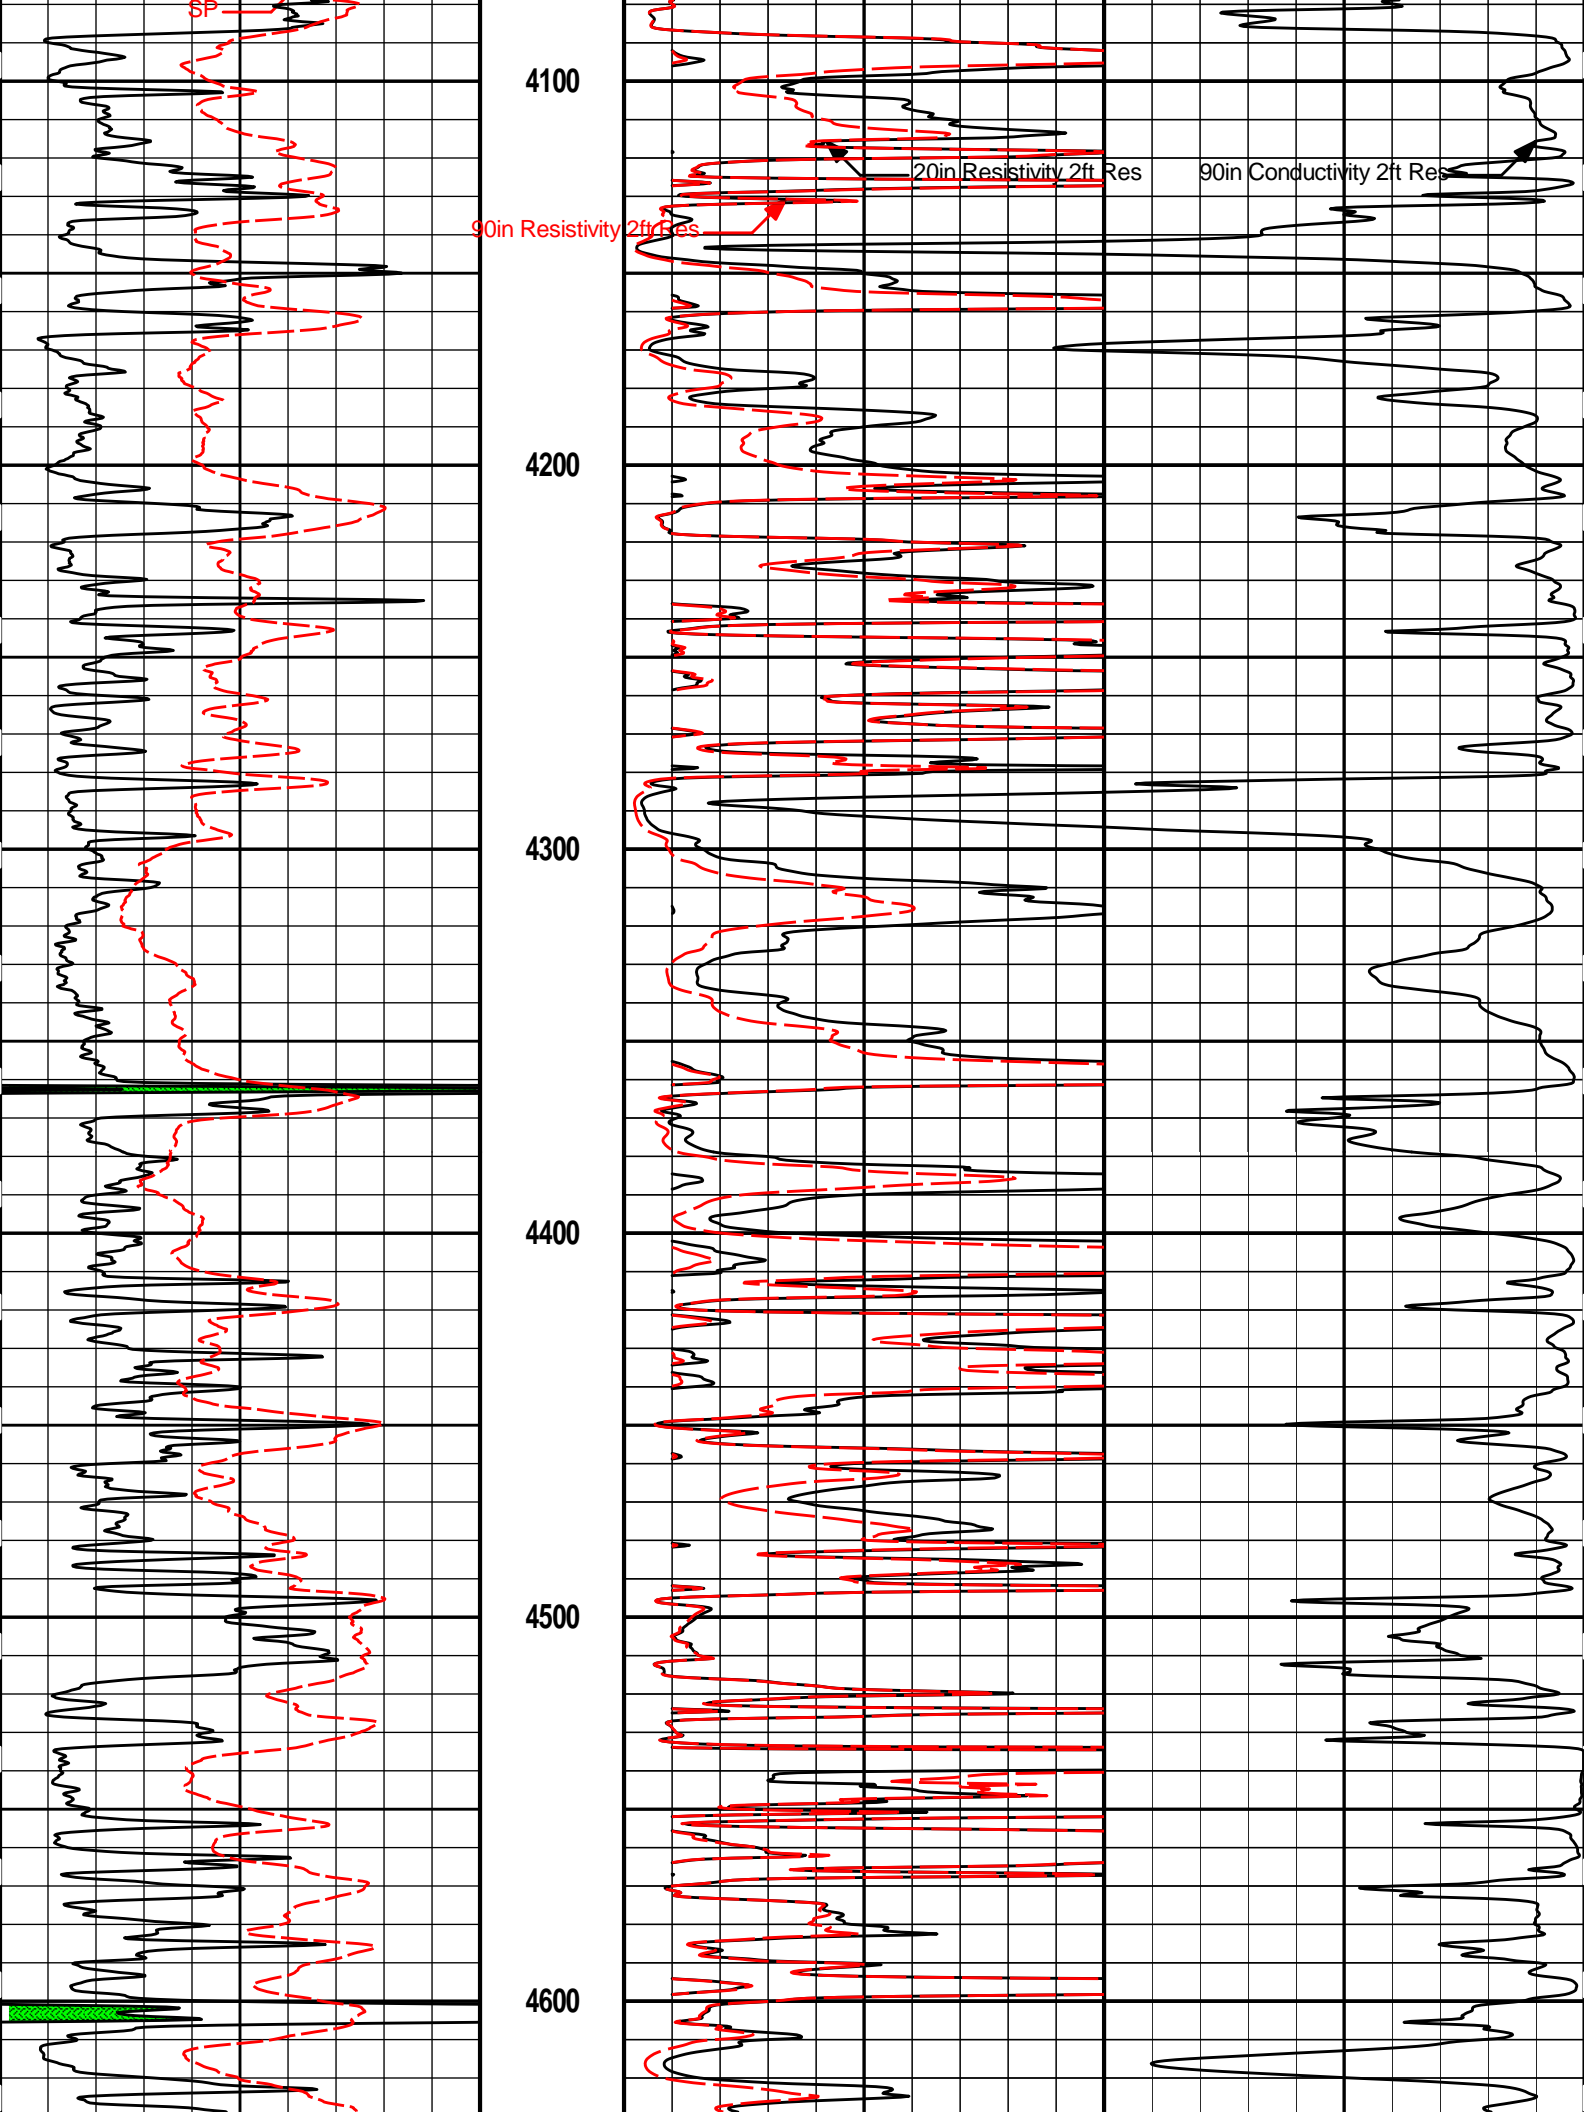

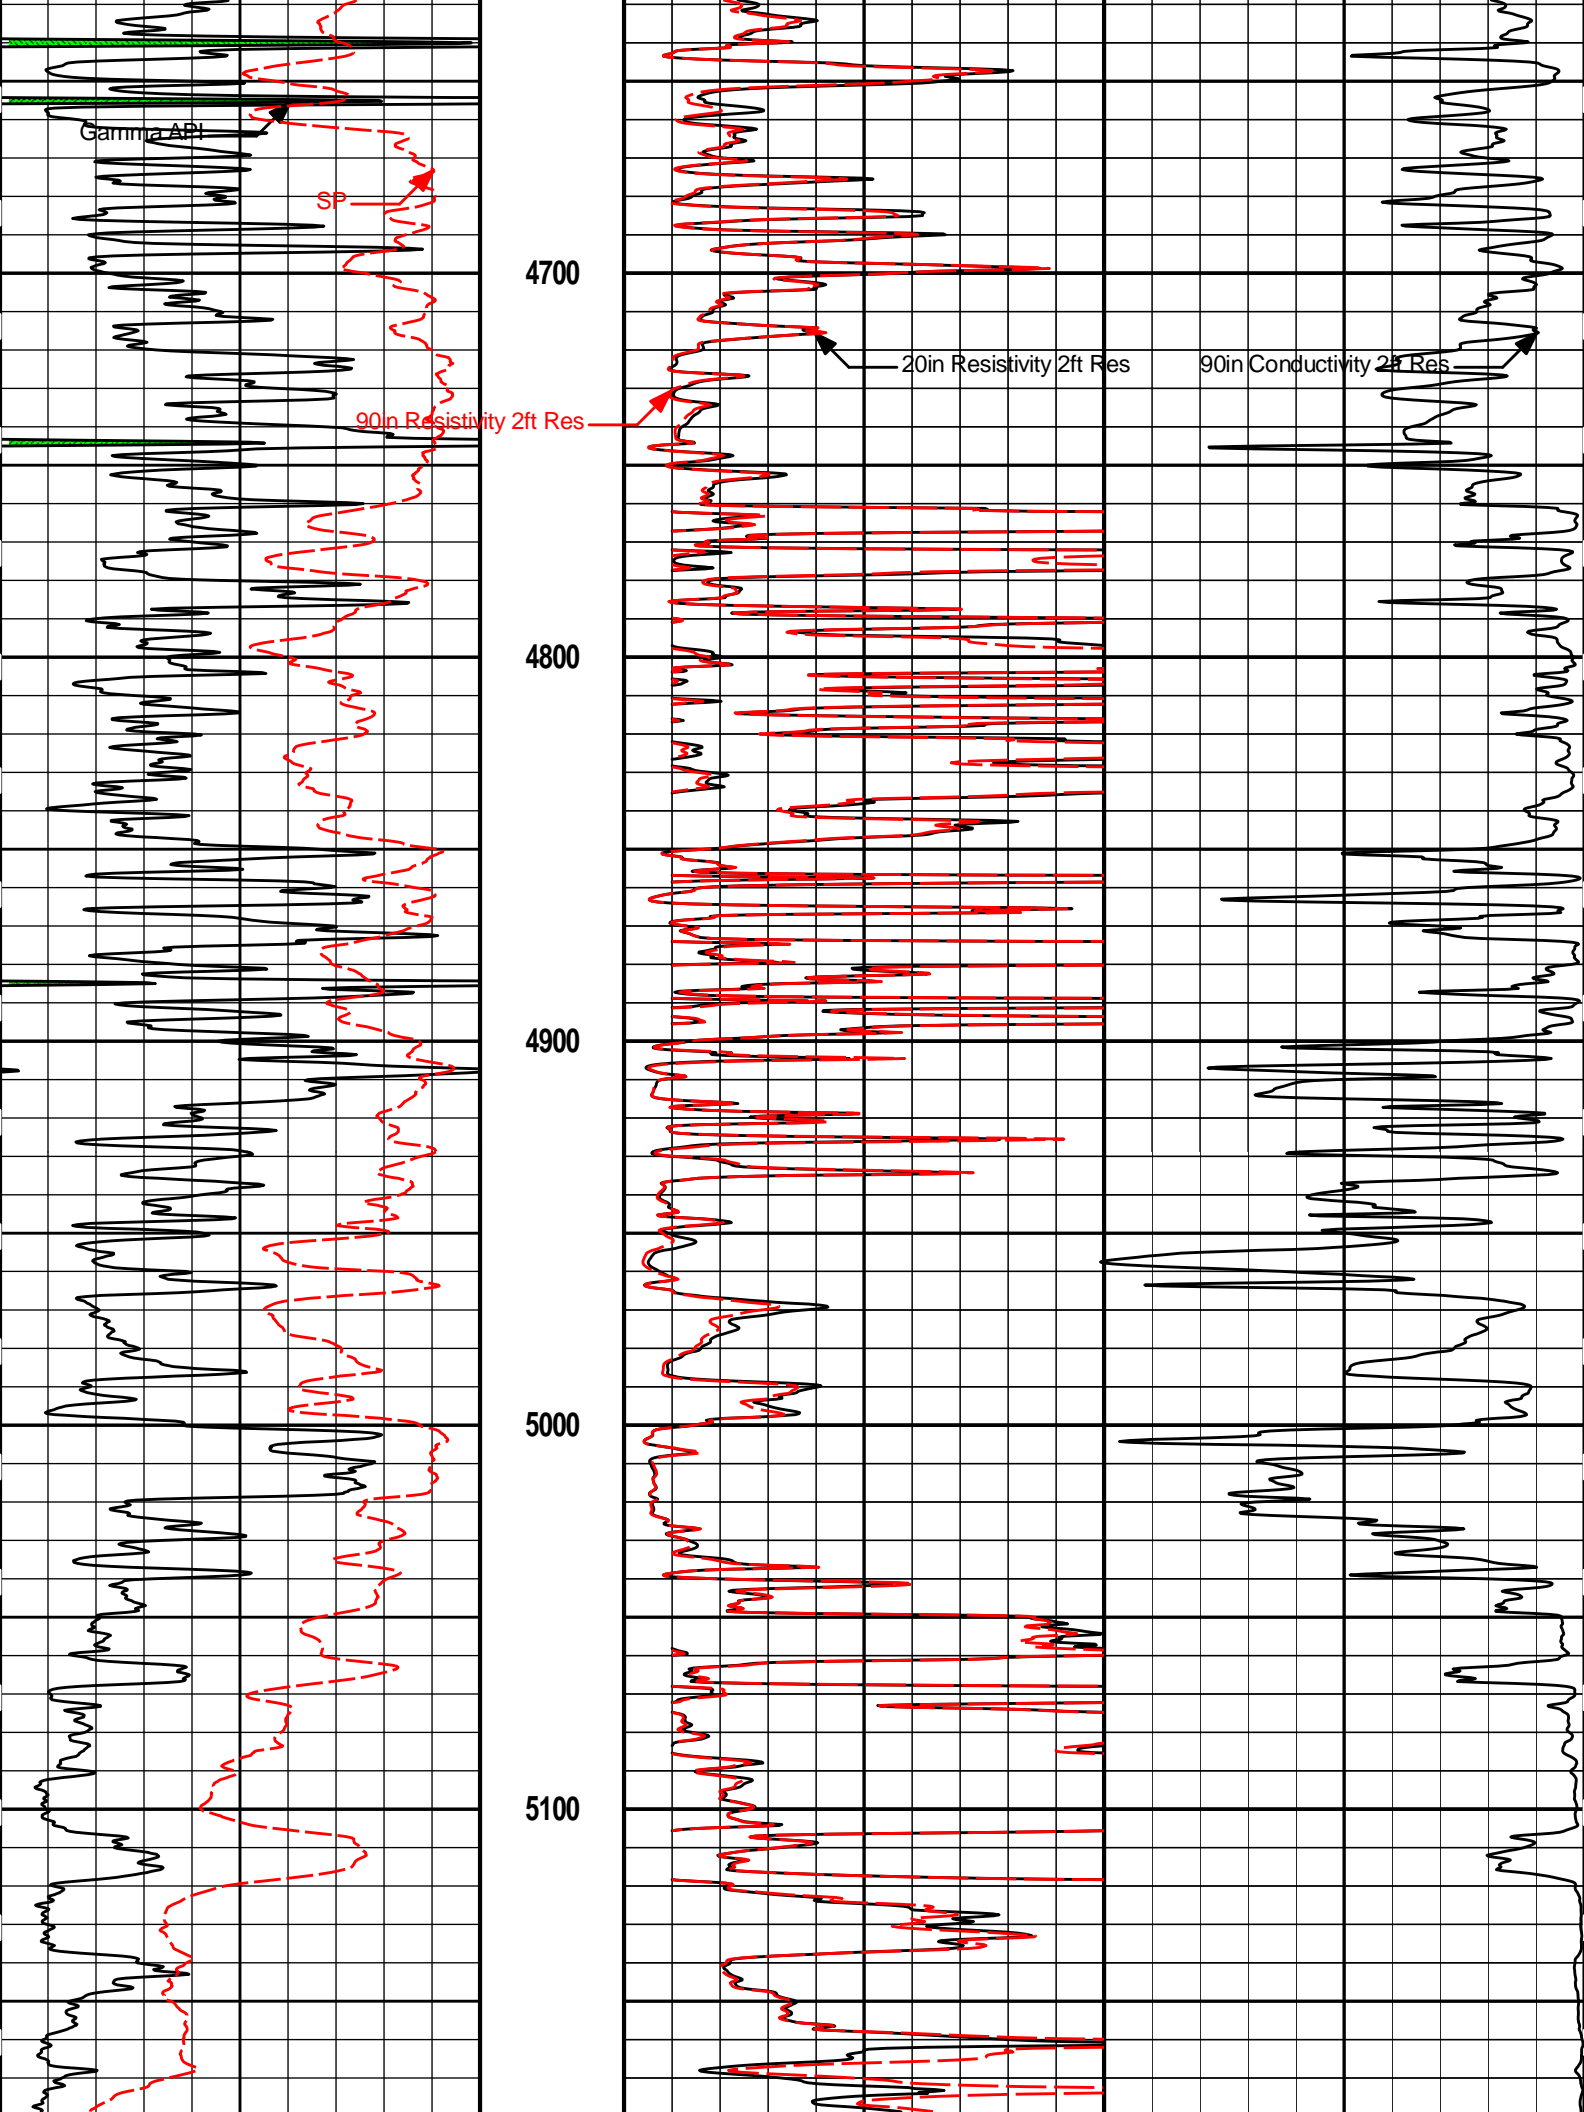

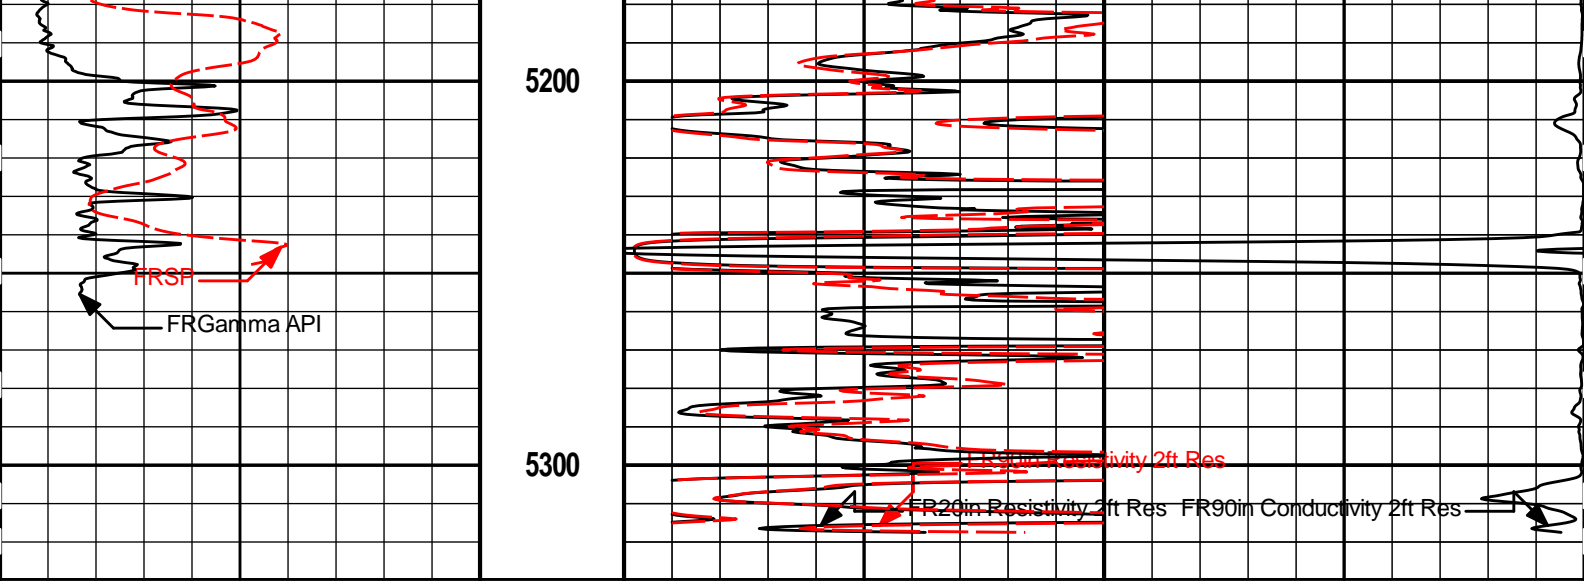

0	Gamma API	150	MD 1 : 600 ft	0	20in Resistivity 2ft Res	50
	api				ohm-metre	
	SP			0	90in Resistivity 2ft Res	50
	-]20[+				ohm-metre	
				1000	90in Conductivity 2ft Res	0
					mmho per metre	

HALLIBURTON


Plot Time: 26-Apr-14 00:19:32
 Plot Range: 1730 ft to 5329.75 ft
 Data: FAYE_1-18\Well Based\DAQ-0001-003\
 Plot File: \\LOCAL-ACRT\ACRT_2_lib

2 INCH MAIN LOG

HALLIBURTON


Plot Time: 26-Apr-14 00:19:33
 Plot Range: 3798 ft to 5329.75 ft
 Data: FAYE_1-18\Well Based\DAQ-0001-003\
 Plot File: \\LOCAL-ACRT\ACRT_5_main_lib

5 INCH MAIN LOG

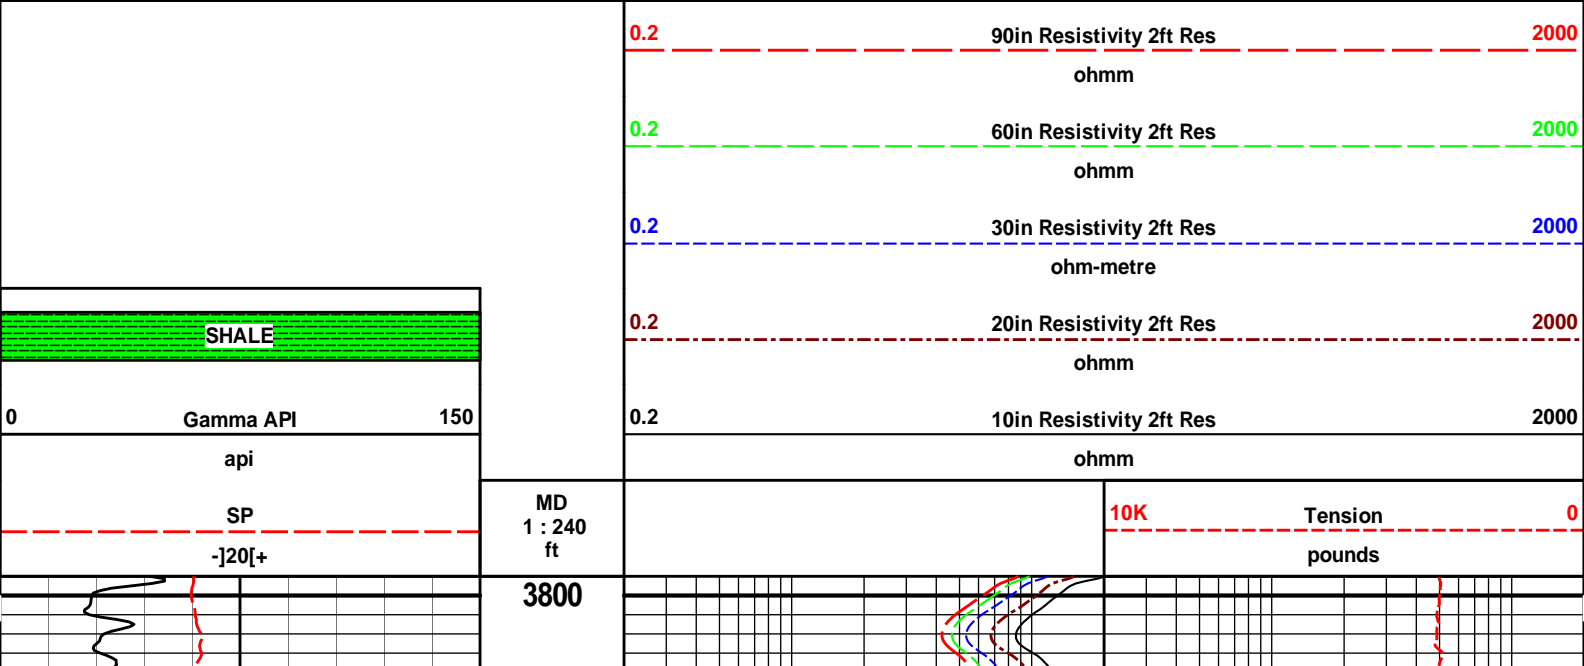


SHALE		
0	Gamma API	150
	api	
	SP	
	-]20[+	


0.2	90in Resistivity 2ft Res	2000
	ohmm	
0.2	60in Resistivity 2ft Res	2000
	ohmm	
0.2	30in Resistivity 2ft Res	2000
	ohm-metre	
0.2	20in Resistivity 2ft Res	2000
	ohmm	
0.2	10in Resistivity 2ft Res	2000
	ohmm	
	MD	
	1 : 240	
	ft	
	10K	Tension
		pounds
	0	

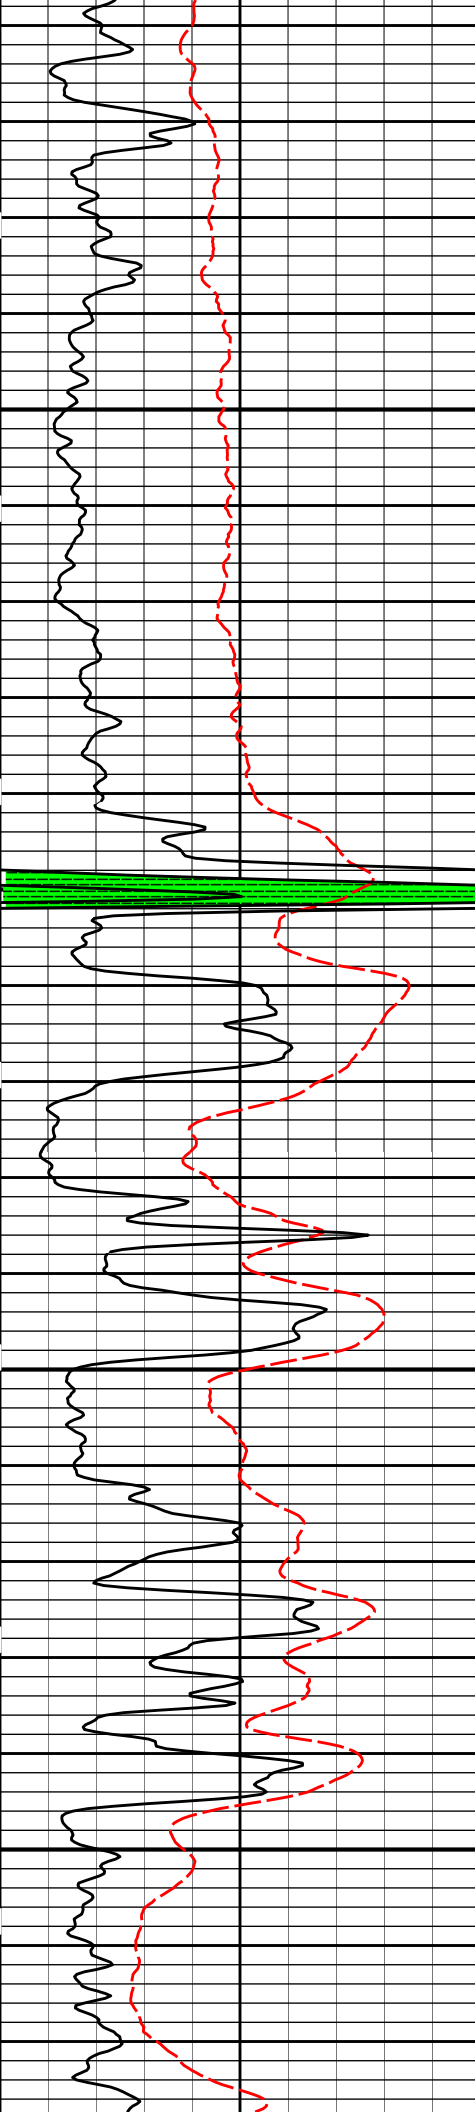

3900


4000

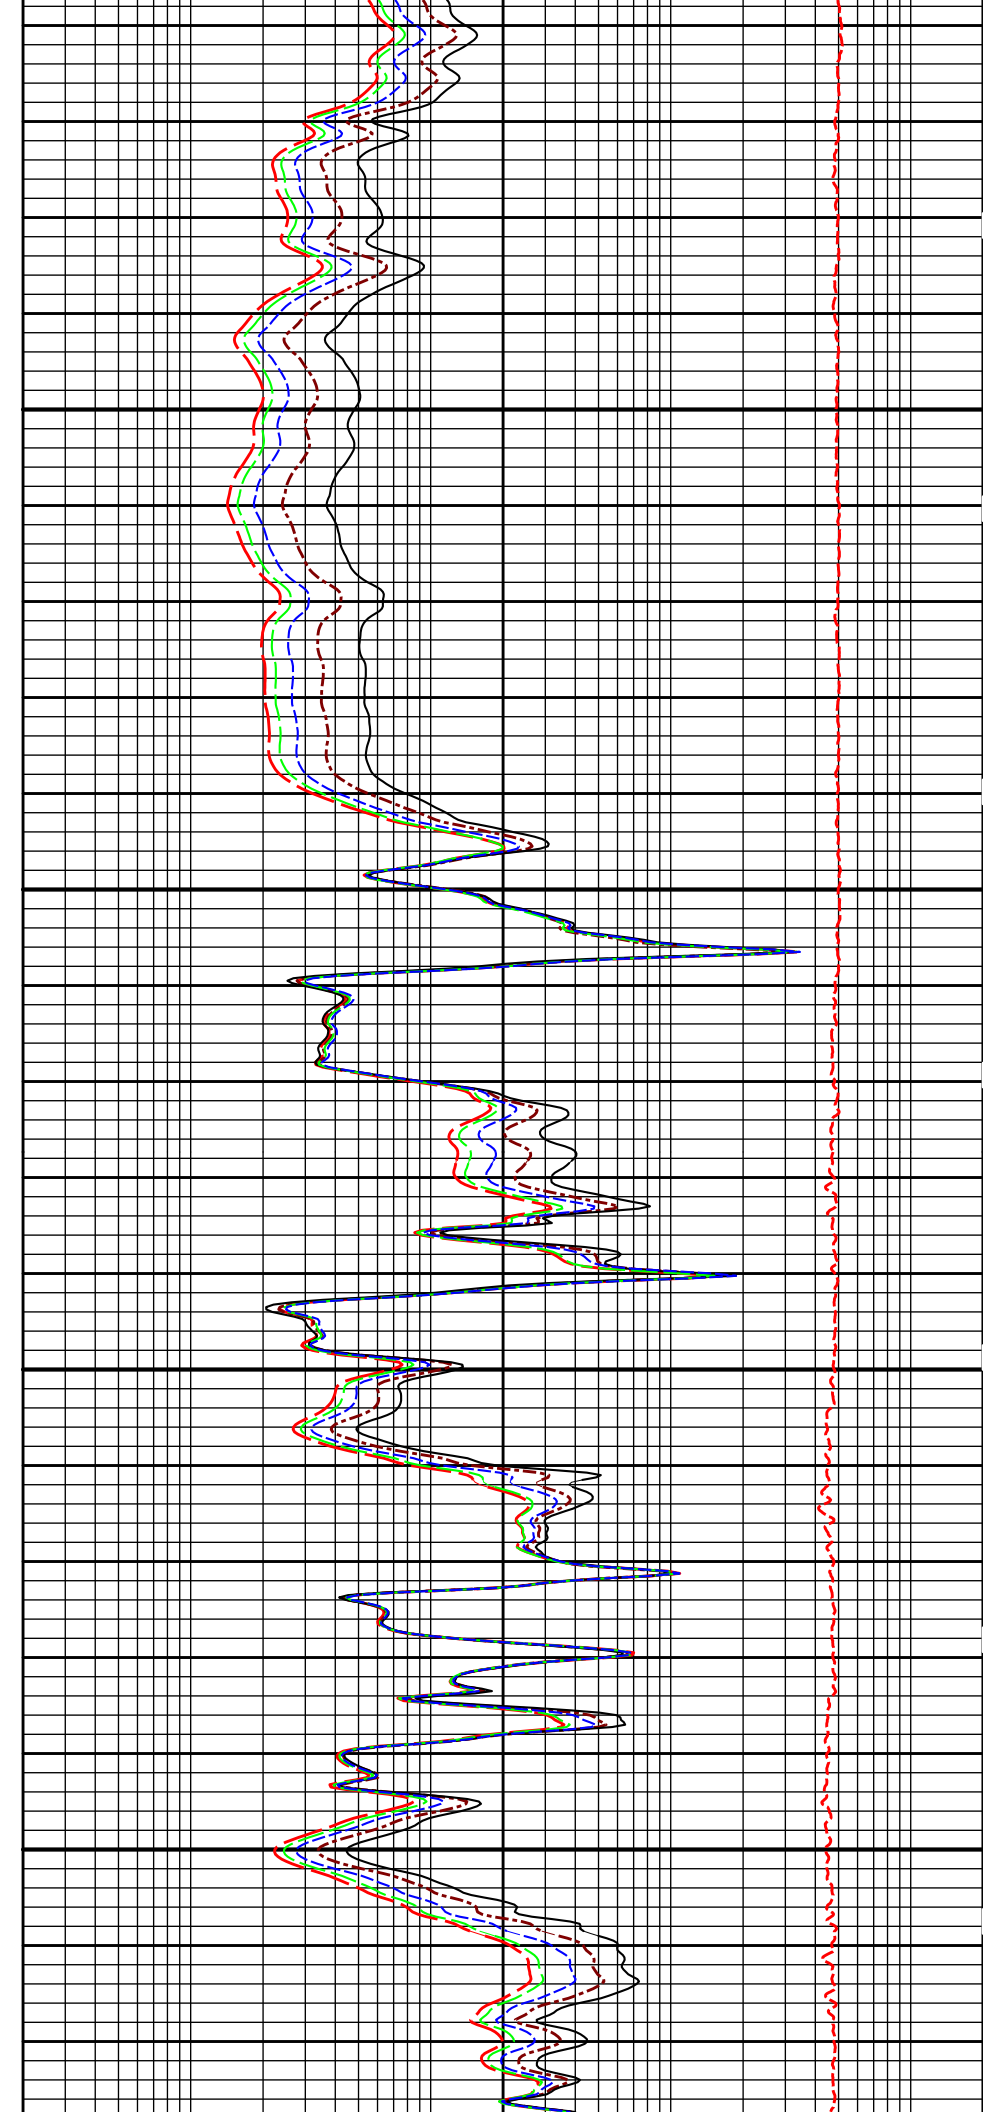

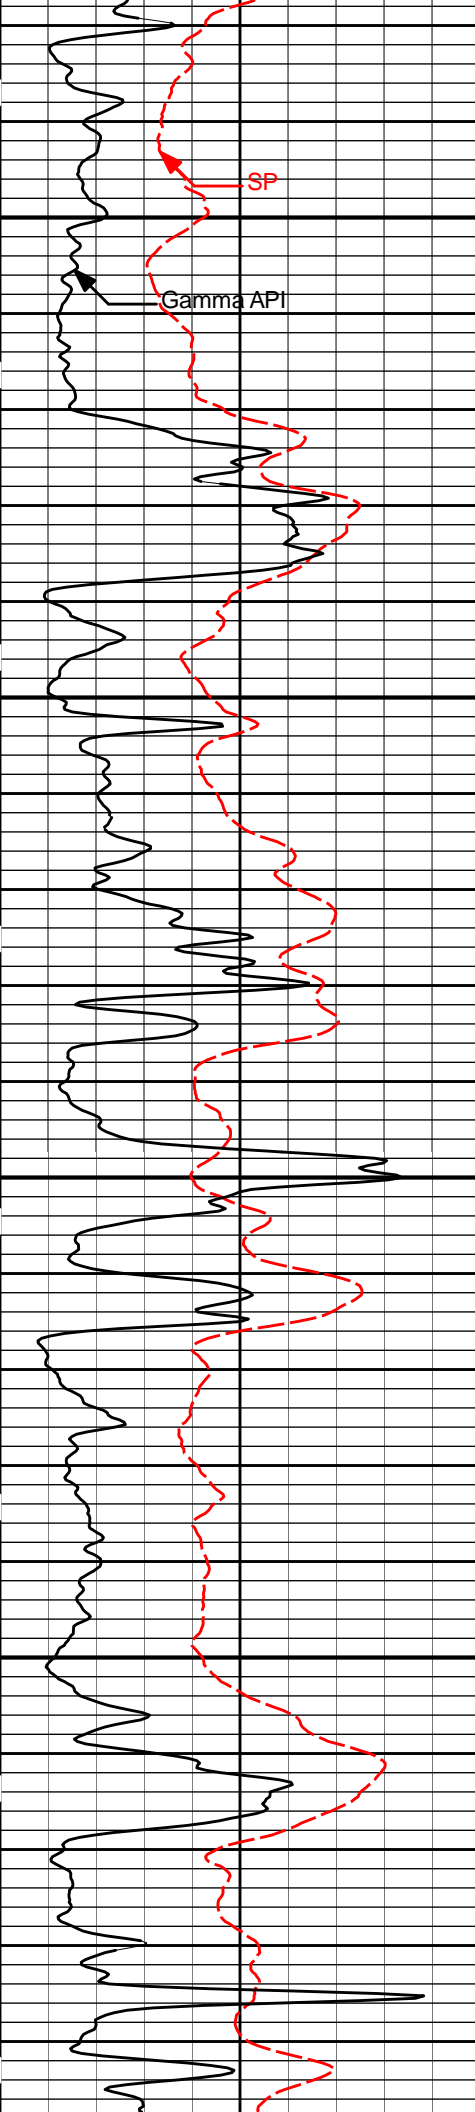

4100

4200

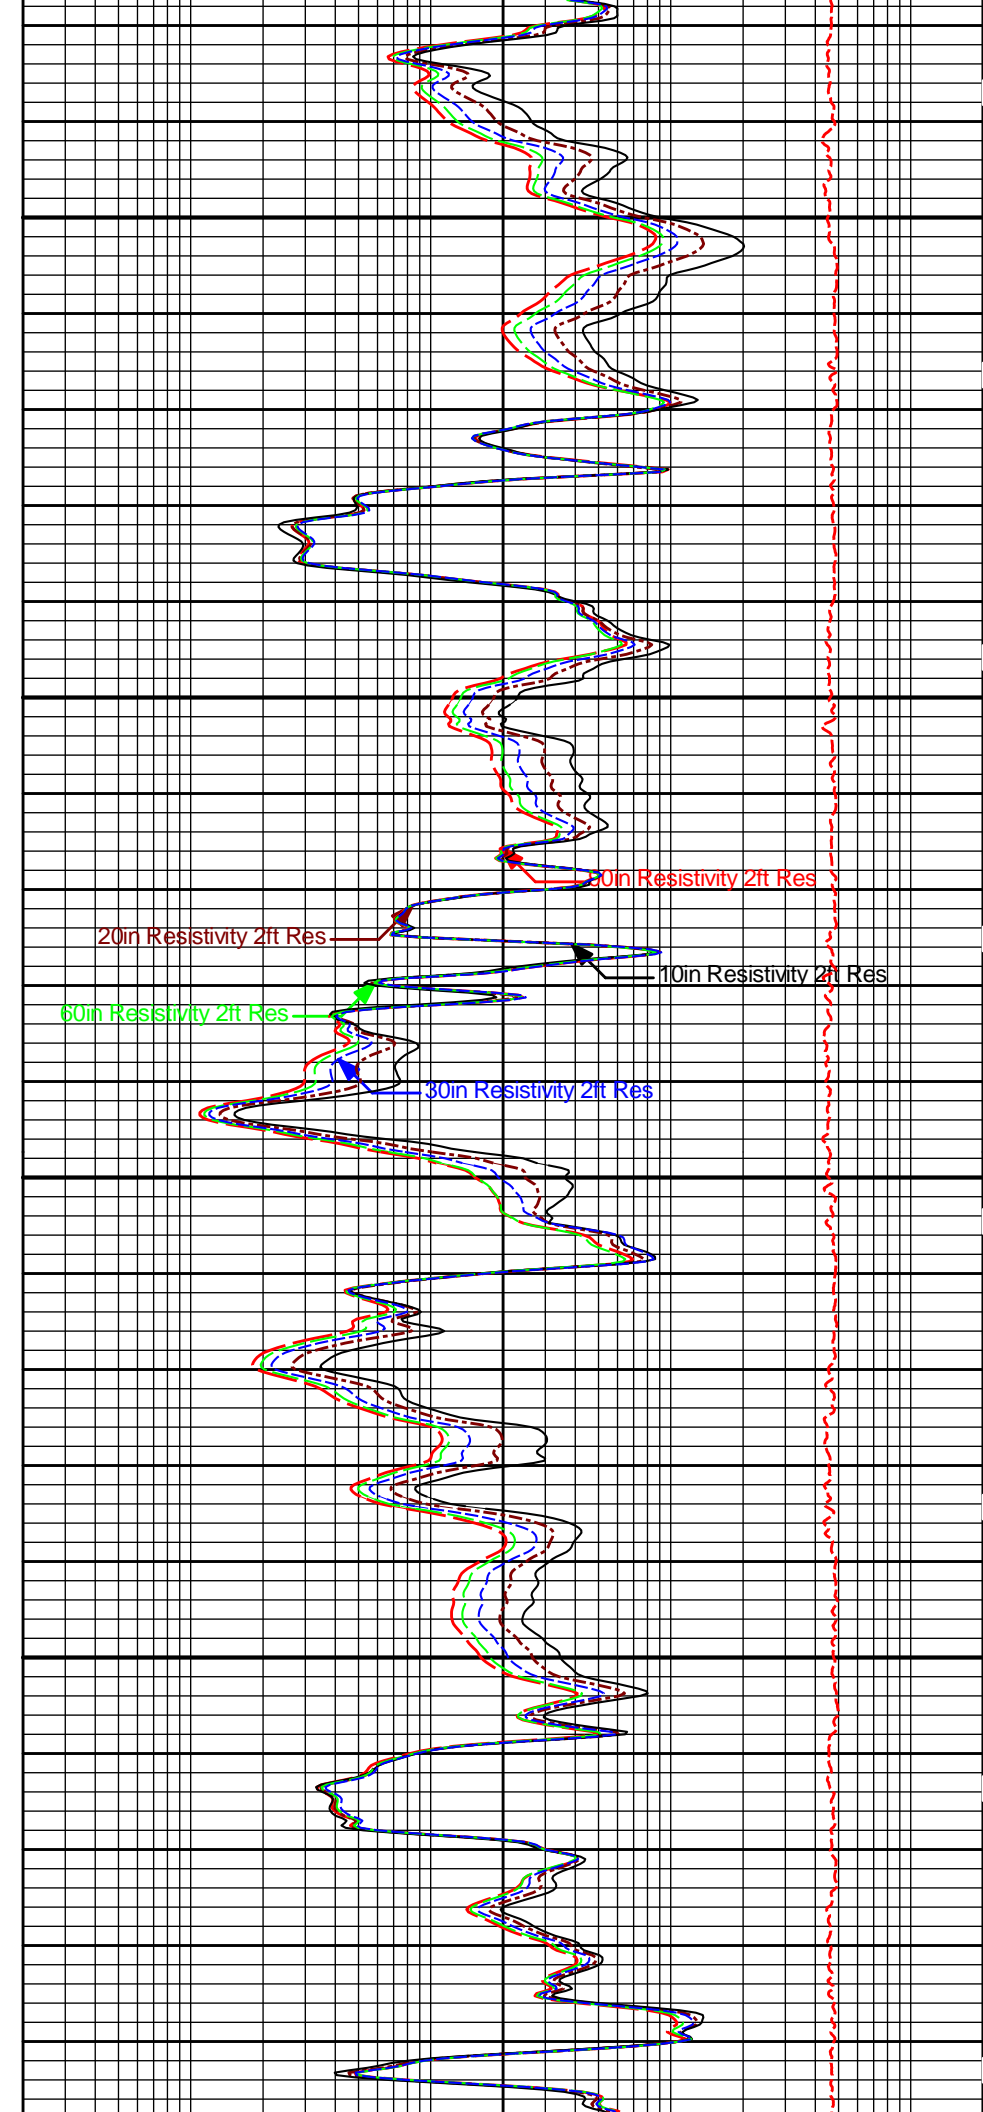


20in Resistivity 2ft Res

20in Resistivity 2ft Res

10in Resistivity 2ft Res


60in Resistivity 2ft Res


30in Resistivity 2ft Res

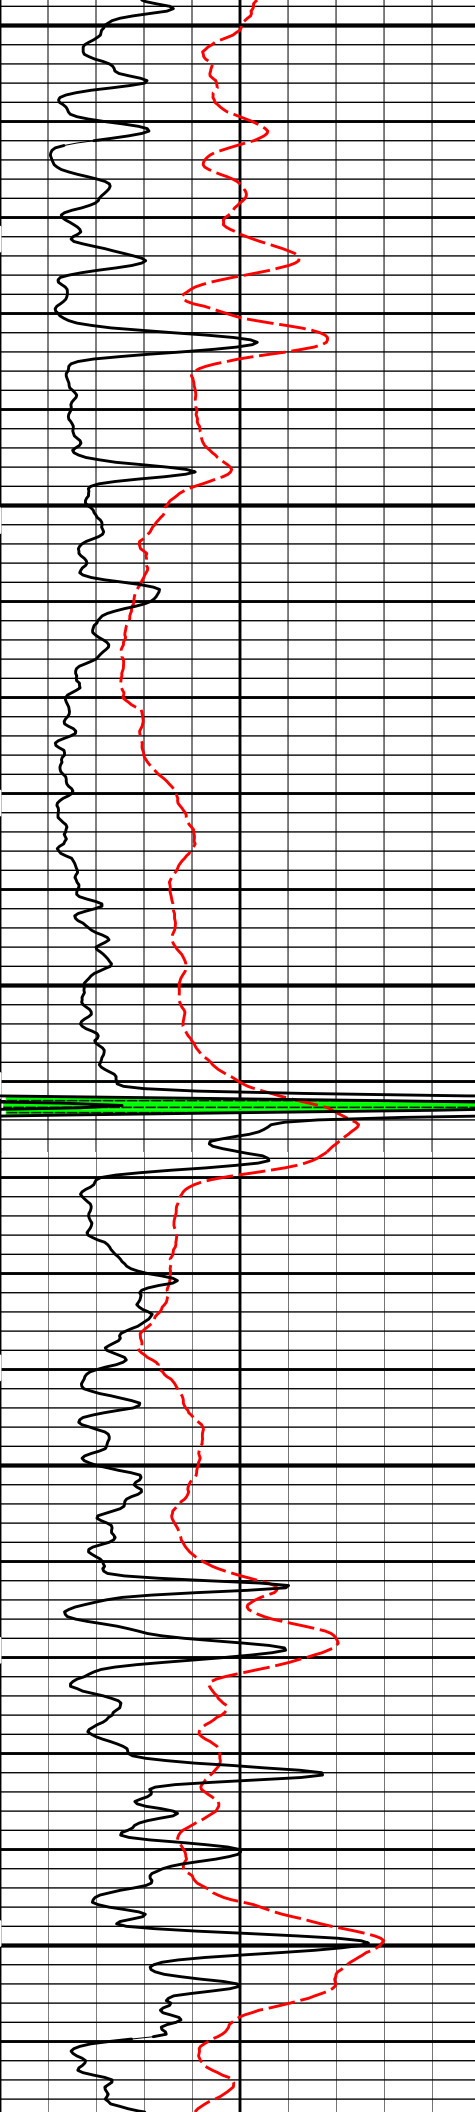

4300

4400

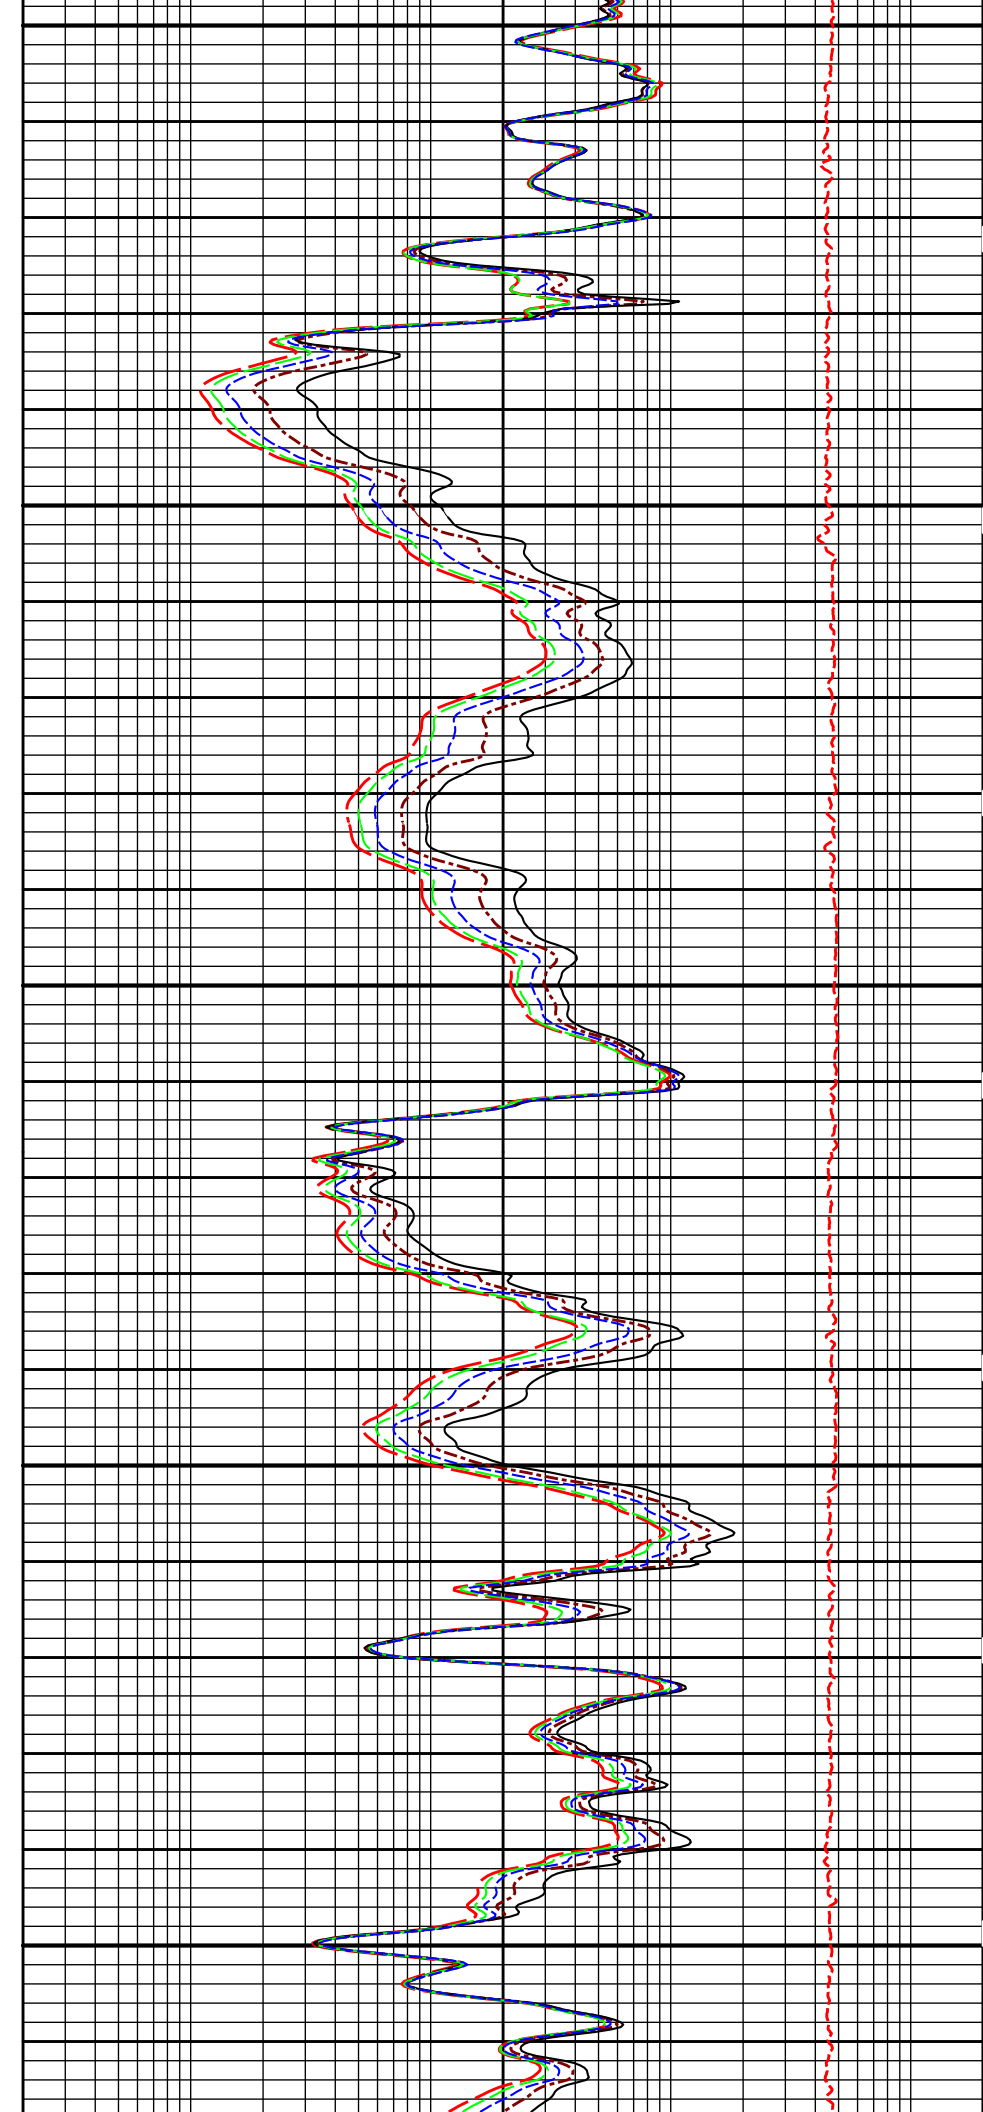


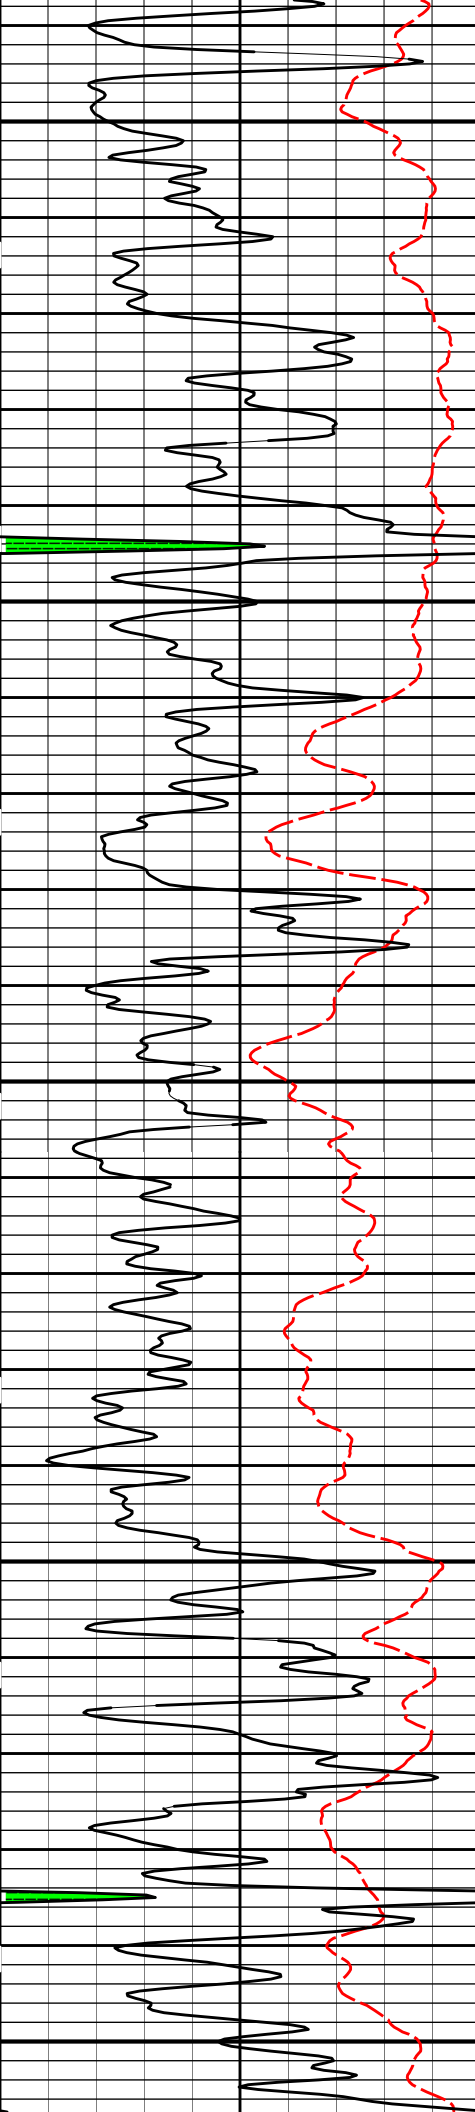

4700

4800

4900

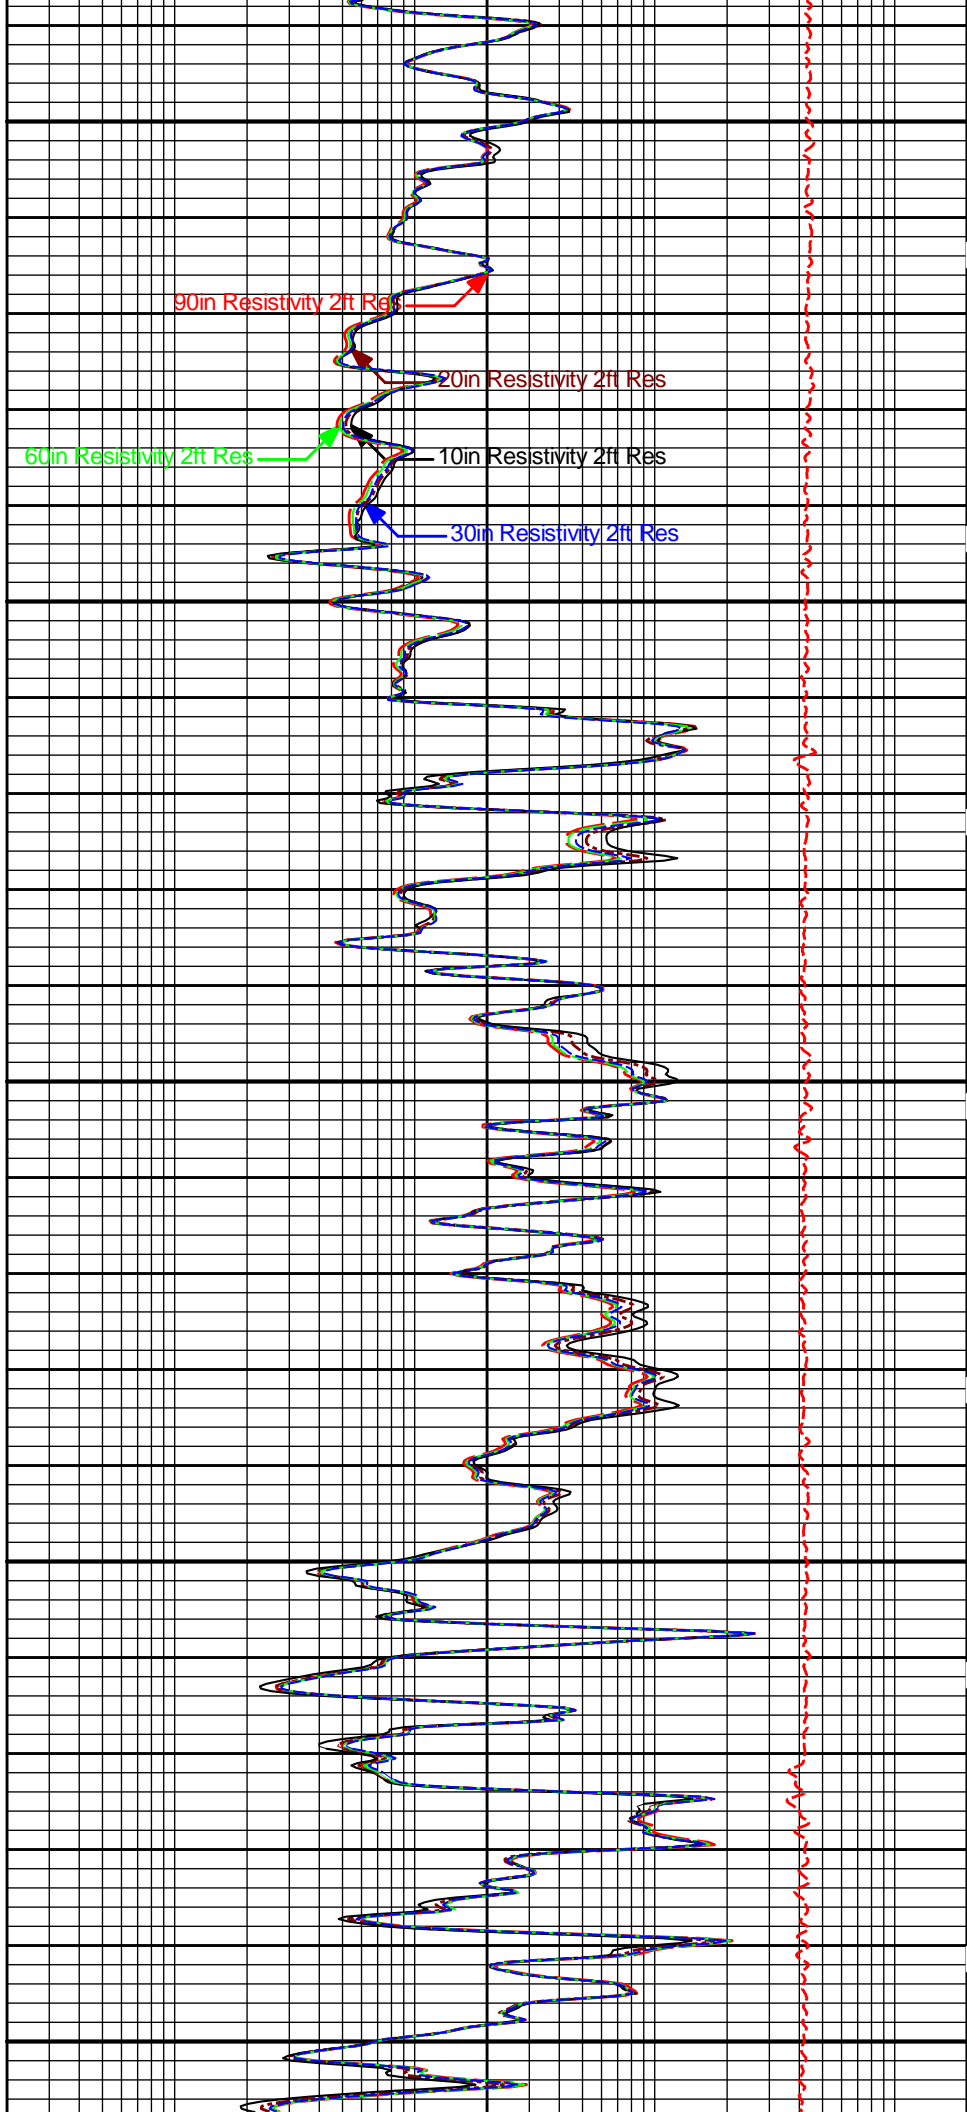


90in Resistivity 2ft Res

20in Resistivity 2ft Res

60in Resistivity 2ft Res


10in Resistivity 2ft Res


30in Resistivity 2ft Res

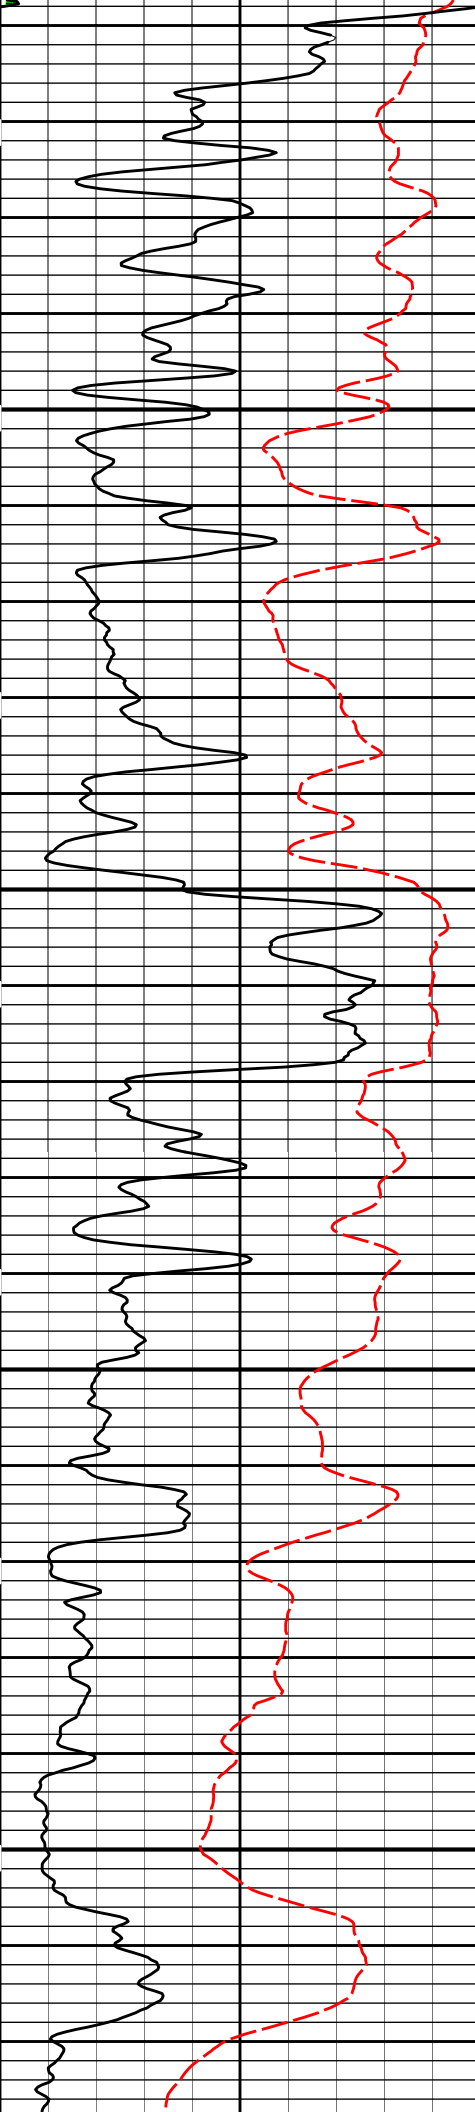

5000

5100

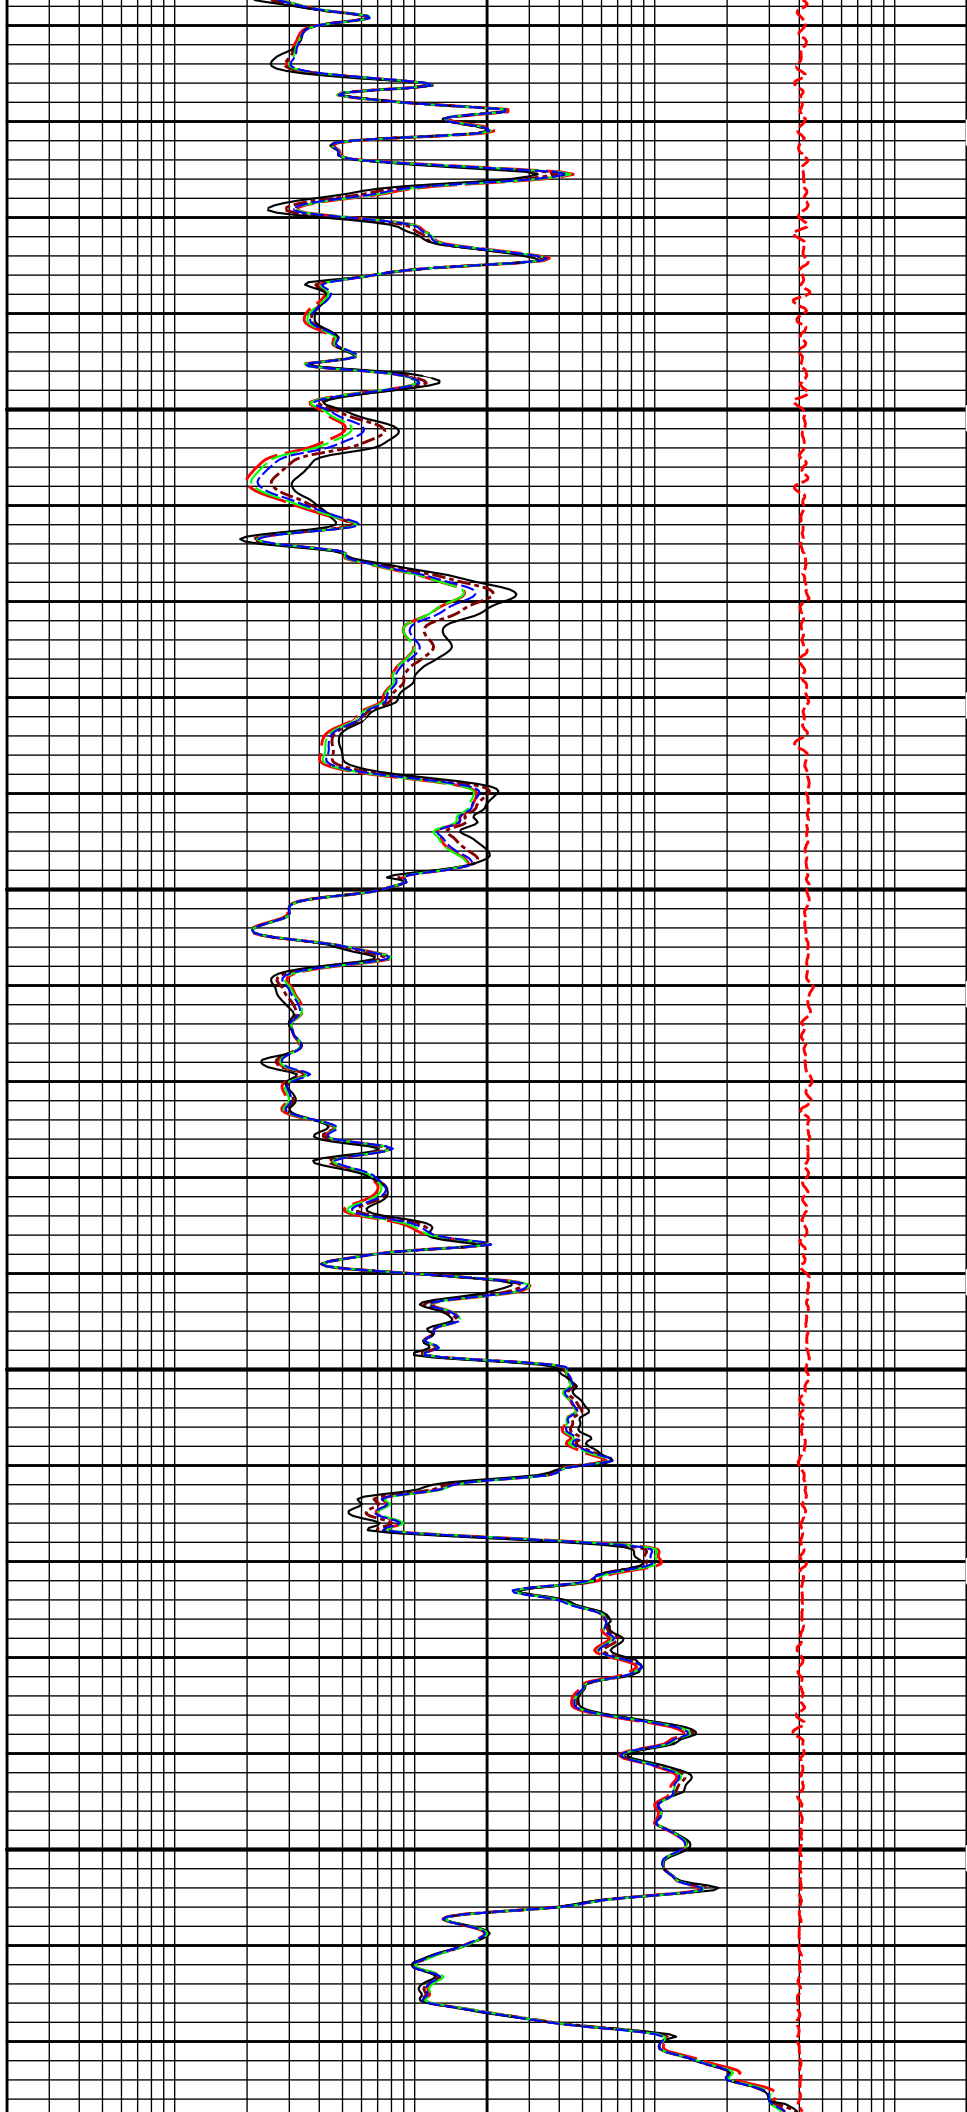

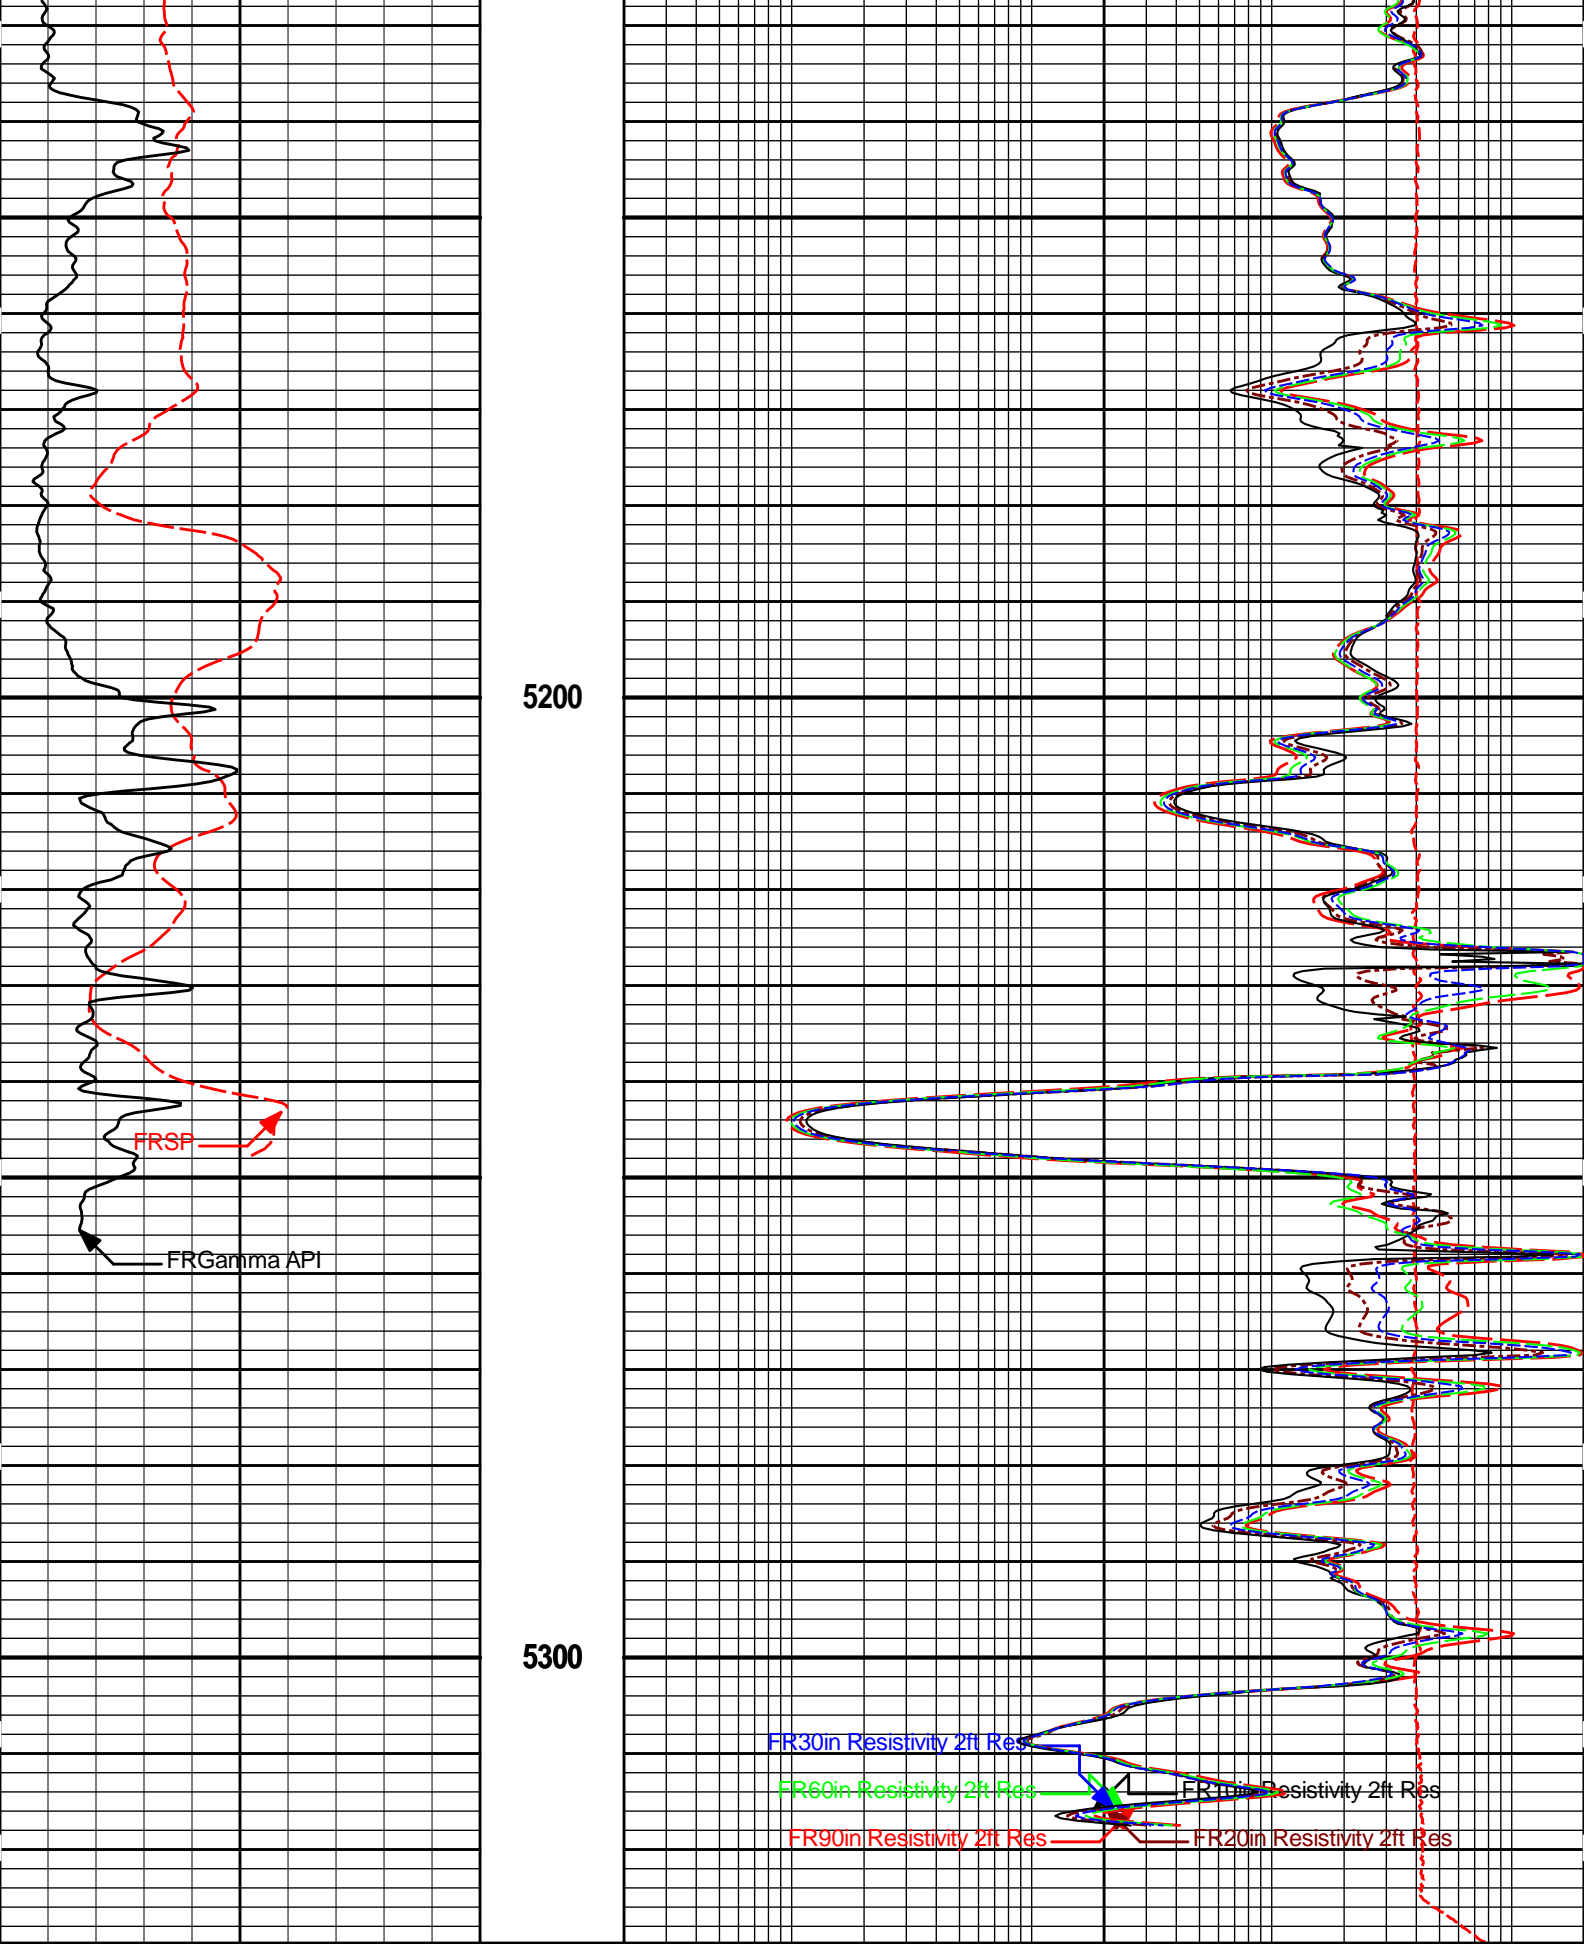

5200

5300

FRSF

FRGamma API

FR30in Resistivity 2ft Res

FR60in Resistivity 2ft Res

FR90in Resistivity 2ft Res

FR1in Resistivity 2ft Res

FR20in Resistivity 2ft Res

<p>SP - 20 +</p>	<p>MD 1 : 240 ft</p>	<p>10K Tension pounds 0</p>
<p>0 Gamma API 150</p>	<p>0.2 10in Resistivity 2ft Res</p>	<p>2000</p>

api
SHALE

0.2 20in Resistivity 2ft Res 2000
 ohmm
 0.2 30in Resistivity 2ft Res 2000
 ohm-metre
 0.2 60in Resistivity 2ft Res 2000
 ohmm
 0.2 90in Resistivity 2ft Res 2000
 ohmm

HALLIBURTON

Plot Time: 26-Apr-14 00:19:34
 Plot Range: 3798 ft to 5329.75 ft
 Data: FAYE_1-18\Well Based\DAQ-0001-003\
 Plot File: \\-LOCAL-ACRT\ACRT_5_main_lib

5 INCH MAIN LOG

HALLIBURTON

Plot Time: 26-Apr-14 00:19:35
 Plot Range: 4798 ft to 5330 ft
 Data: FAYE_1-18\Well Based\DAQ-0001-002\
 Plot File: \\-LOCAL-ACRT\ACRT_5_repeat_lib

REPEAT SECTION

SHALE

0 Gamma API 150



api
 SP
 -|20|+


0.2 90in Resistivity 2ft Res 2000
 ohmm
 0.2 60in Resistivity 2ft Res 2000
 ohmm
 0.2 30in Resistivity 2ft Res 2000
 ohm-metre
 0.2 20in Resistivity 2ft Res 2000
 ohmm
 0.2 10in Resistivity 2ft Res 2000
 ohmm

MD
 1 : 240
 ft

10K Tension 0
 pounds


4800

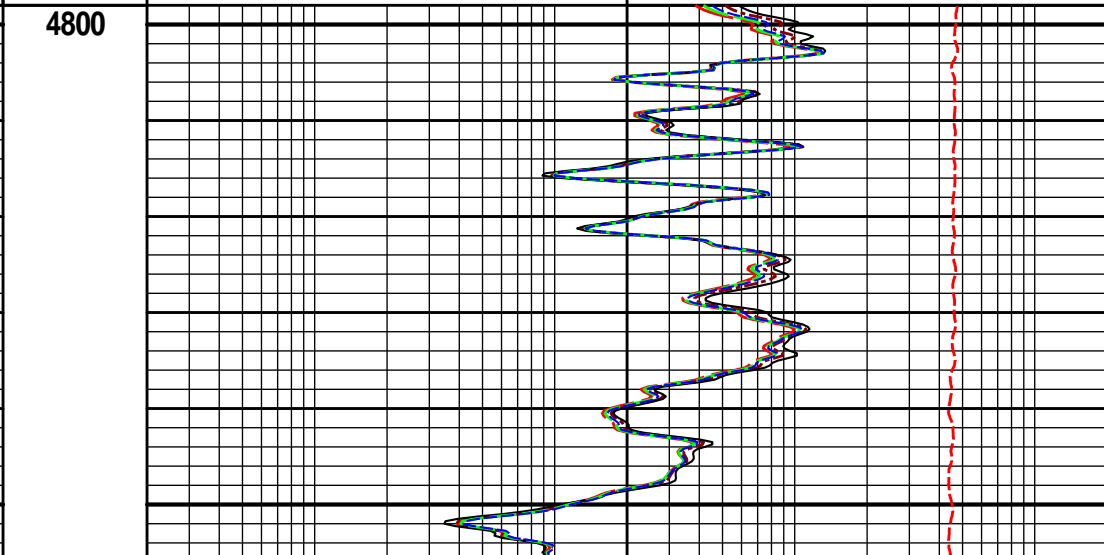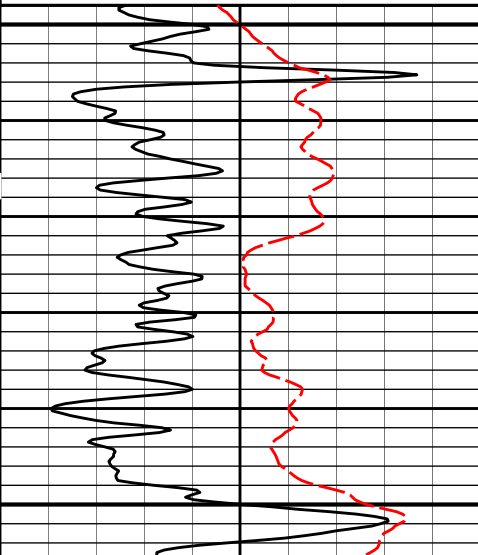

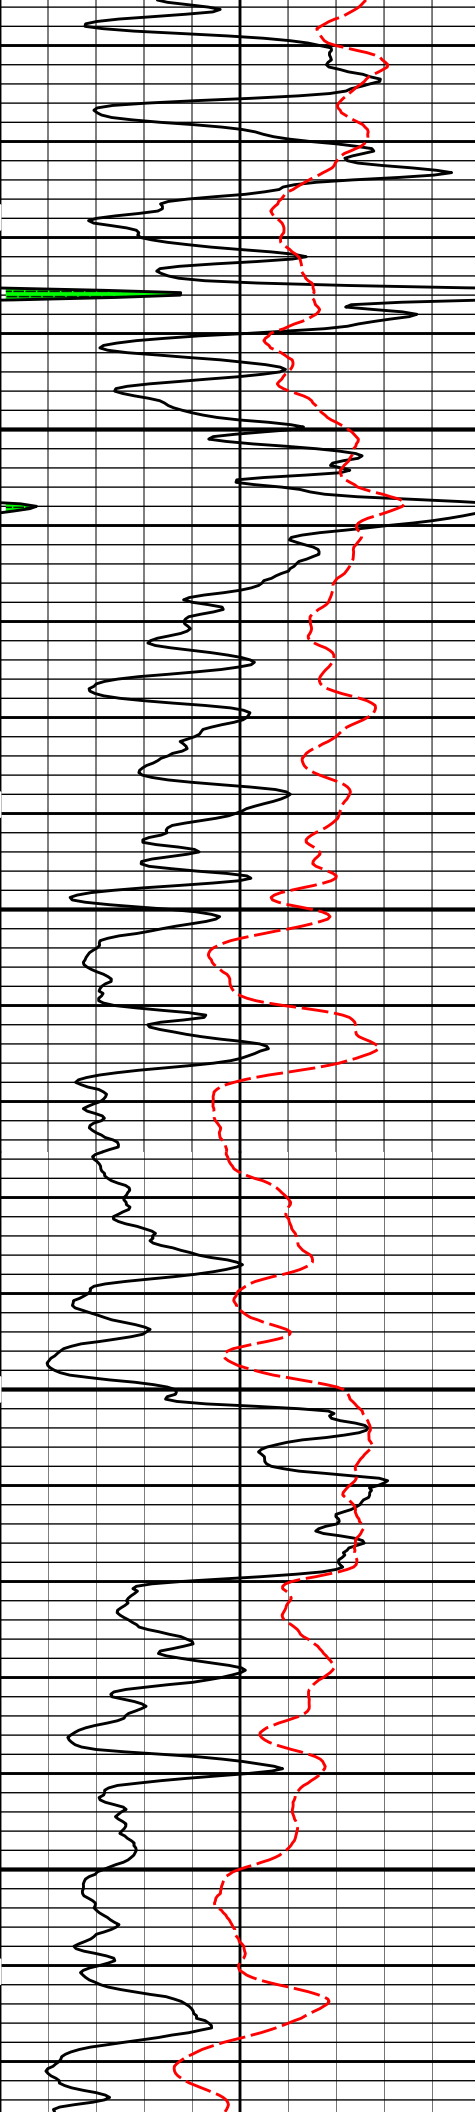

4900


5000

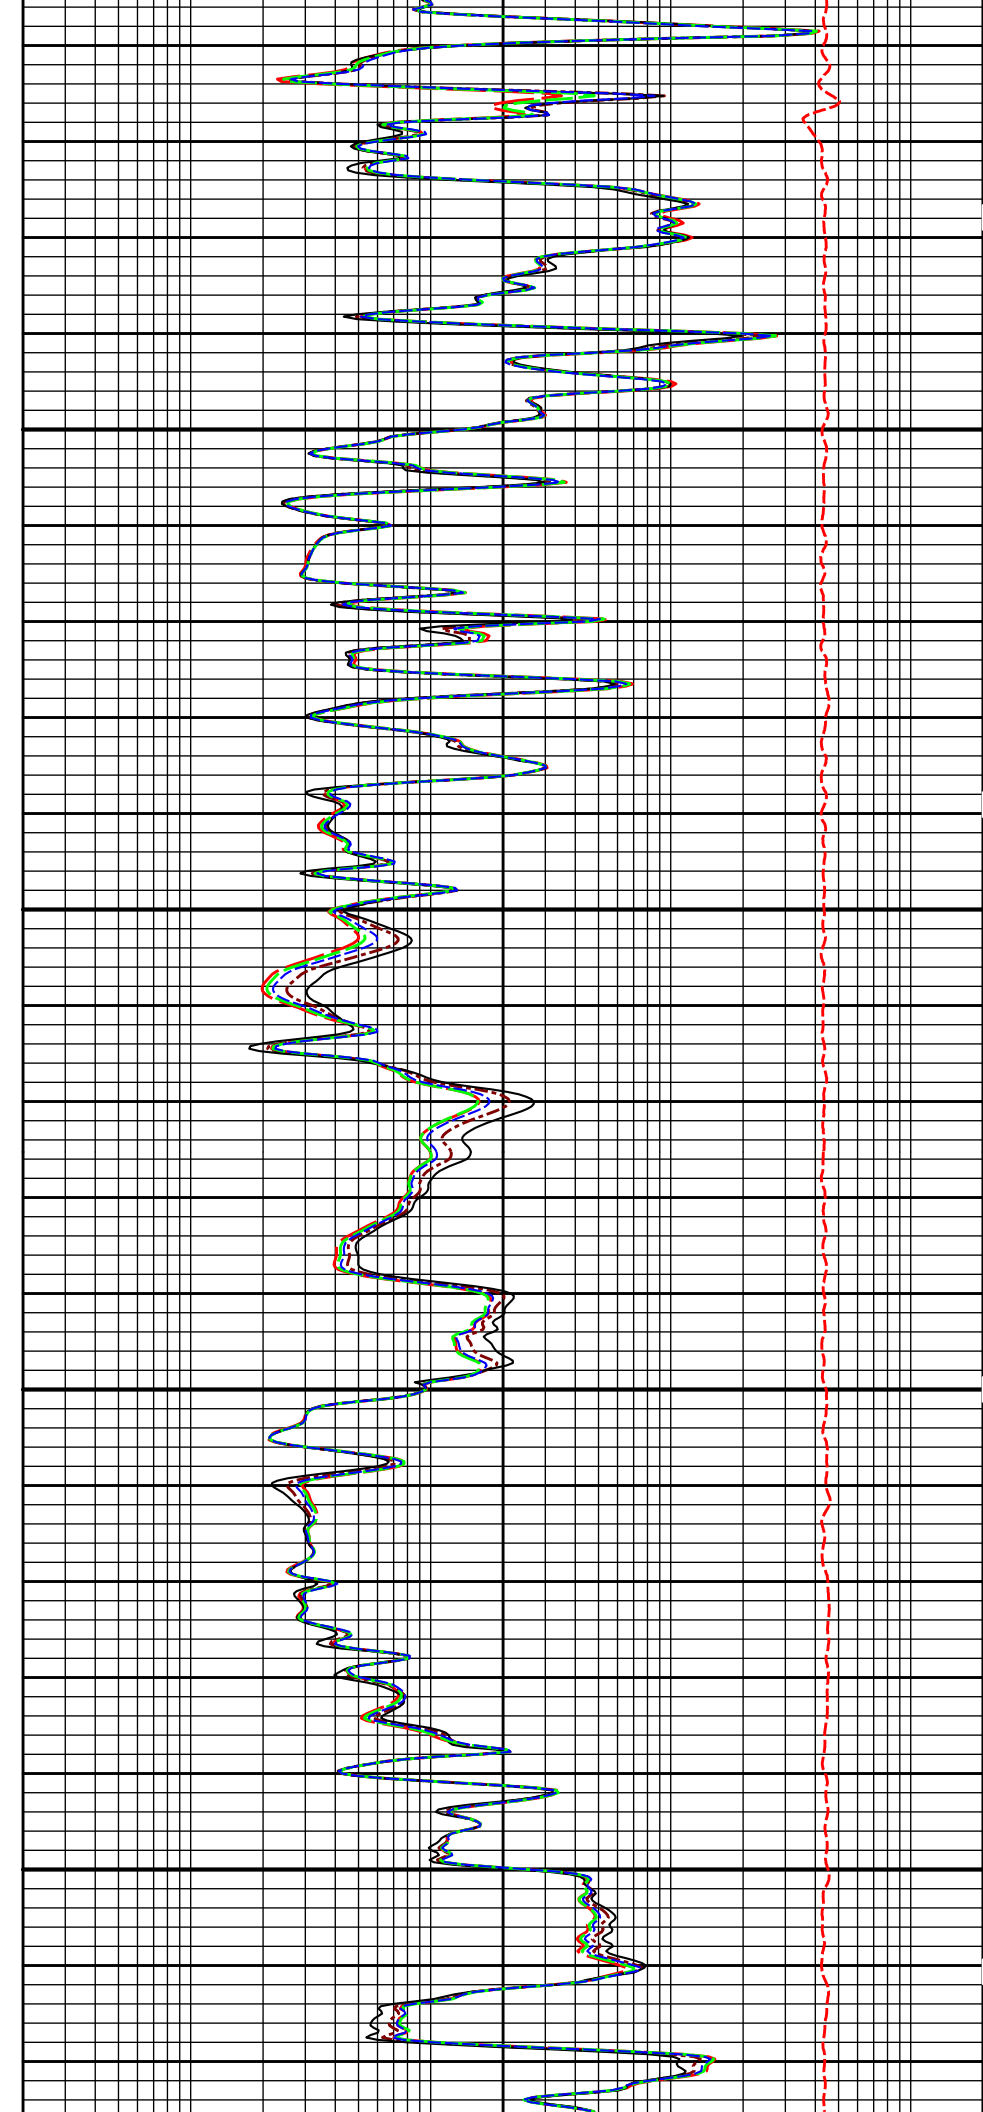




5100

5200

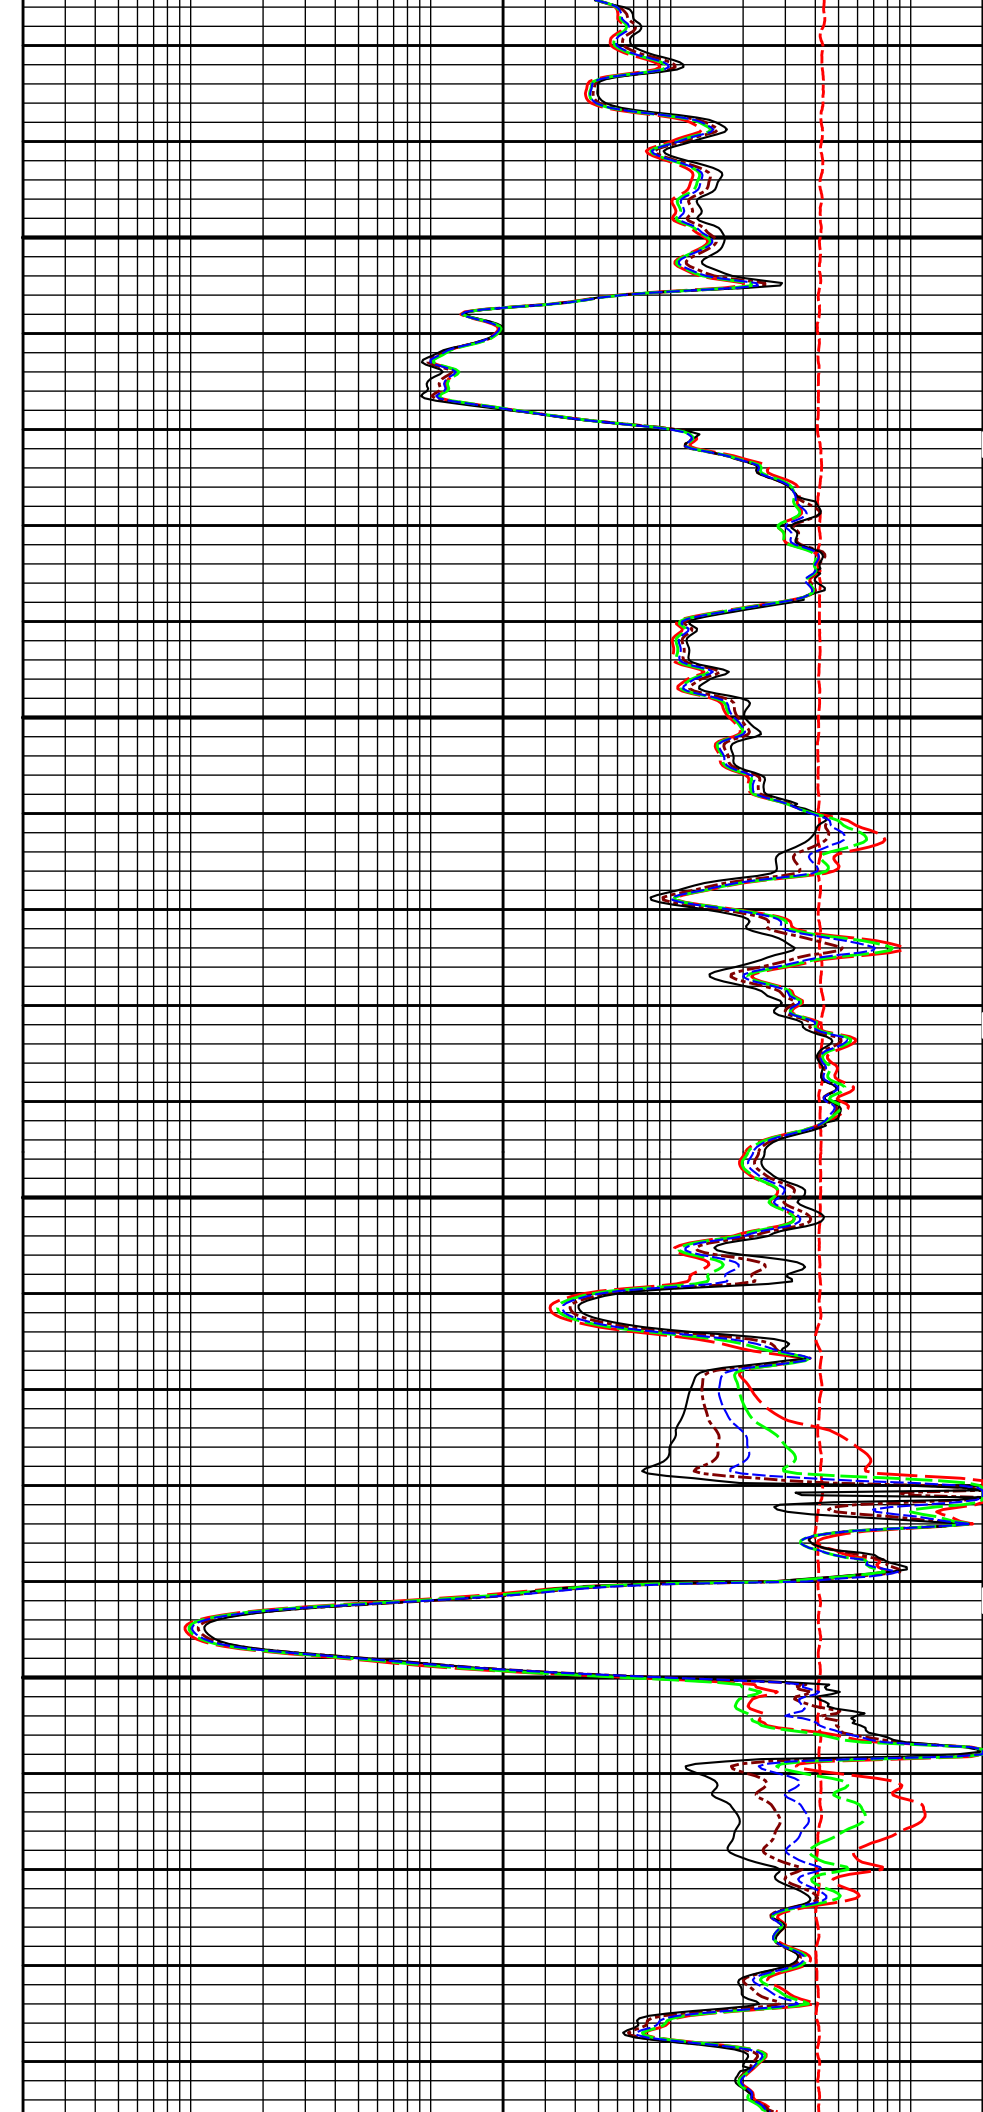

5300

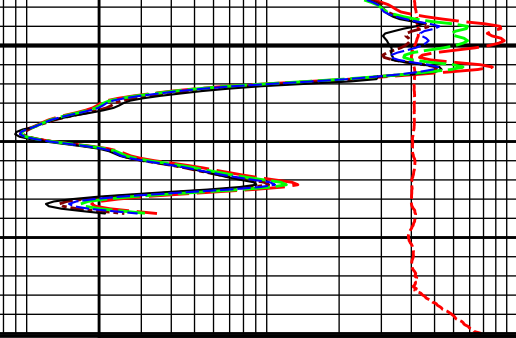

SP -]20[+	MD 1 : 240 ft	10K Tension pounds	
0 Gamma API 150 api			
SHALE	0.2	10in Resistivity 2ft Res	2000
	0.2	20in Resistivity 2ft Res	2000
	0.2	30in Resistivity 2ft Res	2000
	0.2	60in Resistivity 2ft Res	2000
	0.2	90in Resistivity 2ft Res	2000

HALLIBURTON

Plot Time: 26-Apr-14 00:19:36
 Plot Range: 4798 ft to 5330 ft
 Data: FAYE_1-18\Well Based\DAQ-0001-002\
 Plot File: \\-LOCAL-ACRT\ACRT_5_repeat_lib

REPEAT SECTION

HALLIBURTON

TOOL STRING DIAGRAM REPORT

Description	Overbody Description	O.D.	Diagram	Sensors @ Delays	Length	Accumulated Length
Cable Head- 12345678 30.00 lbs		Ø 3.625 in →			1.92 ft	85.40 ft
SP Sub-12345678 60.00 lbs		Ø 3.625 in →		← SP @ 81.70 ft	3.74 ft	83.48 ft
					8.52 ft	79.74 ft
GTET-10811258 165.00 lbs		Ø 3.625 in →		← GammaRay @ 73.67 ft		71.22 ft

DSN Decentralizer-10735145
 6.60 lbs
 DSNT-10755066
 174.00 lbs

Ø 5.000 in* →
 Ø 3.625 in →

← DSN Far @ 64.28 ft
 ← DSN Near @ 63.53 ft

9.69 ft
 61.53 ft

SDLT-10685803
 360.00 lbs
 SDLT Pad-10714945
 65.00 lbs
 Microlog Pad-10685803
 8.00 lbs

Ø 4.500 in →
 Ø 4.750 in* →
 Ø 4.750 in* →

Microlog @ 53.72 ft
 SDL Caliper @ 53.53 ft
 SDL @ 53.52 ft

10.81 ft
 50.72 ft

IQ Flex-00000668
 140.00 lbs

Ø 3.625 in →

5.67 ft
 45.05 ft

XRMI Isolator-00000001
 32.50 lbs

Ø 4.500 in →

1.30 ft
 43.74 ft

XRMI-I Instrument-11682412
 290.00 lbs

Ø 4.500 in →

13.00 ft
 30.74 ft

XRMI-I Mandrel-11682413
 206.00 lbs

Ø 5.000 in →
 Ø 4.500 in →

Pads 2, 4, 6 @ 22.35 ft
 Pads 1, 3, 5 @ 22.12 ft

11.16 ft
 19.58 ft

Centralizer 25-00000002
 8.00 lbs

Ø 4.000 in* →

5.03 ft


ACRt Instrument-10811256
 50.00 lbs

Ø 3.625 in →

Centralizer 25-00000001

Ø 4.000 in* →

14.55 ft

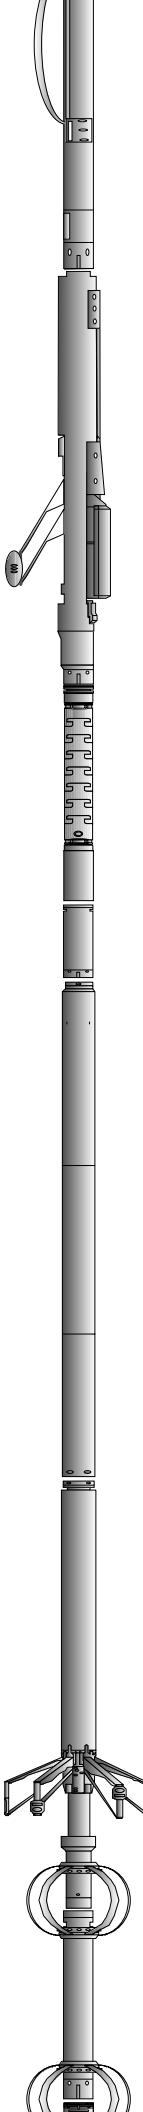

Centralizer 25-00000001
8.00 lbs

Regal Standoff 6_75-
00000001
20.00 lbs

ACRt Sonde-
10800784
200.00 lbs

Bull Nose-00000668
5.00 lbs

Ø 4.000 in* →

Ø 6.750 in* →

Ø 3.625 in →

Ø 2.750 in →

← Mud Resistivity @ 13.19 ft


← ACRt @ 9.21 ft

14.22 ft

0.33 ft

0.33 ft

0.00 ft



Mnemonic	Tool Name	Serial Number	Weight (lbs)	Length (ft)	Accumulated Length (ft)	Max.Log. Speed (fpm)
CH	Standard OH Cable Head	12345678	30.00	1.92	83.48	300.00
SP	SP Sub	12345678	60.00	3.74	79.74	300.00
GTET	Gamma Telemetry Tool	10811258	165.00	8.52	71.22	60.00
DSNT	Dual Spaced Neutron	10755066	174.00	9.69	61.53	60.00
DCNT	DSN Decentralizer	10735145	6.60	5.13	* 64.86	300.00
SDLT	Spectral Density Tool	10685803	360.00	10.81	50.72	60.00
SDLP	Density Insite Pad	10714945	65.00	2.55	* 52.93	60.00
MICP	Microlog Pad	10685803	8.00	1.00	* 53.22	60.00
IQF	IQ Flex tool	00000668	140.00	5.67	45.05	300.00
	Isolator for the XRMI tool	00000001	32.50	1.30	43.74	300.00
XRMI	XRMI Navigation - Insite	11682412	290.00	13.00	30.74	30.00
XRMI-I	XRMI Imager - Insite	11682413	206.00	11.16	19.58	30.00
ACRt	Array Compensated True Resistivity Instrument Section	10811256	50.00	5.03	14.55	120.00
OBCEN	Centralizer - 25 in. Overbody	00000002	8.00	2.08	* 18.69	300.00
ACRt	Array Compensated True Resistivity Sonde Section	10800784	200.00	14.22	0.33	120.00
RSOF	Regal Standoff 6.75in	00000001	20.00	0.52	* 12.25	300.00
OBCEN	Centralizer - 25 in. Overbody	00000001	8.00	2.08	* 13.53	300.00
BLNS	Bull Nose	00000668	5.00	0.33	0.00	300.00

Total **1,828.10** **85.40**

* Not included in Total Length and Length Accumulation.

Data: FAYE_1-18\0001 SP-GTET-DSNT-SDLT-ACRT-BN\IDLE Date: 25-Apr-14 20:40:53

HALLIBURTON

CALIBRATION REPORT

NATURAL GAMMA RAY TOOL SHOP CALIBRATION

Tool Name: GTET - 10811258	Reference Calibration Date: 25-Apr-14 08:20:22
Engineer: THOMAS K HYDE	Calibration Date: 25-Apr-14 08:23:37
Software Version: WL INSITE R4.2.0 (Build 2)	Calibration Version: 1

Calibrator Source S/N: TB-185
 Calibrator API Reference:228.00 api
 Equivalent Calibrator API Reference:232.0 api

Measurement	Measured	Calibrated	Units
Background	44.8	44.7	api
Background + Calibrator	277.2	276.7	api

NATURAL GAMMA RAY TOOL FIELD CALIBRATION

Tool Name: GTET - 10811258

Reference Calibration Date: 25-Apr-14 08:23:37

Engineer: THOMAS K HYDE

Calibration Date: 25-Apr-14 08:26:59

Software Version: WL INSITE R4.2.0 (Build 2)

Calibration Version: 1

Calibrator Source S/N: TB-185

Calibrator API Reference:228.00 api

Equivalent Calibrator API Reference:232.0 api

Field Verification	Shop	Field	Units
Background	44.7	43.9	api
Background + Calibrator	276.7	279.3	api
Calibrator	232.0	235.4	api

Shop	Field	Difference	Tolerance
232.0	235.4	-3.4	+/- 9.00

ARRAY COMPENSATED TRUE RESISTIVITY SHOP CALIBRATION

Tool Name: ACRt Sonde - 10800784

Reference Calibration Date: 19-Mar-14 11:38:30

Engineer: THOMAS K HYDE

Calibration Date: 19-Mar-14 11:46:10

Software Version: WL INSITE R4.2.0 (Build 2)

Calibration Version: 1

Host Tool Name: ACRt Instrument - 10811256

TYPICAL GAIN RANGE

Subarray	R12KHz			R36KHz			R72KHz		
	Lower	(mmho/m)	Upper	Lower	(mmho/m)	Upper	Lower	(mmho/m)	Upper
A1 (80")	0.95	1.0309	1.05	0.95	1.0230	1.05	0.95	1.0090	1.05
A2 (50")	0.95	1.0448	1.05	0.95	1.0375	1.05	0.95	1.0253	1.05
A3 (29")	0.95	1.0143	1.05	0.95	1.0067	1.05	0.95	0.9946	1.05
A4 (17")	0.95	1.0172	1.05	0.95	1.0083	1.05	0.95	1.0003	1.05
A5 (10")	N/A	N/A	N/A	0.95	1.0099	1.05	0.95	1.0014	1.05
A6 (6")	N/A	N/A	N/A	0.95	0.9987	1.05	0.95	0.9903	1.05

SONDE OFFSET

Subarray	R12KHz			R36KHz			R72KHz		
	(mmho/m)			(mmho/m)			(mmho/m)		
A1 (80")	0.282			-3.841			-5.287		
A2 (50")	-1.602			-3.836			-4.722		
A3 (29")	-16.009			-4.660			-3.606		
A4 (17")	-99.202			-32.925			-26.758		
A5 (10")	N/A			-99.062			-49.020		
A6 (6")	N/A			297.853			159.220		

TRANSMITTER CURRENT GAIN

Signal	Lower	R	Upper
12K	0.6	0.85	1.3
36K	1.0	1.18	2.0
72K	1.0	1.51	2.0

R-MUD VERIFICATION

Signal	Lower (ohm-m)	Measured (ohm-m)	Upper (ohm-m)
Mud Cell	0.95	1.00	1.05

PASS/FAIL SUMMARY

GAIN RANGE CHK

PASS

TOOL OK TO LOG

CALIBRATION SUMMARY

Sensor	Shop	Field	Post	Difference	Tolerance	Units
GTET-10811258						
Gamma Ray Calibrator	232.0	235.4	-----	-3.4	+/- 9.00	api
ACRt Sonde-10800784						
Mud Cell	1.00	-----	-----	0.00	-----	ohm-m

Data: FAYE_1-18\0001 SP-GTET-DSNT-SDLT-ACRT-BNIDLE

Date: 25-Apr-14 21:06:53

HALLIBURTON

PARAMETERS REPORT

Depth (ft)	Tool Name	Mnemonic	Description	Value	Units
TOP					
	SHARED	BS	Bit Size	7.875	in
	SHARED	UBS	Use Bit Size instead of Caliper for all applications.	No	
	SHARED	MDBS	Mud Base	Water	
	SHARED	MDWT	Borehole Fluid Weight	9.350	ppg
	SHARED	WAGT	Weighting Agent	Natural	
	SHARED	BSAL	Borehole salinity	0.00	ppm
	SHARED	FSAL	Formation Salinity NaCl	0.00	ppm
	SHARED	KPCT	Percent K in Mud by Weight?	0.00	%
	SHARED	RMUD	Mud Resistivity	2.000	ohmm
	SHARED	TRM	Temperature of Mud	75.0	degF
	SHARED	CSD	Logging Interval is Cased?	No	
	SHARED	ICOD	AHV Casing OD	5.500	in
	SHARED	ST	Surface Temperature	80.0	degF
	SHARED	TD	Total Well Depth	5330.00	ft
	SHARED	BHT	Bottom Hole Temperature	200.0	degF
	SHARED	SVTM	Navigation and Survey Master Tool	XRMI-I Instrument	
	SHARED	AZTM	High Res Z Accelerometer Master Tool	XRMI-I Instrument	
	SHARED	TEMM	Temperature Master Tool	NONE	
	Rwa / CrossPlot	XPOK	Process Crossplot?	Yes	
	Rwa / CrossPlot	FCHO	Select Source of F	Automatic	
	Rwa / CrossPlot	AFAC	Archie A factor	0.6200	
	Rwa / CrossPlot	MFAC	Archie M factor	2.1500	
	Rwa / CrossPlot	RMFR	Rmf Reference	0.10	ohmm
	Rwa / CrossPlot	TMFR	Rmf Ref Temp	75.00	degF
	Rwa / CrossPlot	RWA	Resistivity of Formation Water	0.05	ohmm
	Rwa / CrossPlot	ADP	Use Air Porosity to calculate CrossplotPhi	No	
	Rwa / CrossPlot	BHSM	Borehole Size Source Tool	XRMI-I Mandrel	
	GTET	GROK	Process Gamma Ray?	Yes	
	GTET	GRSO	Gamma Tool Standoff	0.000	in
	GTET	GEOK	Process Gamma Ray EVR?	No	

GTET	TPOS	Tool Position for Gamma Ray Tools.	Eccentered	
GTET	BHSM	Borehole Size Source Tool	XRMI-I Mandrel	
DSNT	DNOK	Process DSN?	Yes	
DSNT	DEOK	Process DSN EVR?	No	
DSNT	NLIT	Neutron Lithology	Limestone	
DSNT	DNSO	DSN Standoff - 0.25 in (6.35 mm) Recommended	0.250	in
DSNT	DNTP	Temperature Correction Type	None	
DSNT	DPRS	DSN Pressure Correction Type	None	
DSNT	SHCO	View More Correction Options	No	
DSNT	UTVD	Use TVD for Gradient Corrections?	No	
DSNT	LHWT	Logging Horizontal Water Tank?	No	
DSNT	BHSM	Borehole Size Source Tool	XRMI-I Mandrel	
SDLT	CLOK	Process Caliper Outputs?	Yes	
SDLT Pad	DNOK	Process Density?	Yes	
SDLT Pad	DNOK	Process Density EVR?	No	
SDLT Pad	CB	Logging Calibration Blocks?	No	
SDLT Pad	SPVT	SDLT Pad Temperature Valid?	Yes	
SDLT Pad	DTWN	Disable temperature warning	No	
SDLT Pad	DMA	Formation Density Matrix	2.710	g/cc
SDLT Pad	DFL	Formation Density Fluid	1.000	g/cc
SDLT Pad	BHSM	Borehole Size Source Tool	SDLT	
Microlog Pad	MLOK	Process MicroLog Outputs?	Yes	
XRMI-I Instrument	WRTI	Survey Writing Interval	30	ft
XRMI-I Instrument	SOPT	Smoothing Option	None	
XRMI-I Mandrel	DIMG	Process XRMI?	Yes	
XRMI-I Mandrel	ALMT	Image Alignment Method	AZIM	
XRMI-I Mandrel	AGN	Use Button Auto Gain?	Yes	
XRMI-I Mandrel	BCLR	Button Auto Gain Color	127	
XRMI-I Mandrel	BFIL	Button Auto Gain Filter	0.020	
XRMI-I Mandrel	BGAN	Button Gain Value	0.001	
XRMI-I Mandrel	BOFF	Button Offset	0	
XRMI-I Mandrel	DIPE	Process Dipmeter Calculations?	Yes	
XRMI-I Mandrel	BHCS	Process Borehole Corrections?	Yes	
XRMI-I Mandrel	BHSM	Borehole Size Source Tool	XRMI-I Mandrel	
XRMI-I Mandrel	CLOK	Process Caliper Outputs?	Yes	
XRMI-I Mandrel	CMAX	Caliper Maximum Limit	100.0	in
XRMI-I Mandrel	CMIN	Caliper Mimimum Limit	3.5	in
XRMI-I Mandrel	NAVS	Navigation Source Tool	XRMI-I Instrument	
XRMI-I Mandrel	BHVC	Radius type for borehole volume calcuations	Elliptical	
ACRt Sonde	RTOK	Process ACRt?	Yes	
ACRt Sonde	MNSO	Minimum Tool Standoff	1.50	in
ACRt Sonde	TCS1	Temperature Correction Source	FP Lwr & FP Up	
ACRt Sonde	TPOS	Tool Position	Free Hanging	
ACRt Sonde	RMOP	Rmud Source	Mud Cell	
ACRt Sonde	RMIN	Minimum Resistivity for MAP	0.20	ohmm
ACRt Sonde	RMIN	Maximum Resistivity for MAP	200.00	ohmm
ACRt Sonde	THQY	Threshold Quality	0.50	
ACRt Sonde	MRFX	Fixed mud resistivity	2000	ohmm
ACRt Sonde	BHSM	Borehole Size Source Tool	XRMI-I Mandrel	

BOTTOM

INPUTS, DELAYS AND FILTERS TABLE

Mnemonic	Input Description	Delay (ft)	Filter Type	Filter Length (ft)
Depth Panel				
TENS	Tension	0.00	NO	
Rwa / CrossPlot				
TPUL	Tension Pull	85.40	NO	
BS	Bit Size	85.40	NO	
HDIA	Measured Hole Diameter	0.00	NO	
SP Sub				
PLTC	Plot Control Mask	81.70	NO	
SP	Spontaneous Potential	81.70	BLK	1.250
SPR	Raw Spontaneous Potential	81.70	NO	
SPO	Spontaneous Potential Offset	81.70	NO	
GTET				
TPUL	Tension Pull	73.67	NO	
GR	Natural Gamma Ray API	73.67	TRI	1.750
GRU	Unfiltered Natural Gamma Ray API	73.67	NO	
EGR	Natural Gamma Ray API with Enhanced Vertical Resolution	73.67	W	1.416 , 0.750
HDIA	Measured Hole Diameter	0.00	NO	
ACCZ	Accelerometer Z	0.00	BLK	0.083
DEVI	Inclination	0.00	NO	
DSNT				
TPUL	Tension Pull	63.43	NO	
RNDS	Near Detector Telemetry Counts	63.53	BLK	1.417
RFDS	Far Detector Telemetry Counts	64.28	TRI	0.583
DNTT	DSN Tool Temperature	63.53	NO	
DSNS	DSN Tool Status	63.43	NO	
ERND	Near Detector Telemetry Counts EVR	63.53	BLK	0.000
ERFD	Far Detector Telemetry Counts EVR	64.28	BLK	0.000
ENTM	DSN Tool Temperature EVR	63.53	NO	
HDIA	Measured Hole Diameter	0.00	NO	
SDLT				
TPUL	Tension Pull	53.53	NO	
PCAL	Pad Caliper	53.53	TRI	0.250
ACAL	Arm Caliper	53.53	TRI	0.250
XRMI-I Mandrel				
TPUL	Tension Pull	22.35	NO	
PAD1	XRMI Pad 1 values	22.12	NO	
PAD2	XRMI Pad 2 values	22.12	NO	
PAD3	XRMI Pad 3 values	22.12	NO	
PAD4	XRMI Pad 4 values	22.12	NO	
PAD5	XRMI Pad 5 values	22.12	NO	
PAD6	XRMI Pad 6 values	22.12	NO	
OD1	EMI Odd Button Values Pad 1	22.12	NO	
OD2	EMI Odd Button Values Pad 2	22.35	NO	
OD3	EMI Odd Button Values Pad 3	22.12	NO	
OD4	EMI Odd Button Values Pad 4	22.35	NO	

OD5	EMI Odd Button Values Pad 5	22.12	NO	
OD6	EMI Odd Button Values Pad 6	22.35	NO	
EV1	EMI Even Button Values Pad 1	22.14	NO	
EV2	EMI Even Button Values Pad 2	22.32	NO	
EV3	EMI Even Button Values Pad 3	22.14	NO	
EV4	EMI Even Button Values Pad 4	22.32	NO	
EV5	EMI Even Button Values Pad 5	22.14	NO	
EV6	EMI Even Button Values Pad 6	22.32	NO	
ITMP	Instrument Temperature	19.58	NO	
EMIM	Tool Mode	19.58	NO	
HAZI	Hole Azimuth	21.87	NO	
HAZI	Hole Azimuth - Down Delay	22.37	NO	
ZACC	Accelerometer Z	22.12	NO	
RB	Relative Bearing	21.87	NO	
RBD	Relative Bearing Down	22.37	NO	
TPUL	Tension Pull	22.35	NO	
FIR1	Current Button R - Pad 1	22.12	NO	
FIR2	Current Button R - Pad 2	22.35	NO	
FIR3	Current Button R - Pad 3	22.12	NO	
FIR4	Current Button R - Pad 4	22.35	NO	
FIR5	Current Button R - Pad 5	22.12	NO	
FIR6	Current Button R - Pad 6	22.35	NO	
FIX1	Current Button X - Pad 1	22.12	NO	
FIX2	Current Button X - Pad 2	22.35	NO	
FIX3	Current Button X - Pad 3	22.12	NO	
FIX4	Current Button X - Pad 4	22.35	NO	
FIX5	Current Button X - Pad 5	22.12	NO	
FIX6	Current Button X - Pad 6	22.35	NO	
SIR1	Current Slow Button R - Pad 1	22.12	BLK	3.000
SIR2	Current Slow Button R - Pad 2	22.35	BLK	3.000
SIR3	Current Slow Button R - Pad 3	22.12	BLK	3.000
SIR4	Current Slow Button R - Pad 4	22.35	BLK	3.000
SIR5	Current Slow Button R - Pad 5	22.12	BLK	3.000
SIR6	Current Slow Button R - Pad 6	22.35	BLK	3.000
SIX1	Current Slow Button X - Pad 1	22.12	BLK	3.000
SIX2	Current Slow Button X - Pad 2	22.35	BLK	3.000
SIX3	Current Slow Button X - Pad 3	22.12	BLK	3.000
SIX4	Current Slow Button X - Pad 4	22.35	BLK	3.000
SIX5	Current Slow Button X - Pad 5	22.12	BLK	3.000
SIX6	Current Slow Button X - Pad 6	22.35	BLK	3.000
EMMR	Phasor Voltage - Real Part	22.12	NO	
EMMX	Phasor Voltage - Imaginary Part	22.12	NO	
PADV	Pad Voltage	19.58	BLK	0.250
ITMP	Instrument Temperature	19.58	BLK	0.000
CON1	Conductivity Pad 1	22.12	BLK	3.000
CON2	Conductivity Pad 2	22.35	BLK	3.000
CON3	Conductivity Pad 3	22.12	BLK	3.000
CON4	Conductivity Pad 4	22.35	BLK	3.000
CON5	Conductivity Pad 5	22.12	BLK	3.000
CON6	Conductivity Pad 6	22.35	BLK	3.000
UIR2	Current Button R No Delay - Pad 2	22.12	NO	
UIR4	Current Button R No Delay - Pad 4	22.12	NO	
UIR6	Current Button R No Delay - Pad 6	22.12	NO	
UIX2	Current Button X No Delay - Pad 2	22.12	NO	
UIX4	Current Button X No Delay - Pad 4	22.12	NO	

UIX6	Current Button X No Delay - Pad 6	22.12	NO	
HDIA	Measured Hole Diameter	0.00	NO	
TPUL	Tension Pull	22.35	NO	
ARM1	Caliper 1 measurement	22.12	BLK	0.000
ARM2	Caliper 2 measurement	22.12	BLK	0.000
ARM3	Caliper 3 measurement	22.12	BLK	0.000
ARM4	Caliper 4 measurement	22.12	BLK	0.000
ARM5	Caliper 5 measurement	22.12	BLK	0.000
ARM6	Caliper 6 measurement	22.12	BLK	0.000
MOTV	Motor Voltage Monitor 1	22.12	BLK	0.000
PRES	Caliper percentage of total compression of the spring	19.58	BLK	0.000
HAZI	Hole Azimuth	22.12	NO	
RB	Relative Bearing	22.12	NO	
AZI1	PAD1 Azimuth	22.12	NO	
DEVI	Inclination	22.12	NO	
ACRt Sonde				
TPUL	Tension Pull	2.73	NO	
F1R1	ACRT 12KHz - 80in R value	8.98	BLK	0.000
F1X1	ACRT 12KHz - 80in X value	8.98	BLK	0.000
F1R2	ACRT 12KHz - 50in R value	6.48	BLK	0.000
F1X2	ACRT 12KHz - 50in X value	6.48	BLK	0.000
F1R3	ACRT 12KHz - 29in R value	4.98	BLK	0.000
F1X3	ACRT 12KHz - 29in X value	4.98	BLK	0.000
F1R4	ACRT 12KHz - 17in R value	3.98	BLK	0.000
F1X4	ACRT 12KHz - 17in X value	3.98	BLK	0.000
F1R5	ACRT 12KHz - 10in R value	3.48	BLK	0.000
F1X5	ACRT 12KHz - 10in X value	3.48	BLK	0.000
F1R6	ACRT 12KHz - 6in R value	3.23	BLK	0.000
F1X6	ACRT 12KHz - 6in X value	3.23	BLK	0.000
F2R1	ACRT 36KHz - 80in R value	8.98	BLK	0.000
F2X1	ACRT 36KHz - 80in X value	8.98	BLK	0.000
F2R2	ACRT 36KHz - 50in R value	6.48	BLK	0.000
F2X2	ACRT 36KHz - 50in X value	6.48	BLK	0.000
F2R3	ACRT 36KHz - 29in R value	4.98	BLK	0.000
F2X3	ACRT 36KHz - 29in X value	4.98	BLK	0.000
F2R4	ACRT 36KHz - 17in R value	3.98	BLK	0.000
F2X4	ACRT 36KHz - 17in X value	3.98	BLK	0.000
F2R5	ACRT 36KHz - 10in R value	3.48	BLK	0.000
F2X5	ACRT 36KHz - 10in X value	3.48	BLK	0.000
F2R6	ACRT 36KHz - 6in R value	3.23	BLK	0.000
F2X6	ACRT 36KHz - 6in X value	3.23	BLK	0.000
F3R1	ACRT 72KHz - 80in R value	8.98	BLK	0.000
F3X1	ACRT 72KHz - 80in X value	8.98	BLK	0.000
F3R2	ACRT 72KHz - 50in R value	6.48	BLK	0.000
F3X2	ACRT 72KHz - 50in X value	6.48	BLK	0.000
F3R3	ACRT 72KHz - 29in R value	4.98	BLK	0.000
F3X3	ACRT 72KHz - 29in X value	4.98	BLK	0.000
F3R4	ACRT 72KHz - 17in R value	3.98	BLK	0.000
F3X4	ACRT 72KHz - 17in X value	3.98	BLK	0.000
F3R5	ACRT 72KHz - 10in R value	3.48	BLK	0.000
F3X5	ACRT 72KHz - 10in X value	3.48	BLK	0.000
F3R6	ACRT 72KHz - 6in R value	3.23	BLK	0.000
F3X6	ACRT 72KHz - 6in X value	3.23	BLK	0.000
RMUD	Mud Resistivity	12.52	BLK	0.000
F1RT	Transmitter Reference 12 KHz Real Signal	2.73	BLK	0.000

TRT	Transmitter Reference 12 KHz Real Signal	2.73	BLK	0.000
F1XT	Transmitter Reference 12 KHz Imaginary Signal	2.73	BLK	0.000
F2RT	Transmitter Reference 36 KHz Real Signal	2.73	BLK	0.000
F2XT	Transmitter Reference 36 KHz Imaginary Signal	2.73	BLK	0.000
F3RT	Transmitter Reference 72 KHz Real Signal	2.73	BLK	0.000
F3XT	Transmitter Reference 72 KHz Imaginary Signal	2.73	BLK	0.000
TFPU	Upper Feedpipe Temperature Calculated	2.73	BLK	0.000
TFPL	Lower Feedpipe Temperature Calculated	2.73	BLK	0.000
ITMP	Instrument Temperature	2.73	BLK	0.000
TCVA	Temperature Correction Values Loop Off	2.73	NO	
TIDV	Instrument Temperature Derivative	2.73	NO	
TUDV	Upper Temperature Derivative	2.73	NO	
TLDV	Lower Temperature Derivative	2.73	NO	
TRBD	Receiver Board Temperature	2.73	NO	
HDIA	Measured Hole Diameter	0.00	NO	

SDLT Pad

TPUL	Tension Pull	53.52	NO	
NAB	Near Above	53.35	BLK	0.920
NHI	Near Cesium High	53.35	BLK	0.920
NLO	Near Cesium Low	53.35	BLK	0.920
NVA	Near Valley	53.35	BLK	0.920
NBA	Near Barite	53.35	BLK	0.920
NDE	Near Density	53.35	BLK	0.920
NPK	Near Peak	53.35	BLK	0.920
NLI	Near Lithology	53.35	BLK	0.920
NBAU	Near Barite Unfiltered	53.35	BLK	0.250
NLIU	Near Lithology Unfiltered	53.35	BLK	0.250
FAB	Far Above	53.70	BLK	0.250
FHI	Far Cesium High	53.70	BLK	0.250
FLO	Far Cesium Low	53.70	BLK	0.250
FVA	Far Valley	53.70	BLK	0.250
FBA	Far Barite	53.70	BLK	0.250
FDE	Far Density	53.70	BLK	0.250
FPK	Far Peak	53.70	BLK	0.250
FLI	Far Lithology	53.70	BLK	0.250
PTMP	Pad Temperature	53.53	BLK	0.920
NHV	Near Detector High Voltage	52.93	NO	
FHV	Far Detector High Voltage	52.93	NO	
ITMP	Instrument Temperature	52.93	NO	
DDHV	Detector High Voltage	52.93	NO	
HDIA	Measured Hole Diameter	0.00	NO	

Microlog Pad

TPUL	Tension Pull	53.72	NO	
MINV	Microlog Lateral	53.72	BLK	0.750
MNOR	Microlog Normal	53.72	BLK	0.750

DATE: FAYE 1-18-04 SP-CTET-DENT-SDLT-ACBT-RUNFILE


DATE: 25 Apr 14 21:08:44


COMPANY	BEREXCO LLC.			
WELL	FAYE 1-18			
FIELD	WILDCAT			
COUNTY	FINNEY	STATE	KANSAS	


HALLIBURTON


Plot Time: 26-Apr-14 00:19:36
Plot Range: 1730 ft to 5317.5 ft
Data: FAYE_1-18\Well Based\DAQ-0001-003\
Plot File: \\-LOCAL-ACRT\ACRT_1_lib

1 INCH MAIN LOG

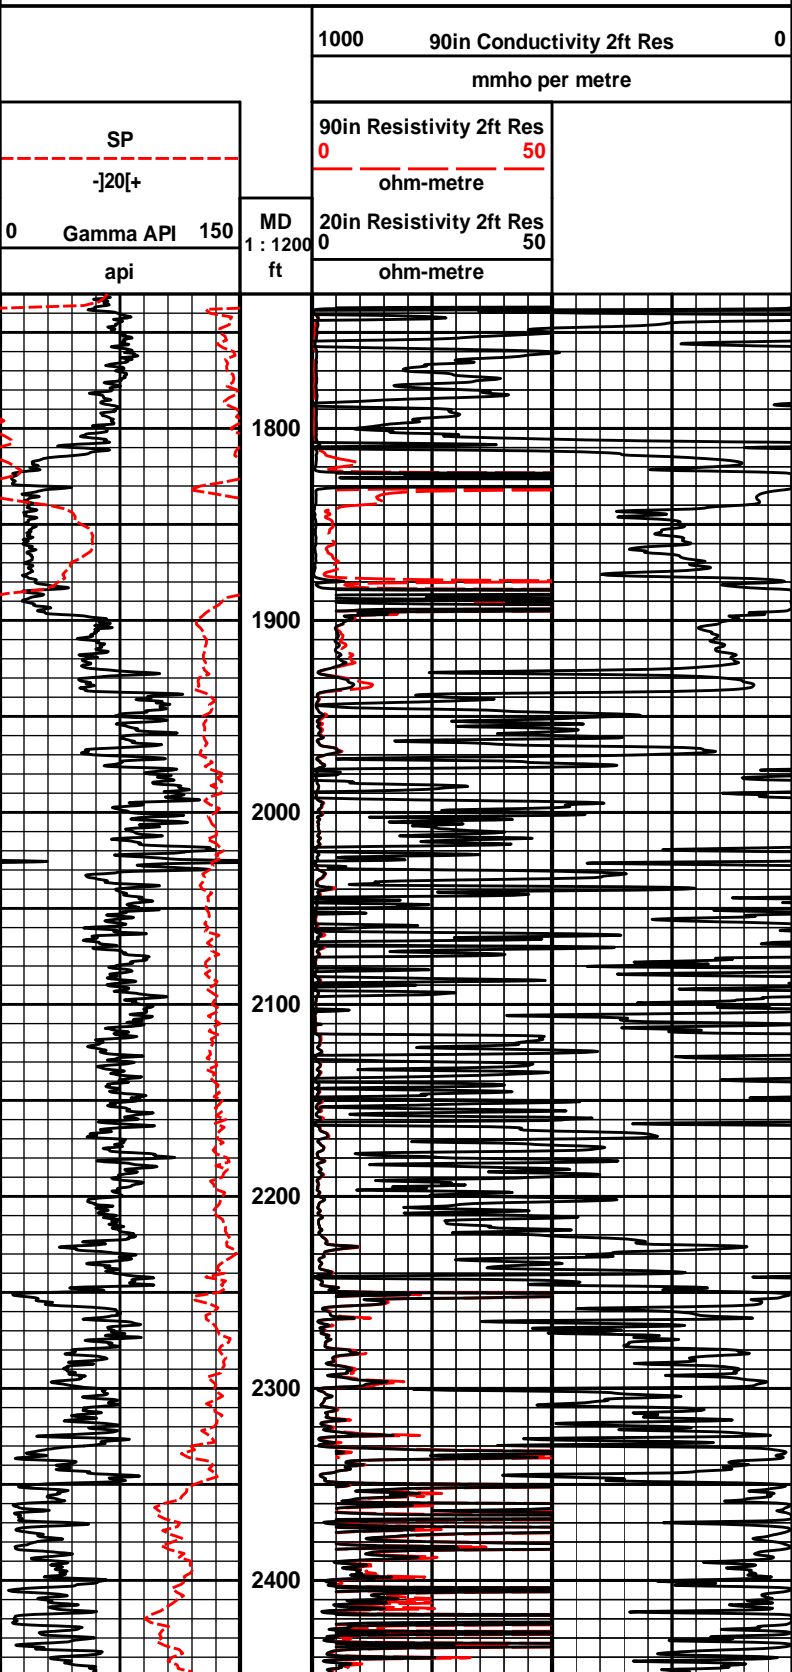

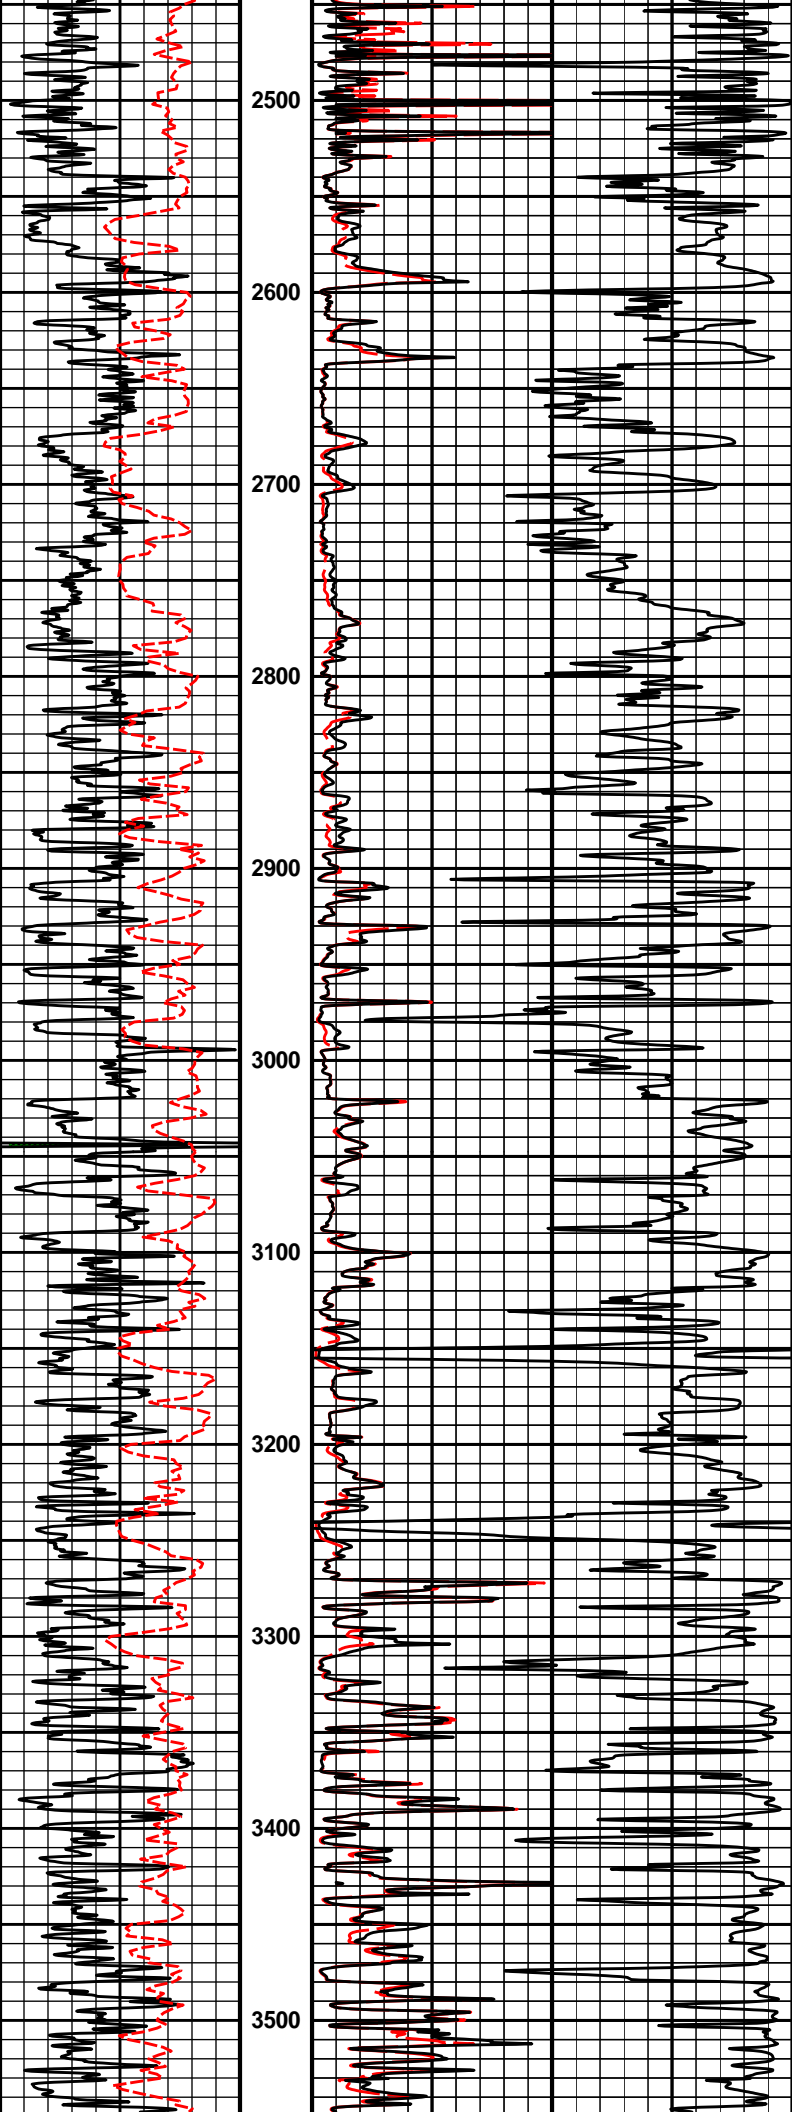

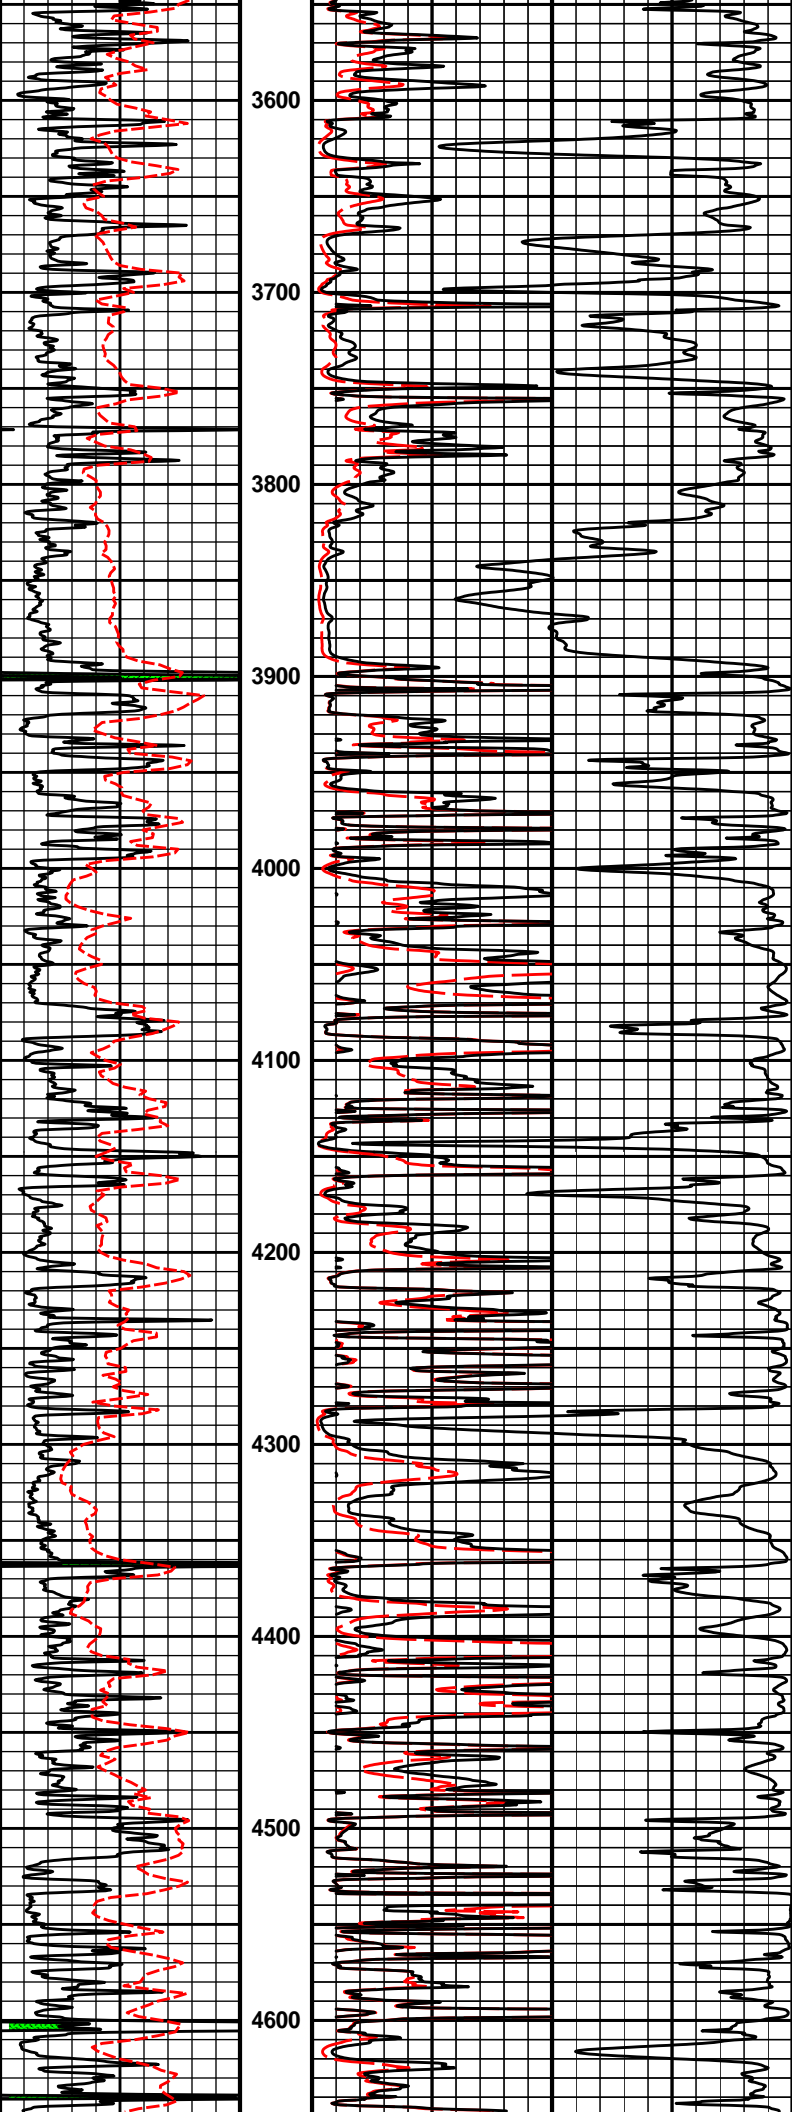

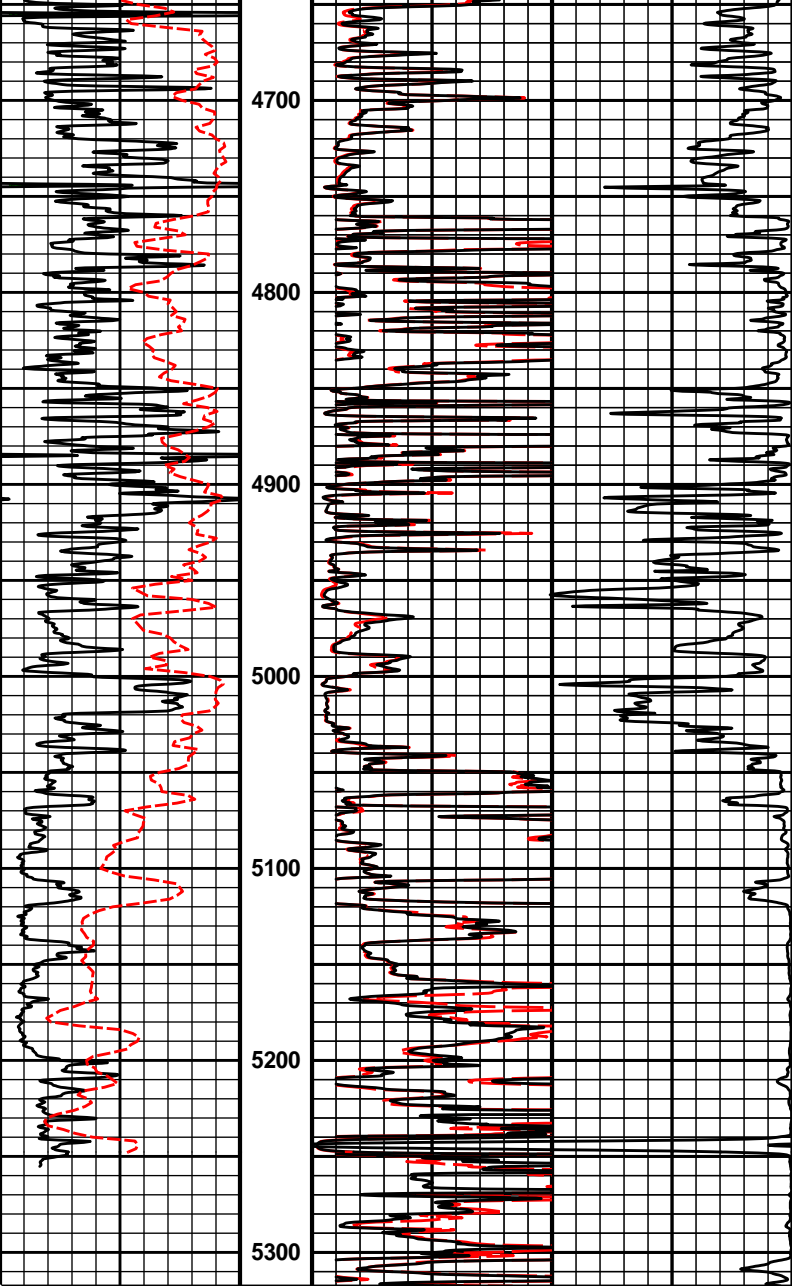

0	Gamma API	150	MD	20in Resistivity 2ft Res	0	50
	api		1 : 1200	ohm-metre		
	SP		ft	90in Resistivity 2ft Res	0	50
	- 20 +			ohm-metre		
				1000	90in Conductivity 2ft Res	0
					mmho per metre	

HALLIBURTON

Plot Time: 26-Apr-14 00:19:38
 Plot Range: 1730 ft to 5317.5 ft
 Data: FAYE_1-18\Well Based\DAQ-0001-003\
 Plot File: \\-LOCAL-ACRT\ACRT_1_lib

1 INCH MAIN LOG