

KANSAS CORPORATION COMMISSION
OIL & GAS CONSERVATION DIVISION

WELL PLUGGING APPLICATION

Please TYPE Form and File ONE Copy

Form CP-1
September 2003
This Form must be Typed
Form must be Signed
All blanks must be Filled

API # 15 - 085-20075-00-00 (Identifier Number of this well). This must be listed for wells drilled since 1967; if no API # was issued, indicate original spud or completion date _____.

Well Operator: Heartland Oil & Gas Corporation KCC License #: 33233
Address: 1610 Industrial Park Drive City: Paola
(Owner / Company Name) (Operator's)

State: Kansas Zip Code: 66071 Contact Phone: (913) 294 - 1400

Lease: Atwater Well #: 7-15 Sec. 15 Twp. 05 S. R. 15 East West
- NW - SW - NE Spot Location / QQQQ County: Jackson

3420 Feet (in exact footage) From North / South (from nearest outside section corner) Line of Section (Not Lease Line)

2130 Feet (in exact footage) From East / West (from nearest outside section corner) Line of Section (Not Lease Line)

Check One: Oil Well Gas Well D&A Cathodic Water Supply Well
 SWD Docket # _____ ENHR Docket # _____ Other: _____

Conductor Casing Size: _____ Set at: _____ Cemented with: _____ Sacks

Surface Casing Size: 8 5/8" Set at: 243.3' Cemented with: 120 Sacks

Production Casing Size: 5 1/2" Set at: 2376.3' Cemented with: 190 Sacks

List (ALL) Perforations and Bridgeplug Sets: 1992-1994', 2038-2040', 2049-2051', 2076-2078', 2097-2099', 2123-2125', 2150-2151', 2177-2179', 2184-2186'

Elevation: 1107' (G.L. / K.B.) T.D.: 2404' PBTD: 2327' Anhydrite Depth: _____
(Stone Corral Formation)

Condition of Well: Good Poor Casing Leak Junk in Hole

Proposed Method of Plugging (attach a separate page if additional space is needed): Gel from 2327' to 2236' Cement from 2236' to 1942'
Gel from 1942' to 250' Cement from 250' to surface

RECEIVED
DEC 16 2005
KCC WICHITA

Is Well Log attached to this application as required? Yes No Is ACO-1 filed? Yes No

If not explain why? _____

Plugging of this Well will be done in accordance with K.S.A. 55-101 et. seq. and the Rules and Regulations of the State Corporation Commission.

List Name of Company Representative authorized to be in charge of plugging operations: _____

Steve Littell

Phone: (913) 294 - 1400 or 785-893-2066

Address: 1610 Industrial Park Drive

City / State: Paola, KS

Plugging Contractor: Hurricane Well Service, Inc.

KCC License #: 32006

Address: P. O. Box 782228 Wichita, KS 67278-2228


Phone: (316) 685 - 5908

Proposed Date and Hour of Plugging (if known?): Not known at this time

Payment of the Plugging Fee (K.A.R. 82-3-118) will be guaranteed by Operator or Agent

Date: 12-7-05 Authorized Operator / Agent: Steve Littell
(Signature)

Mail to: KCC - Conservation Division, 130 S. Market - Room 2078, Wichita, Kansas 67202

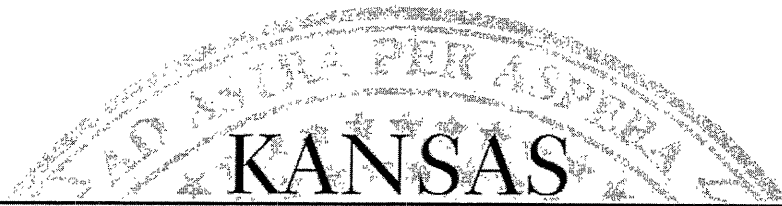

CORPORATION COMMISSION

Kathleen Sebelius, Governor Brian J. Moline, Chair Robert E. Krehbiel, Commissioner Michael C. Moffet, Commissioner

NOTICE OF RECEIPT OF WELL PLUGGING APPLICATION (CP-1)

Heartland Oil & Gas, Inc.
1610 Industrial Park Drive
Paola, KS 66071

December 21, 2005

Re: ATWATER #7-15
API 15-085-20075-00-00
SENWSWNE 15-5S-15E, 3420 FSL 2130 FEL
JACKSON COUNTY, KANSAS

Dear Operator:

This letter is to notify you that the Conservation Division is in receipt of your plugging proposal, form CP-1, for the above-captioned well.

Your CP-1 has been reviewed by the Conservation Division central office for completeness and to verify license numbers. The plugging proposal will now be forwarded to the district office listed below for review of your proposed method of plugging.

Please contact the district office for approval of your proposed plugging method at least five (5) days before plugging the well, pursuant to K.A.R. 82-3-113 (b). If a workover pit will be used during the plugging of the well it must be permitted. A CDP-1 form must be filed and approved prior to the use of the pit.

The Conservation Division's review of form CP-1, either in the central or district office, does not include an inquiry into well ownership or the filing operator's legal right to plug the well.

This notice in no way constitutes authorization to plug the above-captioned well by persons not having legal rights of ownership or interest in the well. This notice is void after ninety (90) days from the above date.

District: #3
1500 W. 7th
Chanute, KS 67220
(620) 432-2300

Sincerely

A handwritten signature in cursive script that reads "David P. Williams".

David P. Williams
Production Supervisor