

TO: STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-185-22631-00-00
Spot: S2S2SE Sec/Twnshp/Rge: 15-22S-12W
330 feet from S Section Line, 1220 feet from E Section Line
Lease Name: SIEFKES KS Well #: 1
County: STAFFORD Total Vertical Depth: 3720 feet

Operator License No.: 4656
Op Name: DAVIS PETROLEUM, INC.
Address: RR 1, BOX 183 B
GREAT BEND, KS 67530

String	Size	Depth (ft)	Pulled (ft)	Comment
PROD	5.5	3716	2007	WITH 165 SX CMT
SURF	8.625	285		WITH 175 SX CMT

Well Type: OIL UIC Docket No: _____ Date/Time to Plug: 12/12/2005 1:00 PM
Plug Co. License No.: 31529 Plug Co. Name: MIKE'S TESTING & SALVAGE, INC.
Proposal Rcvd. from: CURTIS KELSO Company: MIKE'S TESTING & SALVAGE, INC Phone: (620) 793-3051

Proposed Plugging Method: SAND TO 3540' & 5 SX CMT. PLUG AT 600' WITH 10 SX GEL & 50 SX CMT. PLUG AT 310' WITH 50 SX CMT. PLUG AT 40' WITH 10 SX CMT.

Plugging Proposal Received By: RICHARD LACEY WitnessType: COMPLETE (100%)
Date/Time Plugging Completed: 12/12/2005 2:35 PM KCC Agent: RICHARD LACEY

Actual Plugging Report:

SANDED TO 3560' & 5 SX CMT WITH BAILER. SPOTTED PLUGS THROUGH CASING. 1ST PLUG AT 600' WITH 10 SX GEL & 50 SX CMT. 2ND PLUG AT 310' WITH 50 SX CMT. 3RD PLUG AT 40' WITH 20 SX CMT.

Perfs:


Top	Bot	Thru	Comments
3608	3611		

RECEIVED
DEC 19 2005
KCC WICHITA

Remarks: USED 60/40 POZMIX 6% GEL BY COPELAND ACID.

Plugged through: CSG

District: 01

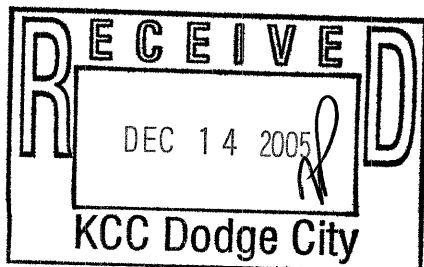

Signed

Richard W. Lacey

(TECHNICIAN)

INVOICED
DATE 12-20-05
INV. NO. 2006060888

Form CP