

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-135-24422-00-00
Spot: NENWNW Sec/Twnshp/Rge: 26-16S-25W
330 feet from N Section Line, 1080 feet from W Section Line
Lease Name: LIVINGSTON Well #: 1
County: NESS Total Vertical Depth: 4580 feet

Operator License No.: 30742
Op Name: PALOMINO PETROLEUM, INC.
Address: 4924 SE 84TH STREET
NEWTON, KS 67114

String	Size	Depth (ft)	Pulled (ft)	Comment
SURF	8.625	212		WITH 160 SX CMT

B/48 85

Well Type: DH UIC Docket No: _____ Date/Time to Plug: 12/14/2005 2:45 AM
Plug Co. License No.: 33350 Plug Co. Name: SOUTHWIND DRILLING, INC.
Proposal Rcvd. from: DOUG ROBERTS Company: SOUTHWIND DRILLING, INC. Phone: (620) 564-3800

Proposed Plugging Method: 1ST PLUG AT 2000' WITH 50 SX CMT. 2ND PLUG AT 1150' WITH 80 SX CMT. 3RD PLUG AT 240' WITH 50 SX CMT. 4TH PLUG AT 60' WITH 20 SX CMT. 5TH PLUG TO CIRCULATE RAT HOLE WITH 15 SX CMT. 6TH PLUG TO CIRCULATE MOUSE HOLE WITH 10 SX CMT.

Plugging Proposal Received By: ERIC MACLAREN WitnessType: NONE
Date/Time Plugging Completed: 12/14/2005 4:45 AM KCC Agent: ERIC MACLAREN

Actual Plugging Report:

1ST PLUG AT 2000' WITH 50 SX CMT. 2ND PLUG AT 1150' WITH 80 SX CMT. 3RD PLUG AT 240' WITH 50 SX CMT. 4TH PLUG AT 60' WITH 20 SX CMT. 5TH PLUG TO CIRCULATE RAT HOLE WITH 15 SX CMT. 6TH PLUG TO CIRCULATE MOUSE HOLE WITH 10 SX CMT.


Perfs:

RECEIVED
DEC 19 2005
KCC WICHITA

Remarks: USED 60/40 POZMIX 6% GEL 1/4# FLO SEAL BY ALLIED.

Plugged through: DP

District: 01

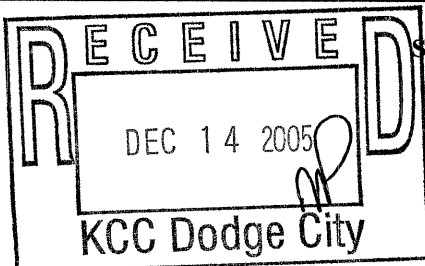

Signed Eric MacLaren
(TECHNICIAN)

INVOICED
DATE 12-20-05
INV. NO 2000060891

Form SP-205