



Microresistivity Log

Pioneer Energy Services

API No.

15-097-21,806-00-00

Company **McCoy Petroleum Corporation**

Well **MTPRC 'A' #4-27**

Field **Alford**

County **Kiowa** State

Kansas

Location

**NE-SE-NE
1650' FNL & 330' FEL**

Sec: **27**

Twp: **30S**

Rge: **19W**

Elevation

**K.B. 2215
D.F. 2206
G.L. 2206**

Permanent Datum **Ground Level**

Elevation 2206

9 Ft. Above Perm. Datum

Log Measured From **Kelly Bushing**

Drilling Measured From Kelly Bushing

Date

9/7/2014

Run Number

Two

Depth Driller

5225

Depth Logger

5224

Bottom Logged Interval

5223

Top Log Interval

3900

Casing Driller

8.625 @ 644

Casing Logger

643

Bit Size

7.875

Type Fluid in Hole

Chemical

Salinity, ppm CL

7.000

Density / Viscosity

9.5 47

pH / Fluid Loss

9.0 11.2

Source of Sample

Flowline

Rm @ Meas. Temp

.18 @ 67

Rmf @ Meas. Temp

.14 @ 67

Rmc @ Meas. Temp

.24 @ 67

Source of Rmf / Rmc

Charts

Rm @ BHT

.09 @ 128

Operating Rig Time

4 Hours

Max Rec. Temp. F

128

Equipment Number

108

Location

Hays

Recorded By

J. Henrickson

Witnessed By

Evan Stone

<<< Fold Here >>>


All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

Thank you for using Pioneer Energy Services
www.pioneerres.com
785 625 3858

Greensburg Kansas
15.5 South on 183, 3 West, 1.8 North, West Into

0	Gamma Ray	150
6	Micro Log Caliper (GAPI)	16
-200	SP (mV)	0

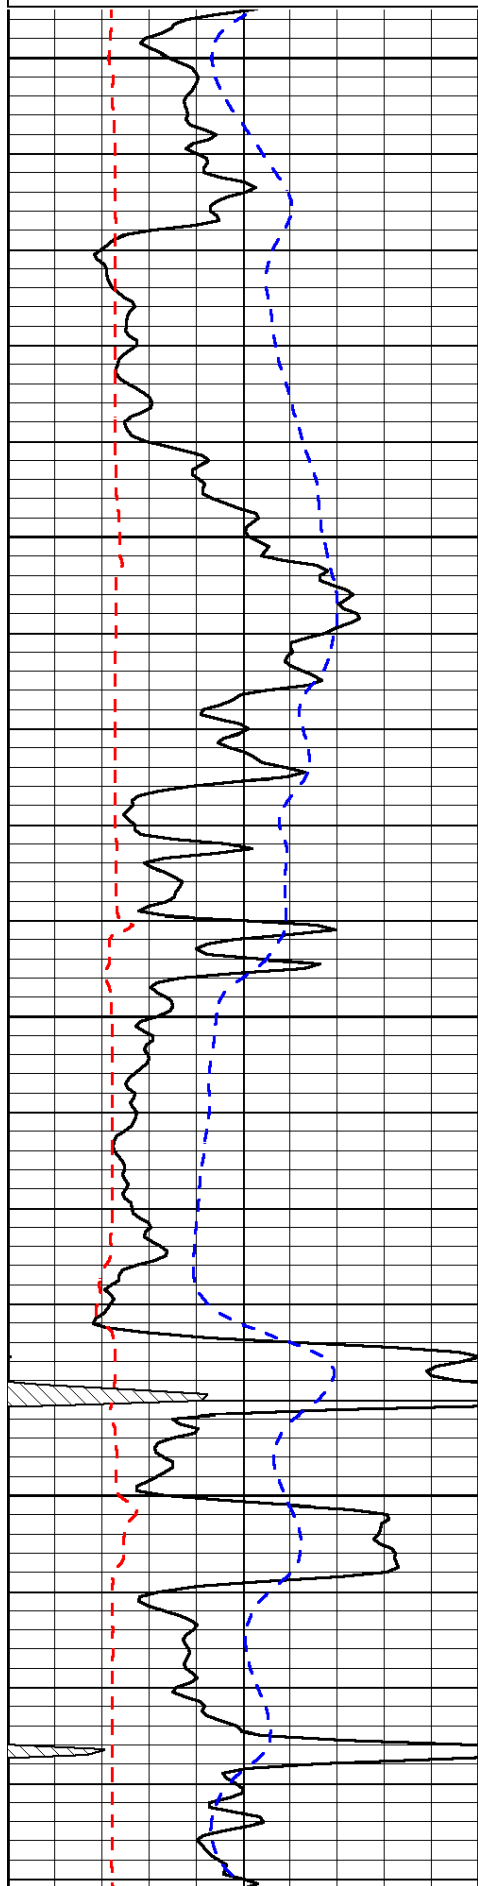

3900


3950


4000

4050

0	Micro Inverse 1 X 1	40
0	Micro Normal 2"	40
15000	Line Weight	0

LSPD

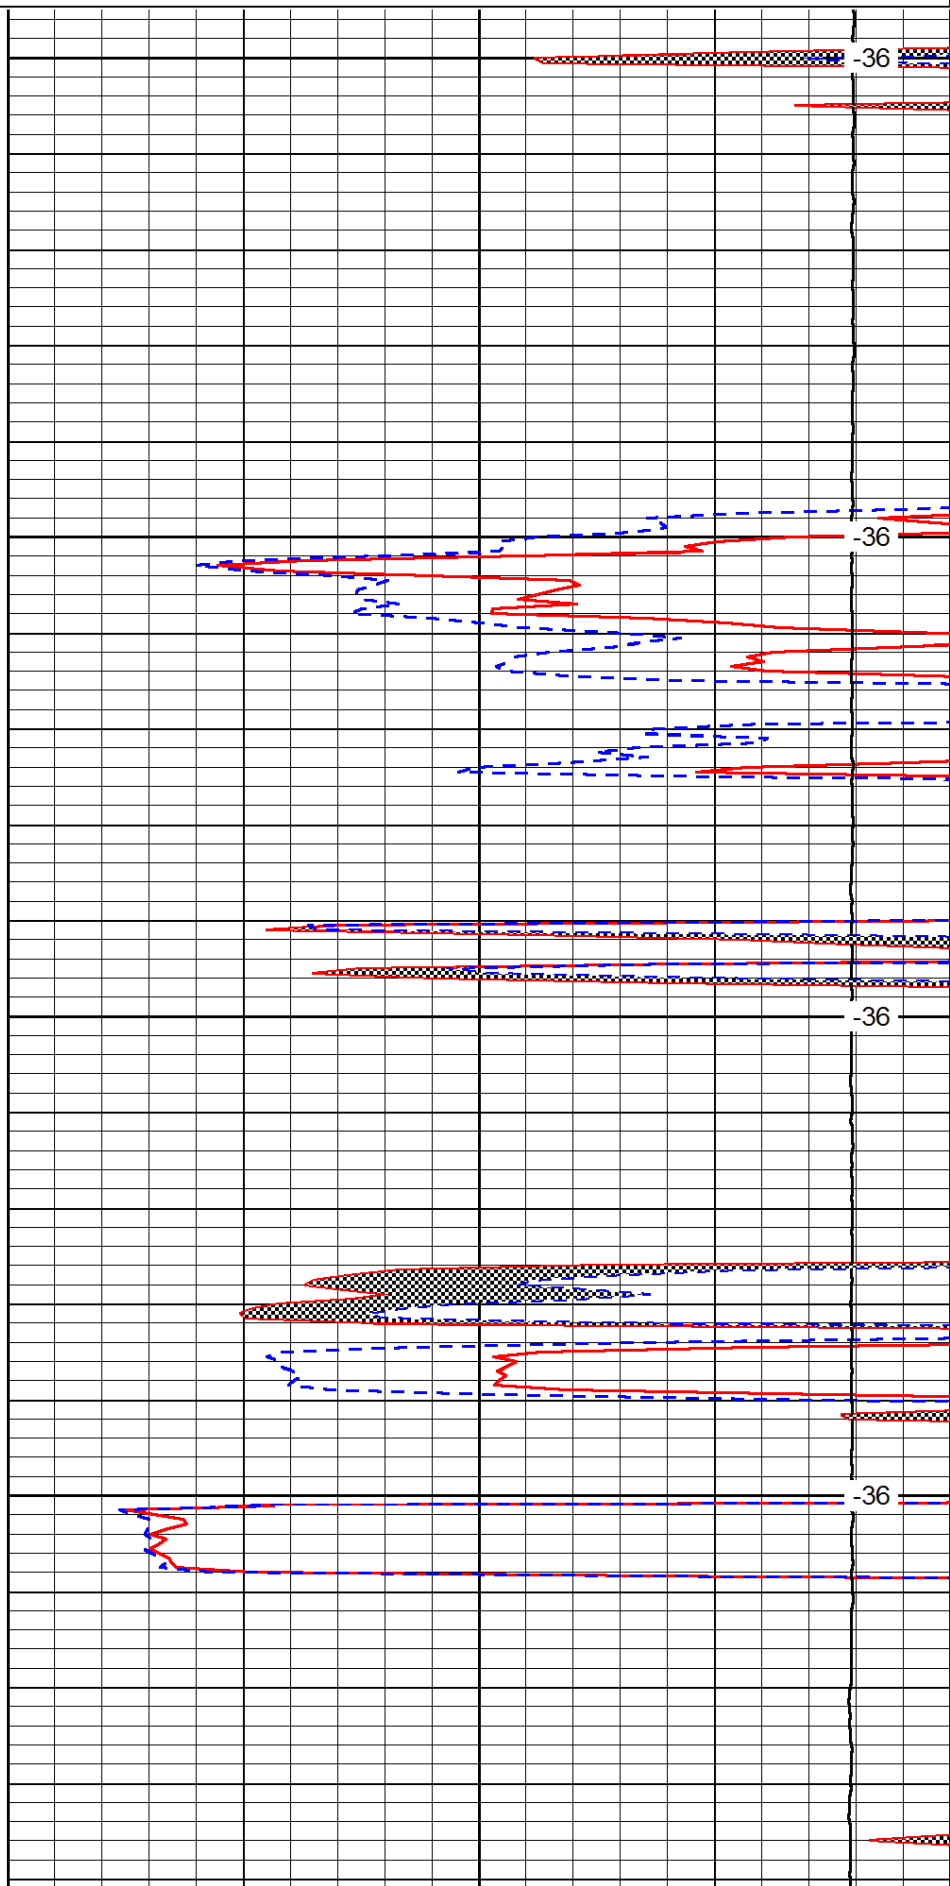

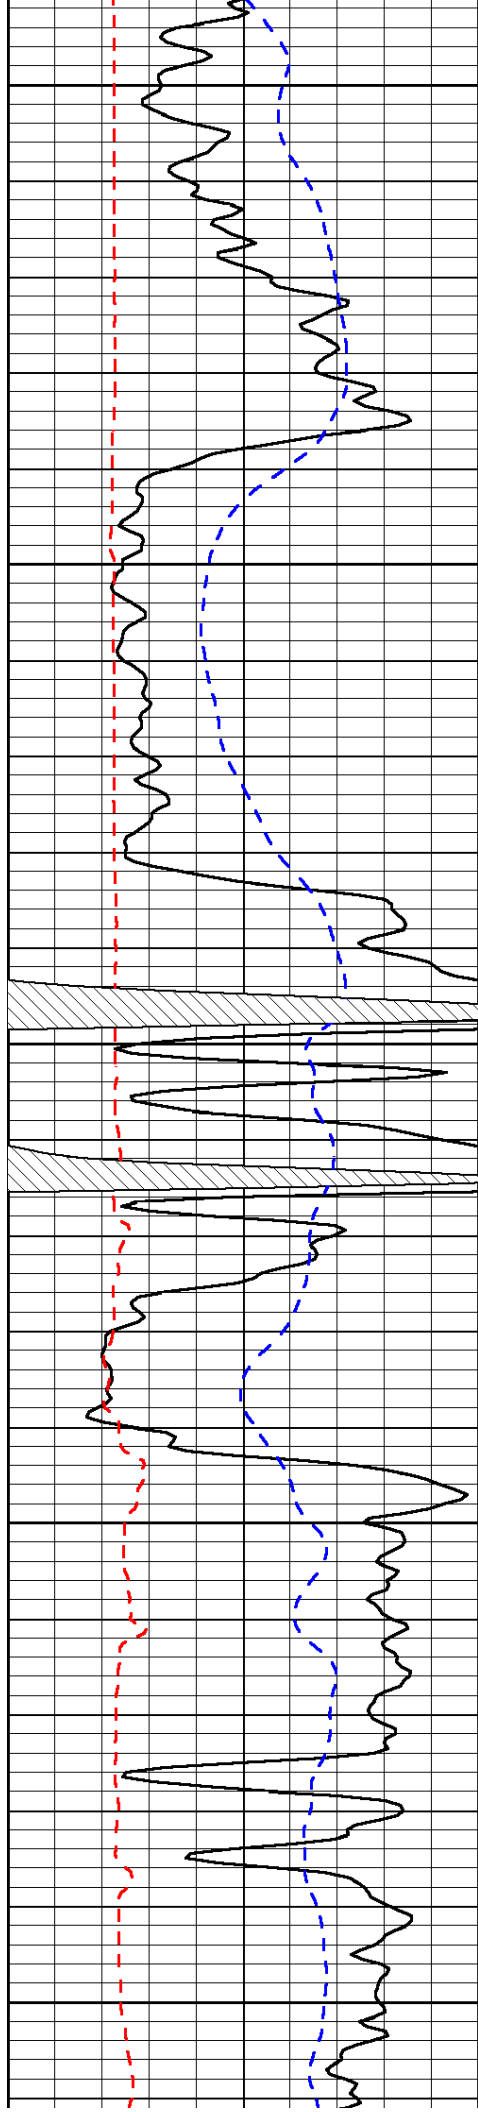


4100

4150

4200

4250

4300

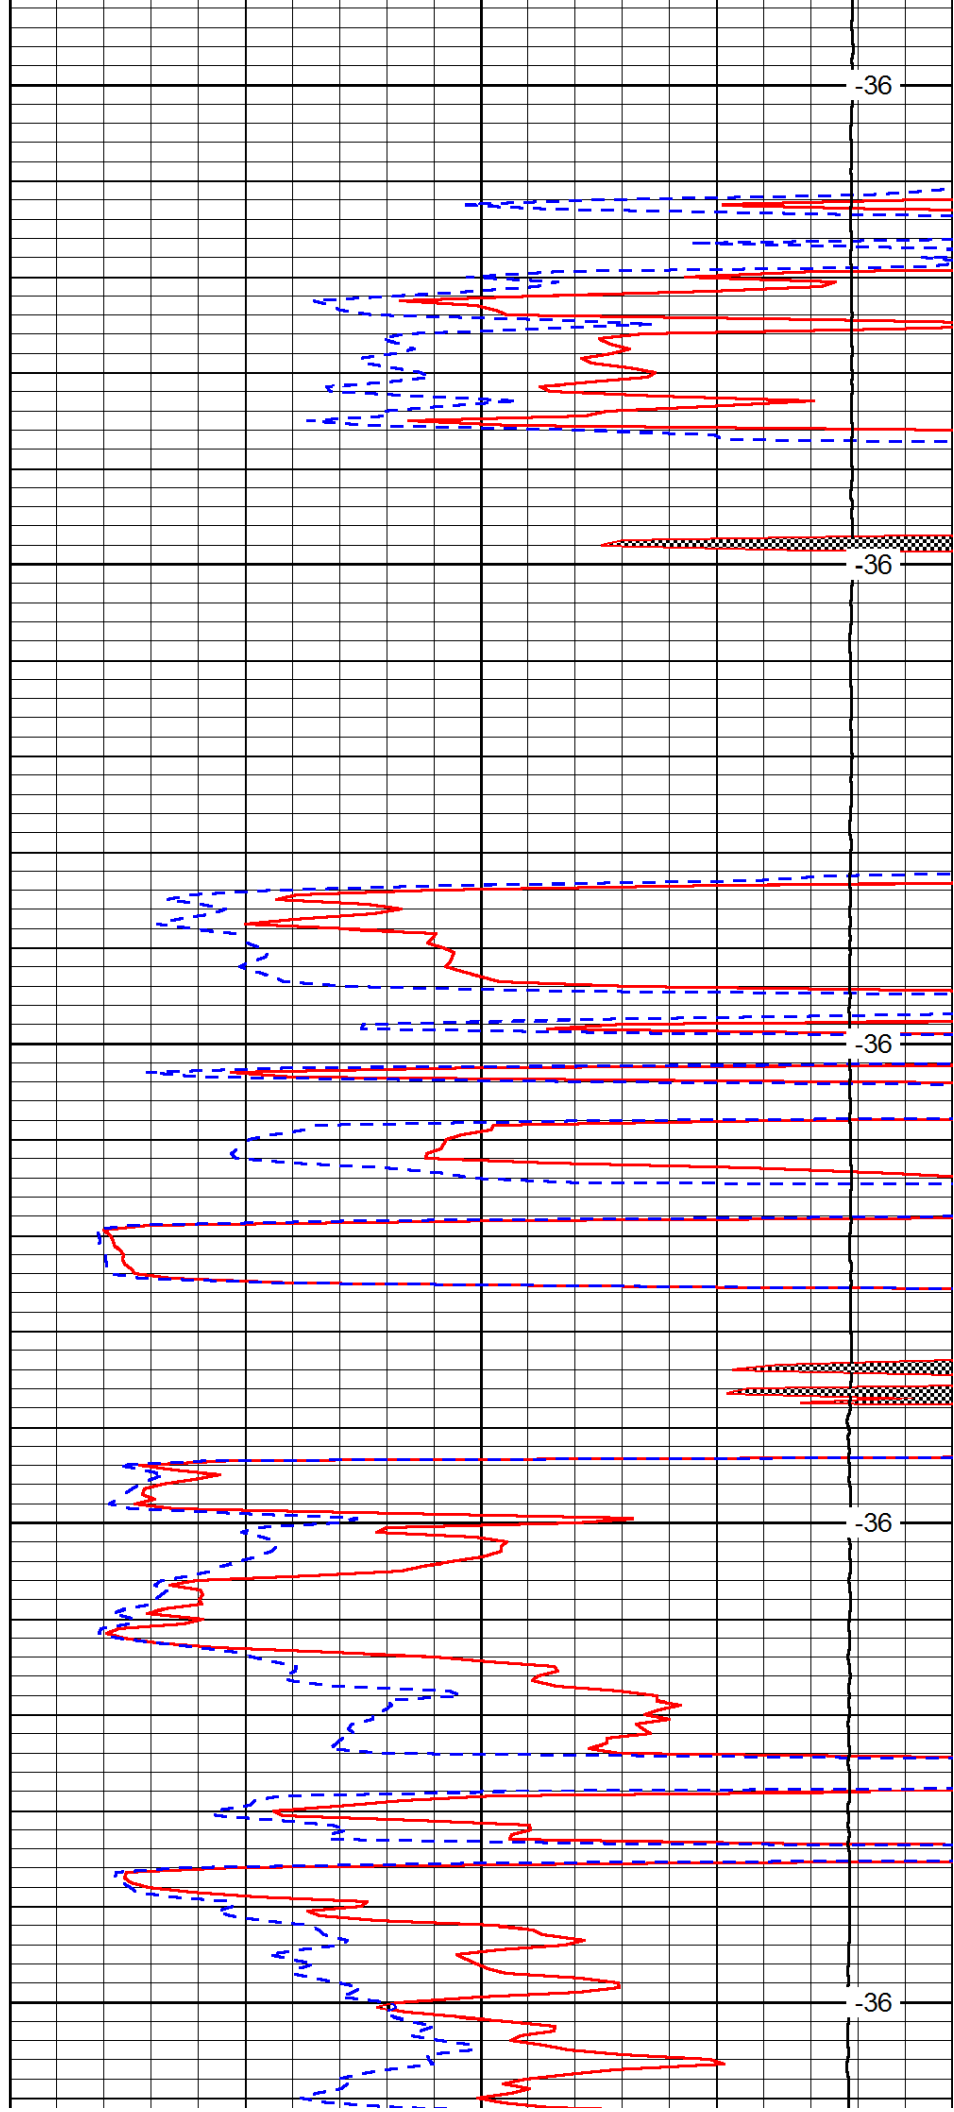


-36

-36

-36

-36

-36

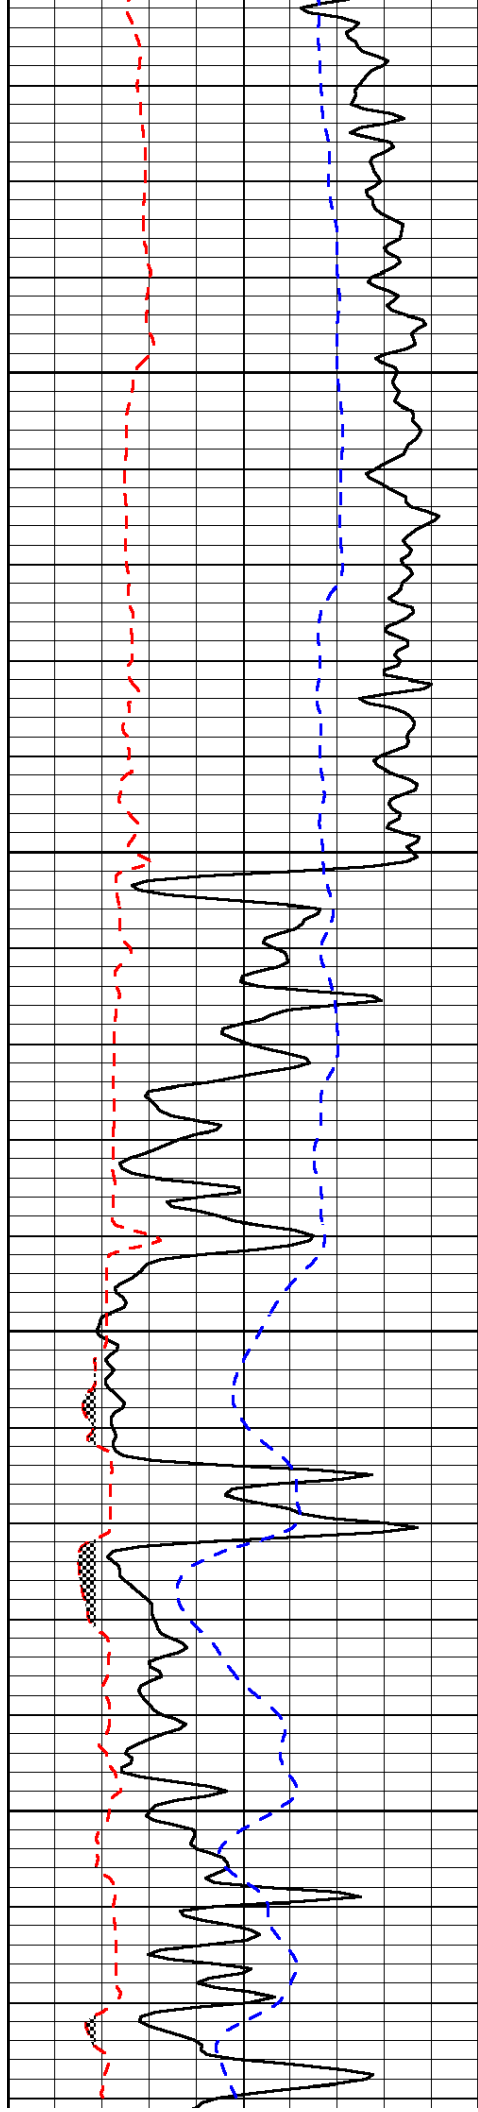


4350

4400

4450

4500

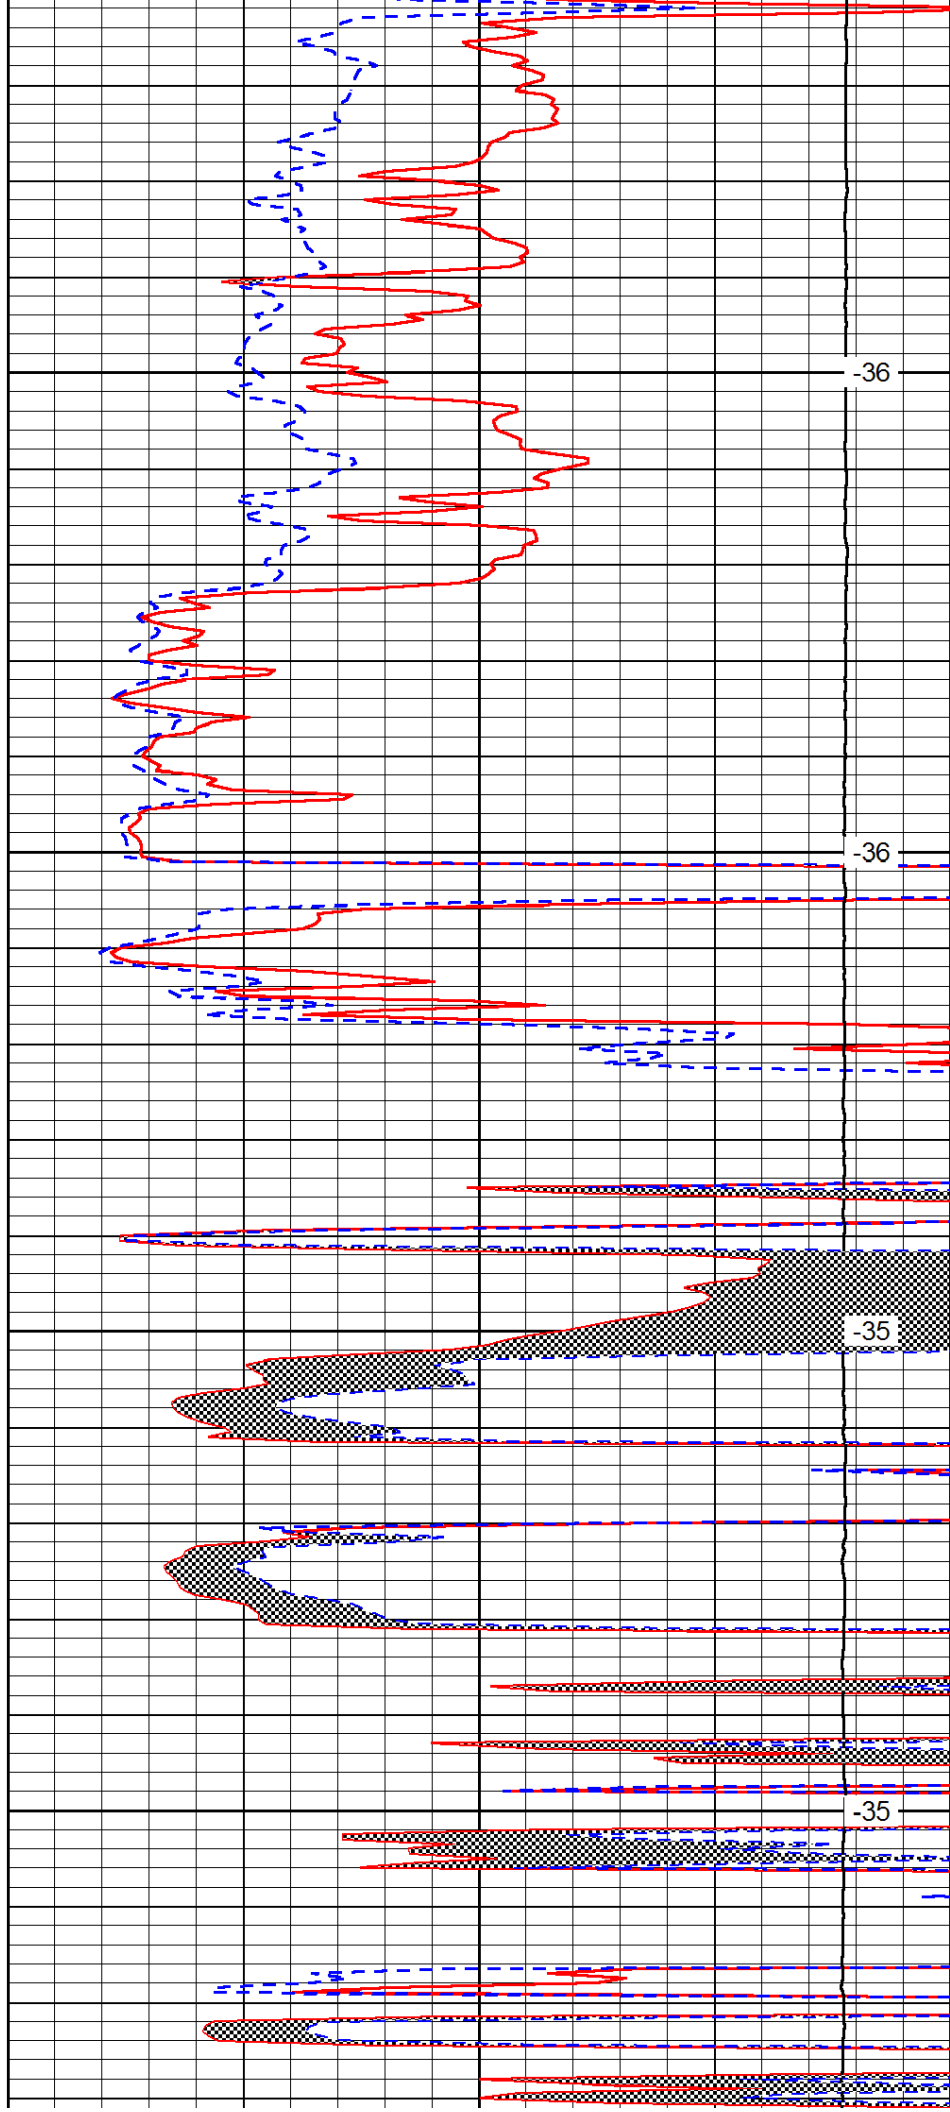


-36

-36

-35

-35

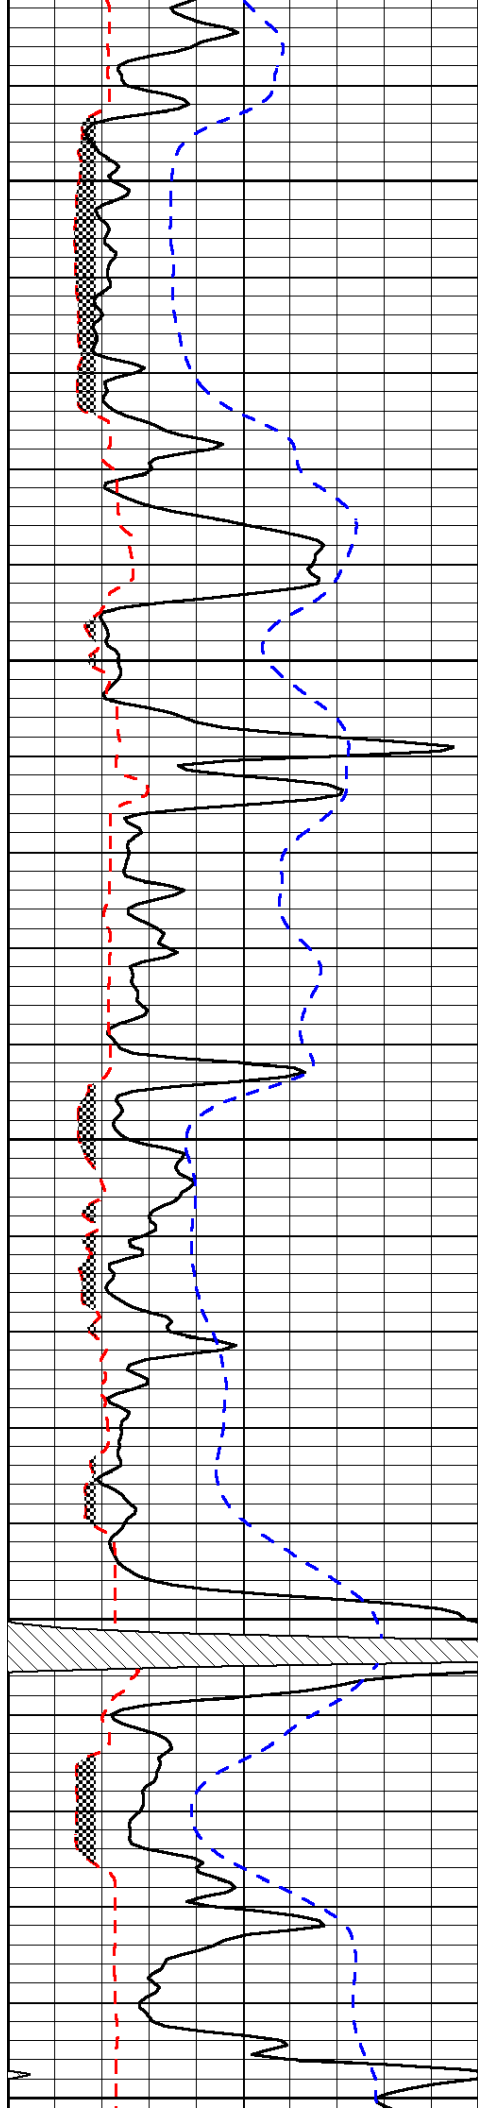


4550


4600

4650

4700

4750

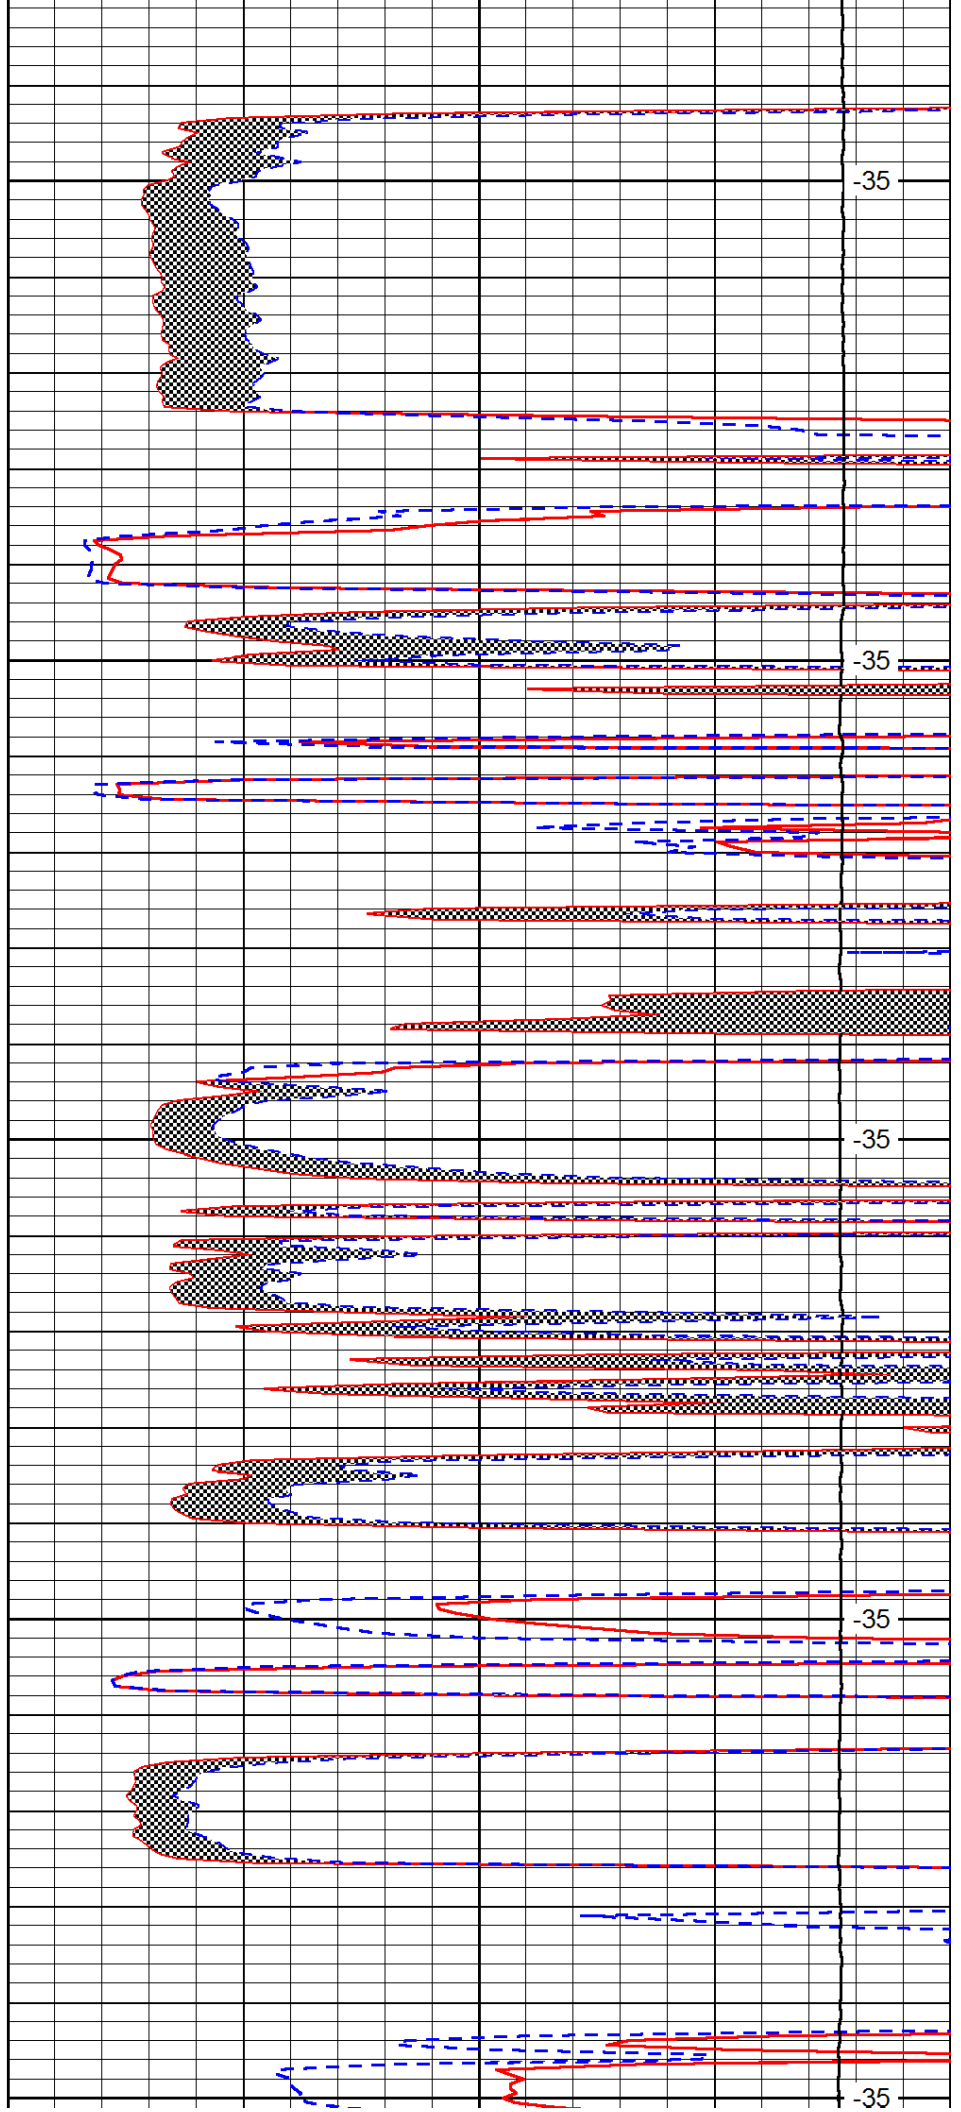

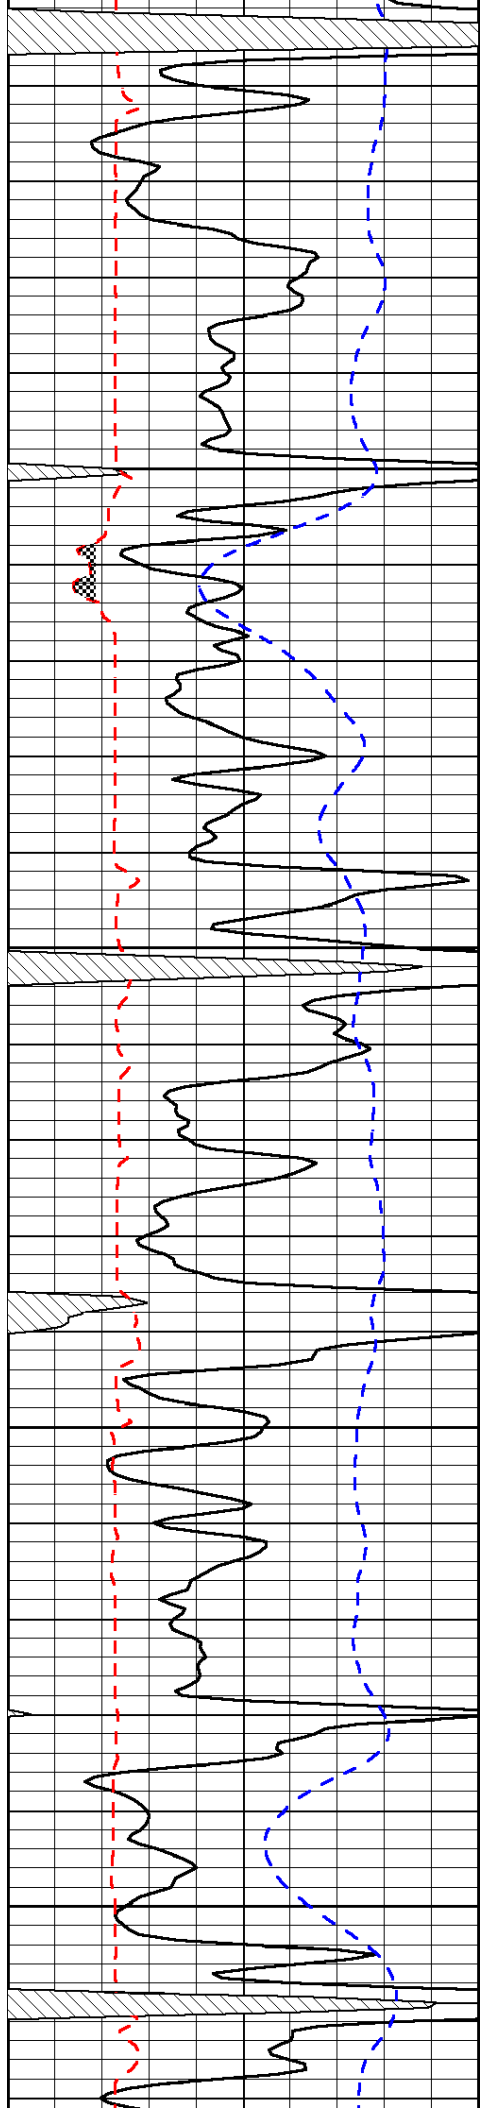



4800

4850

4900

4950

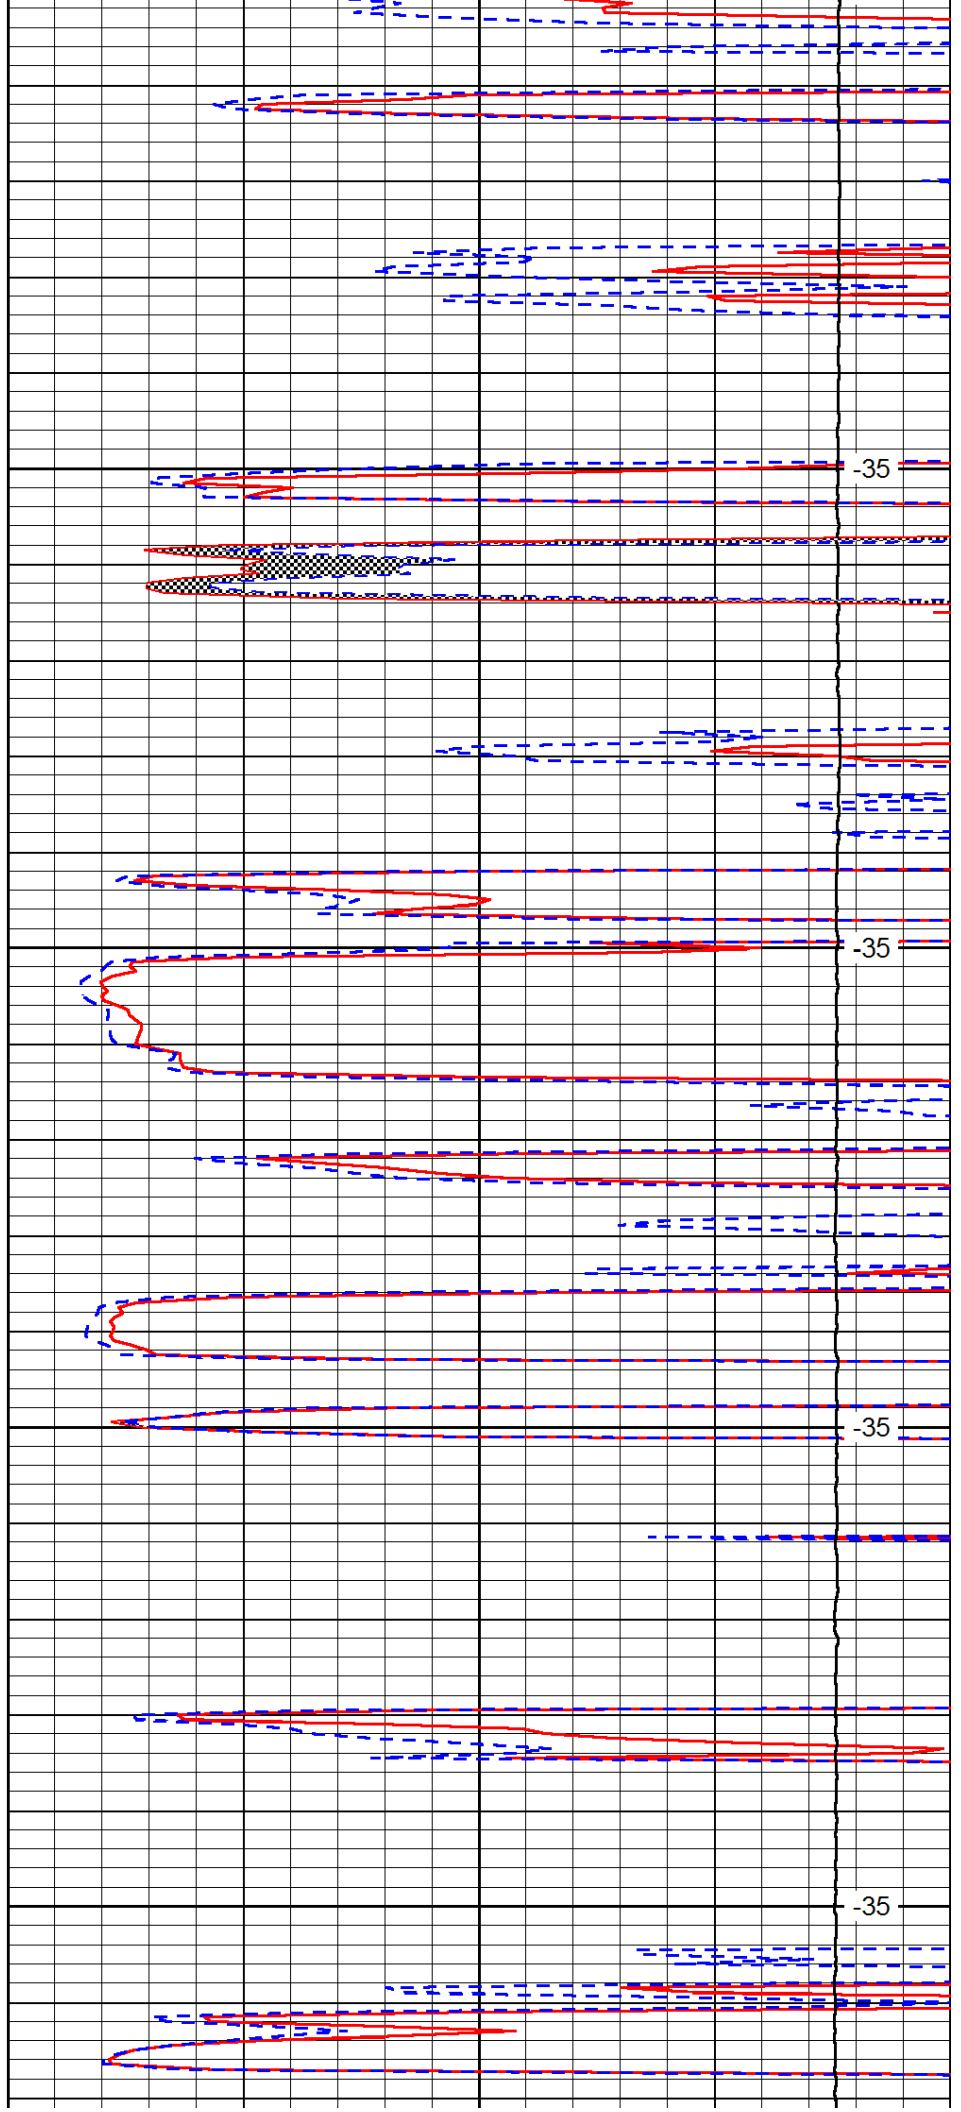

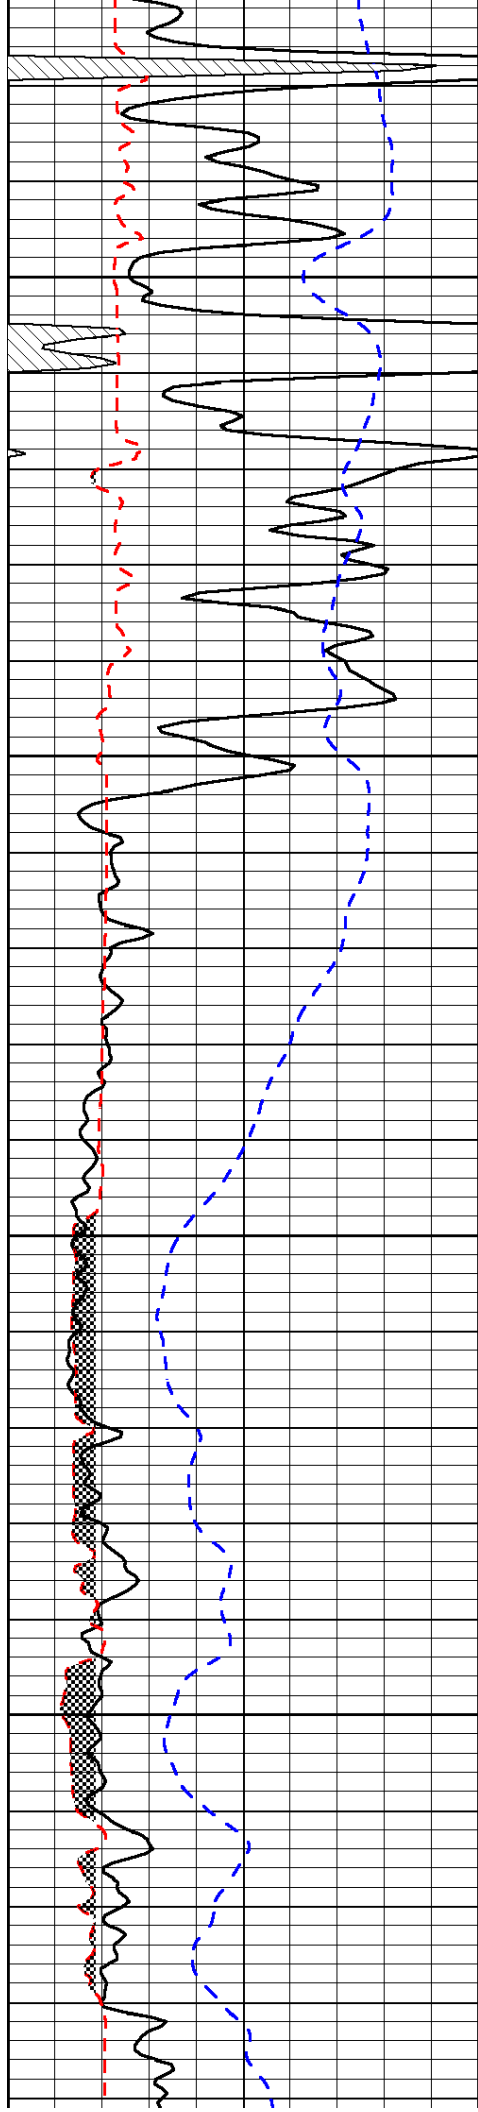


5000

5050

5100

5150

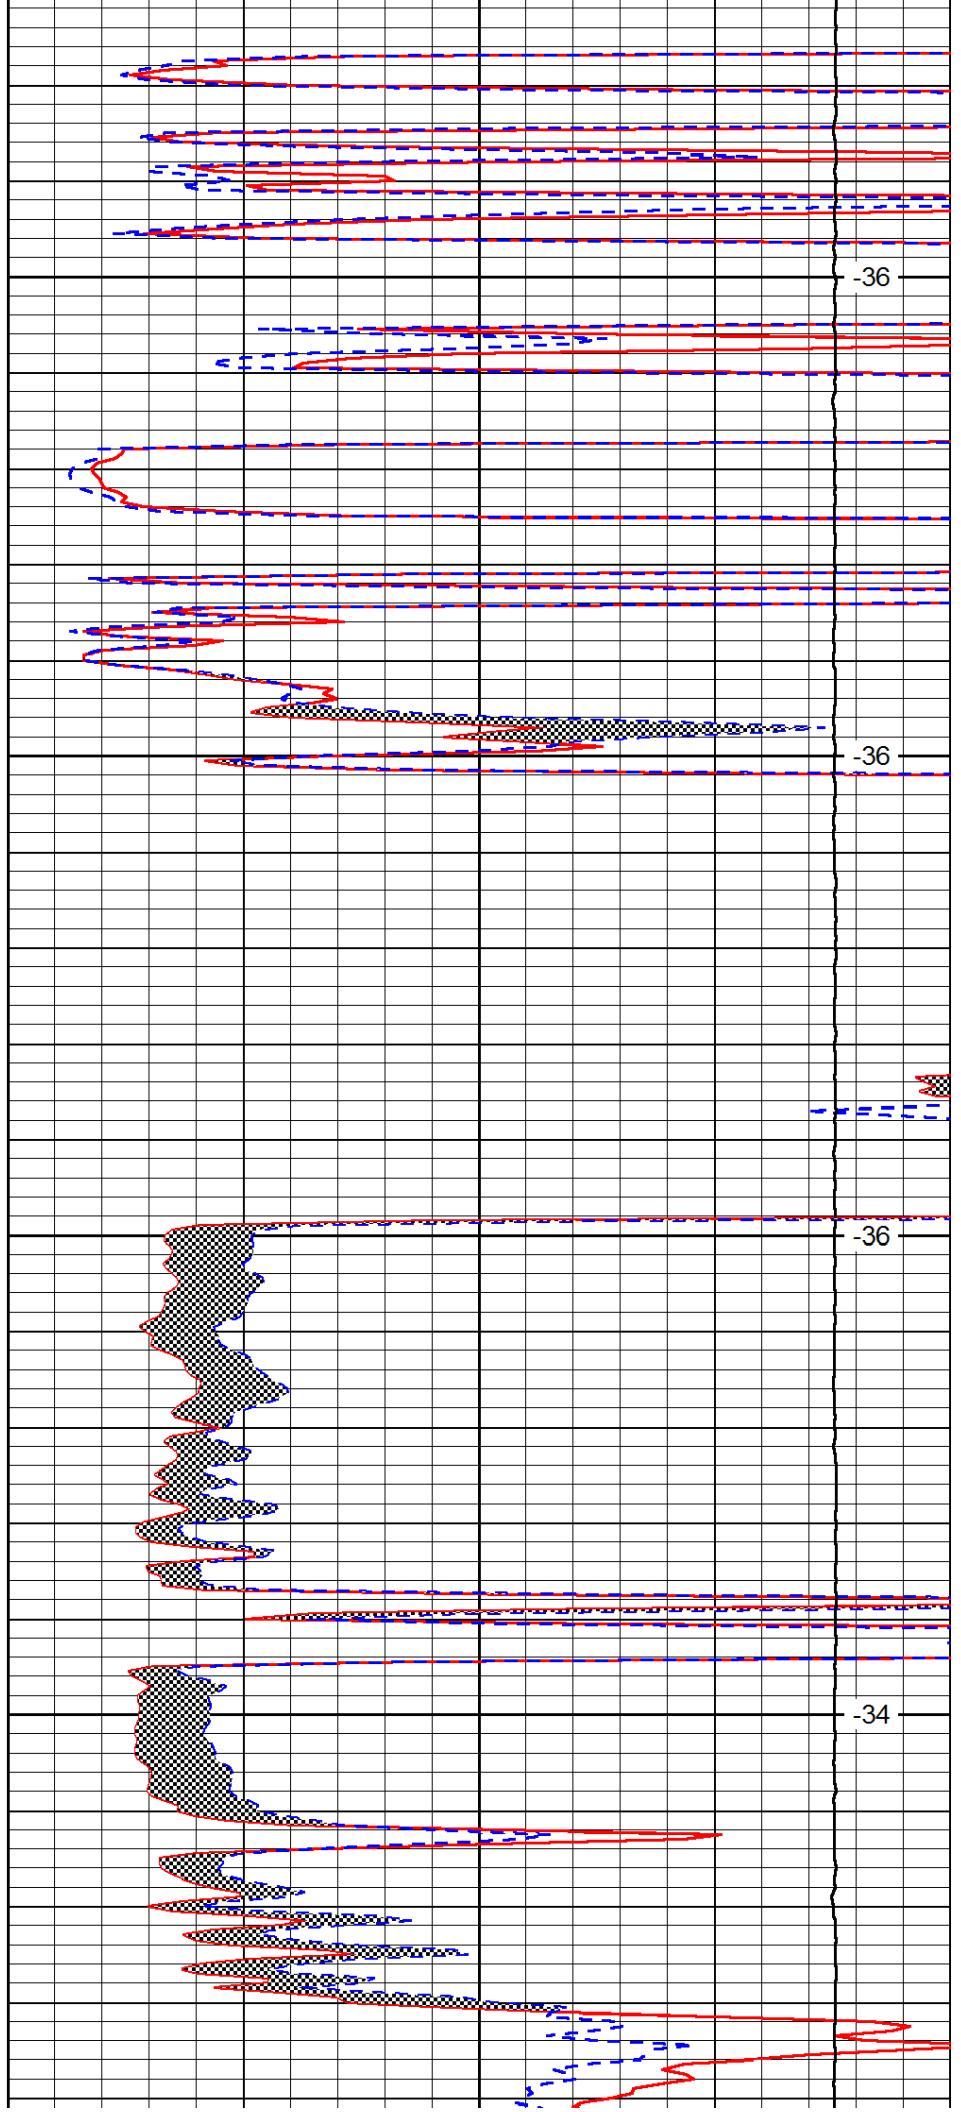


-36

-36

-36

-34

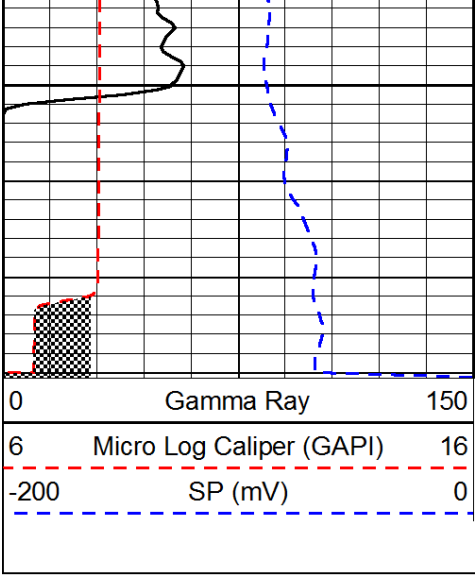

5200

