

STATE OF KANSAS  
 STATE CORPORATION COMMISSION  
 200 Colorado Derby Building  
 Wichita, Kansas 67202

WELL PLUGGING RECORD #4  
 K.A.R.-82-3-117

API NUMBER 15-065-22,488 -00-00

LEASE NAME Pruitt

WELL NUMBER 1

2310 Ft. from S Section Line

3300 Ft. from E Section Line

SEC. 2 TWP. 7S RGE. 21 (E/W)(W)

COUNTY Graham

Date Well Completed 9/22/88

Plugging Commenced 9/22/88

Plugging Completed 9/22/88

TYPE OR PRINT  
 NOTICE: Fill out completely  
 and return to Cons. Div.  
 office within 30 days.

LEASE OPERATOR Black Diamond Oil, Inc.

ADDRESS 1105 E. 30th, Ste. #4, Hays, KS 67601

PHONE# (913) 625-5891 OPERATORS LICENSE NO. 7076

Character of Well D&A

(Oil, Gas, D&A, SWD, Input, Water Supply Well)

The plugging proposal was approved on 9-22-88 (date)

by Carl Goodrow (KCC District Agent's Name).

Is ACO-1 filed? No If not, is well log attached? Yes

Producing Formation \_\_\_\_\_ Depth to Top \_\_\_\_\_ Bottom T.D. 3730'

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Plugged out
				8-5/8"	215'	-0-

9-28-88  
 RECEIVED  
 STATE CORPORATION COMMISSION  
 SEP 28 1988  
 CONSERVATION DIVISION  
 Wichita, Kansas

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_ feet to \_\_\_ feet each set.

Mud laden fluid 3730'-1825' 40 sks cement @ 270'  
 25 sks cement @ 1825' 10 sks cement @ 40'  
 100 sks cement @ 1100' 15 sks cemen in rathole

(If additional description is necessary, use BACK of this form.)

Name of Plugging Contractor Emphasis Oil Operations License No. 750

Address P. O. Box 506, Russell, Kansas 67665-0506

STATE OF KANSAS COUNTY OF RUSSELL, ss.

Kyle B. Branum (Employee of Operator) or (Operator) of above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed that the same are true and correct, so help me God.


(Signature) [Signature]  
 Kyle B. Branum

(Address) P. O. Box 506, Russell, KS 67665-0506

SUBSCRIBED AND SWORN TO before me this 27th day of September, 19 88

[Signature]  
 Glenda R. Tiffin, Notary Public

My Commission Expires: February 6, 1992



15-065-22488-00-00

EMPHASIS OIL OPERATIONS  
P. O. BOX 506  
RUSSELL, KS 67665

DRILLERS LOG

OPERATOR: Black Diamond Oil, Inc.  
1105 E. 30th, Ste. #4  
Hays, Kansas 67601

CONTRACTOR: Emphasis Oil Operations  
Box 506  
Russell, KS 67665

LEASE: Pruitt

WELL #1

LOCATION: N/2 NE SW  
Section 2-7S-21W  
Graham County, Kansas

LOGGERS TOTAL DEPTH: 3730'

ROTARY TOTAL DEPTH: 3730'

COMMENCED: 9/16/88

CASING: 8-5/8" @ 215' w/150 sks cement

ELEVATION: 2235' K.B.

COMPLETED: 9/22/88

STATUS: Dry Hole

DEPTHS & FORMATIONS

(All measurements from K.B.)

Top Soil, Sand & Clay	120'	Shale & Lime	3182'
Shale	740'	Top of Topeka	3183'
Dakota Sand	806'	Top of Heebner	3390'
Red Bed	1320'	Top of Toronto	3412'
Cedar Hills Sand	1530'	Top of Lansing-Kansas City	3428'
Red Bed	1805'	R.T.D.	3730'
Anhydrite			

RECEIVED 1834  
STATE CORPORATION COMMISSION

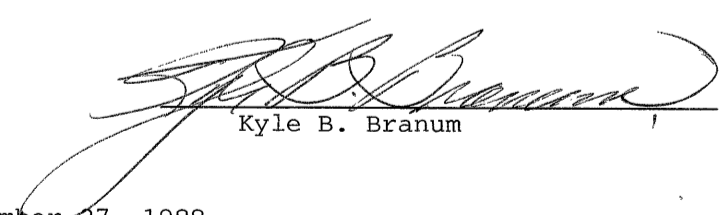
SEP 28 1988

9-28-88

CONSERVATION DIVISION  
Wichita, Kansas


STATE OF KANSAS )  
                          ) ss  
COUNTY OF RUSSELL)

Kyle B. Branum, of Emphasis Oil Operations, states that the above and foregoing is a true and correct log of the above captioned well, to the best of his knowledge.

  
Kyle B. Branum

Subscribed and sworn to before me on September 27, 1988.

My commission expires: February 6, 1992.

  
Glenda R. Tiffin, Notary Public

