

TO: STATE CORPORATION COMMISSION  
CONSERVATION DIVISION - PLUGGING  
130 SOUTH MARKET, SUITE 2078  
WICHITA, KANSAS 67202

API Well Number: 15-175-20576-00-01  
Spot: SWSE Sec/Twnshp/Rge: 9-34S-31W  
660 feet from S Section Line, 1980 feet from E Section Line  
Lease Name: HAYS Well #: 1  
County: SEWARD Total Vertical Depth: 5922 feet

Operator License No.: 33603  
Op Name: NOBLE ENERGY PRODUCTION, INC.  
Address: 1625 BROADWAY, SUITE 2000  
DENVER, CO 80202

String	Size	Depth (ft)	Pulled (ft)	Comment
CIBP		5500		
CIBP		5725		
CIBP		5790		
PROD	4.5	5896	2460	WITH 250 SX CMT
SURF	8.625	1362		WITH 750 SX CMT

# 192 47

Well Type: OIL UIC Docket No: \_\_\_\_\_ Date/Time to Plug: 12/06/2005 9:00 AM  
Plug Co. License No.: 32833 Plug Co. Name: SARGENT LILLARD CASING PULLING, INC.  
Proposal Rcvd. from: TONY BUNCH Company: NOBEL ENERGY Phone: (303) 389-3600

Proposed Plugging Method: 1ST PLUG LOAD HOLE WITH MUD. SPOT 5 0 SX CMT AT 1380' 2ND PLUG PULL TO 600', PUMP 50 SX CMT. 3RD PLUG AT 40-0' WITH 10 SX CMT.

Plugging Proposal Received By: STEVE DURRANT WitnessType: COMPLETE (100%)  
Date/Time Plugging Completed: 12/06/2005 4:00 PM KCC Agent: JIM HOLLAND

Actual Plugging Report:

PUMP 25 SX CMT WITH 200# HULLS. DISPLACED WITH 85 BBL MUD. PRESSURED TO 200#. 1ST PLUG PULL OUT OF HOLE WITH 4 1/2" CASING TO 1380', CIRCULATE HOLE WITH MUD. PUMP 50 SX CMT AT 1380'. 2ND PLUG AT 600' WITH 50 SX CMT. 3RD PLUG AT 40' WITH 10 SX CMT.

Perfs:


Top	Bot	Thru	Comments
5809	5819		
5761	5765		
5744	5750		
5682	5696		
5606	5620		
5066	5072		
3399	3405		

RECEIVED  
JAN 04 2005  
KCC WICHITA

Remarks: USED COMMON CEMENT BY SARGENT & LILLARD.

Plugged through: CSG

District: 01

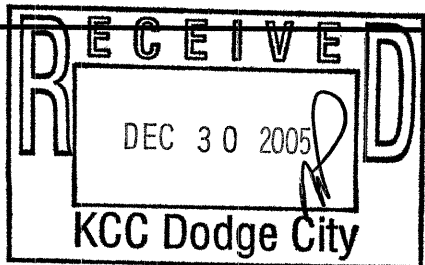

Signed Jim Holland PART II  
(TECHNICIAN)

INVOICED  
DATE 1-4-05  
INV. NO. 2006060945