

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-129-20187-00-00
Spot: SWSWNW Sec/Twnshp/Rge: 15-33S-42W
2990 feet from S Section Line, 4950 feet from E Section Line
Lease Name: BOEHM Well #: 29
County: MORTON Total Vertical Depth: 5000 feet

Operator License No.: 7117
Op Name: COLORADO INTERSTATE GAS COMPA
Address: PO BOX 1087
COLORADO SPRINGS, CO 80944

String	Size	Depth (ft)	Pulled (ft)	Comment
CIBP		4853		WITH 25 SX CMT
COND	13.38	129		
PROD	5.5	4988	0	WITH 1050 SX CMT #162
SURF	9.625	86		
SURF	8.625	1378		WITH 750 SX CMT

Well Type: GS 6W UIC Docket No: S017.27 Date/Time to Plug: 12/22/2005 9:00 AM
Plug Co. License No.: 7407 Plug Co. Name: EAGLE WELL SERVICE
Proposal Rcvd. from: SYD KRAIER Company: COLORADO INTERSTATE GAS CO. Phone: (719) 520-4557

Proposed Plugging Method: CIBP @ 4853' WITH 25 SX CMT. PLUG AT 1400' WITH 40 SX CMT. 90 SX CMT AT 700' TO SURFACE. CHECK BACKSIDE.

Plugging Proposal Received By: STEVE DURRANT WitnessType: COMPLETE (100%)
Date/Time Plugging Completed: 12/27/2005 5:00 PM KCC Agent: JIM HOLLAND

Actual Plugging Report:

CIBP @ 4853' WITH 25 SX CMT. 1ST PLUG AT 1400' WITH 40 SX CMT. 2ND PLUG PUMP 90 SX CMT FROM 700' TO SURFACE. ALL PLUGS INSIDE 5 1/2" CASING. BACKSIDE FULL.

Perfs:


Top	Bot	Thru	Comments
4900	4916		

RECEIVED
JAN 04 2006
KCC WICHITA

Remarks: USED COMMON CEMENT BY EAGLE WELL SERVICE.

Plugged through: TBG

District: 01

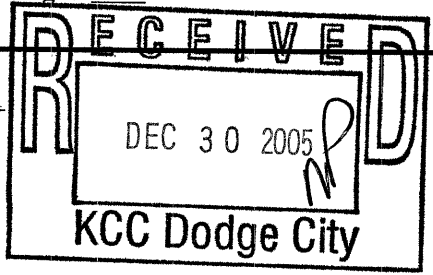

Signed: Jim Holland (TECHNICIAN) PIRTH

INVOICED
DATE 1-4-06
INV. NO 2006060944