



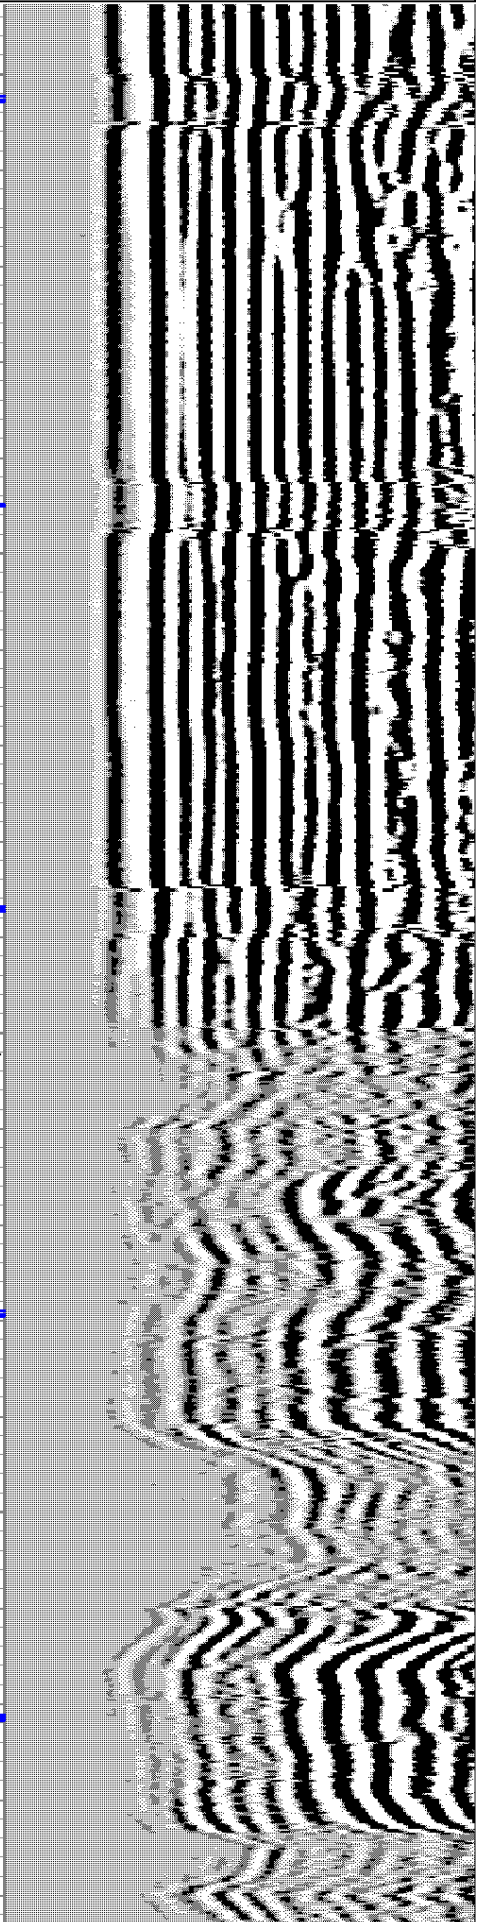

200	Travel Time (usec)	1000
0	GR (GAPI)	150

0	Amplitude (mV)	100
0	Amplified Amplitude (mV)	10
9	Collar Locator	-1

200	Variable Density	1000
-----	------------------	------

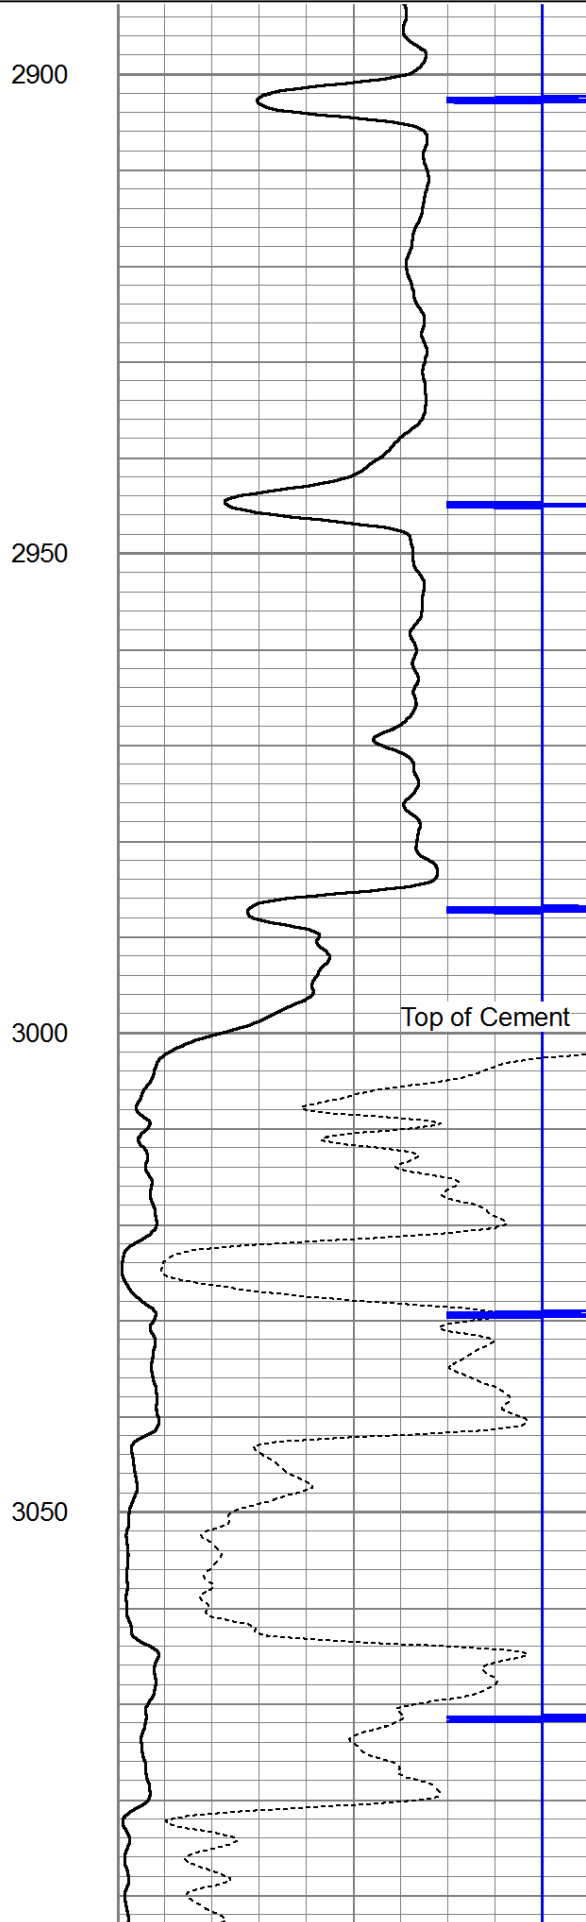


2900

2950

3000

3050

Top of Cement

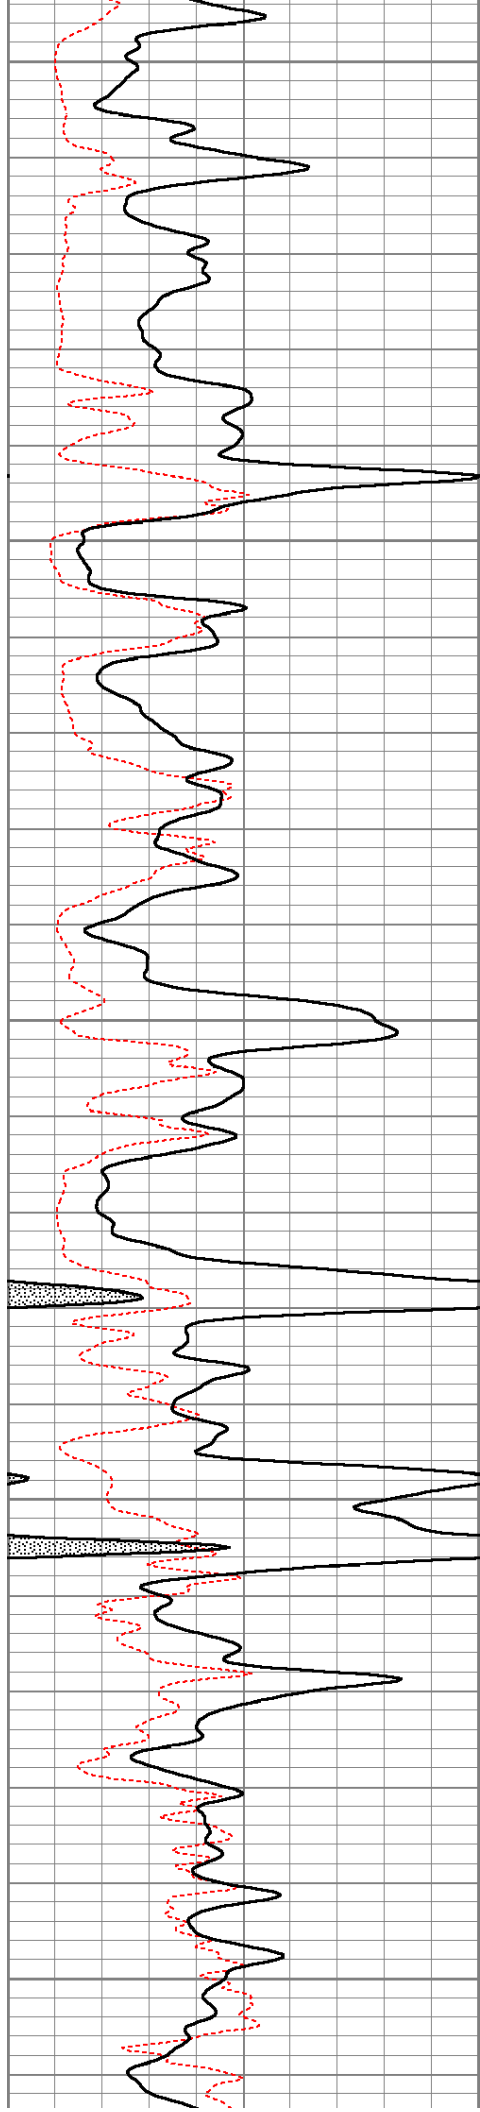



3100


3150

3200

3250

3300

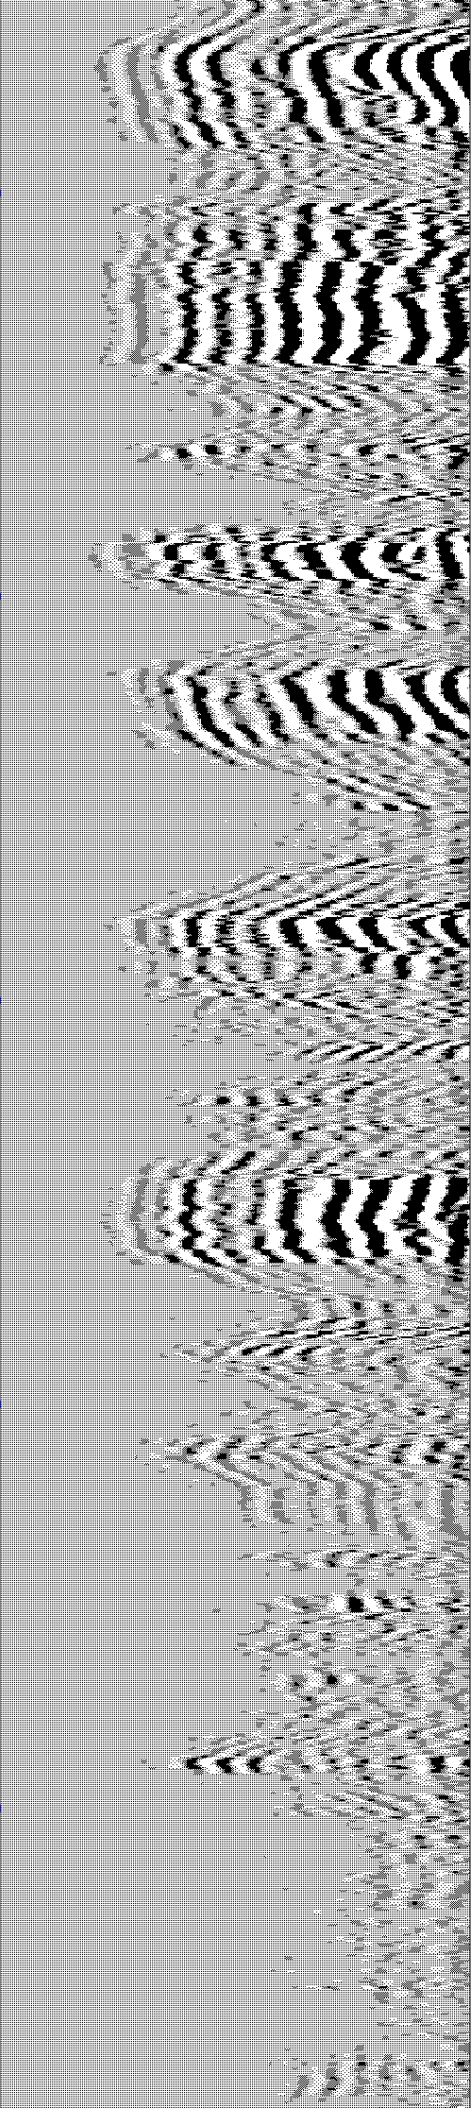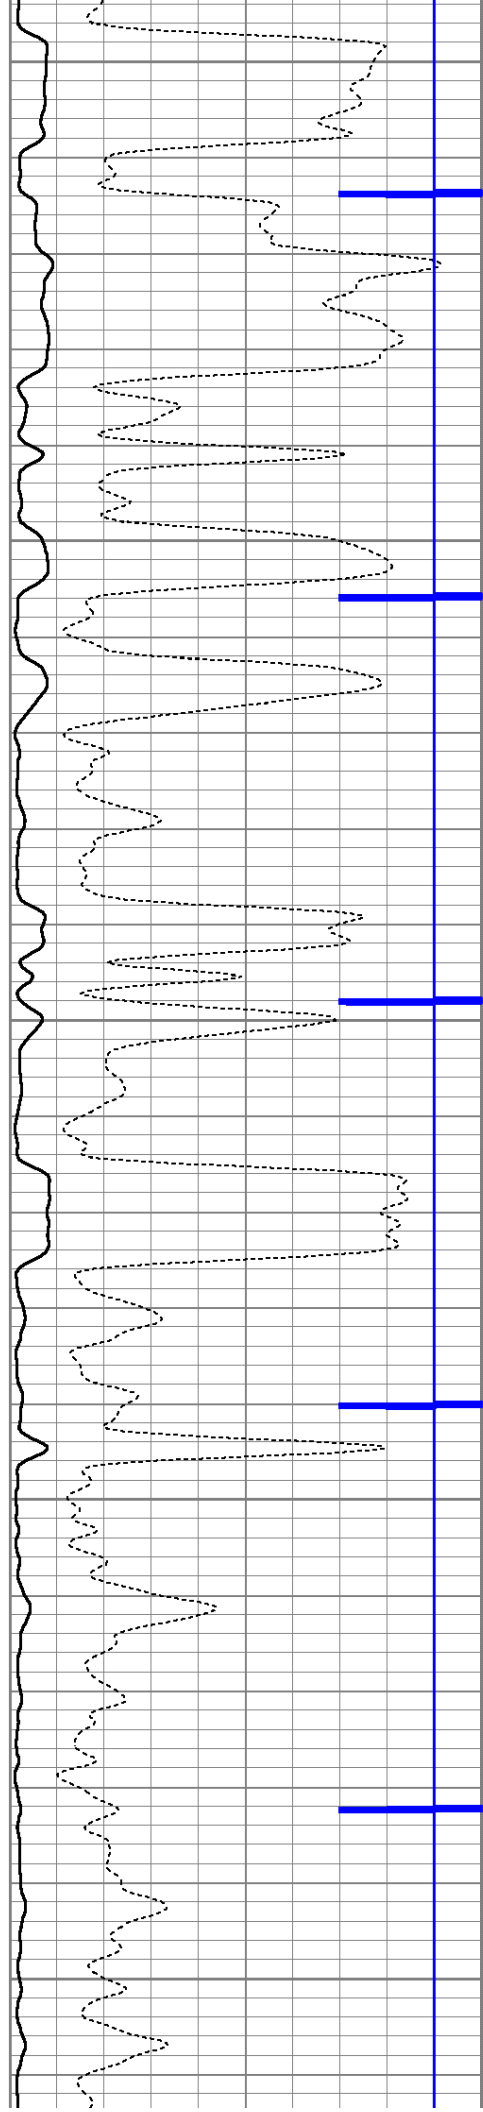


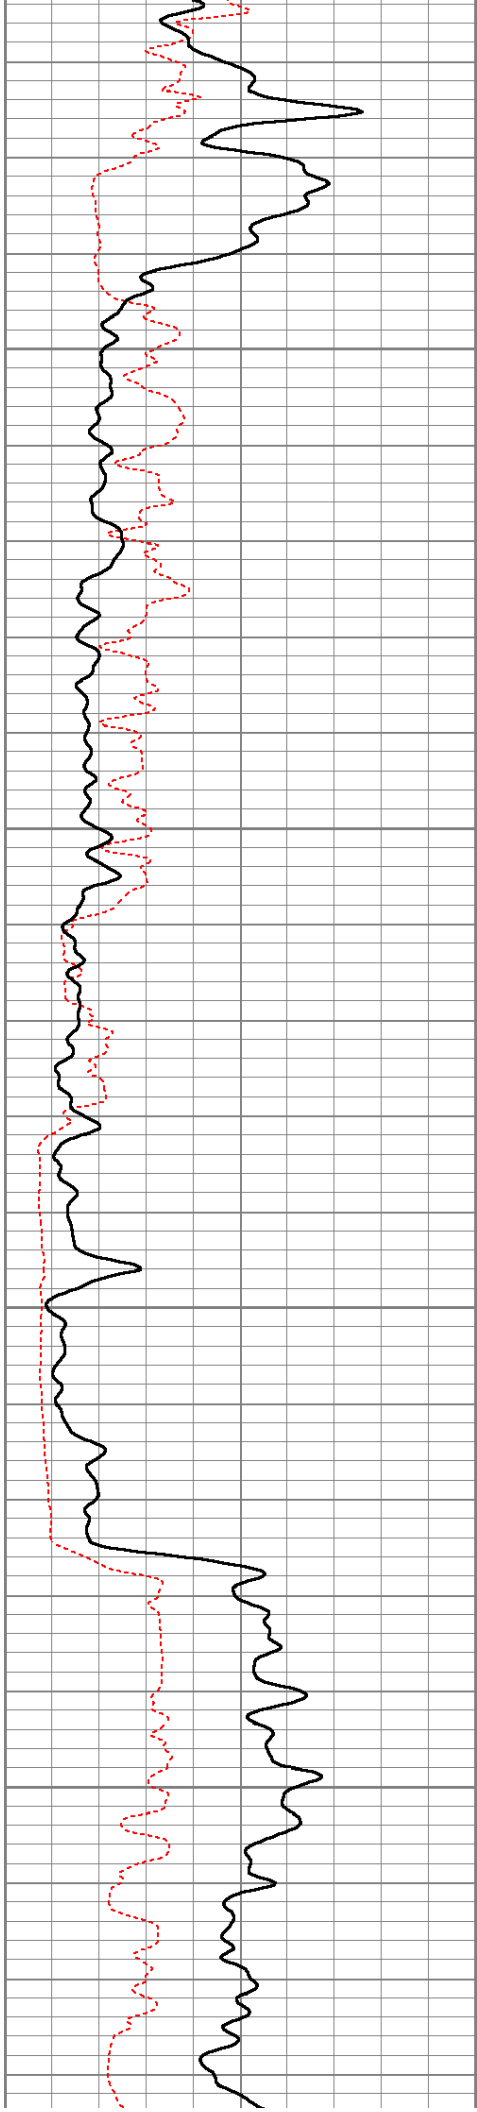



3350

3400

3450

3500

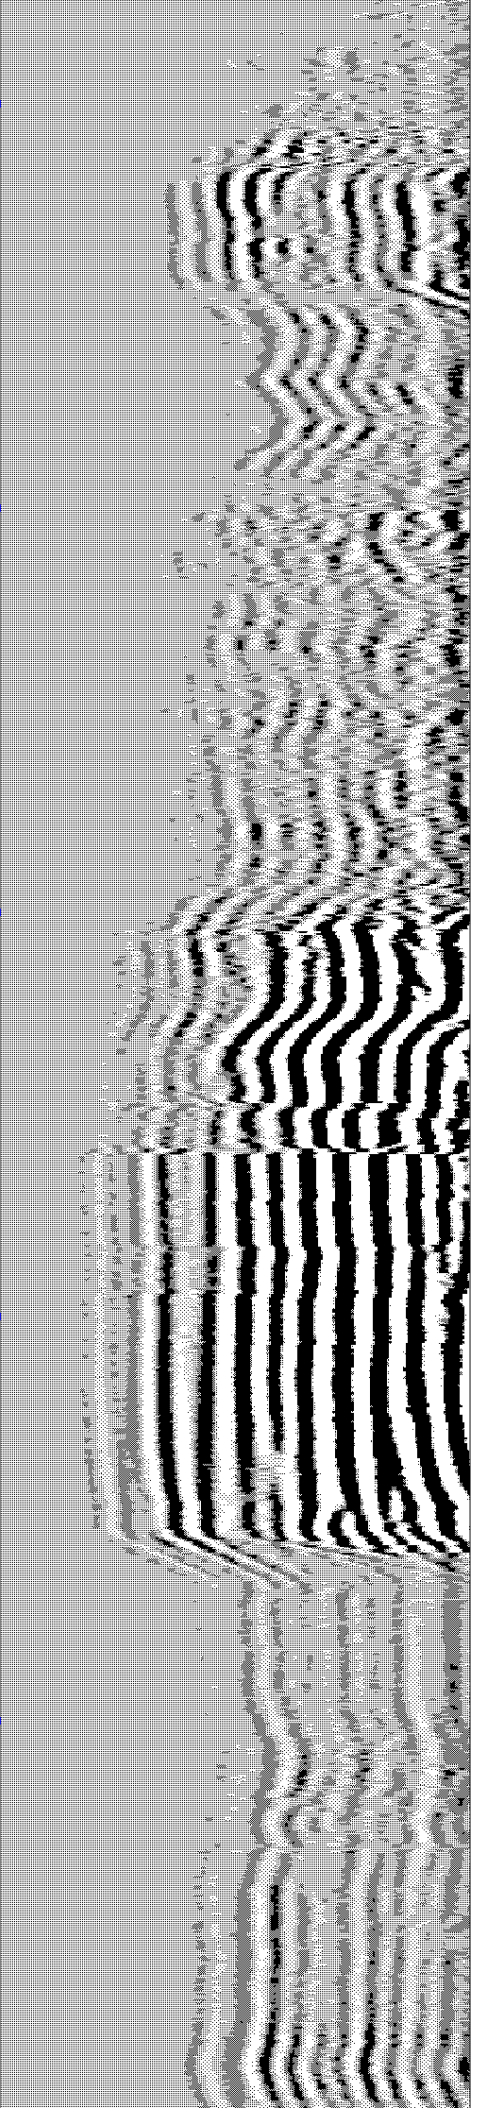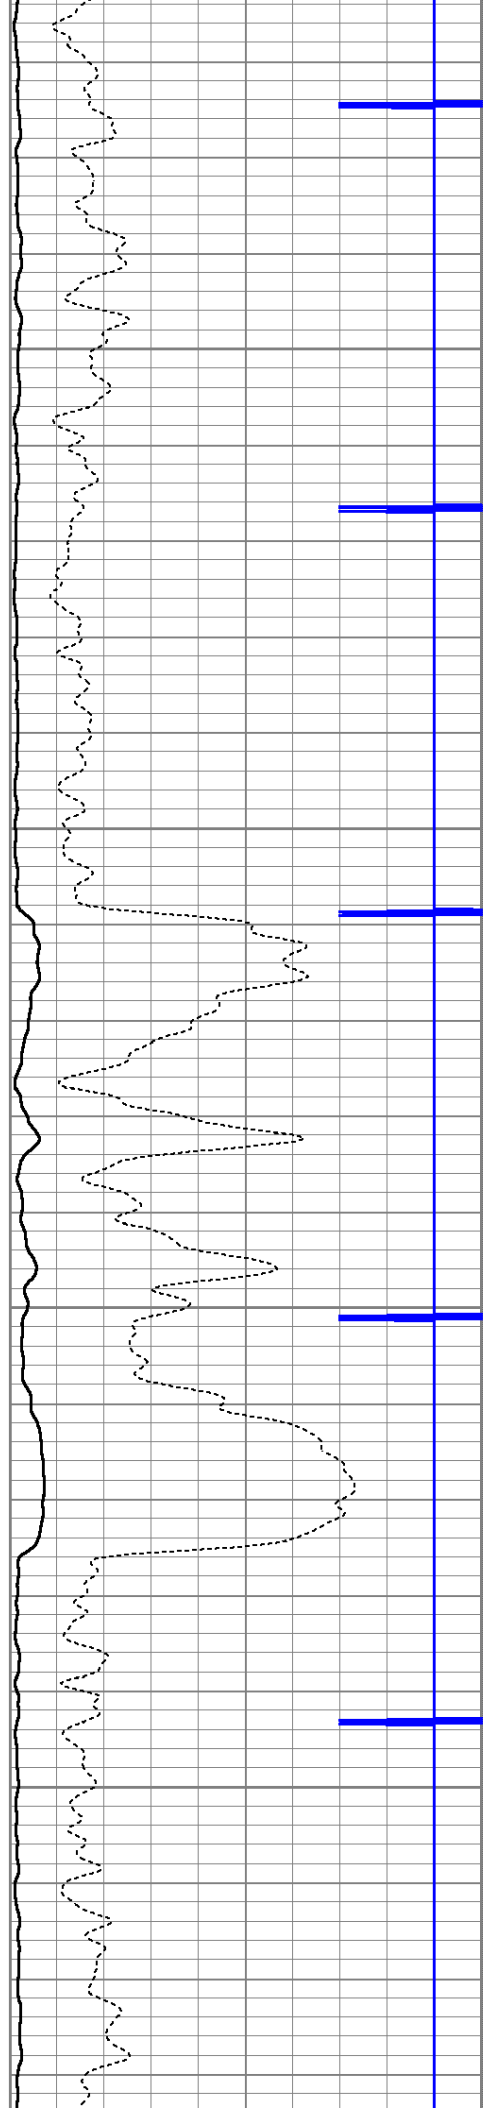

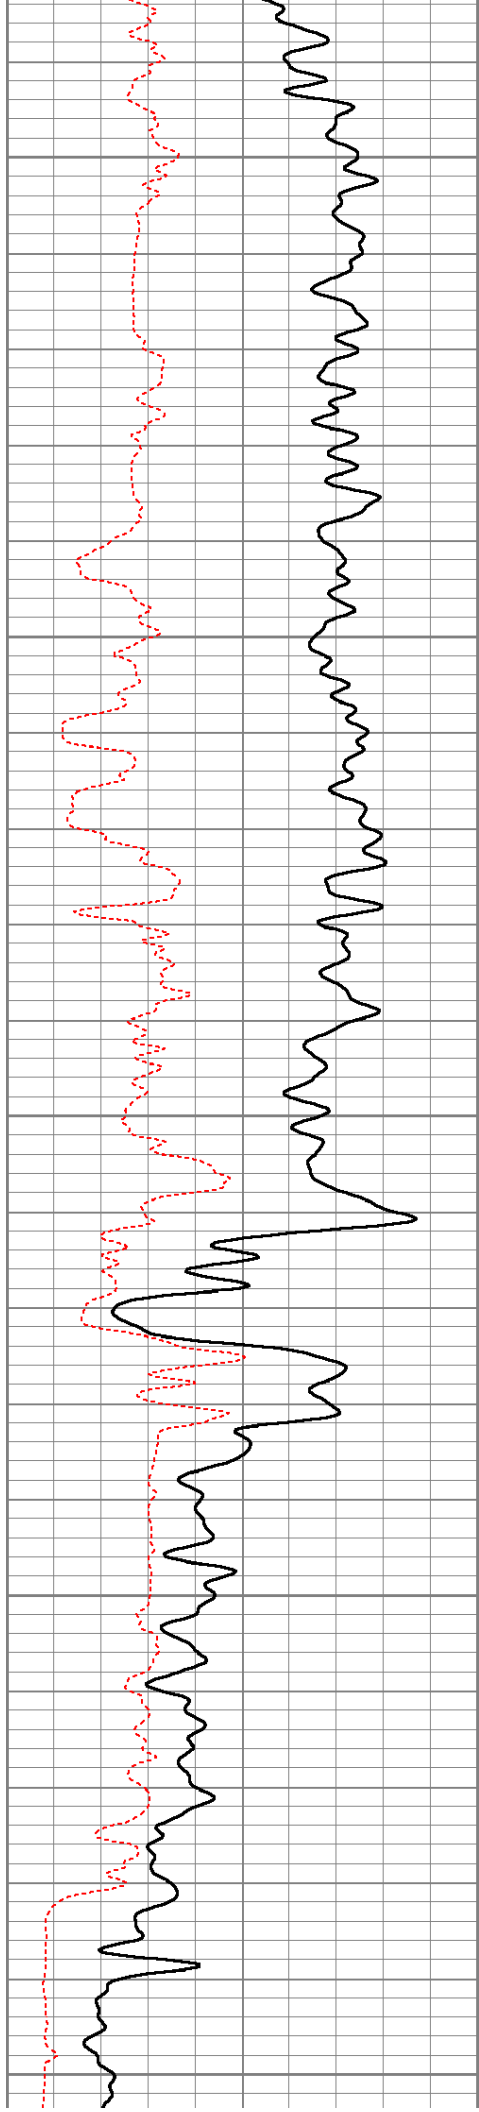



3550




3600

3650

3700

3750

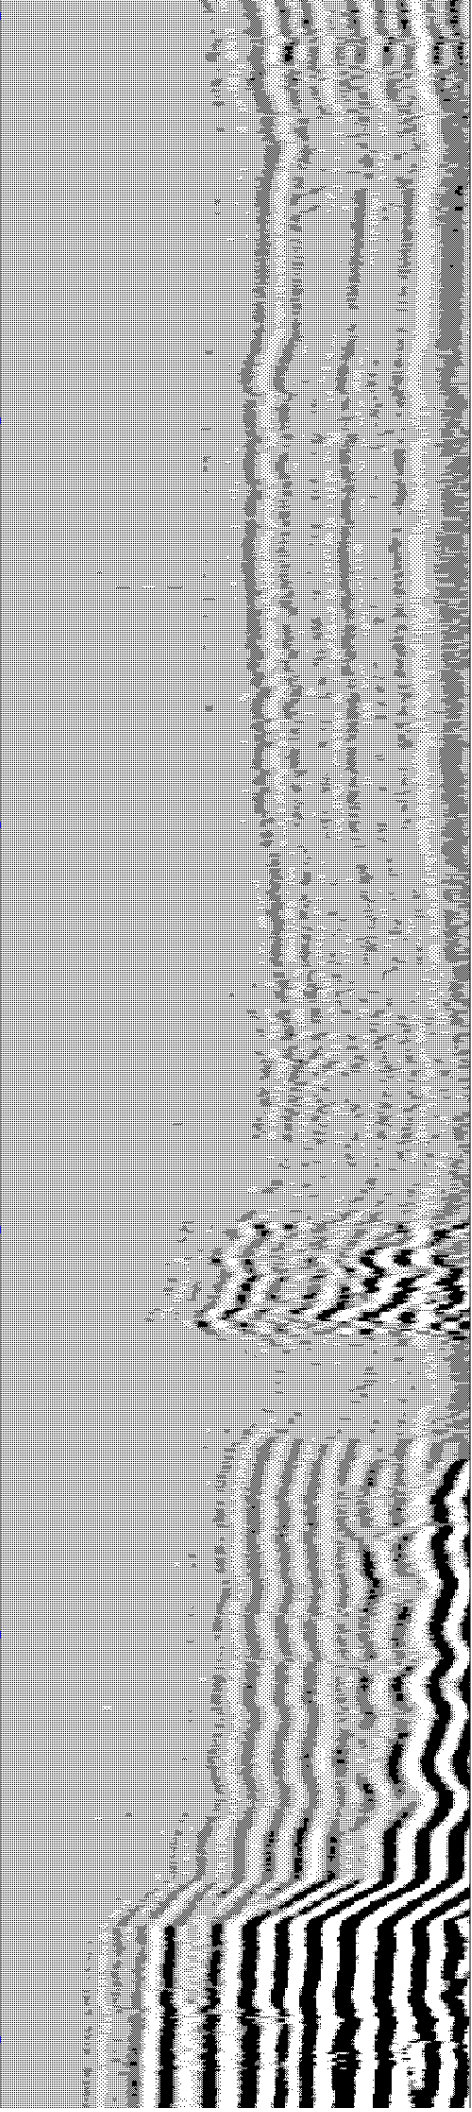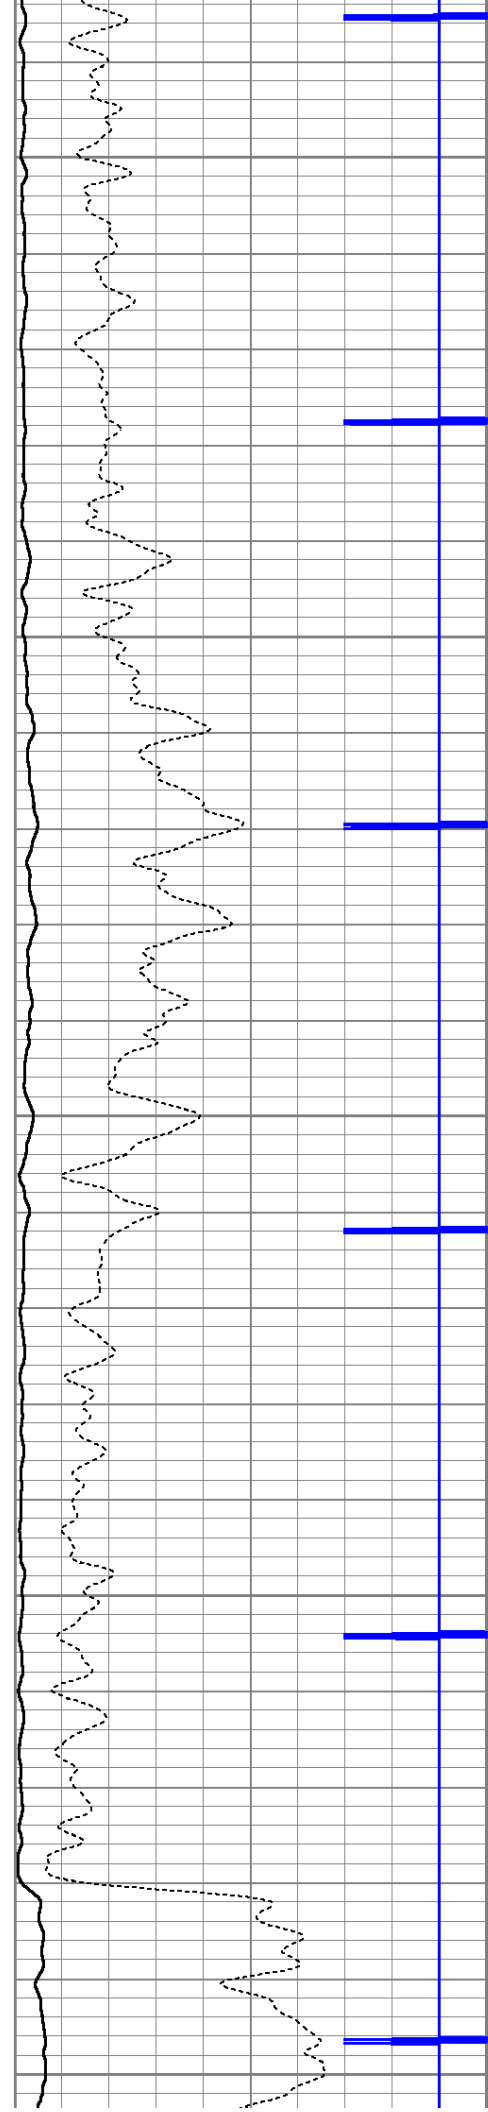

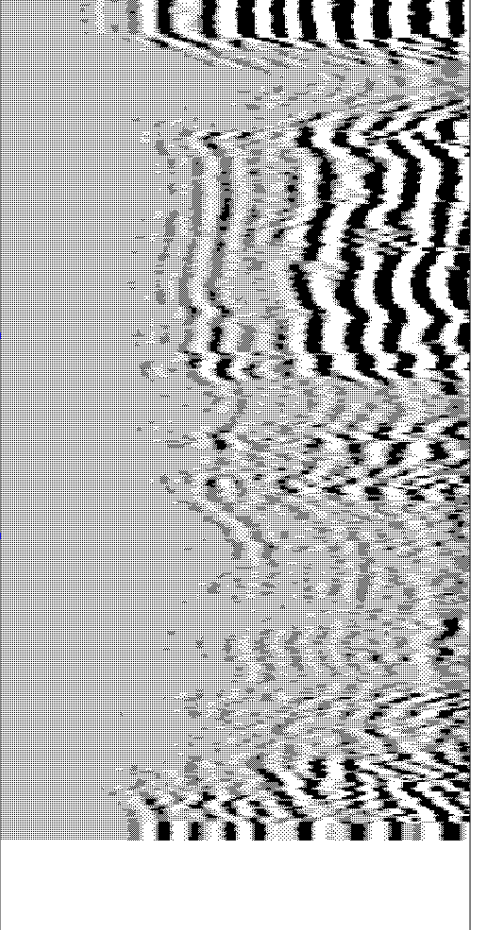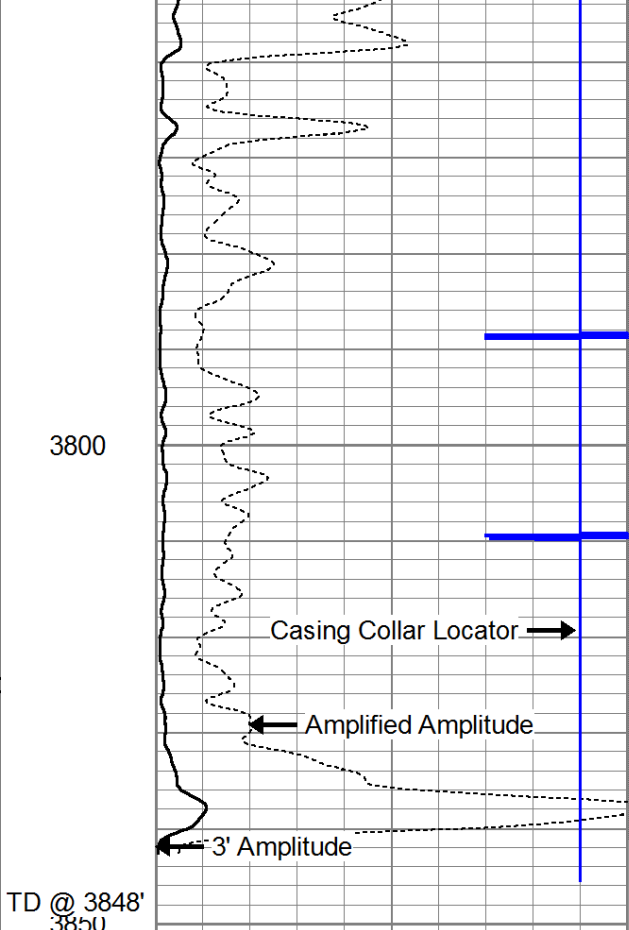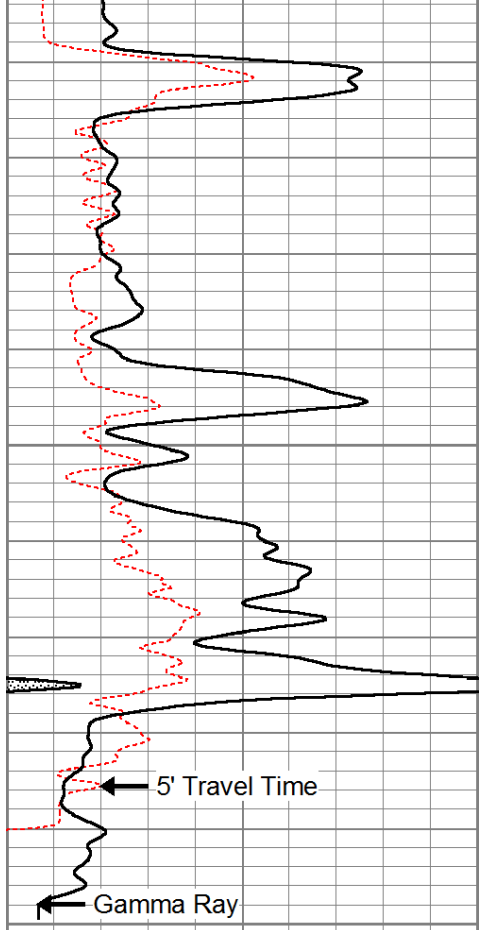

200	Travel Time (usec)	1000
0	GR (GAPI)	150

0	Amplitude (mV)	100
0	Amplified Amplitude (mV)	10
9	Collar Locator	-1

200	Variable Density	1000
-----	------------------	------