


HALLIBURTON


MICROLOG

COMPANY		HERMAN L. LOEB, LLC.			
WELL		WHITE 2-4			
FIELD/BLOCK		GREENSBURG SW			
COUNTY		KIOWA			
STATE		KANSAS			
Permanent Datum		GL		Elev. 2220.0 ft	
Log measured from		KB		D.F. 2232.0 ft	
Drilling measured from		KB		G.L. 2220.0 ft	
Date		31-Aug-14			
Run No.		ONE			
Depth - Driller		4920.00 ft			
Depth - Logger		4920.0 ft			
Bottom - Logged Interval		4916			
Top - Logged Interval		3900			
Casing - Driller		8.625 in @ 647.0 ft		@	
Casing - Logger		649.0 ft			
Bit Size		7.875 in		@	
Type Fluid in Hole		Water Based Mud			
Density		9.3 ppq		62.00 s/qt	
PH		10.00 pH		9.6 cphm	
Source of Sample		MUD PIT			
Rm @ Meas. Temperature		0.510 ohmm @ 86.00 degF		@	
Rmf @ Meas. Temperature		0.43 ohmm @ 86.00 degF		@	
Rmc @ Meas. Temperature		0.590 ohmm @ 86.00 degF		@	
Source Rmf		CALCULATED			
Rmc		CALCULATED			
Rm @ BHT		0.37 ohmm @ 121.0 degF		@	
Time Since Circulation		7.0000 hr			
Time on Bottom		31-Aug-14 07:29			
Max. Rec. Temperature		121.0 degF @ 4920.0 ft		@	
Equipment		11230668 LIBERAL			
Recorded By		SHELDON INGERSOLL			
Witnessed By		J. CHRISTENSEN			

Fold here


Service Ticket No.: 901626122				API Serial No.: 15-097-21804-00-00				PGM Version: WL INSITE R4.2.0 (Build 2)							
CHANGE IN MUD TYPE OR ADDITIONAL SAMPLE						RESISTIVITY SCALE CHANGES									
Date		Sample No.				Type Log		Depth		Scale Up Hole		Scale Down Hole			
Depth-Driller															
Type Fluid in Hole															
Density		Viscosity													
Ph		Fluid Loss													
Source of Sample						RESISTIVITY EQUIPMENT DATA									
Rm @ Meas. Temp		@		@		Run No.		Tool Type & No.		Pad Type		Tool Pos.		Other	
Rmf @ Meas. Temp.		@		@											
Rmc @ Meas. Temp.		@		@											
Source Rmf		Rmc													
Rm @ BHT		@		@											
Rmf @ BHT		@		@											
Rmc @ BHT		@		@											
EQUIPMENT DATA															
GAMMA				ACOUSTIC				DENSITY				NEUTRON			
Run No.		ONE		Run No.				Run No.		ONE		Run No.		ONE	
Serial No.		10748374		Serial No.				Serial No.		10714945		Serial No.		10755066	
Model No.		GTET		Model No.				Model No.		SDLT		Model No.		DSNT	
Diameter		3.625"		No. of Cent.				Diameter		5.3"		Diameter		3.625"	
Detector Model No.		T-102		Spacing				Log Type		GAM-GAM		Log Type		NEU-NEU	
Type		SCINT						Source Type		CS-137		Source Type		AM-241BE	
Length		8"		LSA [Y/N]				Serial No.		5073GW		Serial No.		DSN-436	
Distance to Source		N/A		FWDA [Y/N]				Strength		1.5 CI		Strength		15 CI	
LOGGING DATA															

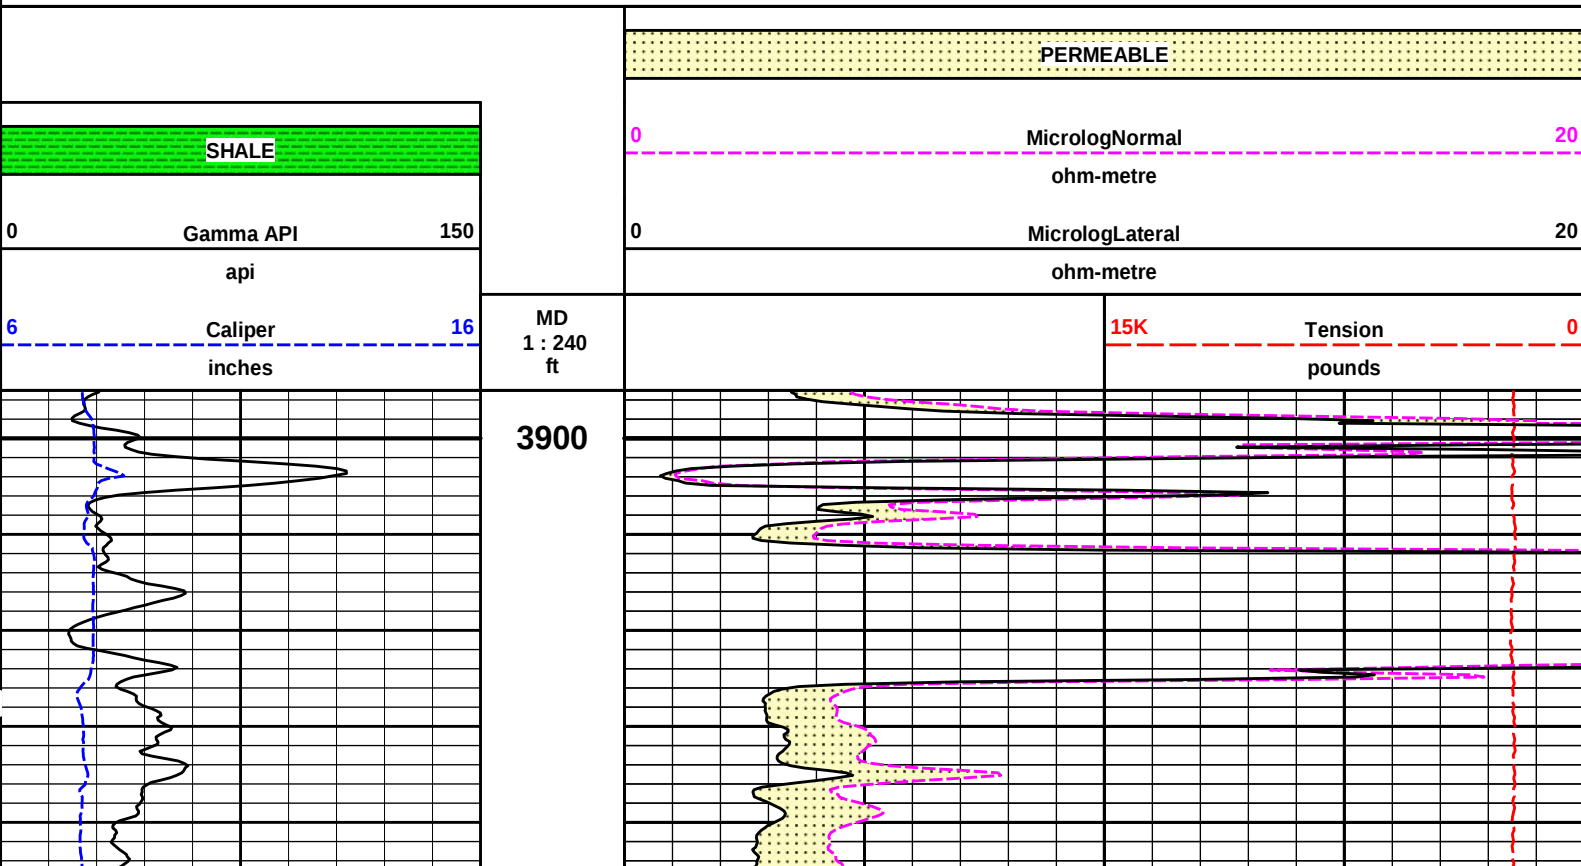
[illegible]

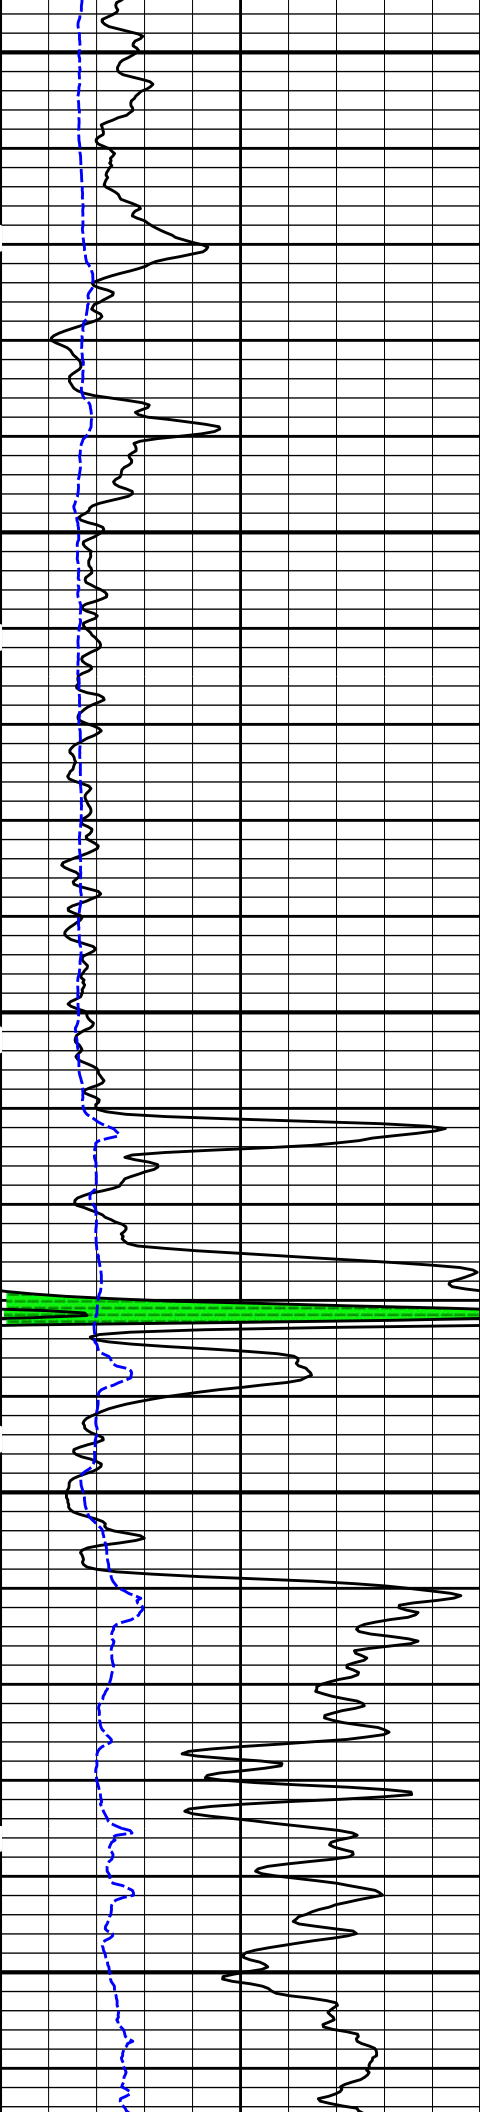

4000


4100

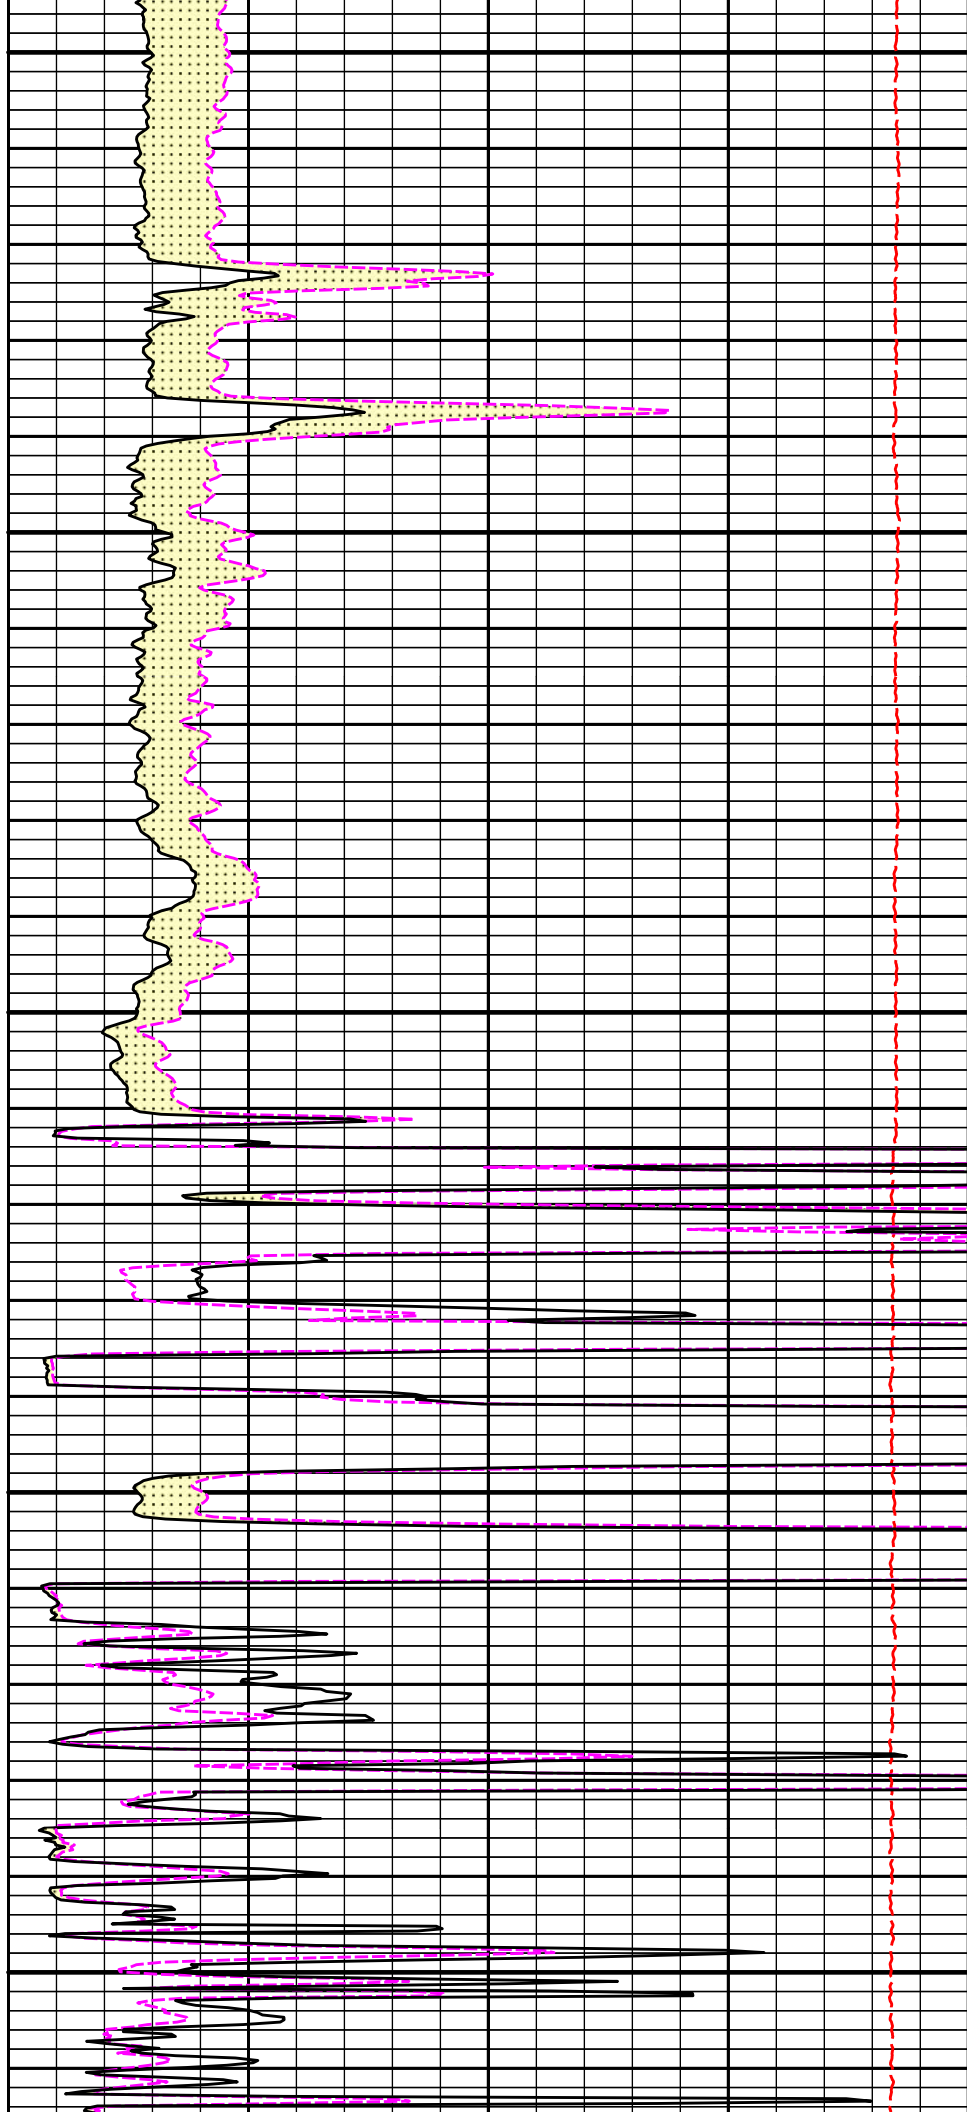


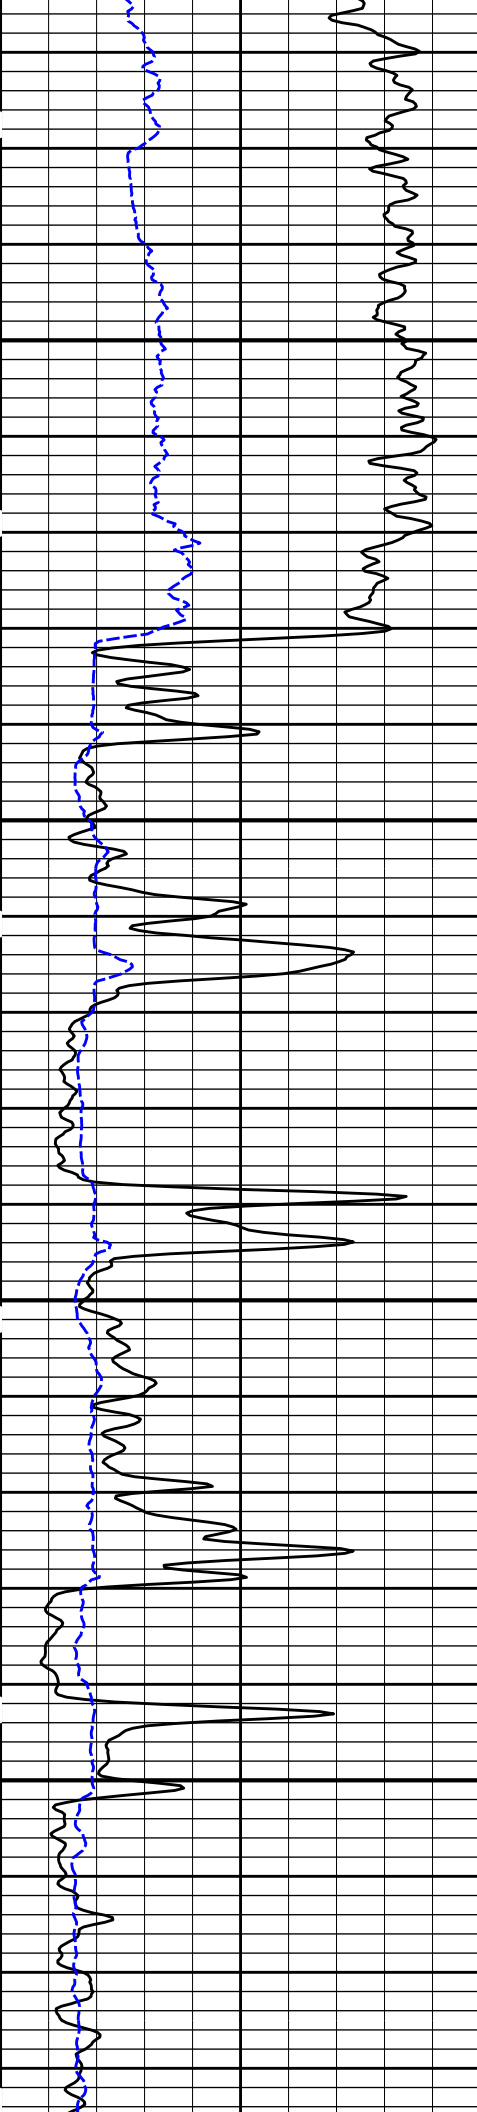

4200

4300

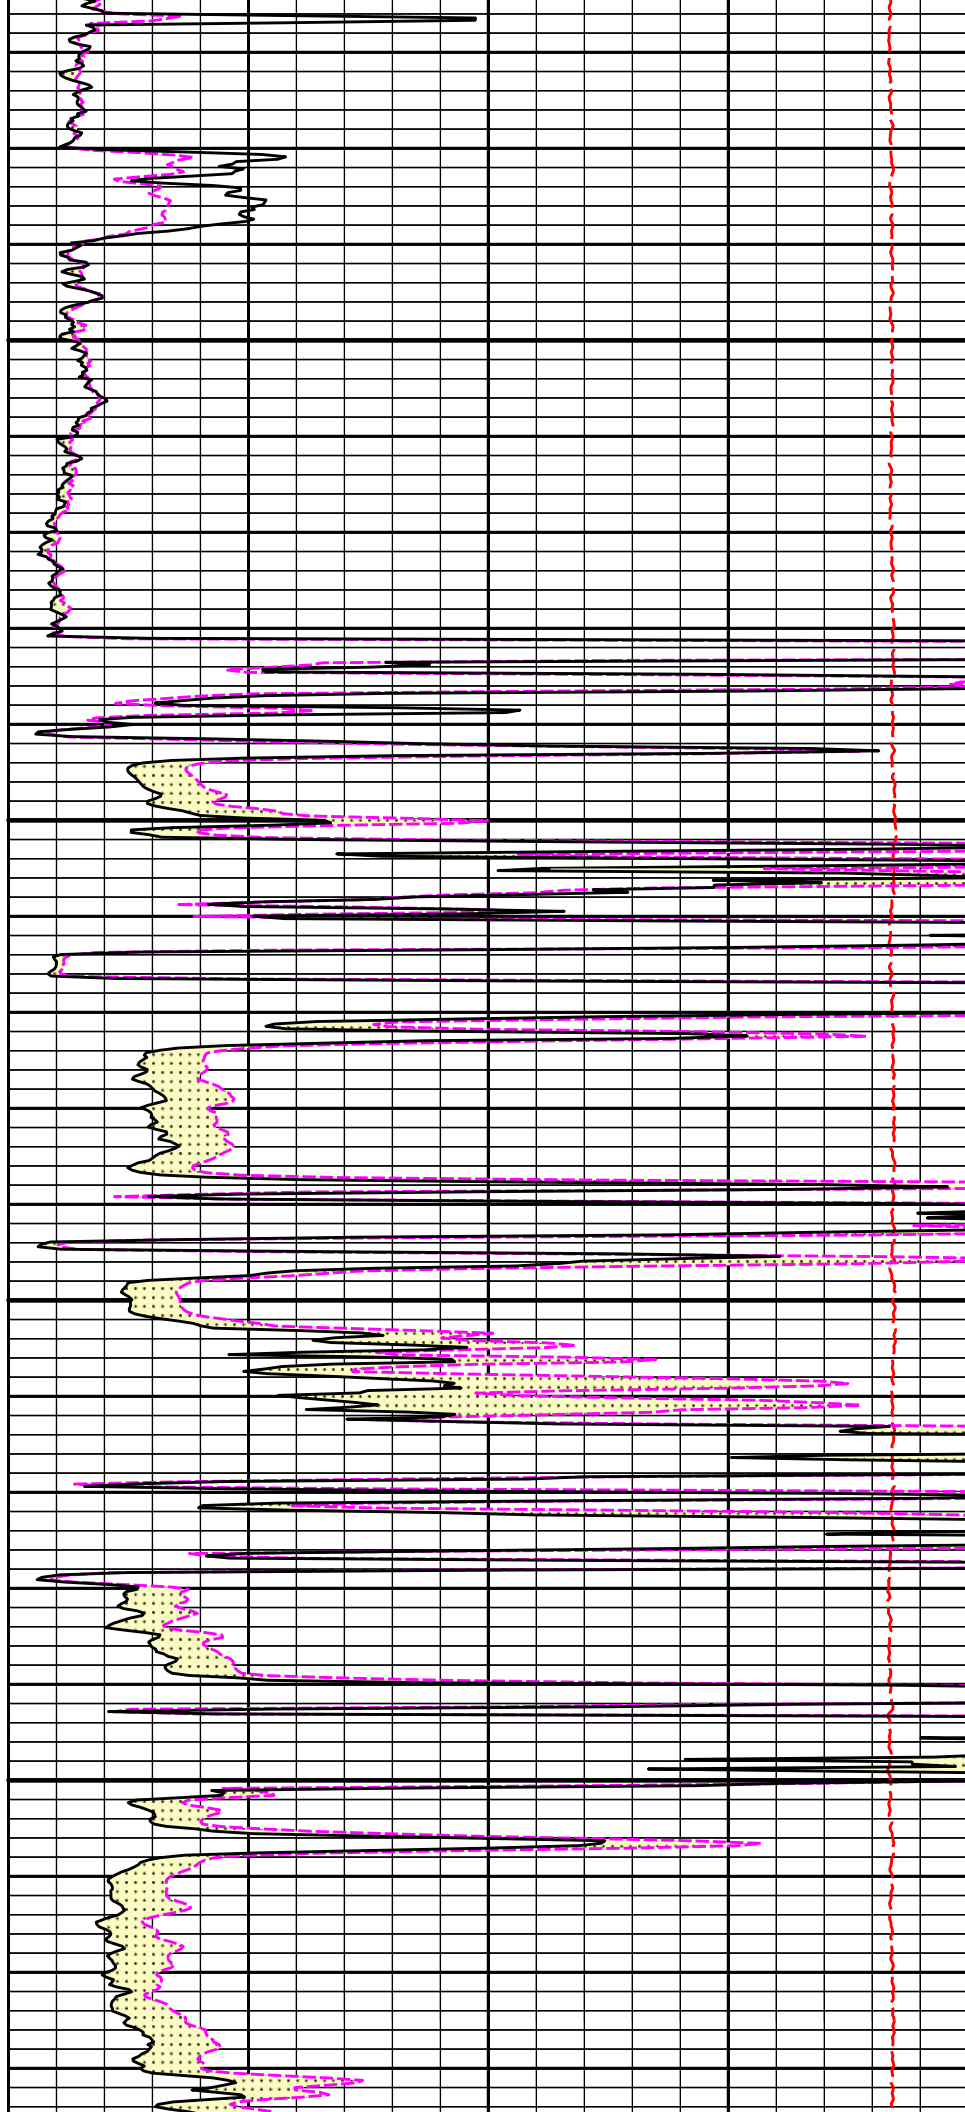


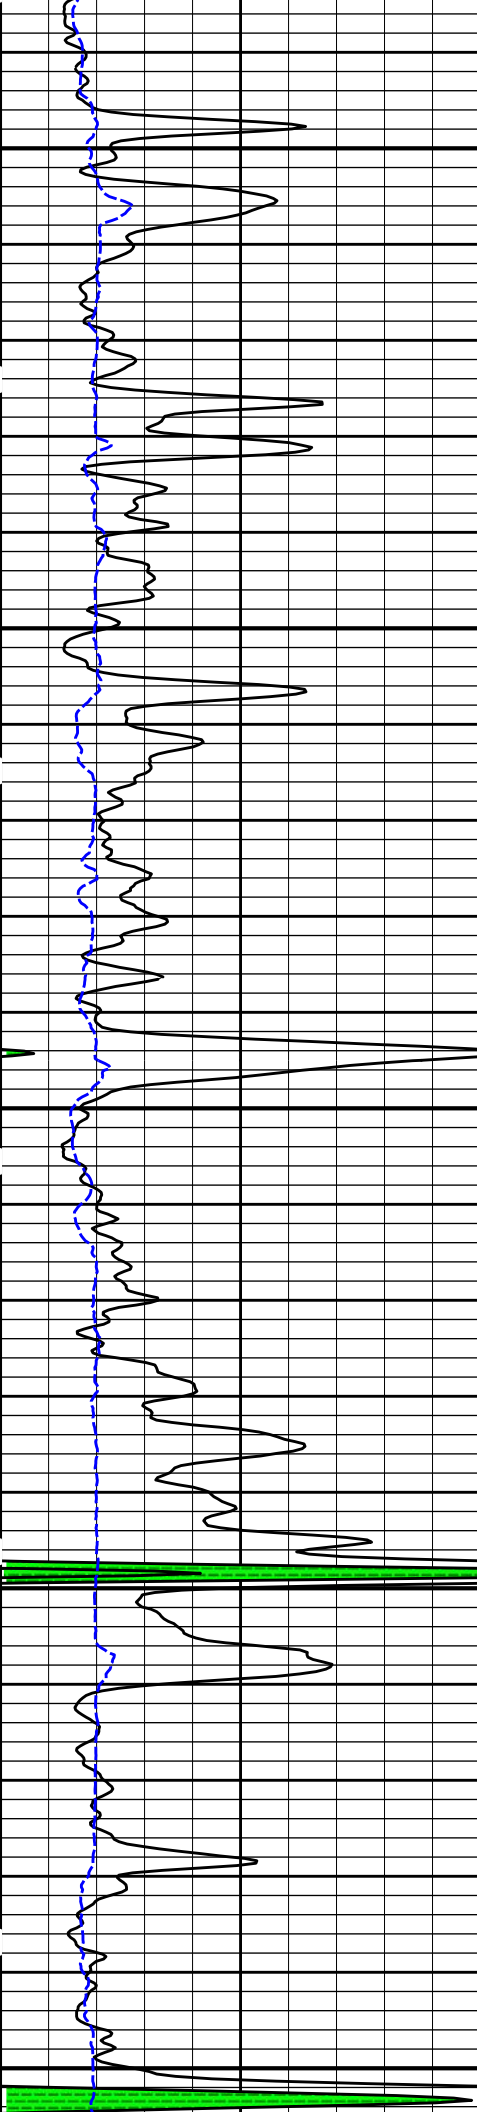


4400

4500


4600

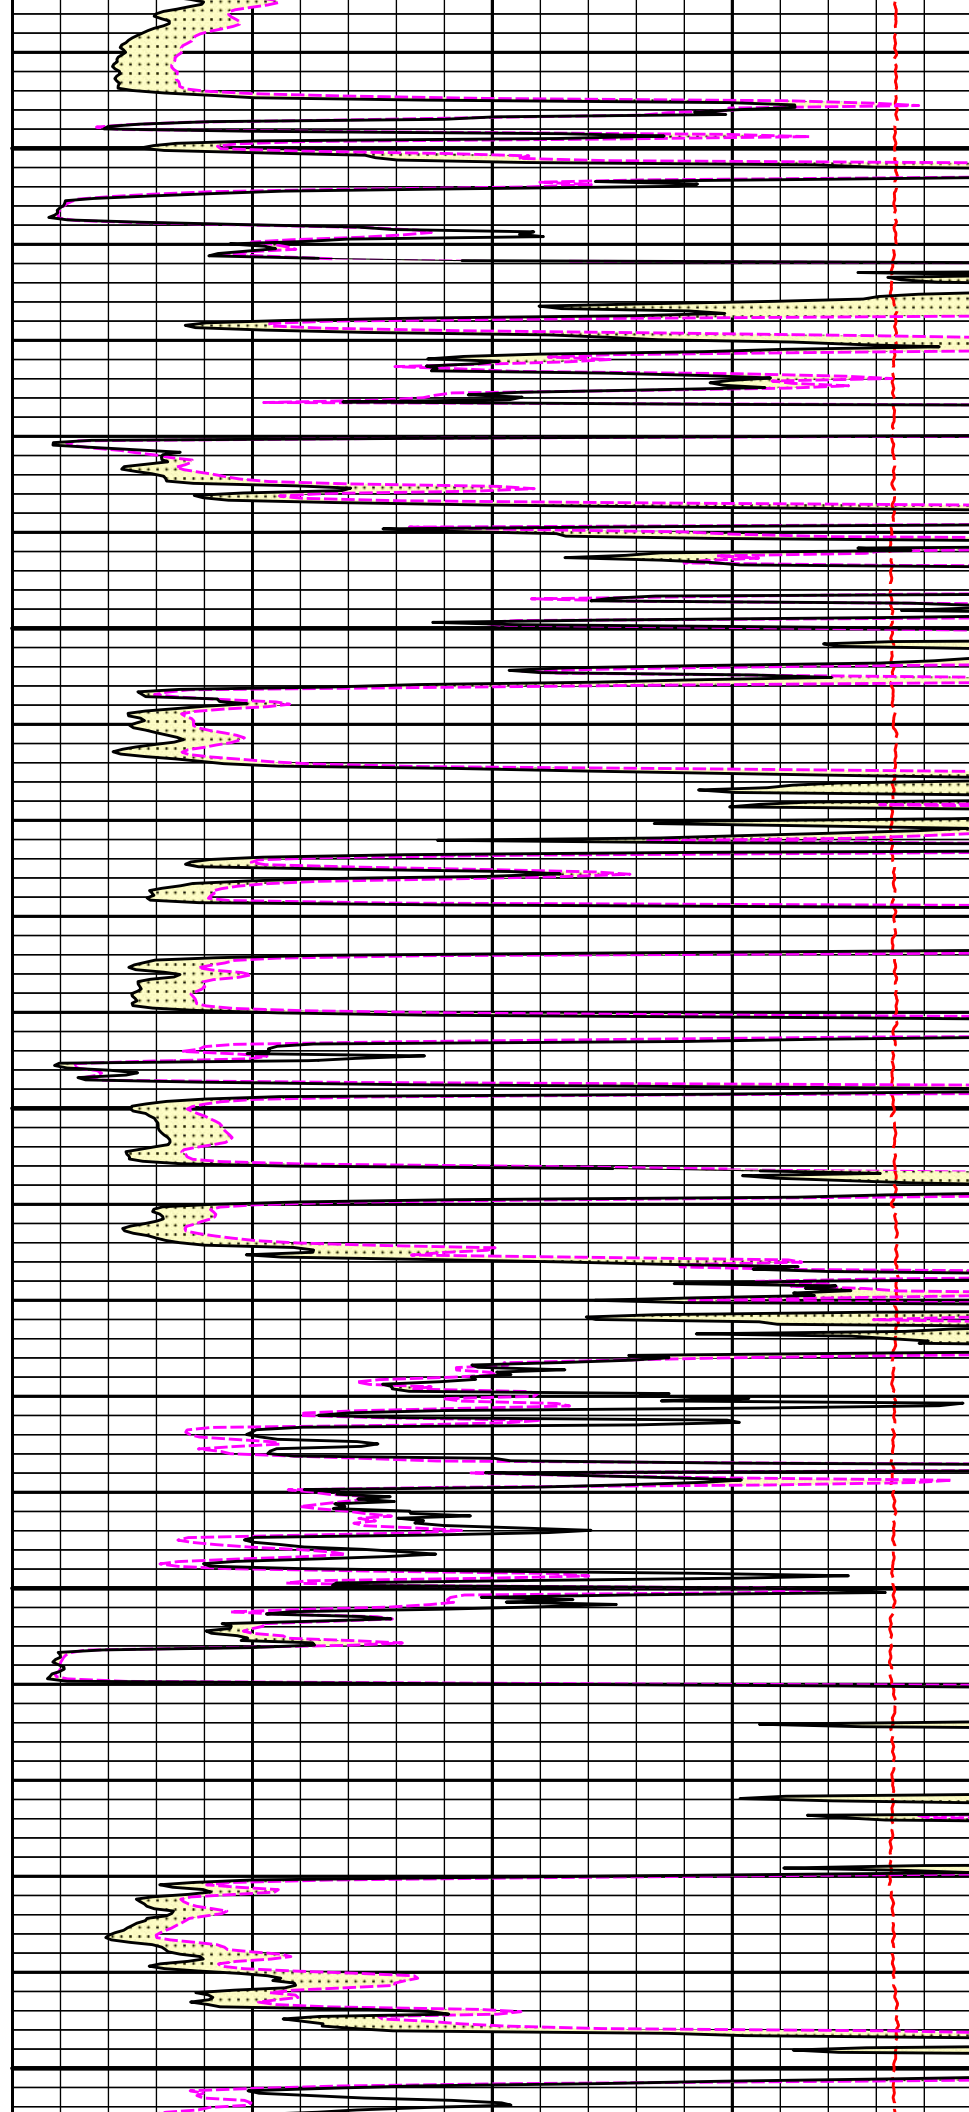


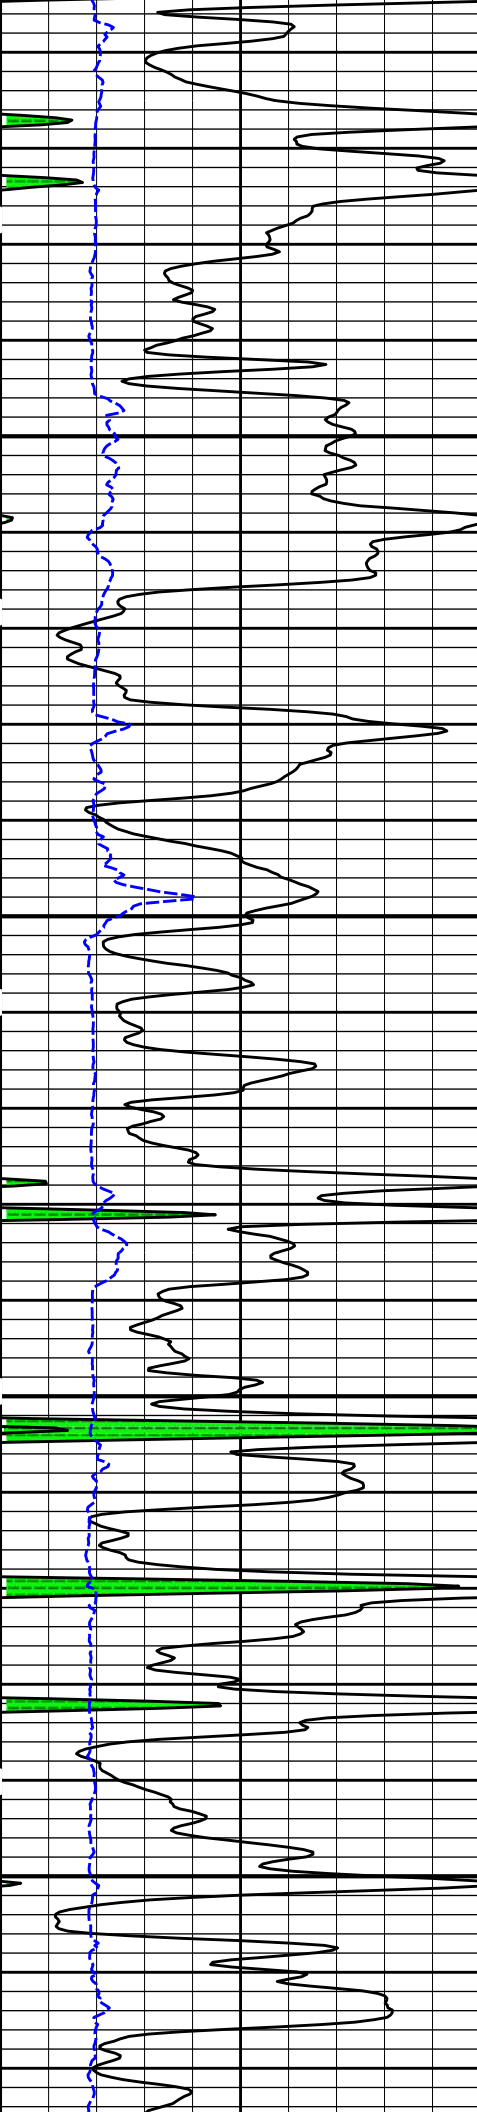

4700

4800

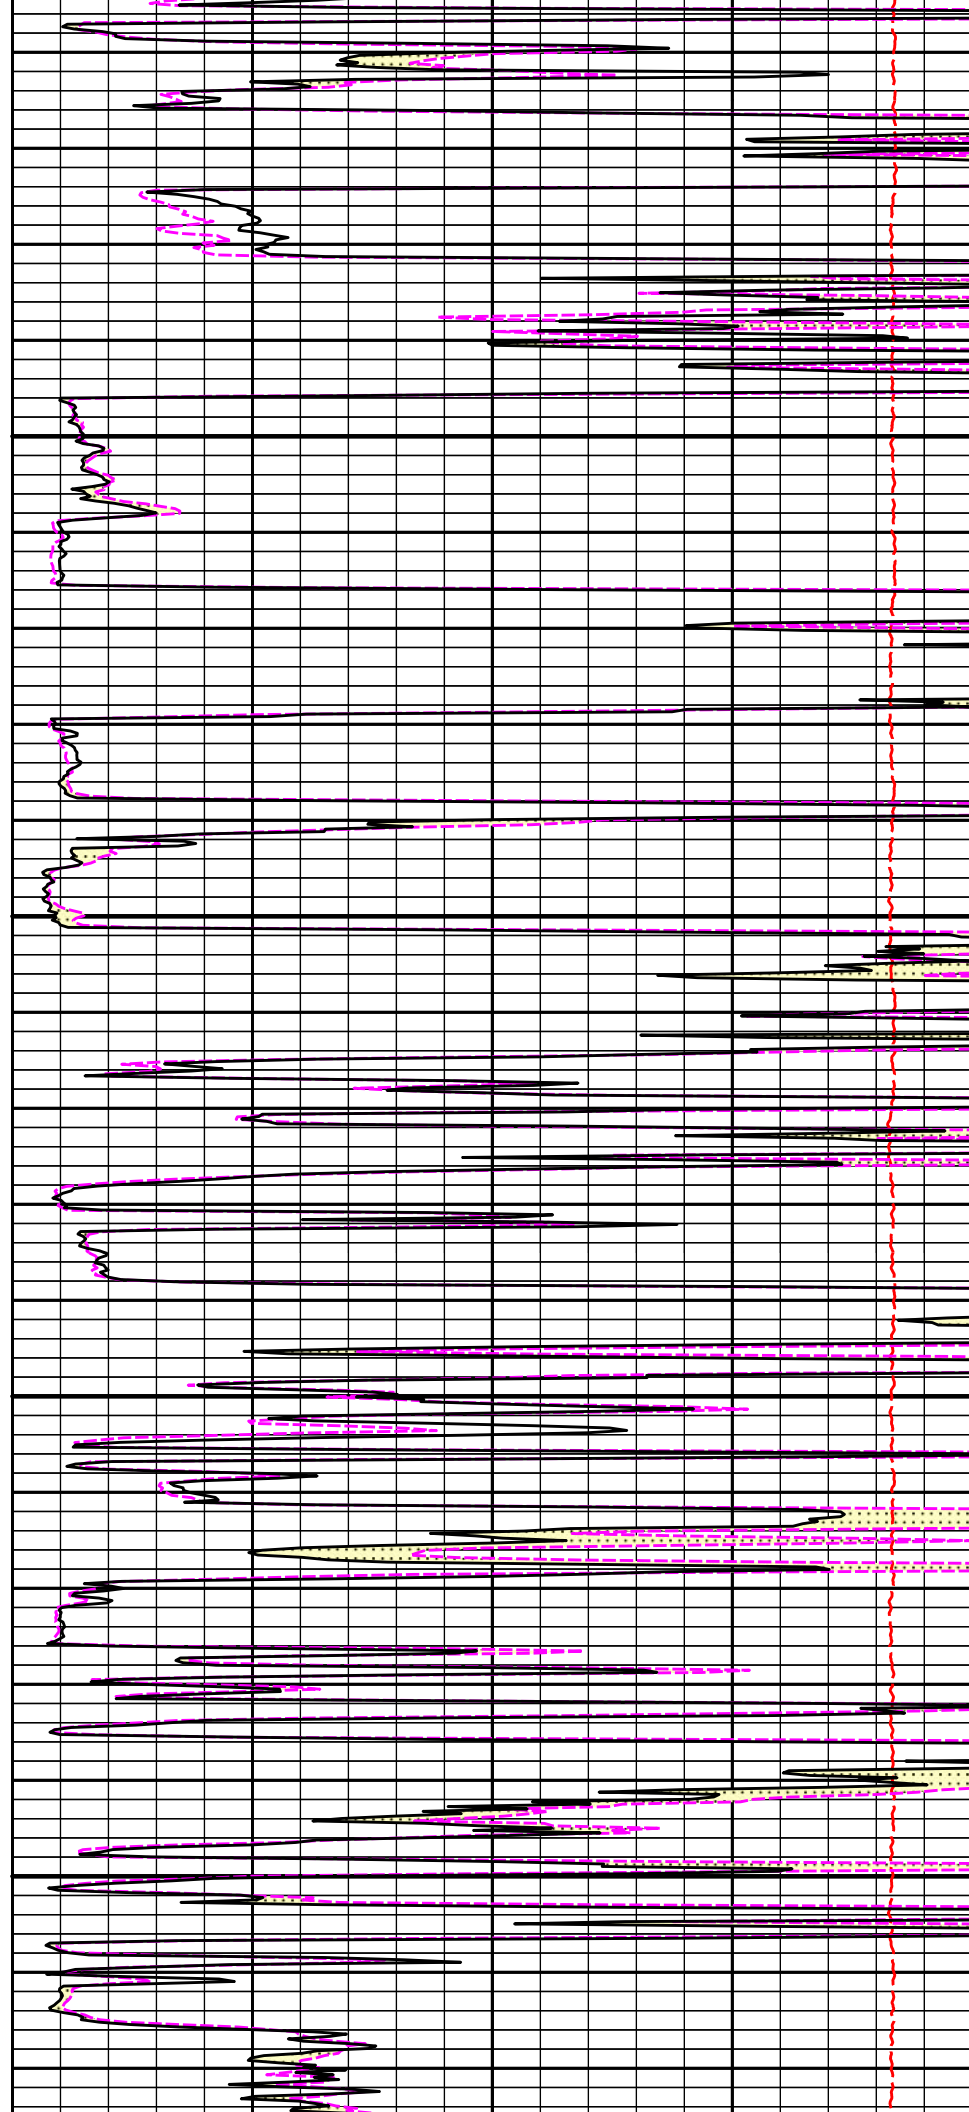

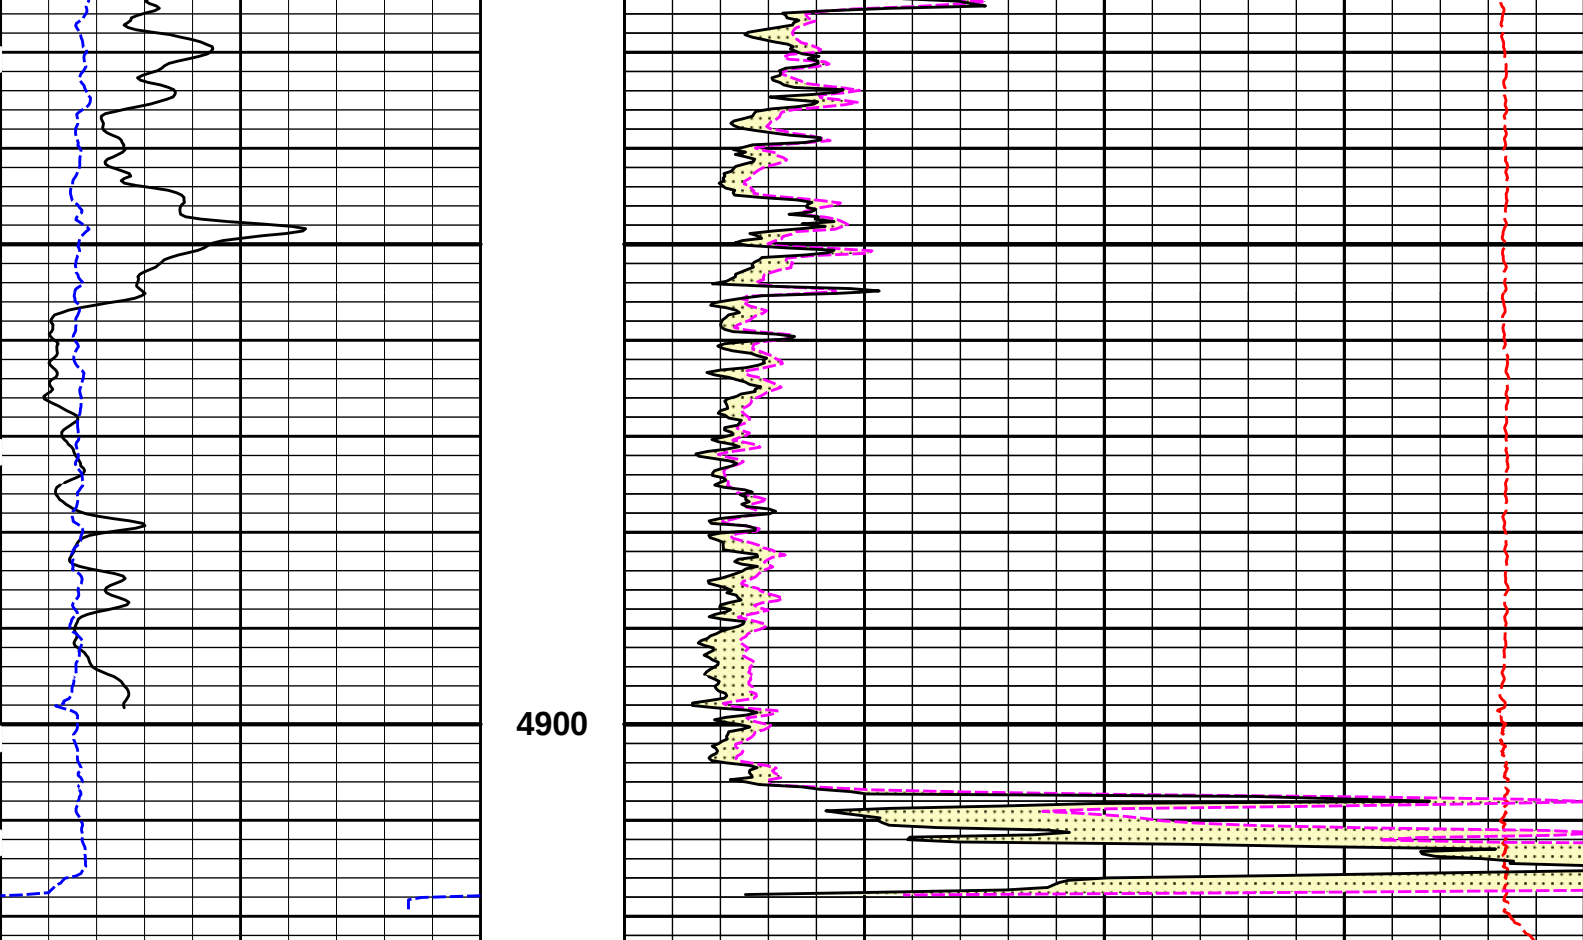

6	Caliper	16	MD 1 : 240 ft		15K	Tension	0
	inches					pounds	
0	Gamma API	150		0	MicrologLateral		20
	api			ohm-metre			
				0	MicrologNormal		20
				ohm-metre			
				PERMEABLE			

HALLIBURTON

Plot Time: 31-Aug-14 08:04:13
Plot Range: 3895 ft to 4922.83 ft
Data: WHITE_2-4\Well Based\IR1 DSN SDL DETAIL\
Plot File: \\-LOCAL-(not saved)\Microlog_IQ_5_main_lib


5 INCH MAIN LOG


HALLIBURTON

Plot Time: 31-Aug-14 08:04:13
Plot Range: 4567.25 ft to 4924.17 ft
Data: WHITE_2-4\Well Based\IR1 DSN SDL REPEAT\
Plot File: \\-LOCAL-(not saved)\Microlog_IQ_5_rep_lib

REPEAT SECTION

		PERMEABLE					
		0	MicrologNormal				20
			ohm-metre				

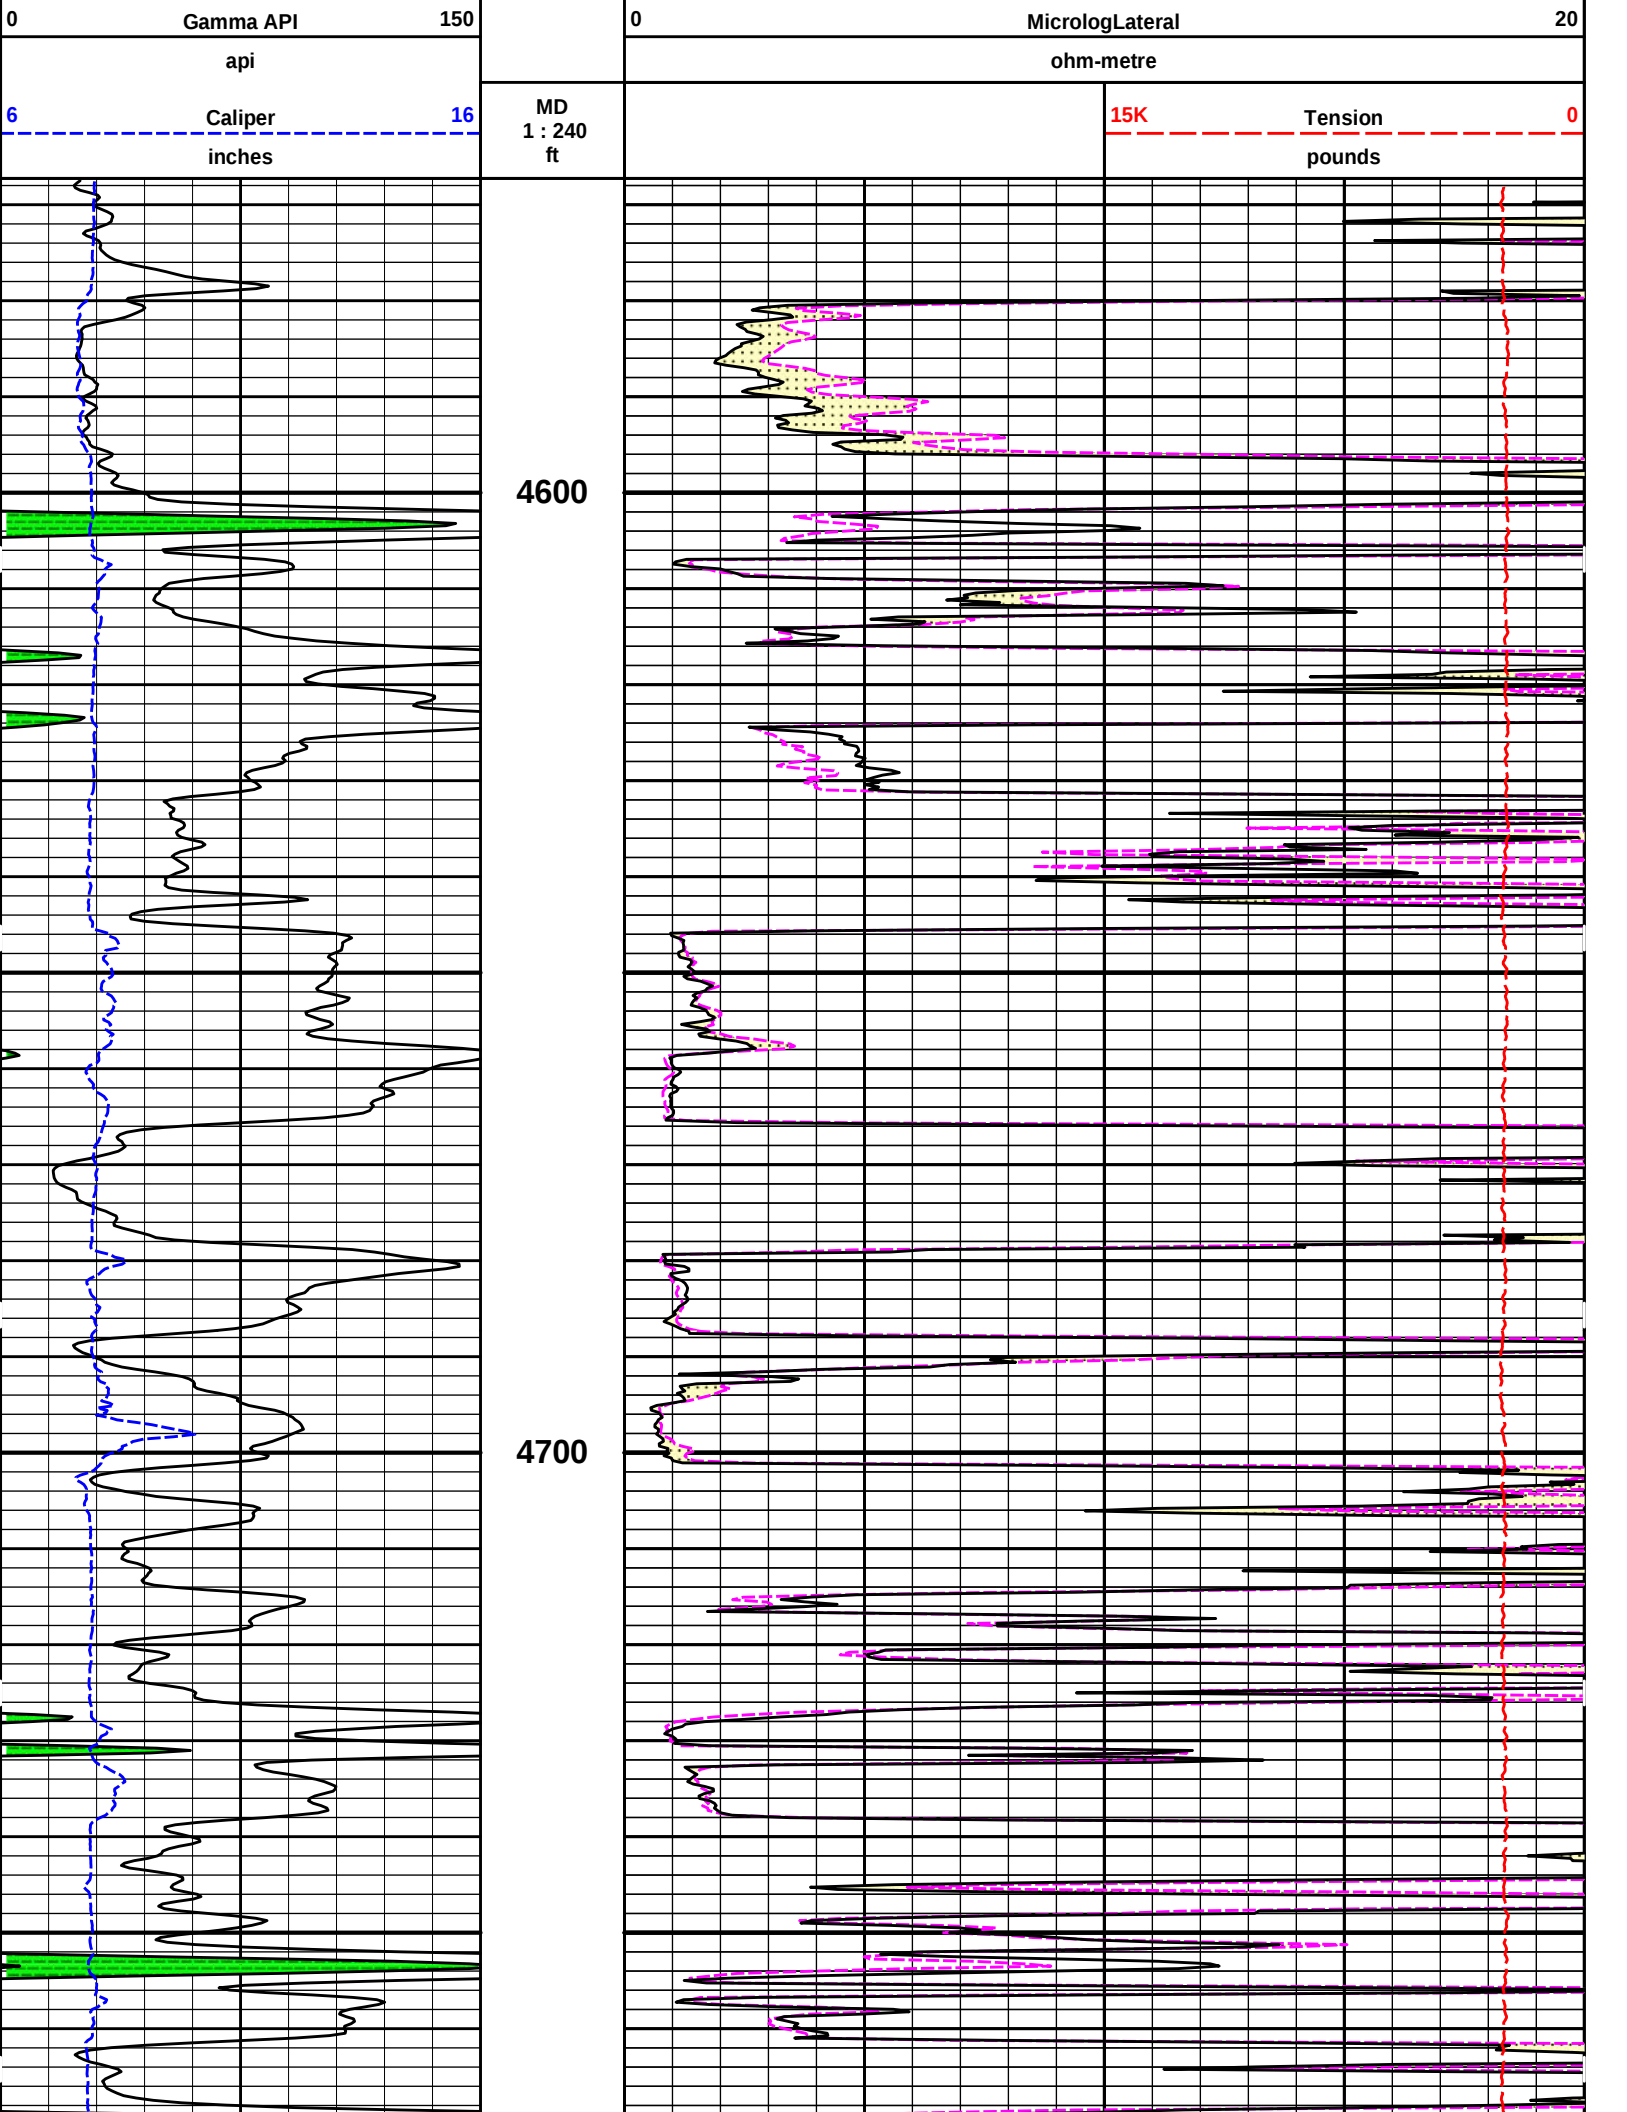

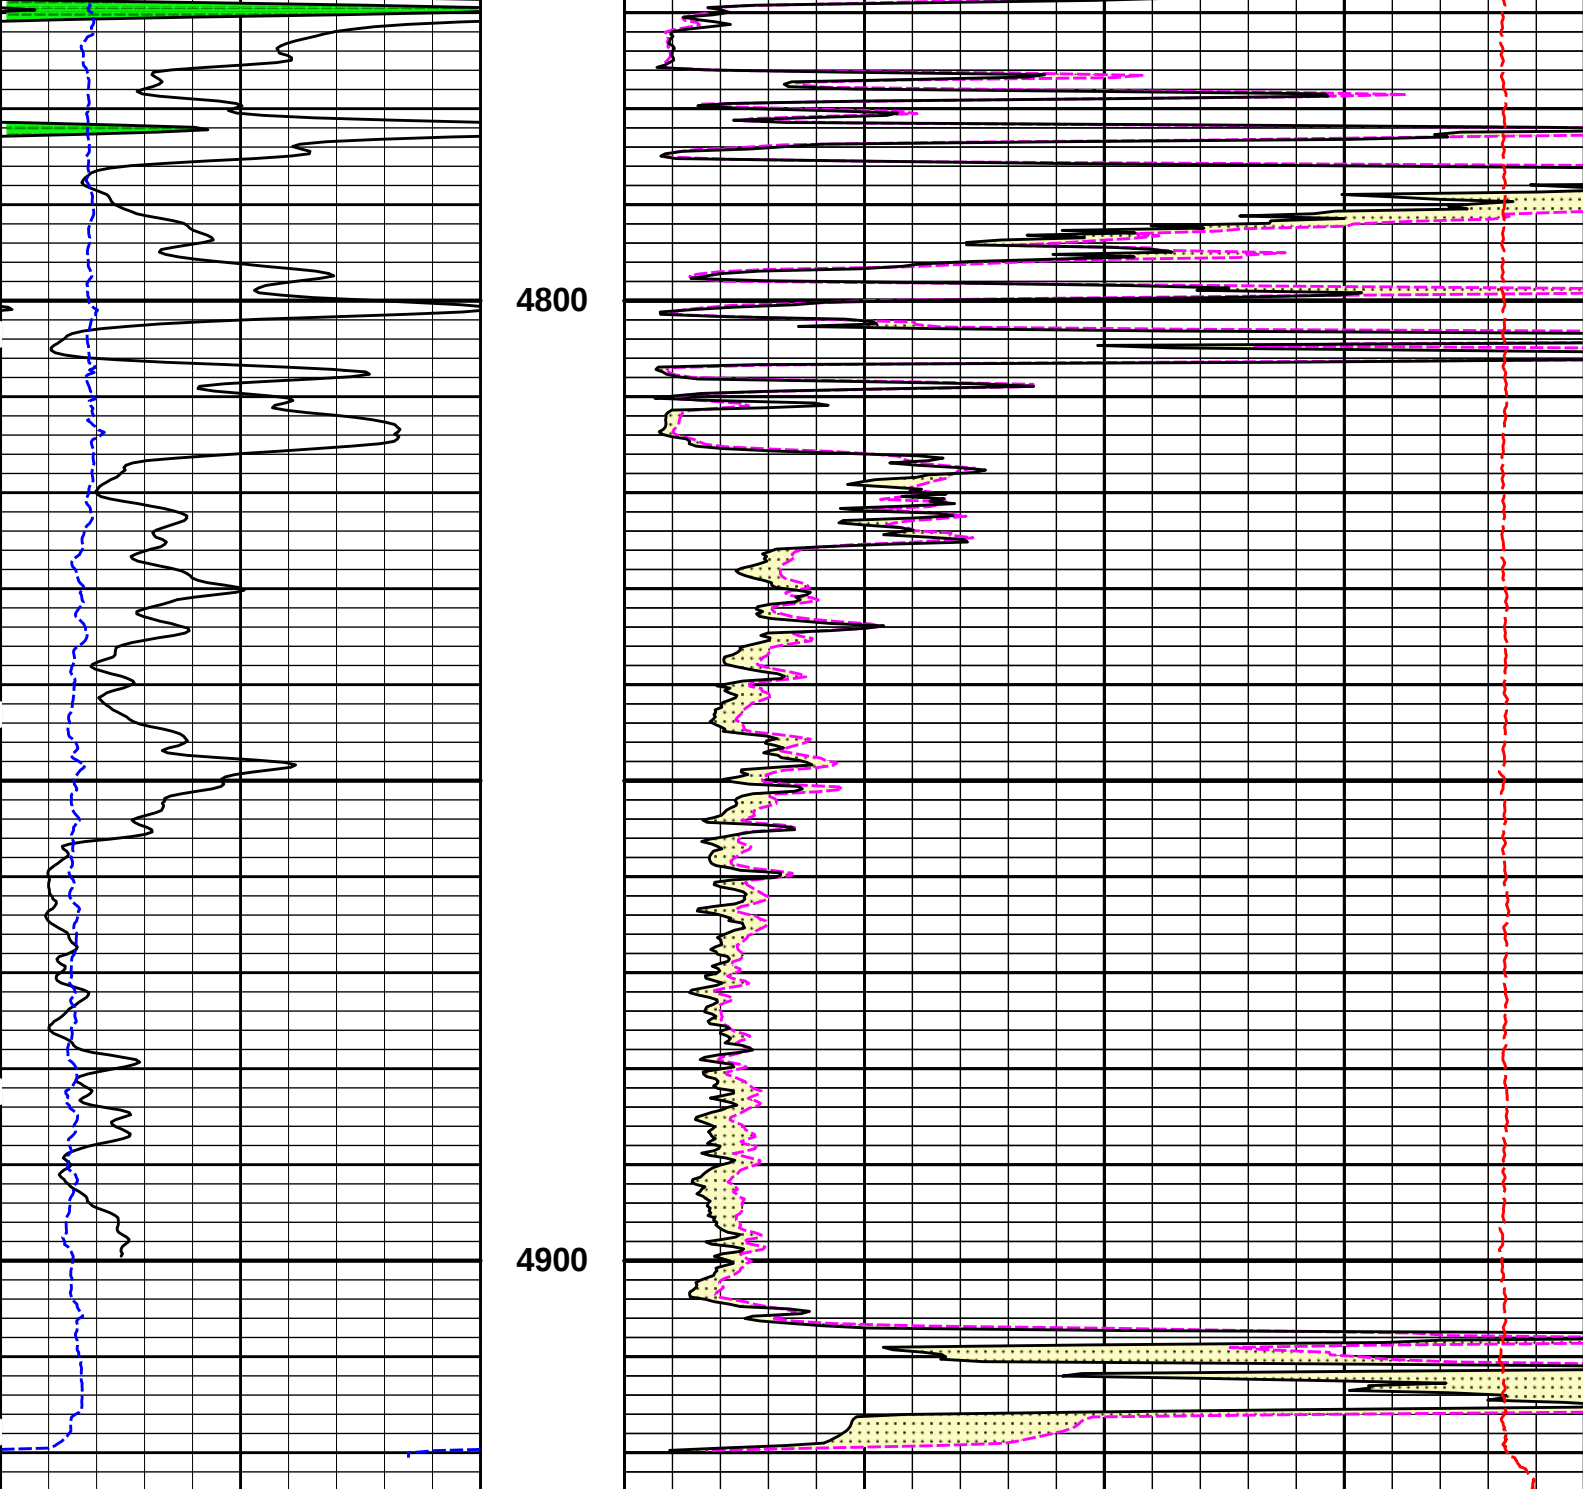

6		Caliper	16	MD 1 : 240 ft	15K		Tension	0
		inches					pounds	
0		Gamma API	150		0		MicrologLateral	20
		api					ohm-metre	
		SHALE			0		MicrologNormal	20
							ohm-metre	
					PERMEABLE			

HALLIBURTON

Plot Time: 31-Aug-14 08:04:14
Plot Range: 4567.25 ft to 4924.17 ft
Data: WHITE_2-4\Well Based\R1 DSN SDL REPEAT\
Plot File: \\-LOCAL-(not saved)\Microlog_IQ_5_rep_lib

REPEAT SECTION

TOOL STRING DIAGRAM REPORT

Description	Overbody Description	O.D.	Diagram	Sensors @ Delays	Length	Accumulated Length	
RWCH-12156658 135.00 lbs		Ø 3.625 in →		← Load Cell @ 36.02 ft ← BH Temperature @ 35.45 ft	6.25 ft	39.70 ft	
SP Sub-12345678 60.00 lbs		Ø 3.625 in →		← SP @ 31.67 ft	3.74 ft	33.45 ft	
GTET-10748374 165.00 lbs		Ø 3.625 in →		← GammaRay @ 23.65 ft	8.52 ft	29.71 ft	
DSNT-10755066 174.00 lbs	DSN Decentralizer- 10735145 6.60 lbs	Ø 5.000 in* → Ø 3.625 in →		← DSN Far @ 14.26 ft ← DSN Near @ 13.51 ft	9.69 ft	21.19 ft	
SDLT-10685803 360.00 lbs	SDLT Pad-10714945 65.00 lbs Microlog Pad-10685803 8.00 lbs	Ø 4.500 in → Ø 4.750 in* → Ø 4.750 in* →		Microlog @ 3.69 ft SDL Caliper @ 3.51 ft SDL @ 3.50 ft	10.81 ft	11.51 ft	
RBP-25K-00000001 16.00 lbs		Ø 4.750 in → Ø 3.370 in →			0.36 ft	0.69 ft	
Bull Nose-00000668 5.00 lbs		Ø 2.750 in →			0.33 ft	0.33 ft	
					0.33 ft	0.00 ft	
Mnemonic	Tool Name		Serial Number	Weight (lbs)	Length (ft)	Accumulated Length (ft)	Max.Log. Speed (fpm)
RWCH	Releasable Wireline Cable Head		12156658	135.00	6.25	33.45	300.00

SP	SP Sub	12345678	60.00	3.74	29.71	300.00
GTET	Gamma Telemetry Tool	10748374	165.00	8.52	21.19	60.00
DSNT	Dual Spaced Neutron	10755066	174.00	9.69	11.51	60.00
DCNT	DSN Decentralizer	10735145	6.60	5.13 *	14.84	300.00
SDLT	Spectral Density Tool	10685803	360.00	10.81	0.69	60.00
SDLP	Density Insite Pad	10714945	65.00	2.55 *	2.90	60.00
MICP	Microlog Pad	10685803	8.00	1.00 *	3.19	60.00
BLNS	Bull Plug	00000001	16.00	0.36	0.33	300.00
BLNS	Bull Nose	00000668	5.00	0.33	0.00	300.00
Total			994.60	39.70		
* Not included in Total Length and Length Accumulation.						
Data: WHITE_2-4\0003 GTET-DSN-SDL-BP\IDLE				Date: 31-Aug-14 06:43:58		

HALLIBURTON PARAMETERS REPORT						
Depth (ft)	Tool Name	Mnemonic	Description	Value	Units	
TOP						
	SHARED	BS	Bit Size	7.875	in	
	SHARED	UBS	Use Bit Size instead of Caliper for all applications.	No		
	SHARED	MDBS	Mud Base	Water		
	SHARED	MDWT	Borehole Fluid Weight	9.300	ppg	
	SHARED	WAGT	Weighting Agent	Natural		
	SHARED	BSAL	Borehole salinity	0.00	ppm	
	SHARED	FSAL	Formation Salinity NaCl	0.00	ppm	
	SHARED	KPCT	Percent K in Mud by Weight?	0.00	%	
	SHARED	RMUD	Mud Resistivity	0.510	ohmm	
	SHARED	TRM	Temperature of Mud	75.0	degF	
	SHARED	CSD	Logging Interval is Cased?	No		
	SHARED	ICOD	AHV Casing OD	5.500	in	
	SHARED	ST	Surface Temperature	75.0	degF	
	SHARED	TD	Total Well Depth	4920.00	ft	
	SHARED	BHT	Bottom Hole Temperature	121.0	degF	
	SHARED	SVTM	Navigation and Survey Master Tool	NONE		
	SHARED	AZTM	High Res Z Accelerometer Master Tool	GTET		
	SHARED	TEMM	Temperature Master Tool	NONE		
	Rwa / CrossPlot	XPOK	Process Crossplot?	Yes		
	Rwa / CrossPlot	FCHO	Select Source of F	Automatic		
	Rwa / CrossPlot	AFAC	Archie A factor	0.6200		
	Rwa / CrossPlot	MFAC	Archie M factor	2.1500		
	Rwa / CrossPlot	RMFR	Rmf Reference	0.10	ohmm	
	Rwa / CrossPlot	TMFR	Rmf Ref Temp	75.00	degF	
	Rwa / CrossPlot	RWA	Resistivity of Formation Water	0.05	ohmm	
	Rwa / CrossPlot	ADP	Use Air Porosity to calculate CrossplotPhi	No		
	Rwa / CrossPlot	BHSM	Borehole Size Source Tool	SDLT		
	GTET	GROK	Process Gamma Ray?	Yes		
	GTET	GRSO	Gamma Tool Standoff	0.000	in	
	GTET	GEOK	Process Gamma Ray EVR?	No		
	GTET	TRSC	Tool Position for Gamma Ray Tools	Entered		

GTET	TPOS	Tool Position for Gamma Ray Tools.	Eccentered	
GTET	BHSM	Borehole Size Source Tool	SDLT	
DSNT	DNOK	Process DSN?	Yes	
DSNT	DEOK	Process DSN EVR?	No	
DSNT	NLIT	Neutron Lithology	Limestone	
DSNT	DNSO	DSN Standoff - 0.25 in (6.35 mm) Recommended	0.250	in
DSNT	DNTP	Temperature Correction Type	None	
DSNT	DPRS	DSN Pressure Correction Type	None	
DSNT	SHCO	View More Correction Options	No	
DSNT	UTVD	Use TVD for Gradient Corrections?	No	
DSNT	LHWT	Logging Horizontal Water Tank?	No	
DSNT	BHSM	Borehole Size Source Tool	SDLT	
SDLT	CLOK	Process Caliper Outputs?	Yes	
SDLT Pad	DNOK	Process Density?	Yes	
SDLT Pad	DNOK	Process Density EVR?	No	
SDLT Pad	CB	Logging Calibration Blocks?	No	
SDLT Pad	SPVT	SDLT Pad Temperature Valid?	Yes	
SDLT Pad	DTWN	Disable temperature warning	No	
SDLT Pad	DMA	Formation Density Matrix	2.710	g/cc
SDLT Pad	DFL	Formation Density Fluid	1.000	g/cc
SDLT Pad	BHSM	Borehole Size Source Tool	SDLT	
Microlog Pad	MLOK	Process MicroLog Outputs?	Yes	
BOTTOM				
Data: WHITE_2-4\0003 GTET-DSN-SDL-BP\004 31-Aug-14 07:29 Up @4930.0f				Date: 31-Aug-14 07:53:29

HALLIBURTON

CALIBRATION REPORT

NATURAL GAMMA RAY TOOL SHOP CALIBRATION

Tool Name:GTET - 10748374

Engineer:SUHAIL BISHTI

Software Version:WL INSITE R4.2.0 (Build 2)

Reference Calibration Date:02-Jul-14 13:05:19

Calibration Date:19-Aug-14 17:33:09

Calibration Version:1

Calibrator Source S/N: TB-185

Calibrator API Reference:228.00 api

Equivalent Calibrator API Reference:232.0 api

Measurement	Measured	Calibrated	Units
Background	45.2	45.3	api
Background + Calibrator	276.7	277.3	api
Calibrator	231.5	232.0	api

NATURAL GAMMA RAY TOOL FIELD CALIBRATION

Tool Name:GTET - 10748374

Engineer:SHELDON INGERSOLL

Software Version:WL INSITE R4.2.0 (Build 2)

Reference Calibration Date:19-Aug-14 17:33:09

Calibration Date:31-Aug-14 06:37:54

Calibration Version:1

Calibrator Source S/N: TB-185

Calibrator API Reference:228.00 api

Equivalent Calibrator API Reference:232.0 api

Field Verification	Shop	Field	Units
Background	45.3	43.6	api
Background + Calibrator	277.3	274.7	api
Calibrator	232.0	231.1	api

Shop		Field		Difference		Tolerance	
232.0		231.1		0.9		+/- 9.00	

MICRO LOG SHOP CALIBRATION			
Tool Name:	Microlog Pad - 10685803	Reference Calibration Date:	25-Jul-14 11:17:56
Engineer:	SUHAIL BISHTI	Calibration Date:	20-Aug-14 15:13:56
Software Version:	WL INSITE R4.2.0 (Build 2)	Calibration Version:	1
Host Tool Name:	DSNT - 10755066		

CALIBRATION COEFFICIENT SUMMARY					
Measurement	Micro Log Normal		Micro Log Lateral		Units
	Measured	Calibrated	Measured	Calibrated	
Tool Zero	-0.08	-0.07	0.00	-0.00	ohmm
Calibration Point #1	-0.00	0.00	0.00	0.00	ohmm
Calibration Point #2	20.03	20.00	20.03	20.00	ohmm
Internal Reference	19.96	19.93	20.03	19.99	ohmm

Measurement	Micro Log Normal Tool Value	Micro Log Lateral Tool Value	Units
Tool Zero	0.23	0.21	V
Calibration Point #1	20.03	1.71	V
Calibration Point #2	5323.53	6907.98	V
Internal Reference	5304.52	6906.01	V

MICRO LOG FIELD CHECK			
Tool Name:	Microlog Pad - 10685803	Reference Calibration Date:	20-Aug-14 15:13:56
Engineer:	SHELDON INGERSOLL	Calibration Date:	30-Aug-14 22:06:48
Software Version:	WL INSITE R4.2.0 (Build 2)	Calibration Version:	1

Measurement	Micro Log Normal		Micro Log Lateral		Units
	Shop	Field	Shop	Field	
Tool Zero	-0.07	-0.07	-0.00	-0.00	ohmm
Internal Reference	19.93	19.90	19.99	19.96	ohmm

Summary				
Signal	Shop	Field	Difference	Tolerance
Microlog Normal	19.93	19.90	0.03	+/- 0.80
Microlog Lateral	19.99	19.96	0.03	+/- 0.80

CALIBRATION SUMMARY						
Sensor	Shop	Field	Post	Difference	Tolerance	Units
GTET-10748374						
Gamma Ray Calibrator	232.0	231.1	-----	0.9	+/- 9.00	api
Microlog Pad-10685803						
MicroLog Normal	19.93	19.90	-----	0.03	+/-0.80	ohmm
MicroLog Lateral	19.99	19.96	-----	0.03	+/-0.80	ohmm

Data: WHITE_2-4\0003 GTET-DSN-SDL-BP\004 31-Aug-14 07:29 Up @4930.0f

Date: 31-Aug-14 07:54:25

Mnemonic		Input Description	Delay (ft)	Filter Type	Filter Length (ft)
Depth Panel					
TENS	Tension		0.00	NO	
Rwa / CrossPlot					
TPUL	Tension Pull		39.70	NO	
BS	Bit Size		39.70	NO	
HDIA	Measured Hole Diameter		0.00	NO	
RWCH					
DHTN	DownholeTension		0.00	BLK	0.000
SP Sub					
PLTC	Plot Control Mask		31.67	NO	
SP	Spontaneous Potential		31.67	BLK	1.250
SPR	Raw Spontaneous Potential		31.67	NO	
SPO	Spontaneous Potential Offset		31.67	NO	
GTET					
TPUL	Tension Pull		23.65	NO	
GR	Natural Gamma Ray API		23.65	TRI	1.750
GRU	Unfiltered Natural Gamma Ray API		23.65	NO	
EGR	Natural Gamma Ray API with Enhanced Vertical Resolution		23.65	W	1.416 , 0.750
HDIA	Measured Hole Diameter		0.00	NO	
ACCZ	Accelerometer Z		0.00	BLK	0.083
DEVI	Inclination		0.00	NO	
DSNT					
TPUL	Tension Pull		13.41	NO	
RNDS	Near Detector Telemetry Counts		13.51	BLK	1.417
RFDS	Far Detector Telemetry Counts		14.26	TRI	0.583
DNTT	DSN Tool Temperature		13.51	NO	
DSNS	DSN Tool Status		13.41	NO	
ERND	Near Detector Telemetry Counts EVR		13.51	BLK	0.000
ERFD	Far Detector Telemetry Counts EVR		14.26	BLK	0.000
ENTM	DSN Tool Temperature EVR		13.51	NO	
HDIA	Measured Hole Diameter		0.00	NO	
SDLT					
TPUL	Tension Pull		3.51	NO	
PCAL	Pad Caliper		3.51	TRI	0.250
ACAL	Arm Caliper		3.51	TRI	0.250
SDLT Pad					
TPUL	Tension Pull		3.50	NO	
NAB	Near Above		3.32	BLK	0.920
NHI	Near Cesium High		3.32	BLK	0.920
NLO	Near Cesium Low		3.32	BLK	0.920
NVA	Near Valley		3.32	BLK	0.920
NBA	Near Barite		3.32	BLK	0.920
NDE	Near Density		3.32	BLK	0.920
NPK	Near Peak		3.32	BLK	0.920
NLI	Near Lithology		3.32	BLK	0.920
NBAU	Near Barite Unfiltered		3.32	BLK	0.250
NLIU	Near Lithology Unfiltered		3.32	BLK	0.250
FAR	Far Above		3.67	BLK	0.250

FAB	Far Above	3.67	BLK	0.250
FHI	Far Cesium High	3.67	BLK	0.250
FLO	Far Cesium Low	3.67	BLK	0.250
FVA	Far Valley	3.67	BLK	0.250
FBA	Far Barite	3.67	BLK	0.250
FDE	Far Density	3.67	BLK	0.250
FPK	Far Peak	3.67	BLK	0.250
FLI	Far Lithology	3.67	BLK	0.250
PTMP	Pad Temperature	3.51	BLK	0.920
NHV	Near Detector High Voltage	2.90	NO	
FHV	Far Detector High Voltage	2.90	NO	
ITMP	Instrument Temperature	2.90	NO	
DDHV	Detector High Voltage	2.90	NO	
HDIA	Measured Hole Diameter	0.00	NO	
Microlog Pad				
TPUL	Tension Pull	3.69	NO	
MINV	Microlog Lateral	3.69	BLK	0.750
MNOR	Microlog Normal	3.69	BLK	0.750
Data: WHITE_2-4\0003 GTET-DSN-SDL-BP\004 31-Aug-14 07:29 Up @4930.0f			Date: 31-Aug-14 07:53:08	

COMPANY	HERMAN L. LOEB, LLC.		
WELL	WHITE 2-4		
FIELD	GREENSBURG SW		
COUNTY	KIOWA	STATE	KANSAS
HALLIBURTON		MICROLOG	