

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-101-21904-00-00
Spot: S2S2NW Sec/Twnshp/Rge: 11-19S-28W
2970 feet from S Section Line, 3960 feet from E Section Line
Lease Name: SHULL A Well #: 1-11
County: LANE Total Vertical Depth: 4675 feet

Operator License No.: 9408
Op Name: TRANS PACIFIC OIL CORPORATION
Address: 100 SOUTH MAIN STE 200
WICHITA, KS 67202

String	Size	Depth (ft)	Pulled (ft)	Comment
SURF	8.625	213		

\$151⁹⁴

Well Type: DH UIC Docket No: _____ Date/Time to Plug: 01/08/2006 8:00 AM
Plug Co. License No.: 5929 Plug Co. Name: DUKE DRILLING CO., INC.
Proposal Rcvd. from: RICH WHEELER Company: DUKE DRILLING CO., INC. Phone: (316) 267-1331

Proposed Plugging Method: 1ST PLUG AT 2150' WITH 50 SX CMT. 2ND PLUG AT 1380' WITH 80 SX CMT. 3RD PLUG AT 660' WITH 50 SX CMT. 4TH PLUG AT 240' WITH 50 SX CMT. 5TH PLUG AT 60 WITH 20 SX CMT. 6TH PLUG TO CIRCULATE RAT HOLE WITH 15 SX CMT. NO MOUSE HOLE.

Plugging Proposal Received By: ERIC MACLAREN WitnessType: NONE
Date/Time Plugging Completed: 01/08/2006 11:15 AM KCC Agent: ERIC MACLAREN

Actual Plugging Report:

1ST PLUG AT 2150' WITH 50 SX CMT. 2ND PLUG AT 1380' WITH 80 SX CMT. 3RD PLUG AT 660' WITH 50 SX CMT. 4TH PLUG AT 240' WITH 50 SX CMT. 5TH PLUG AT 60 WITH 20 SX CMT. 6TH PLUG TO CIRCULATE RAT HOLE WITH 15 SX CMT. NO MOUSE HOLE.


Perfs:

RECEIVED
KANSAS CORPORATION COMMISSION
JAN 11 2006
CONSERVATION DIVISION
WICHITA, KS

Remarks: USED 60/40 POZMIX 6% GEL 1/4# FLO SEAL BY ALLIED.

Plugged through: DP

District: 01

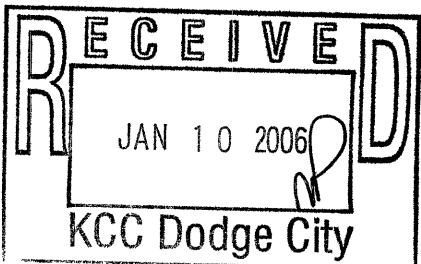

Signed Eric MacLaren
(TECHNICIAN)

INVOICED
DATE 1-11-06
INV. NO. 2006060962

Form CP 20