

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-151-21510-00-00
Spot: NESWSWSW Sec/Twnshp/Rge: 4-29S-15W
460 feet from S Section Line, 4780 feet from E Section Line
Lease Name: BOLSER Well #: 6
County: PRATT Total Vertical Depth: 4900 feet

Operator License No.: 31980
Op Name: LOTUS OPERATING COMPANY, L.L.C.
Address: 100 S. MAIN, STE 420
WICHITA, KS 67202

| String | Size | Depth (ft) | Pulled (ft) | Comment |
|--------|-------|------------|-------------|-----------------|
| PROD | 5.5 | 4898 | 2734 | WITH 300 SX CMT |
| SURF | 8.625 | 429 | | WITH 300 SX CMT |

#15925

Well Type: OIL UIC Docket No: _____ Date/Time to Plug: 01/05/2006 1:15 PM
Plug Co. License No.: 31529 Plug Co. Name: MIKE'S TESTING & SALVAGE, INC.
Proposal Rcvd. from: CURTIS KELSO Company: MIKE'S TESTING & SALVAGE, INC Phone: (620) 938-2537

Proposed Plugging Method: SAND BACK TO 4600' WITH 5 SX CMT. PLUG AT 950' WITH 10 SX GEL & 50 SX CMT. PLUG AT 450' WITH 50 SX CMT. PLUG AT 40' WITH 10 SX CMT.

Plugging Proposal Received By: KEN JEHLIK WitnessType: COMPLETE (100%)
Date/Time Plugging Completed: 01/05/2006 2:30 PM KCC Agent: STEVE PFEIFER

Actual Plugging Report:

SANDED BACK TO 4590' & PUT 5 SX CMT ON TOP OF SAND BRIDGE THROUGH DUMP BAILER. SPOT PLUGS THROUGH 5 1/2" CASING. 1ST PLUG AT 950' WITH 10 SX GEL & 50 SX CMT. 2ND PLUG AT 440' WITH 50 SX CMT. 3RD PLUG AT 40' WITH 10 SX CMT.

Perfs:


| Top | Bot | Thru | Comments |
|------|------|------|----------|
| 4690 | 4706 | | |

RECEIVED
KANSAS CORPORATION COMMISSION
JAN 11 2006
CONSERVATION DIVISION
WICHITA, KS

Remarks: USED 60/40 POZMIX 6% GEL BY ALLIED.

Plugged through: CSG

District: 01

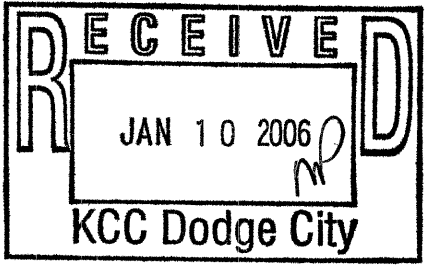

Signed Stephen J. Pfeifer
(TECHNICIAN)

INVOICED
DATE 1-11-06
INV. NO. 2006060958

Form CP-275
[Signature]