

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-135-00684-00-00
Spot: NWSW Sec/Twnshp/Rge: 29-19S-21W
1980 feet from S Section Line, 660 feet from W Section Line
Lease Name: REIN A Well #: 1
County: NESS Total Vertical Depth: 4435 feet

Operator License No.: 4767
Op Name: RITCHIE EXPLORATION, INC.
Address: BOX 783188 8100 E 22ND ST. N. #700
WICHITA, KS 67278

String	Size	Depth (ft)	Pulled (ft)	Comment
CIBP		1300		
PROD	4.5	4411	0	WITH 375 SX CMT
SURF	8.625	528		WITH 300 SX CMT

#144¹⁴

Well Type: OIL UIC Docket No: _____ Date/Time to Plug: 12/22/2005 8:30 AM
Plug Co. License No.: 32970 Plug Co. Name: H-D OIL FIELD SERVICE, INC.
Proposal Rcvd. from: BENNIE DILLS Company: RITCHIE EXPLORATION Phone: (316) 691-9500

Proposed Plugging Method: RUN TUBING TO 4300' & SPOT 30 SX CMT WITH 150# HULLS. PULL TUBING. SET CIBP @ 1300' & PERFORATE AT 650'. PUMP 145 SX CMT TO SURFACE.

Plugging Proposal Received By: MICHAEL MAIER WitnessType: NONE
Date/Time Plugging Completed: 12/22/2005 2:00 PM KCC Agent: MICHAEL MAIER

Actual Plugging Report:

RUN TUBING TO 4300' & SPOT 30 SX CMT WITH 150# HULLS. PULL TUBING. SET CIBP @ 1300' & PERFORATE @ 650'. PUMP 145 SX CMT. CMT CIRCULATED TO SURFACE.

Perfs:


Top	Bot	Thru	Comments
4411	4435	OH	

RECEIVED
KANSAS CORPORATION COMMISSION
JAN 17 2006
CONSERVATION DIVISION
WICHITA, KS

Remarks: USED 60/40 POZMIX 6% GEL BY ALLIED.

Plugged through: TBG

District: 01

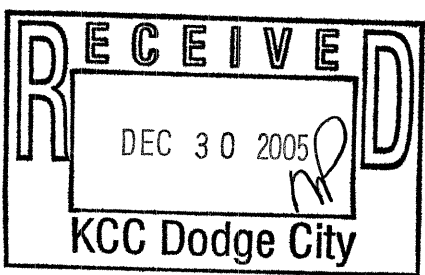

Signed Michael Maier
(TECHNICIAN)

INVOICED
DATE 1-17-06
INV. NO. 2006060979

Form CP-23