



**COMPLETION  
& PRODUCTION  
SERVICES CO.**

**DUAL INDUCTION  
LOG**

Company PHILLIPS EXPLORATION CO. L.C.  
Well PURINTON-WERTH UNIT #1-6  
Field WILDCAT  
County TREGO  
State KANSAS

Company PHILLIPS EXPLORATION COMPANY, L.C.  
Well PURINTON-WERTH UNIT #1-6  
Field WILDCAT  
County TREGO State KANSAS

Location: API # : 15-195-22993-0000  
50' FSL & 1300' FEL  
SW - SW - SE - SE  
SEC 6 TWP 14S RGE 25W  
Permanent Datum GROUND LEVEL Elevation 2426  
Log Measured From KELLY BUSHING 5' A.G.L.  
Drilling Measured From KELLY BUSHING  
Other Services  
CDL/CNL  
MEL/SON  
Elevation  
K.B. 2431  
D.F. 2429  
G.L. 2426

Date	8/7/15		
Run Number	ONE		
Depth Driller	4400		
Depth Logger	4400		
Bottom Logged Interval	4398		
Top Log Interval	00		
Casing Driller	8 5/8"@215'		
Casing Logger	215		
Bit Size	7 7/8"		
Type Fluid in Hole	CHEMICAL MUD	CHLORIDES 4,300 PPM	
Density / Viscosity	9.0/63		
pH / Fluid Loss	10.5/7.8		
Source of Sample	FLOWLINE		
Rim @ Meas. Temp	.600@90F		
Rmf @ Meas. Temp	.450@90F		
Rmc @ Meas. Temp	.720@90F		
Source of Rmf / Rmc	MEASUREMENT		
Rim @ BHT	.450@120F		
Time Circulation Stopped	2.5 HOURS		
Time Logger on Bottom	8:00 P.M.		
Maximum Recorded Temperature	120F		
Equipment Number	4854		
Location	HAYS, KANSAS		
Recorded By	JEFF LUEBBERS		
Witnessed By	PAT DEENIHAN		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

**Comments**


THANK YOU FOR USING "NABORS" HAYS, KANSAS (785) 628-6395  
DIRECTIONS  
COLLYER, KS. & I-70 EXIT, 9S. TO "RD. Q", 2W., 2 1/2S., 3/4 E. INTO


Database File: 26631ddn.db  
 Dataset Pathname: pass3.8  
 Presentation Format: dil2  
 Dataset Creation: Fri Aug 07 21:23:27 2015  
 Charted by: Depth in Feet scaled 1:600

0	Gamma Ray (GAPI)	150
-100	SP (mV)	100
0	RWA (Ohm-m)	1

0	RLL3 (Ohm-m)	50
0	RILD (Ohm-m)	50
1000	CILD (mmho/m)	0

50	RILD X10 (Ohm-m)	500
50	RLL3 X10 (Ohm-m)	500

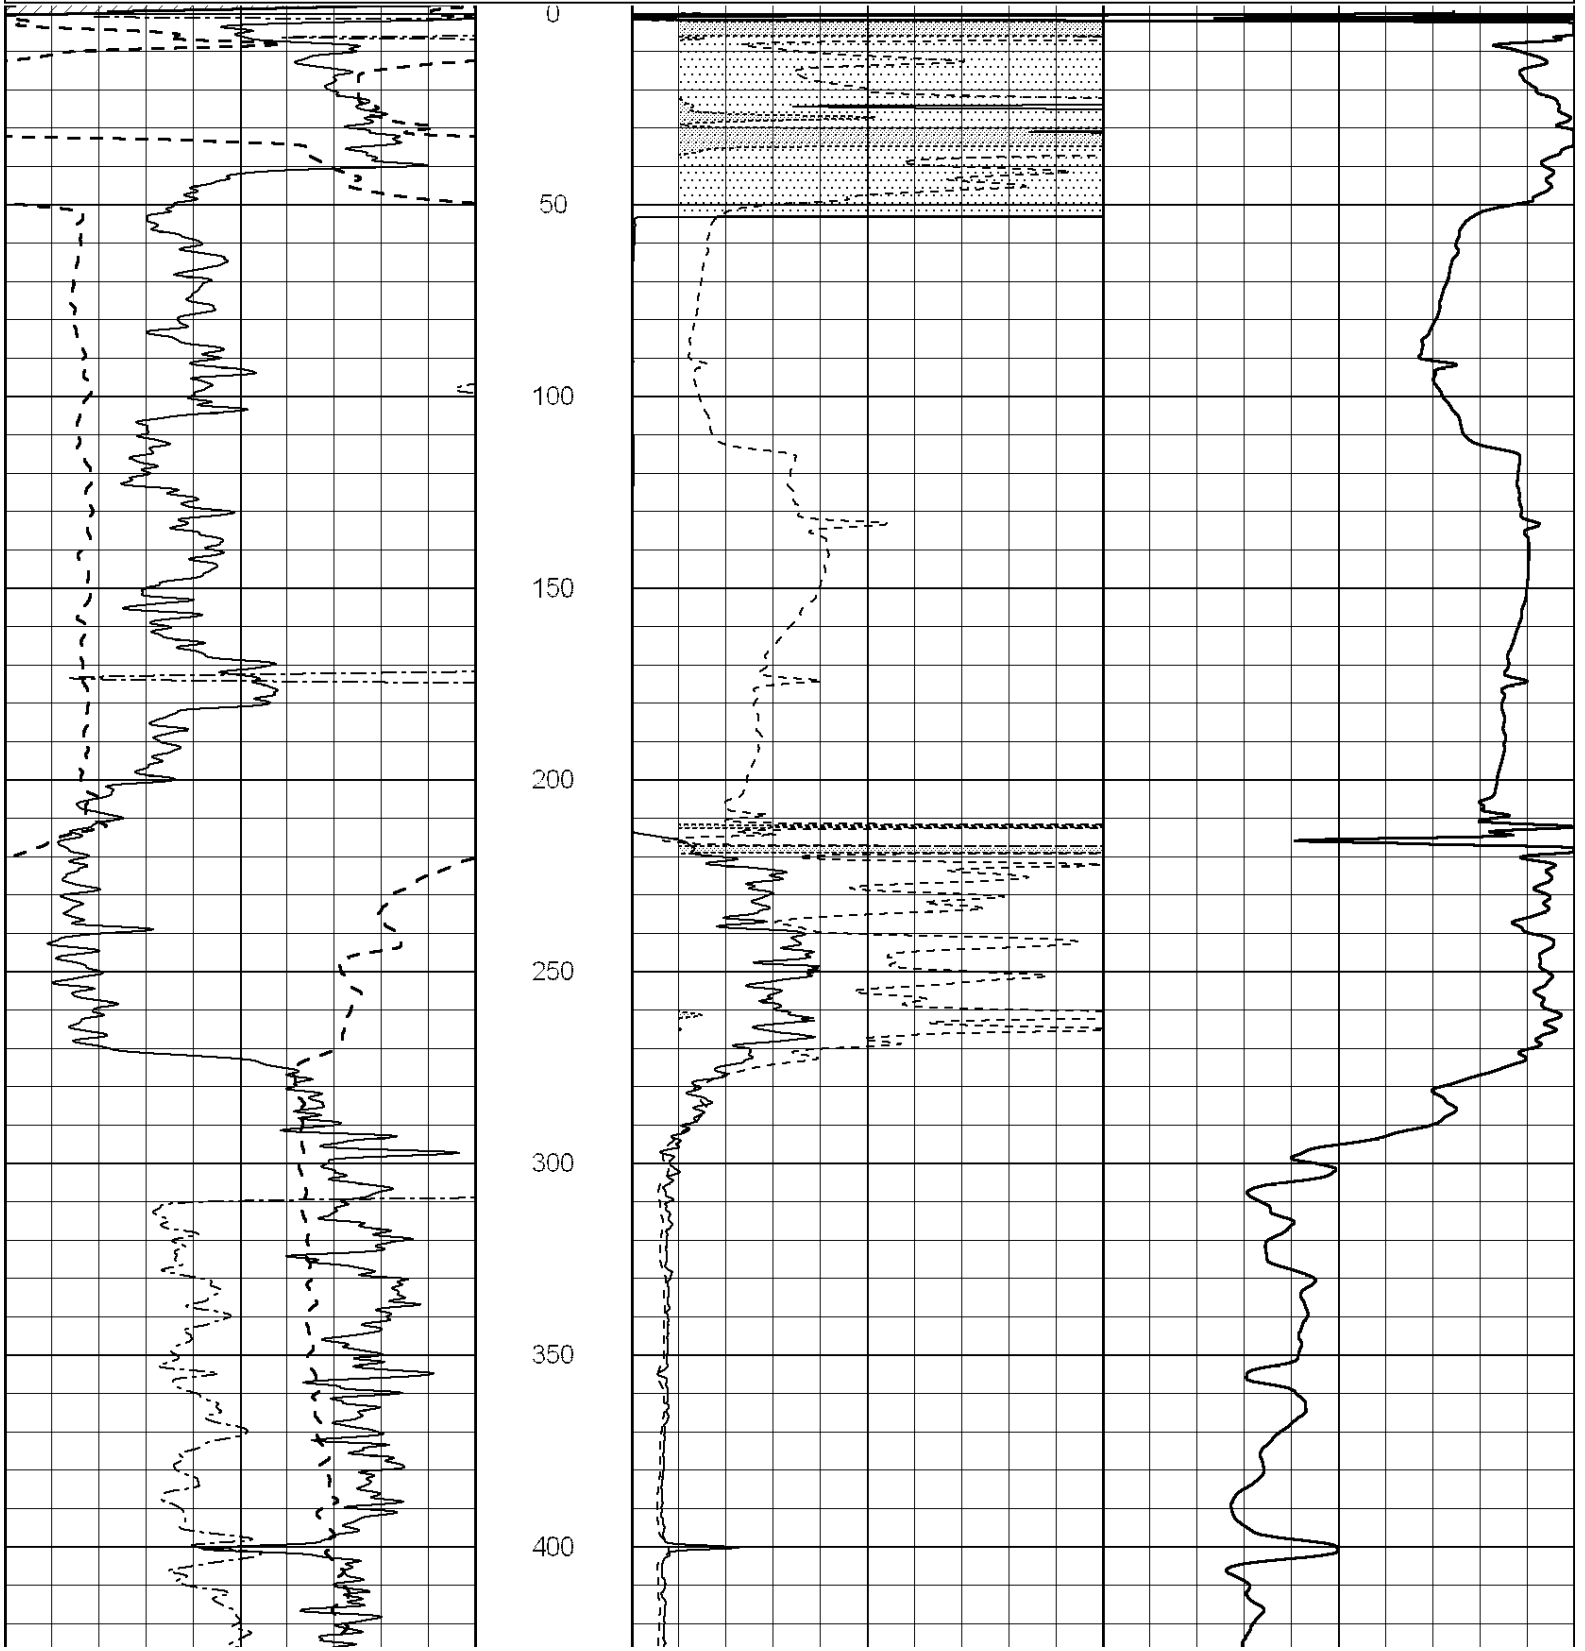

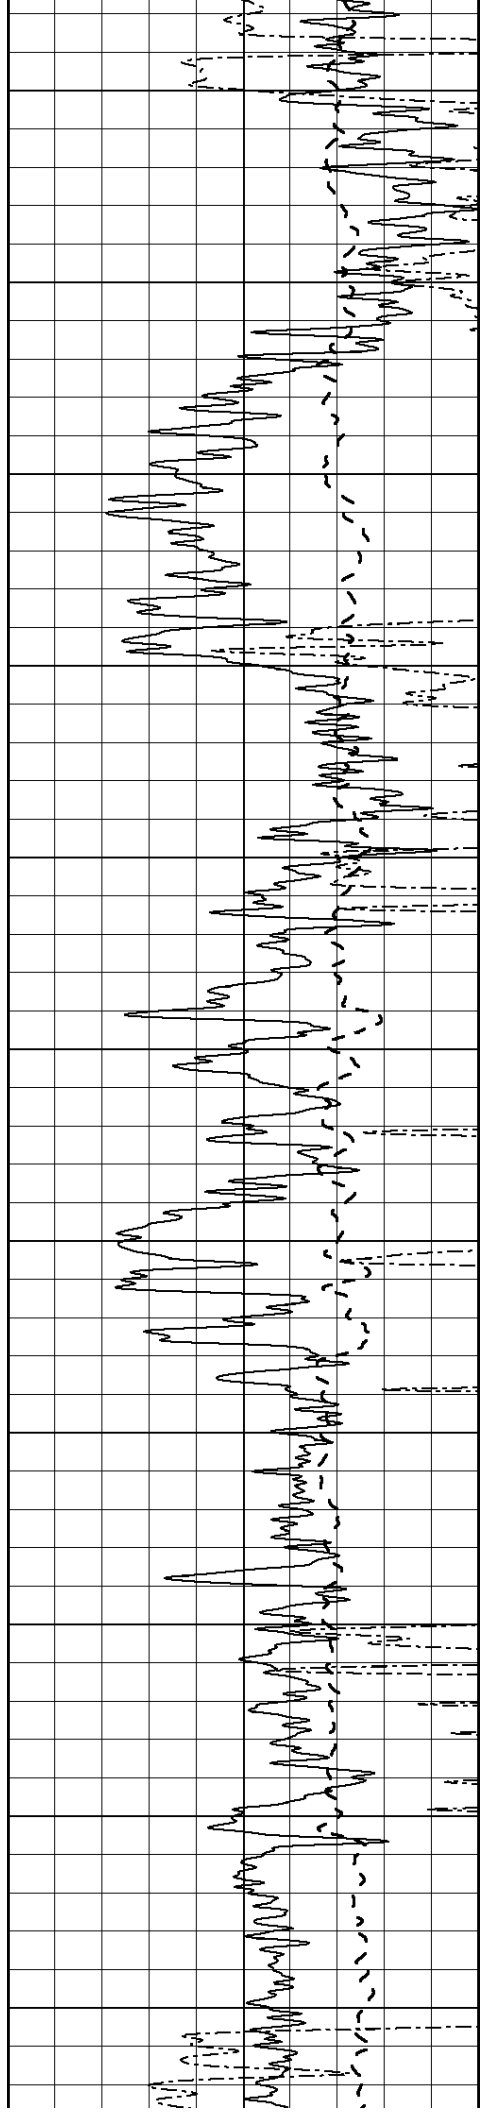

450

500

550

600

650

700



750


800

850


900



950

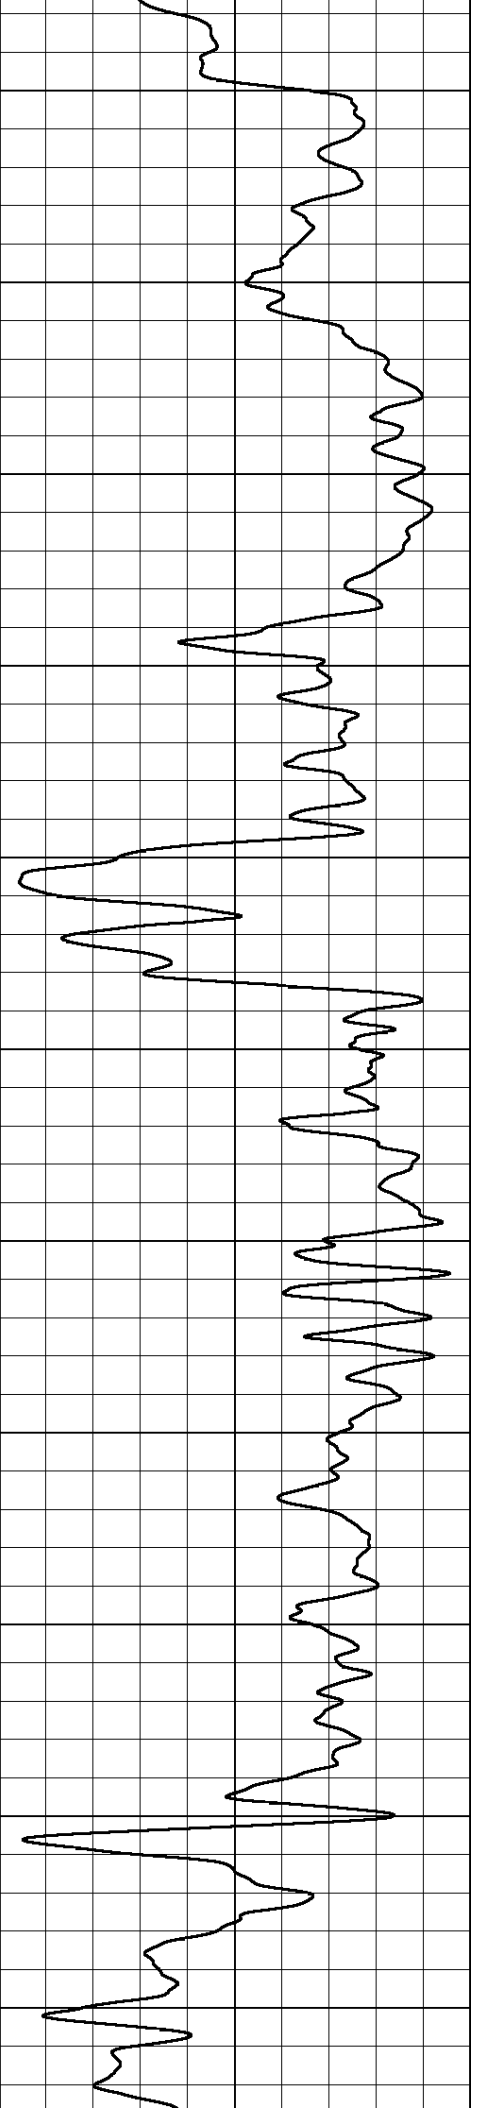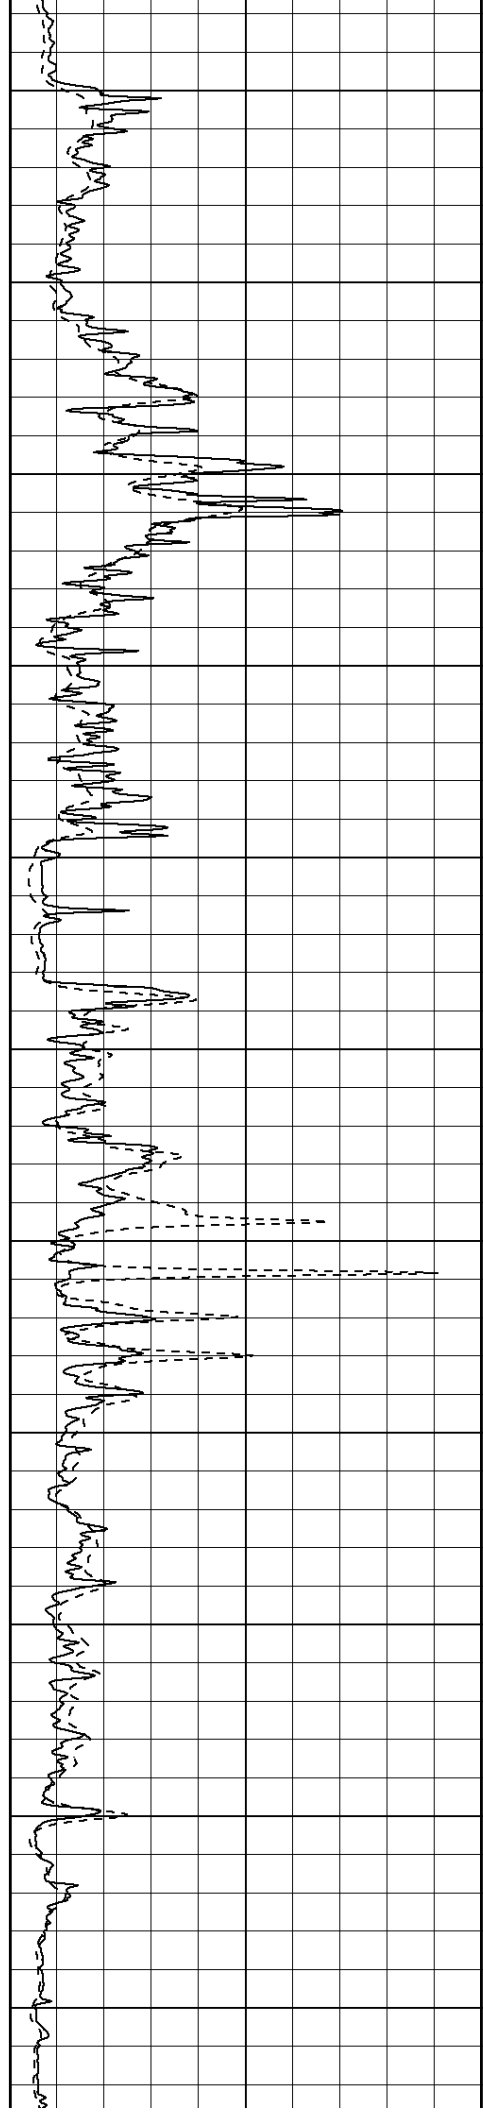


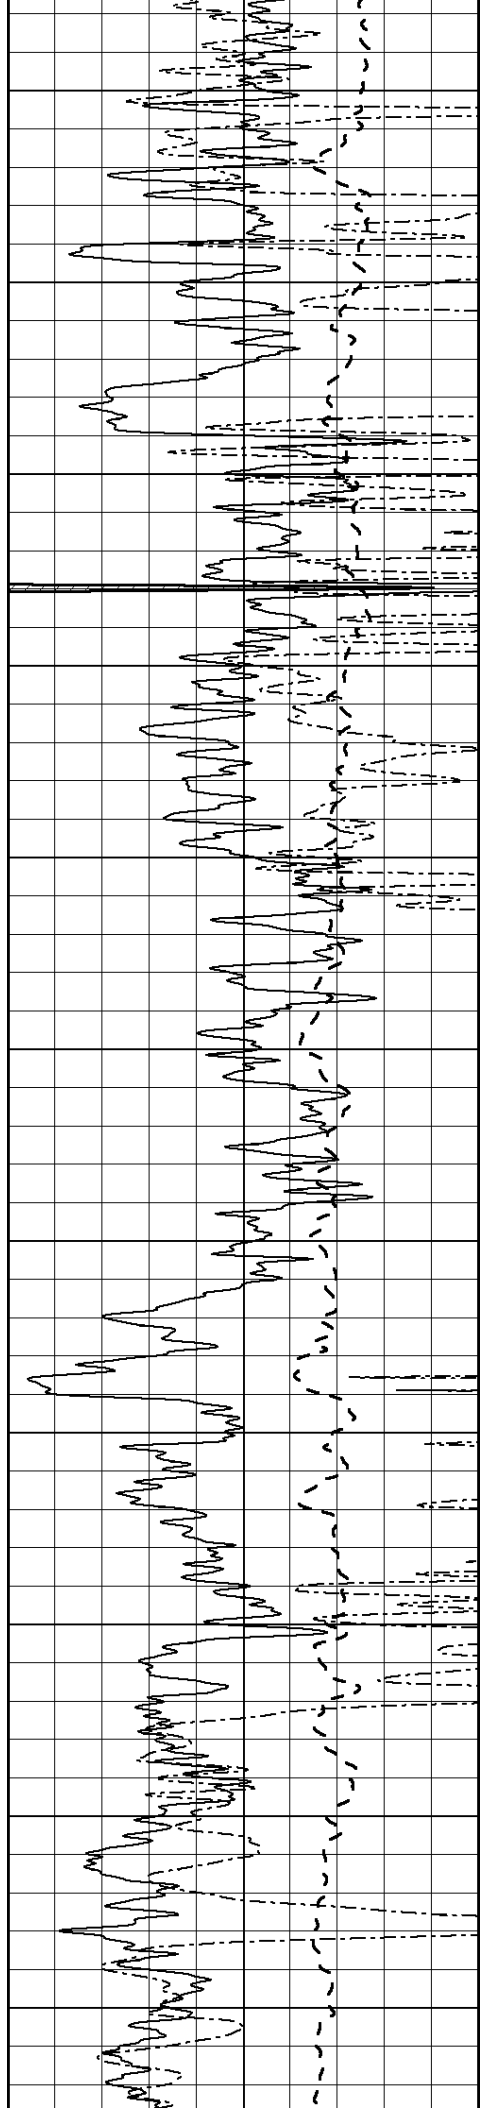

1000  
1050  
1100  
1150  
1200  
1250  
1300  
1350  
1400  
1450  
1500

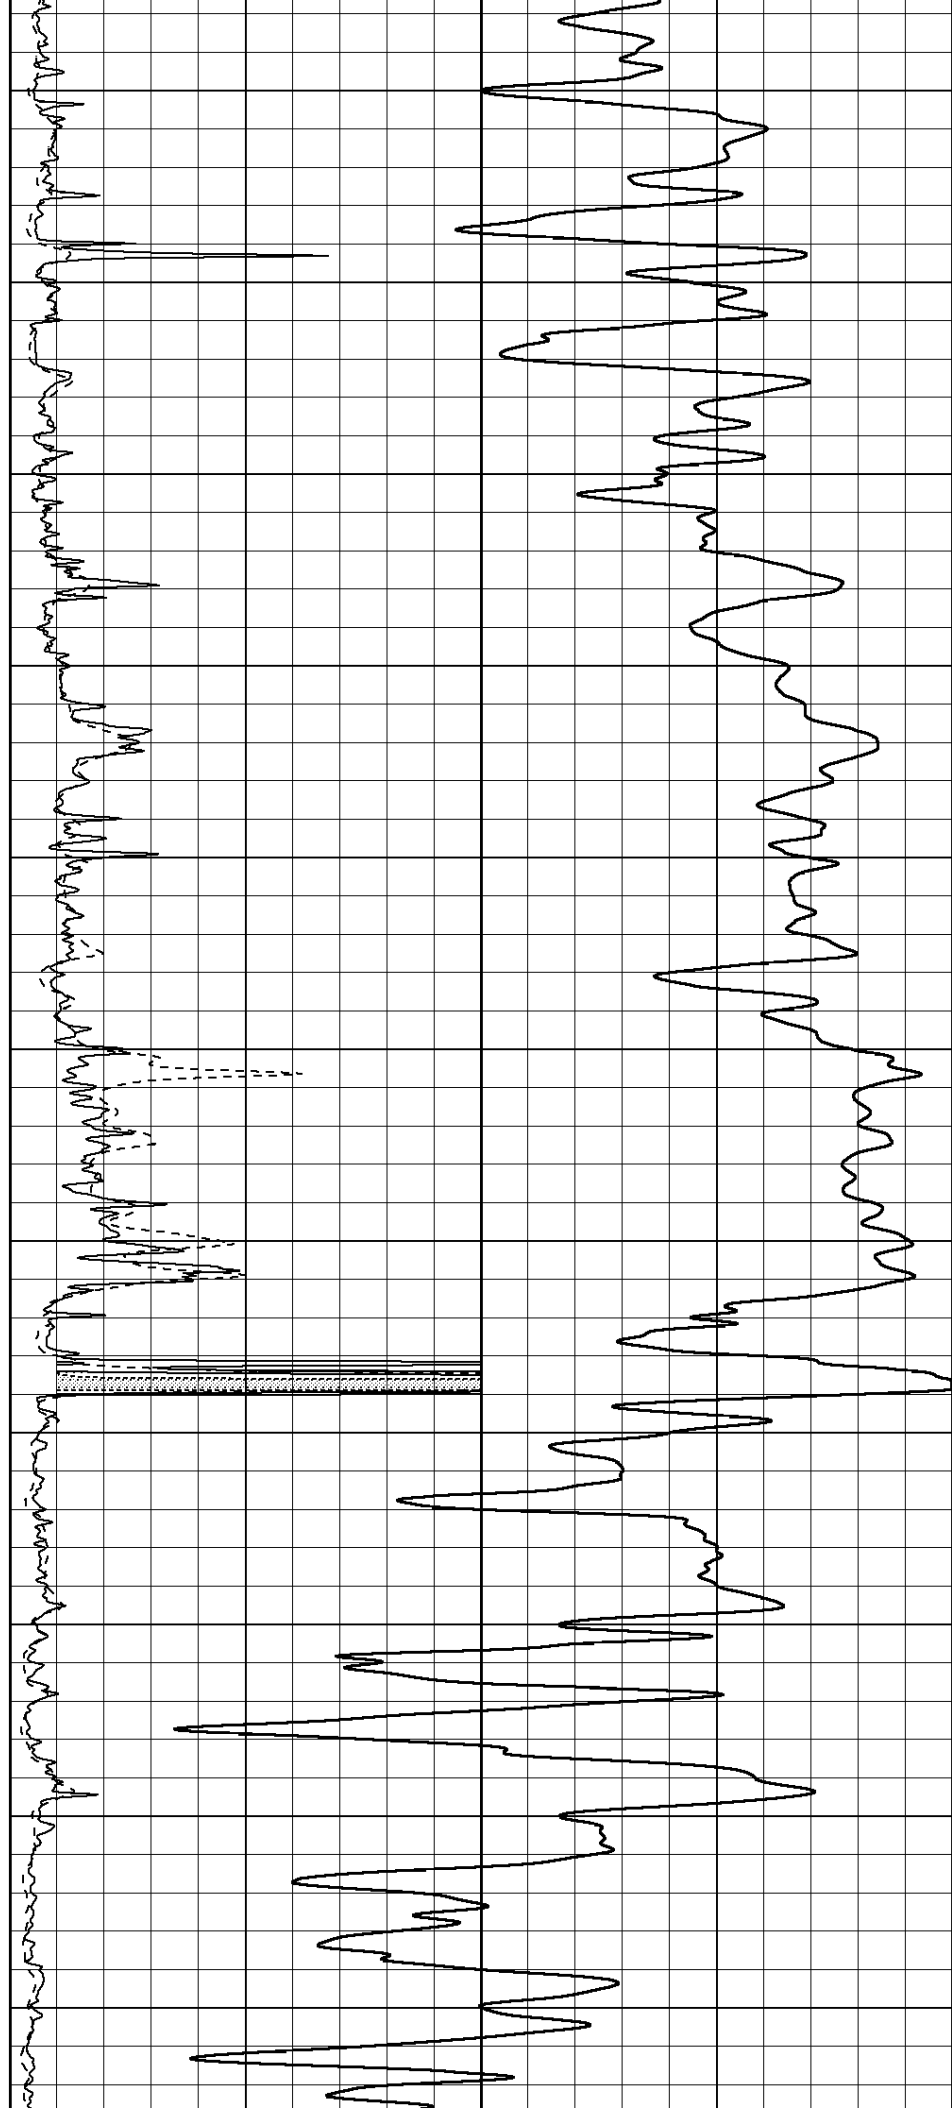

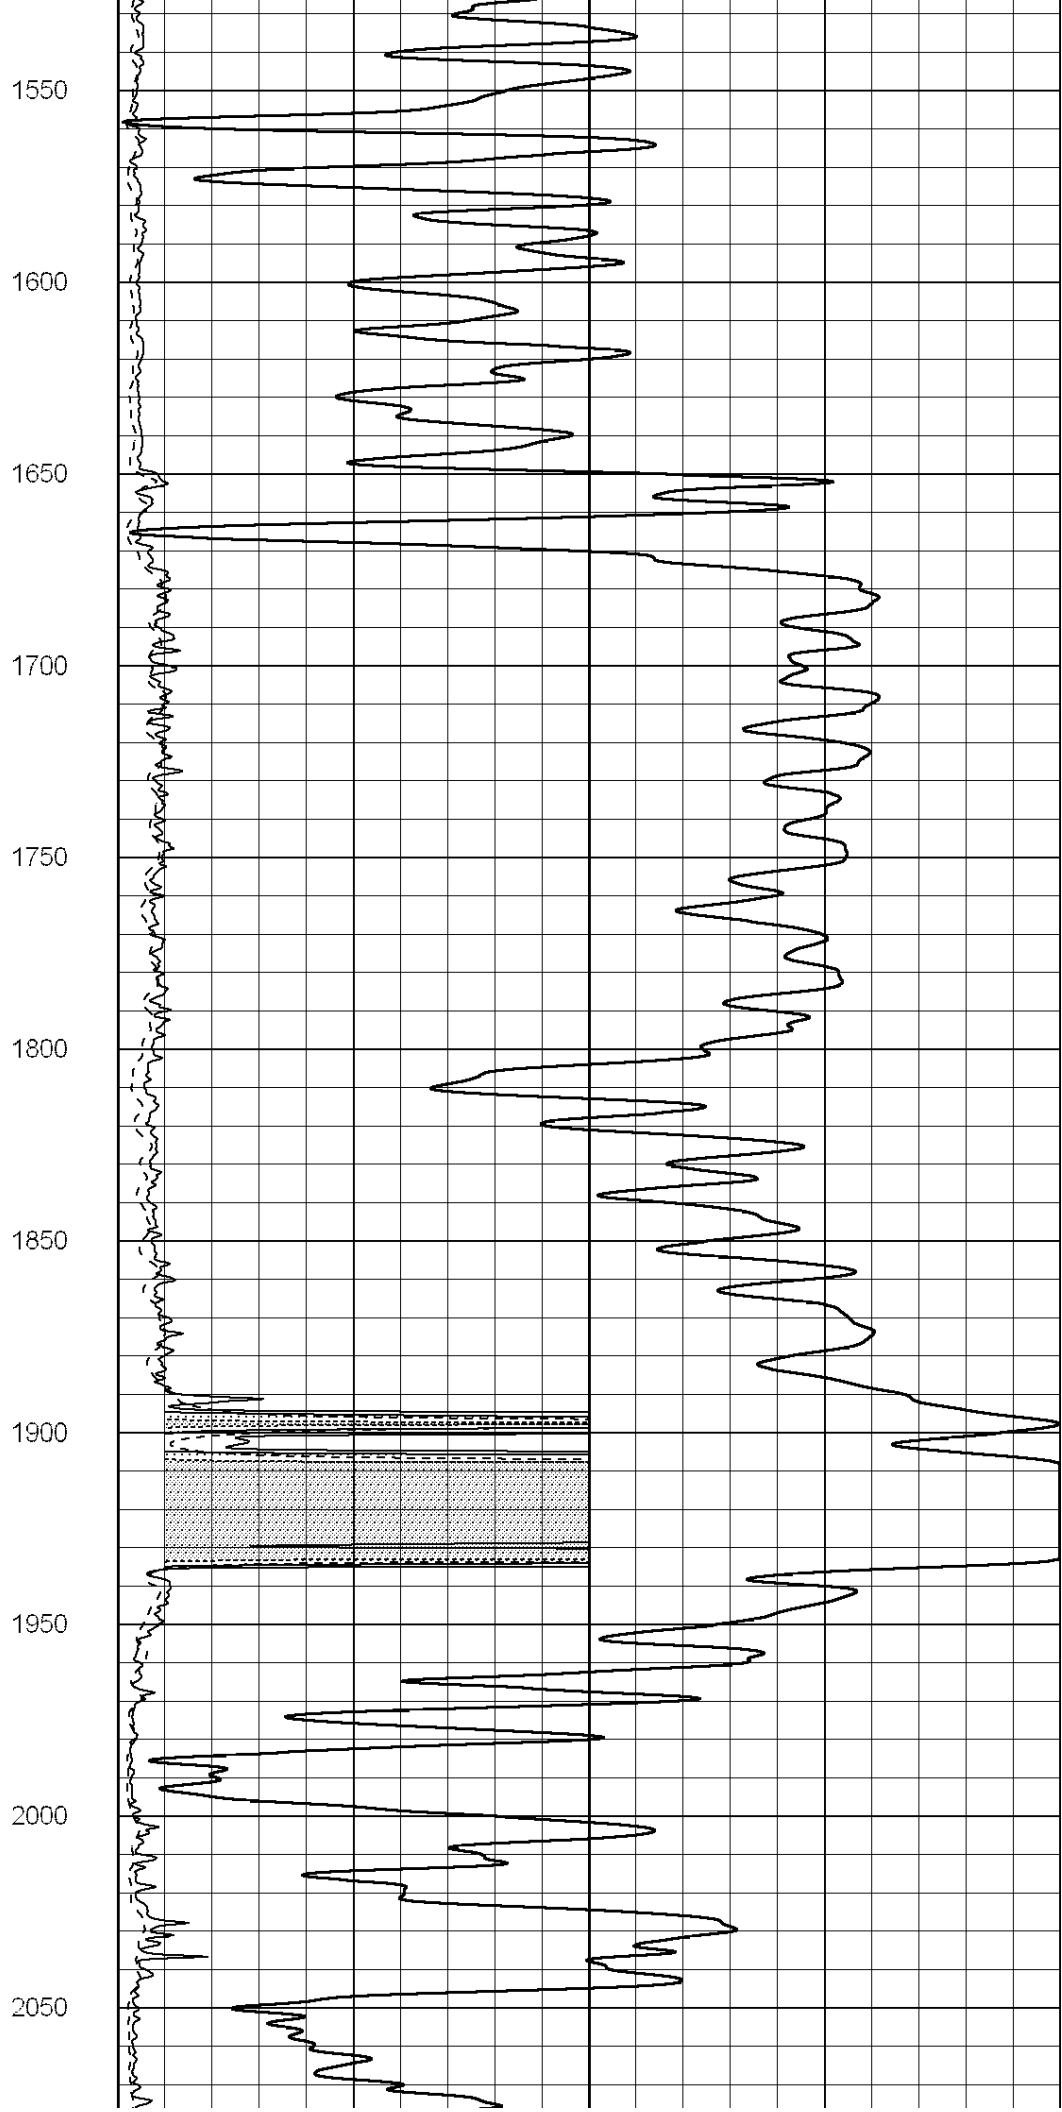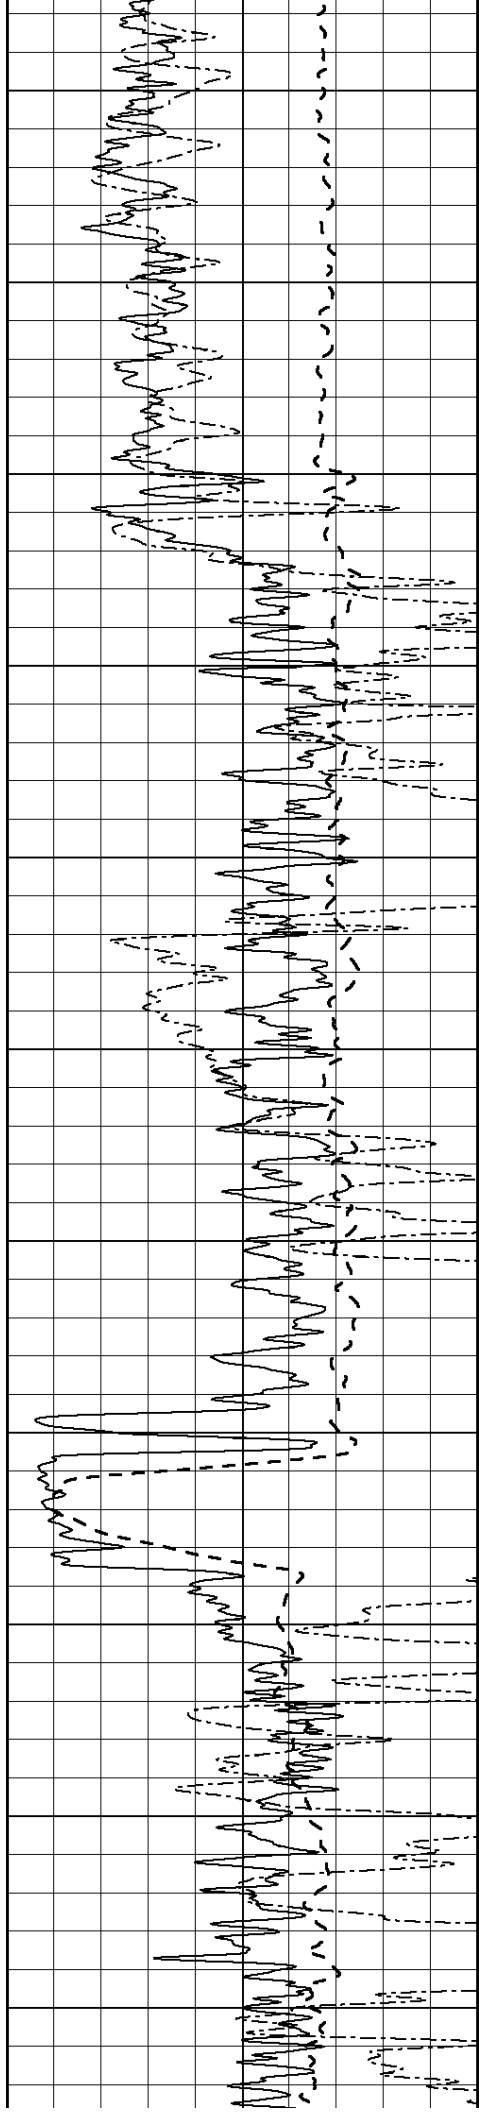

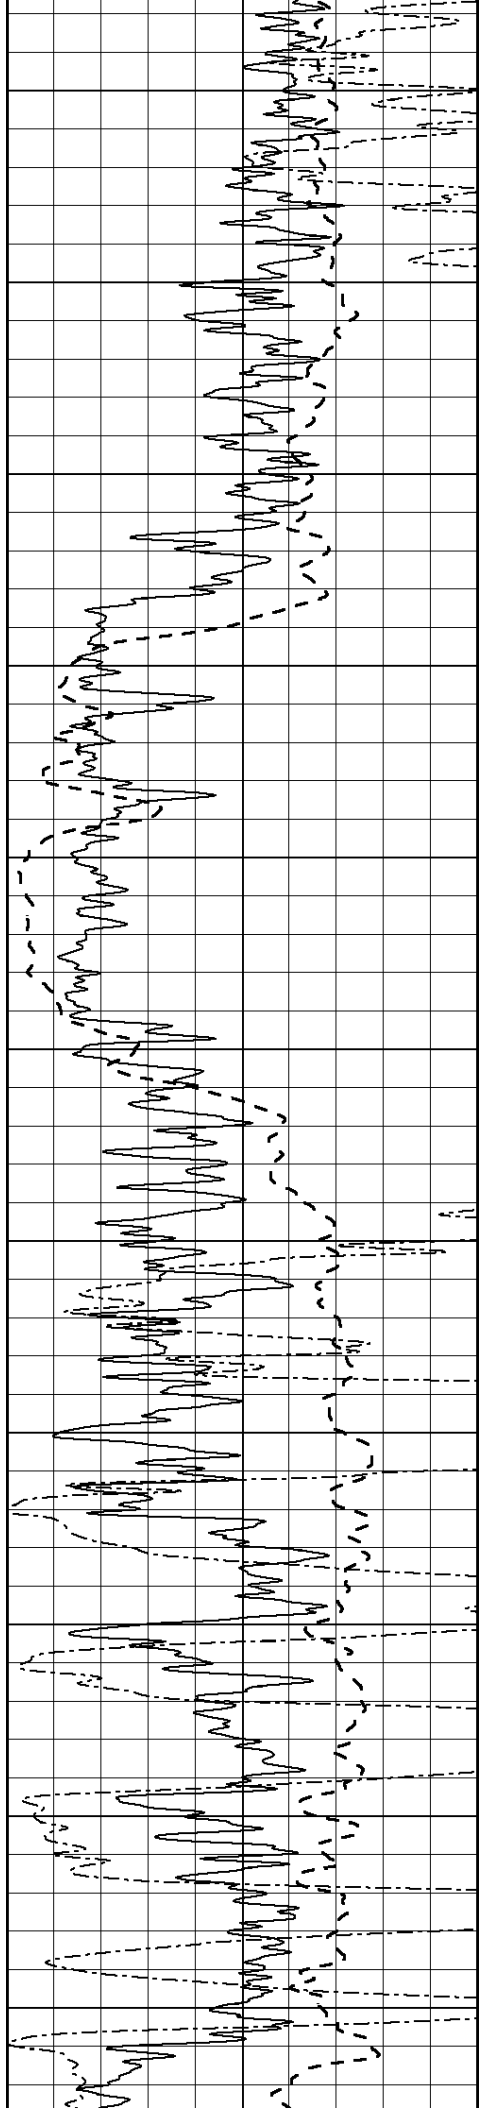

2100

2150

2200

2250

2300

2350


2400


2450

2500

2550

2600

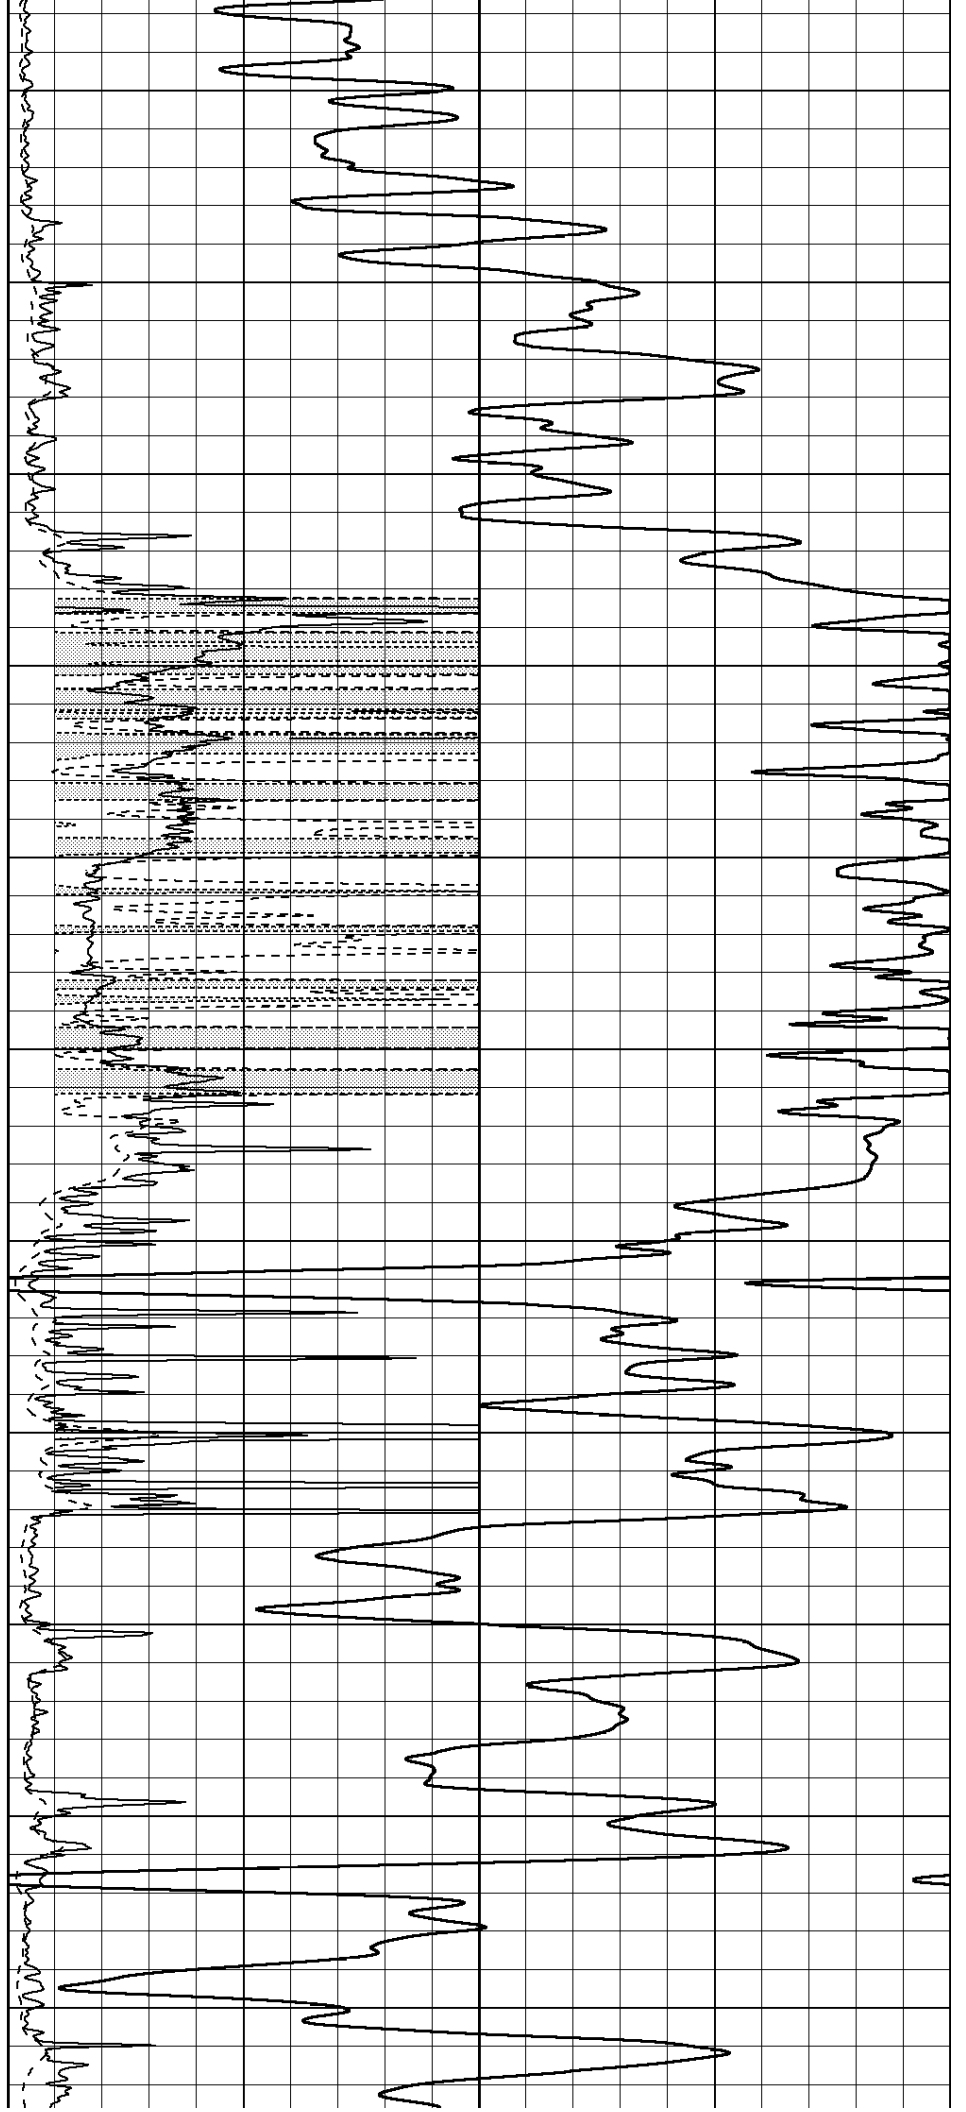

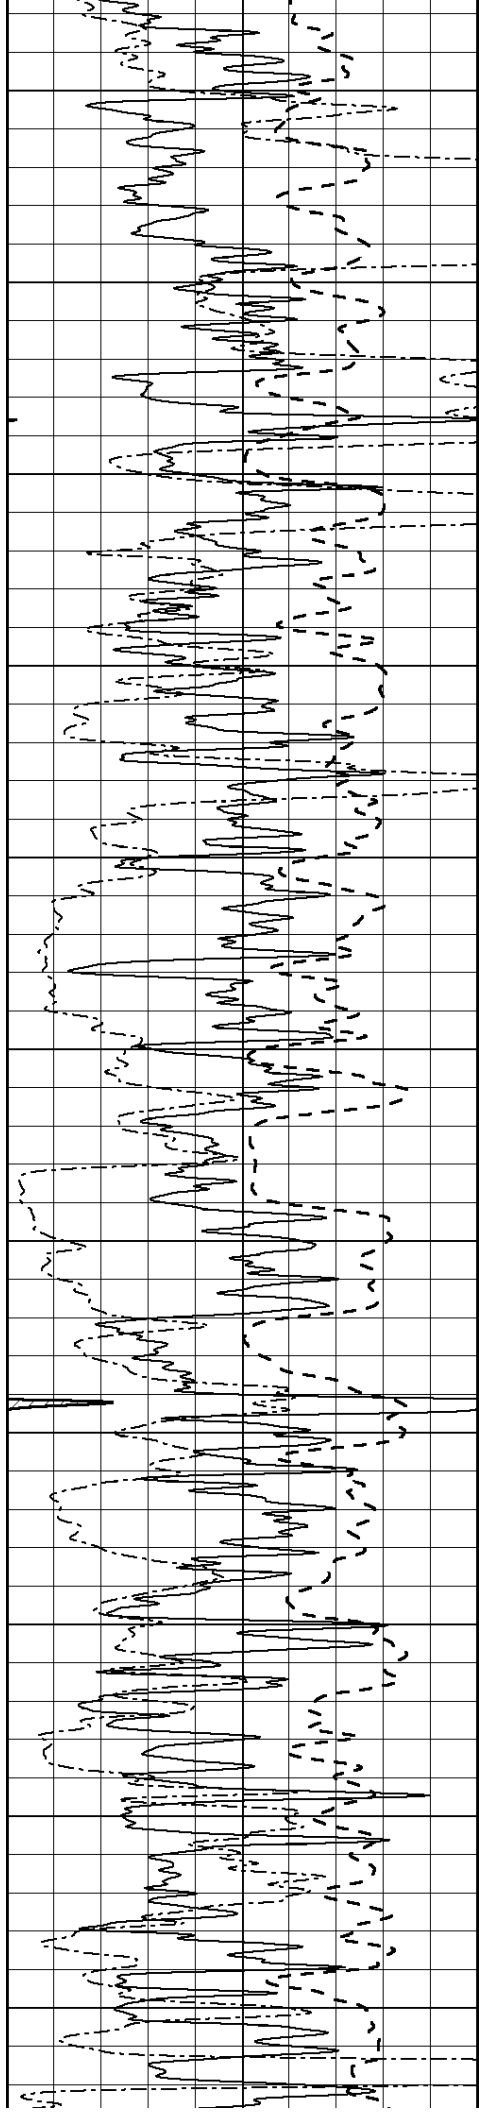

2650

2700

2750

2800

2850

2900


2950


3000

3050

3100

3150

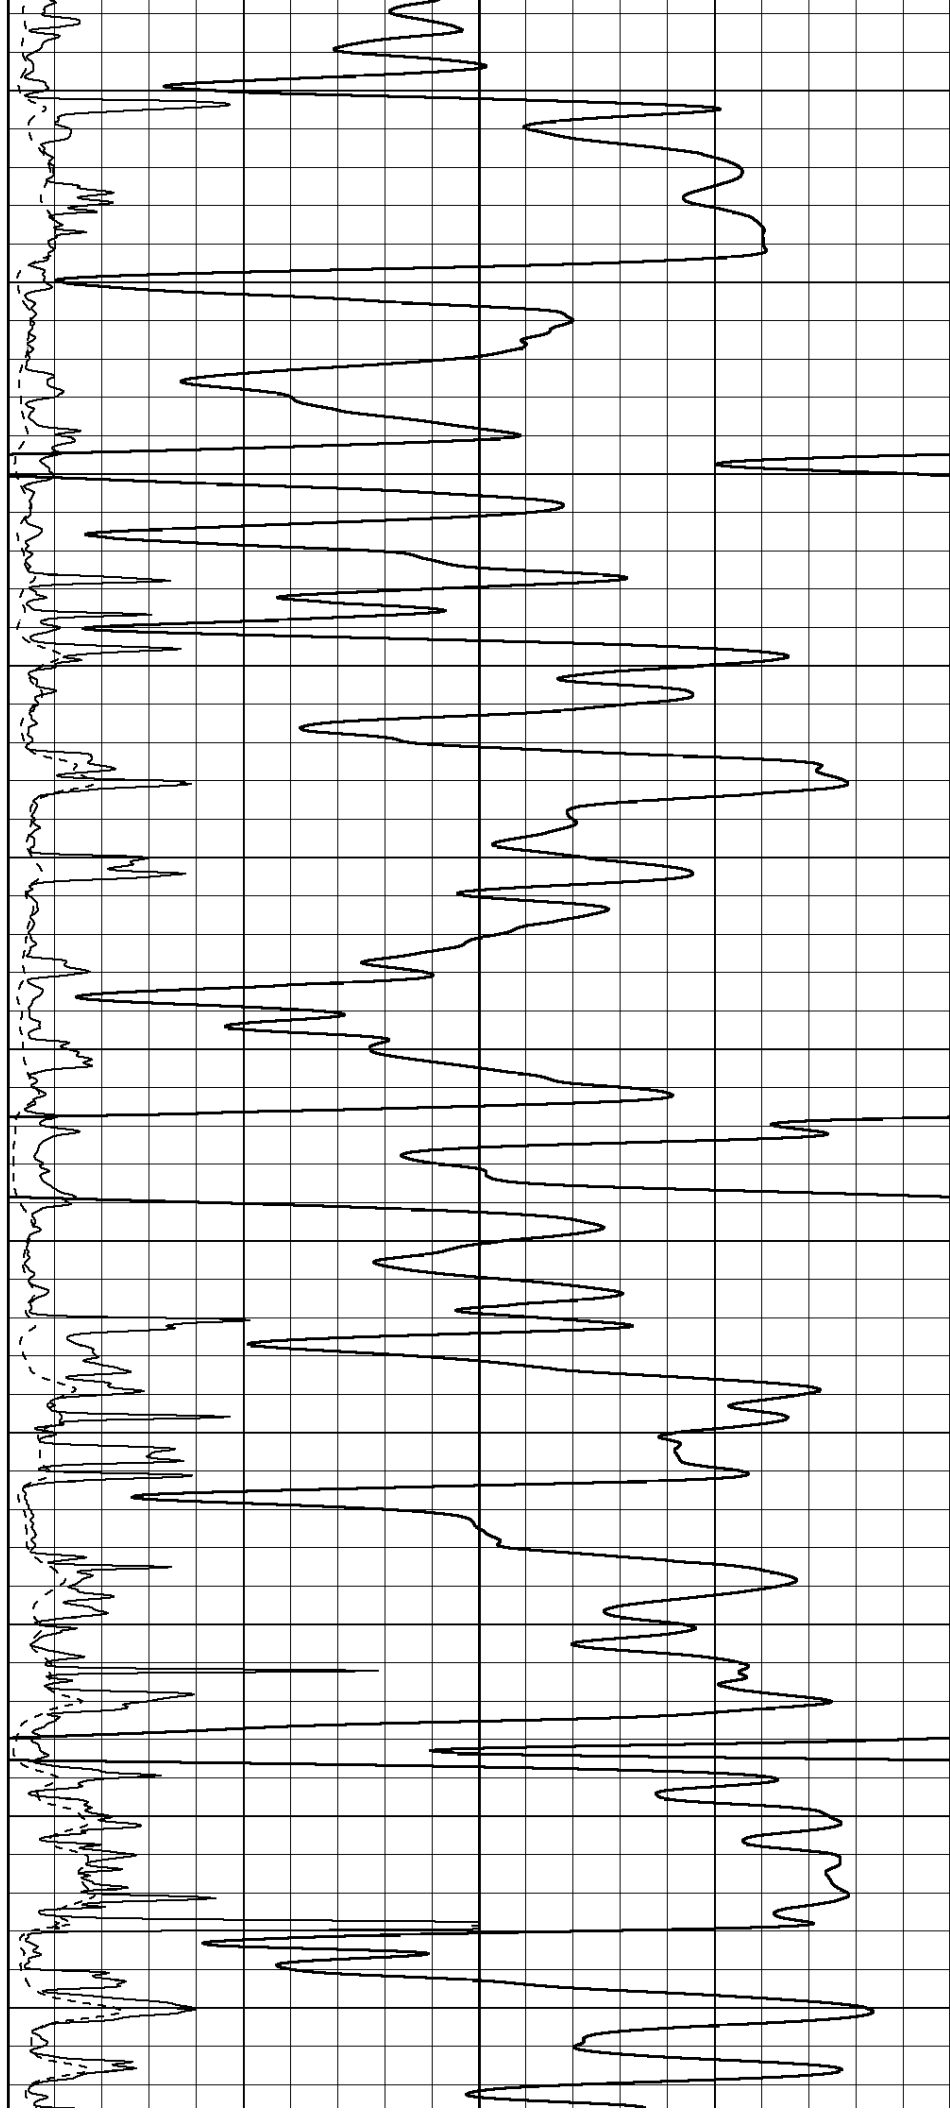

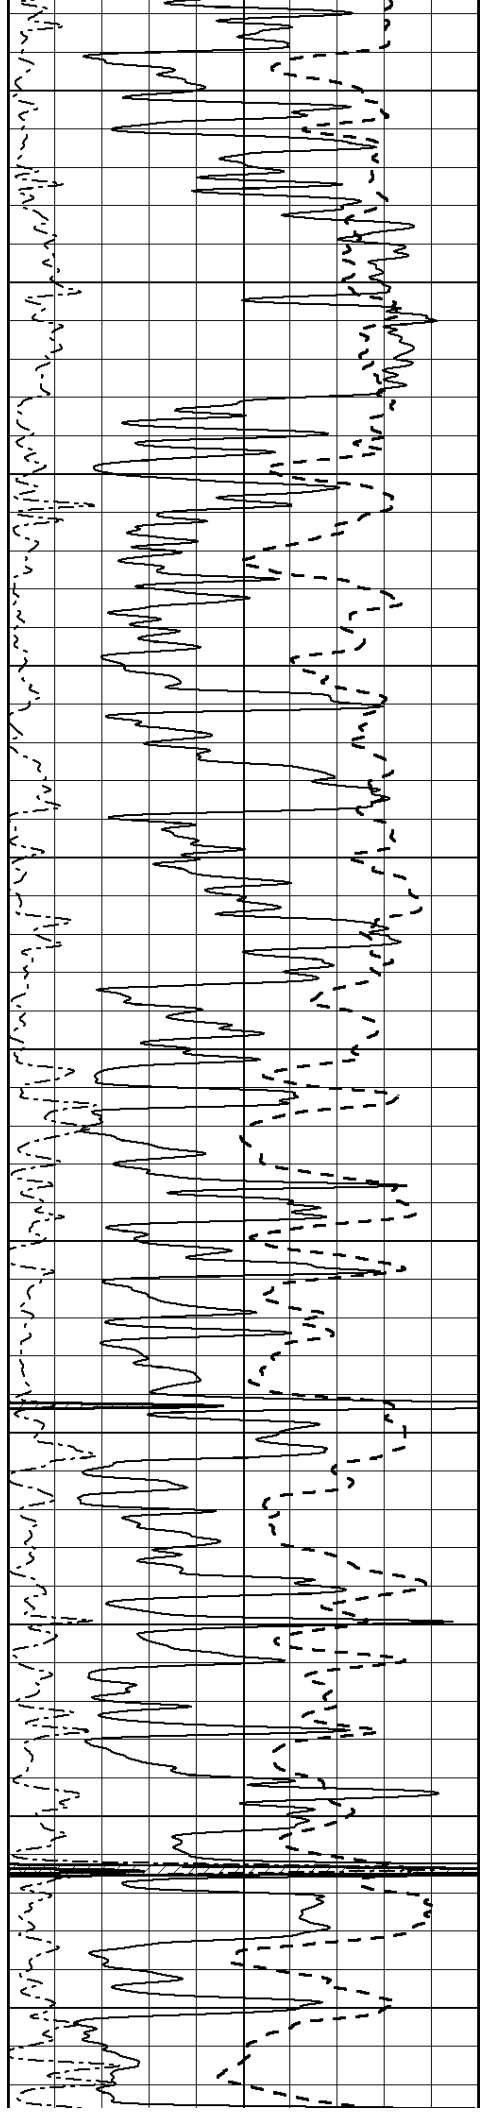

3200

3250

3300

3350

3400

3450


3500

3550


3600

3650

3700

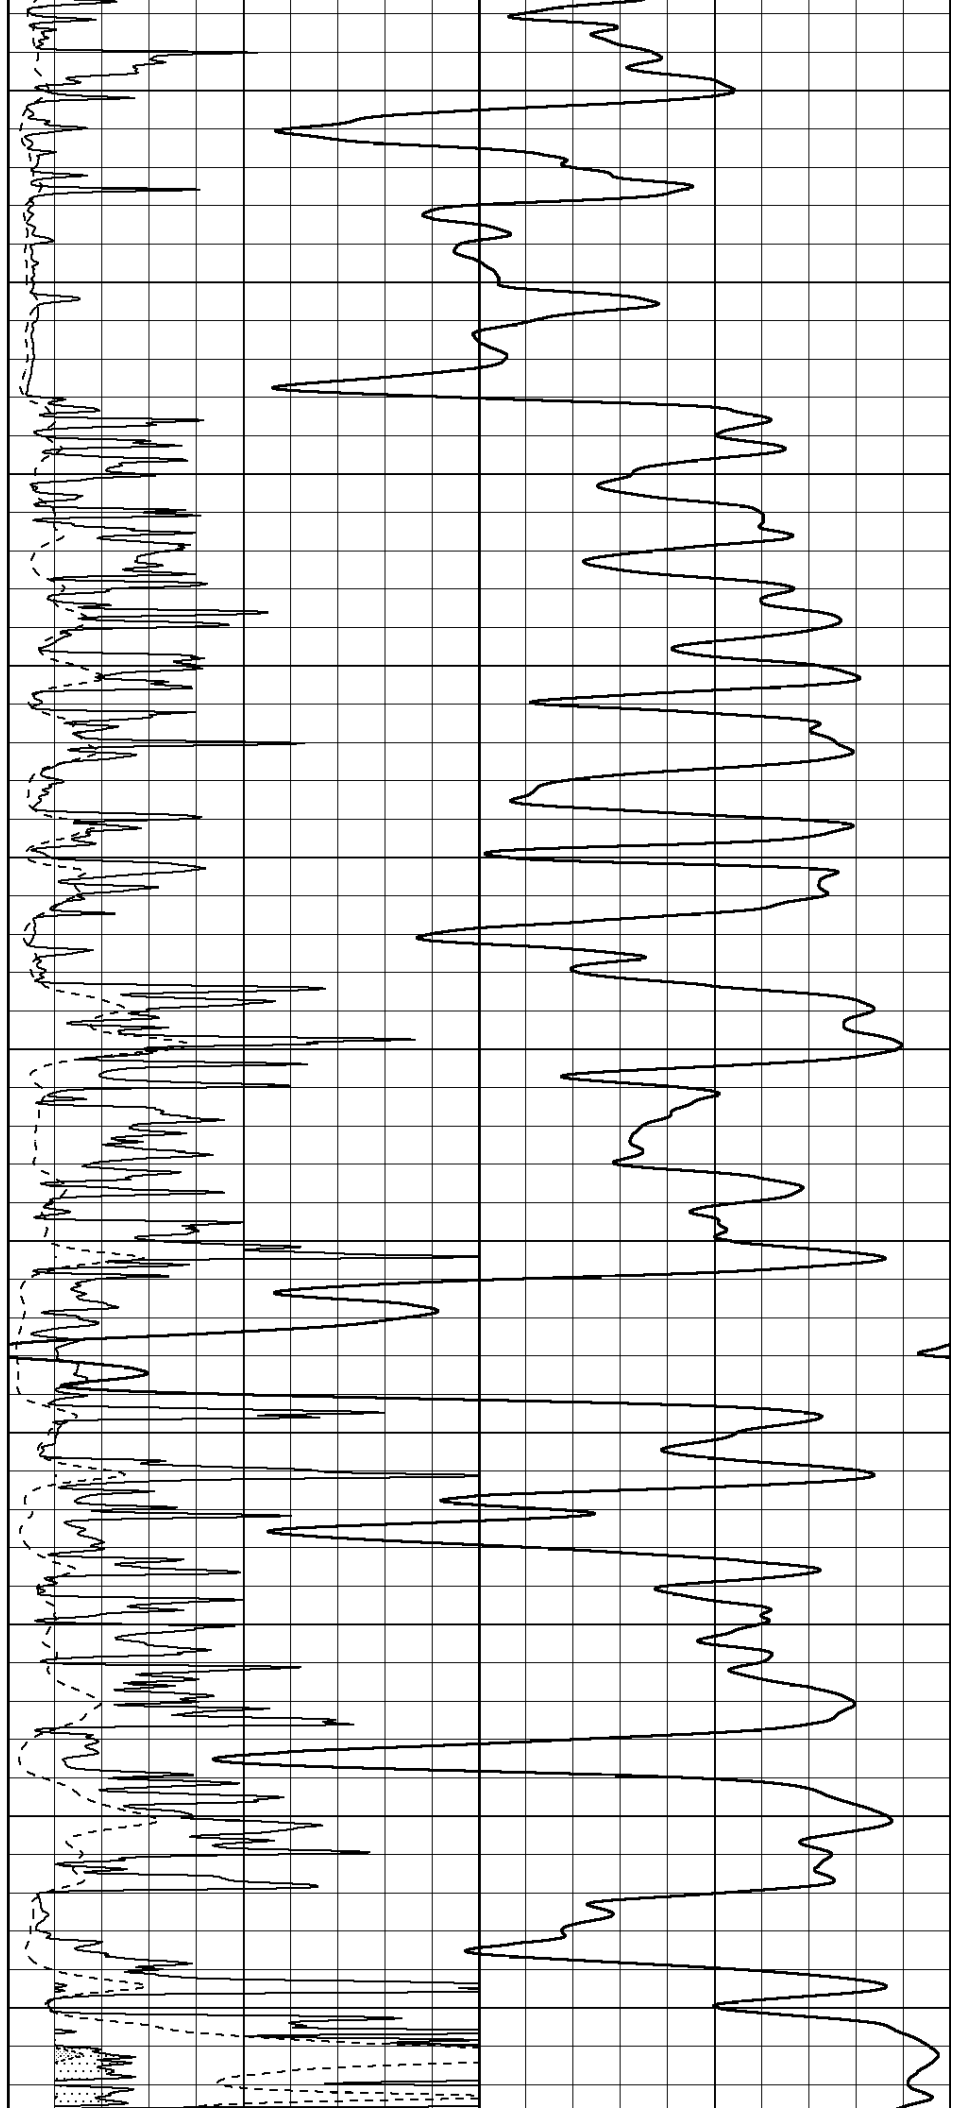



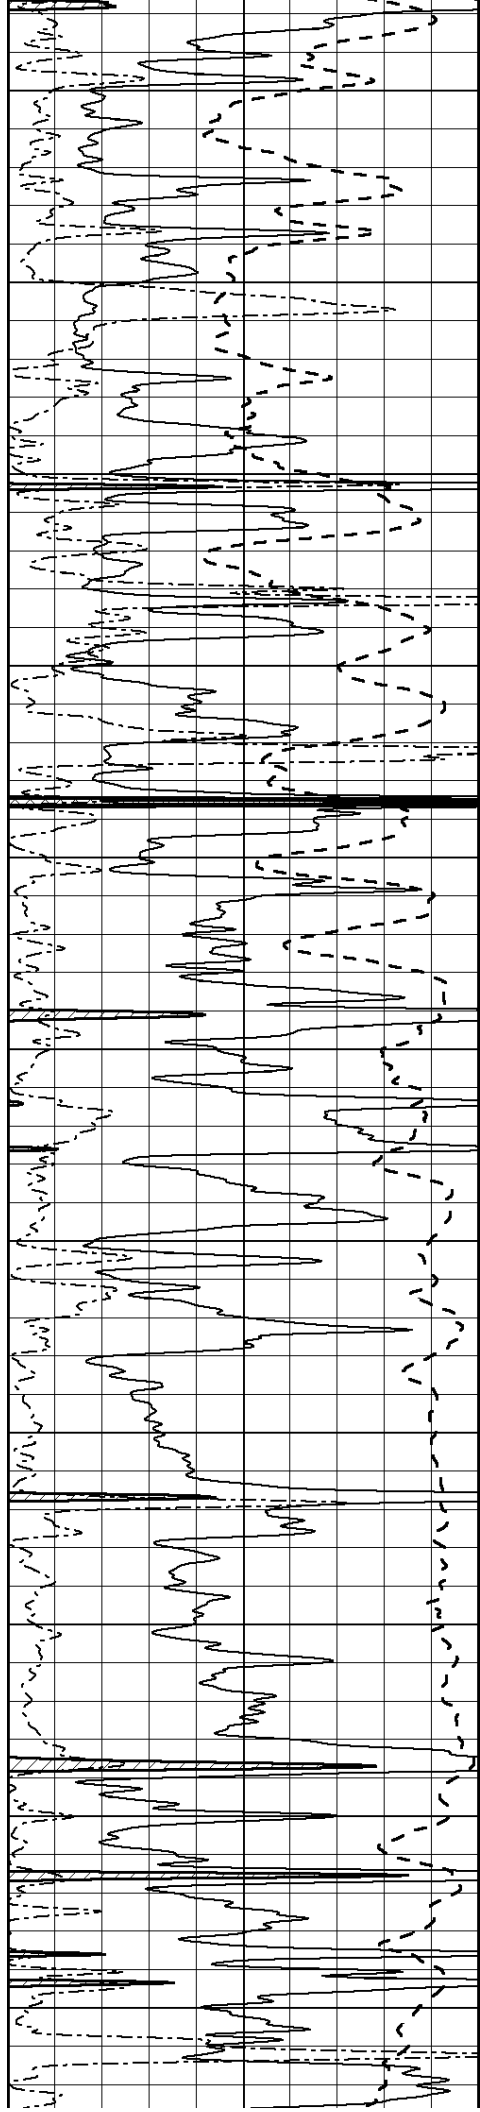

3750

3800

3850

3900

3950

4000



4050




4100

4150

4200





4250

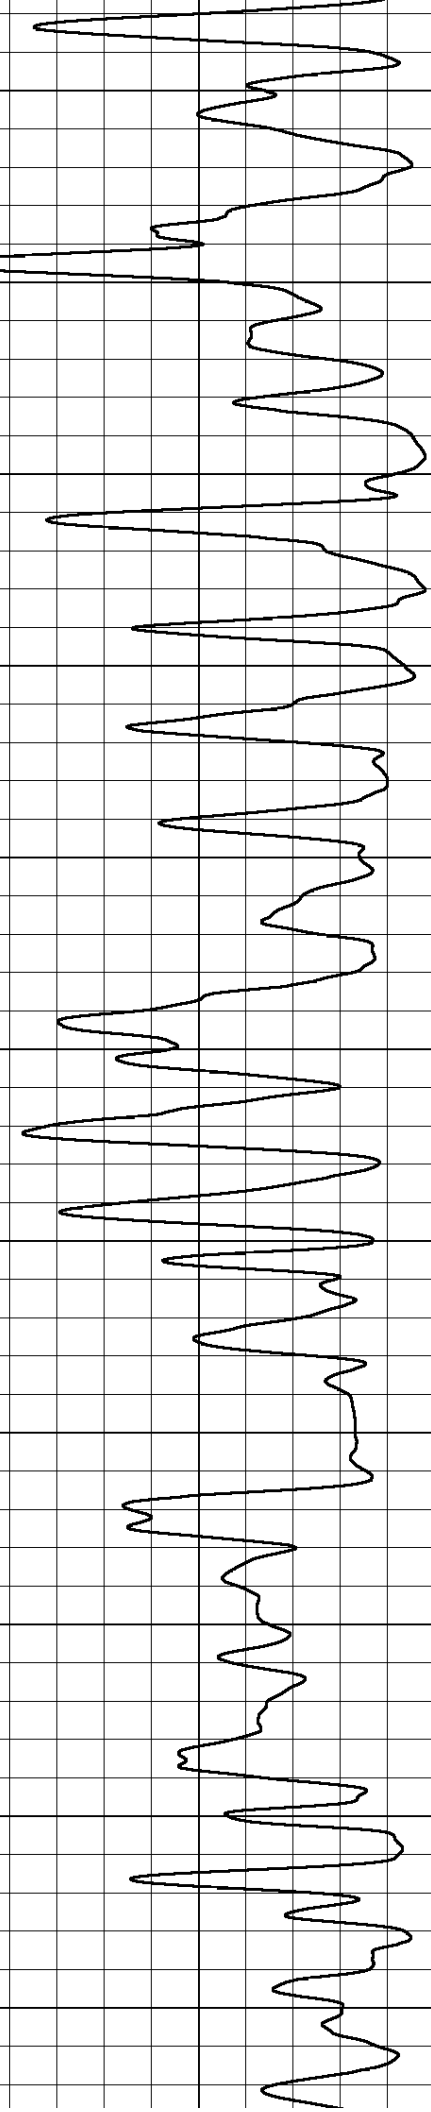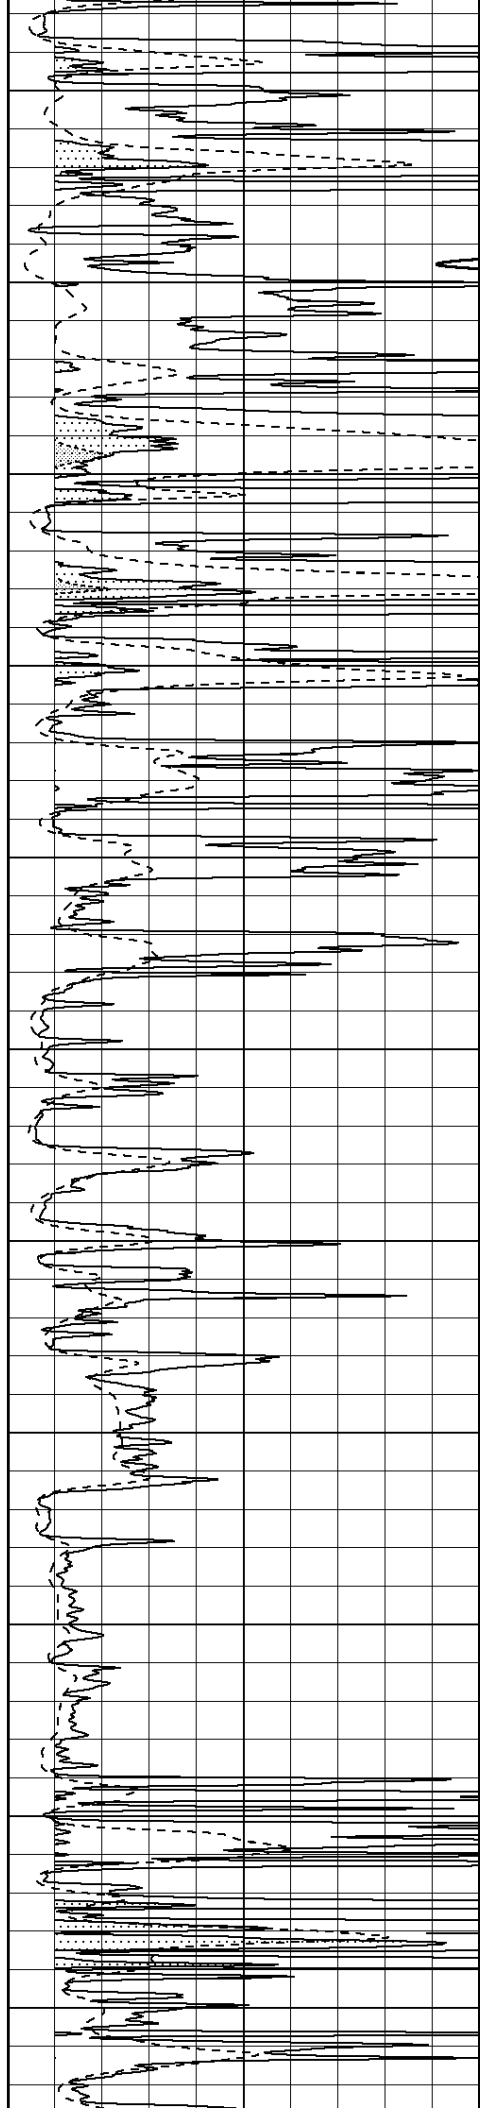


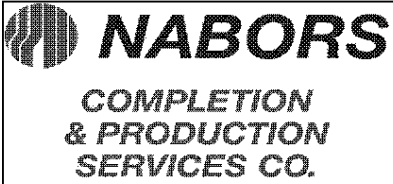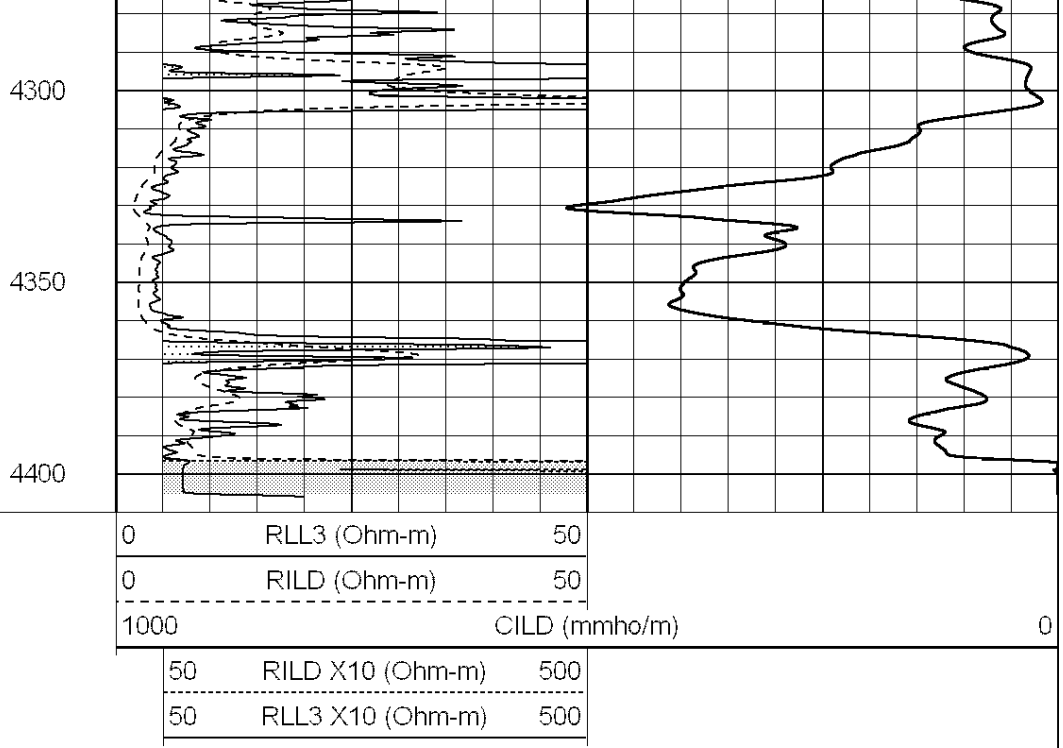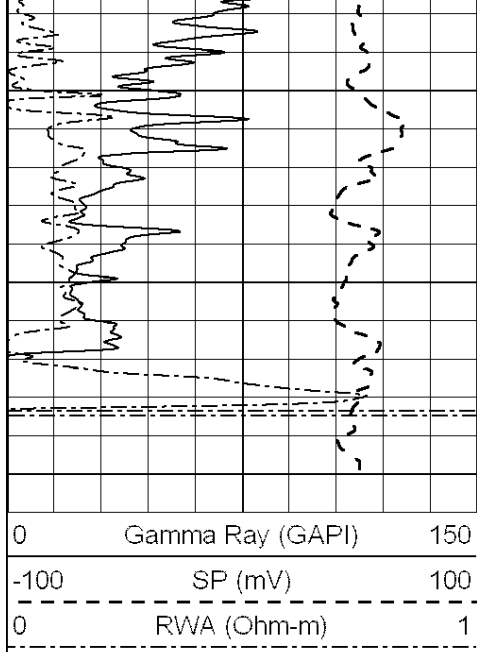

# ANHYDRITE


Database File: 26631ddn.db  
 Dataset Pathname: pass3.9  
 Presentation Format: \_dil  
 Dataset Creation: Fri Aug 07 21:30:49 2015  
 Charted by: Depth in Feet scaled 1:240

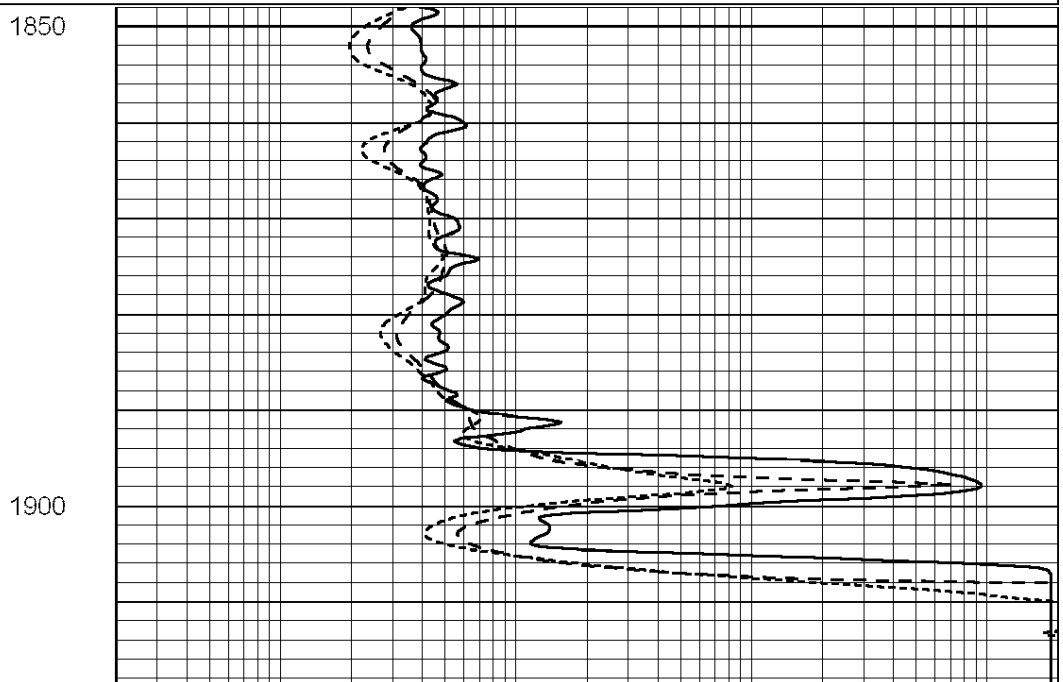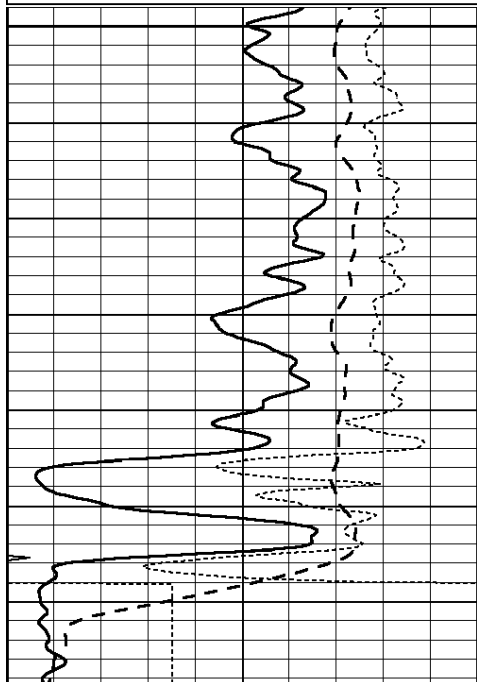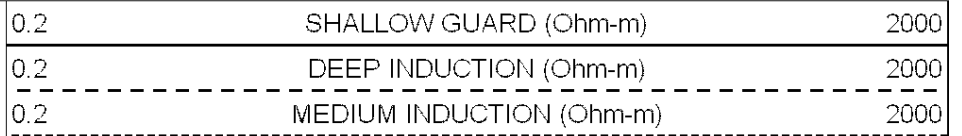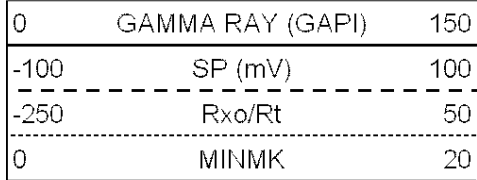

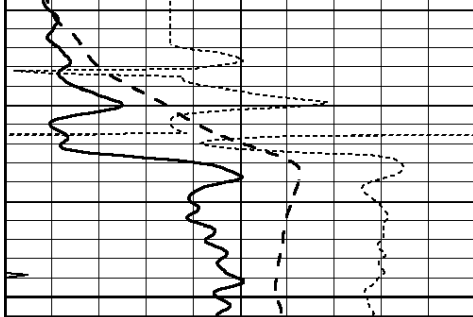

0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50
0	MINMK	20

1950

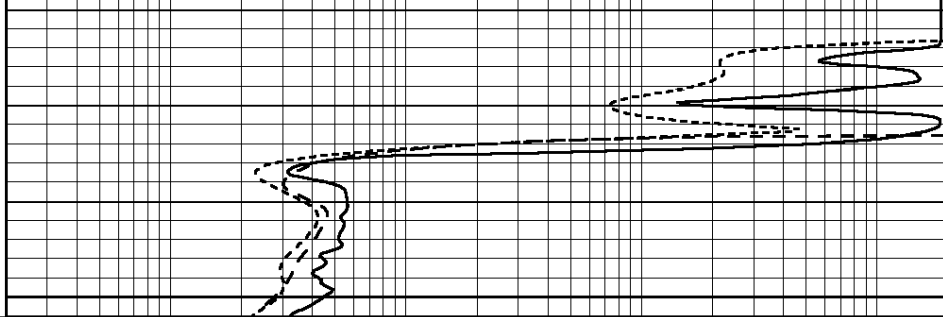

0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000




# MAIN SECTION

Database File: 26631ddn.db  
 Dataset Pathname: pass3.8  
 Presentation Format: \_dil  
 Dataset Creation: Fri Aug 07 21:23:27 2015  
 Charted by: Depth in Feet scaled 1:240


0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50
0	MINMK	20


0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000

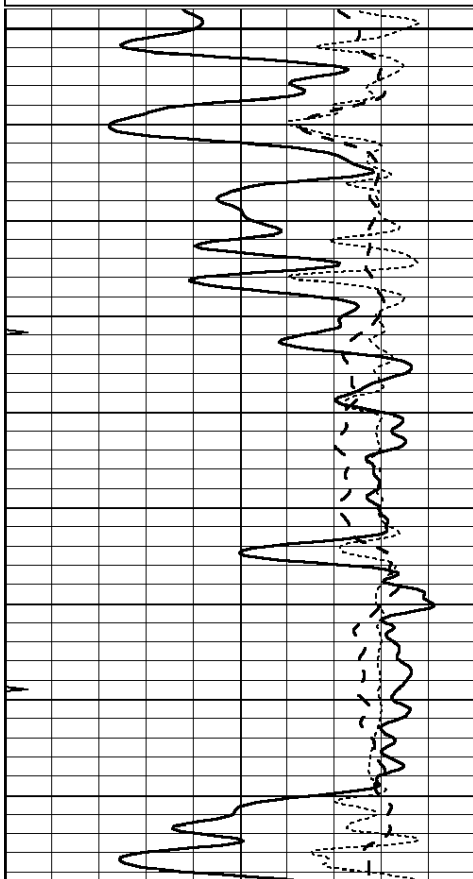

3200

3250

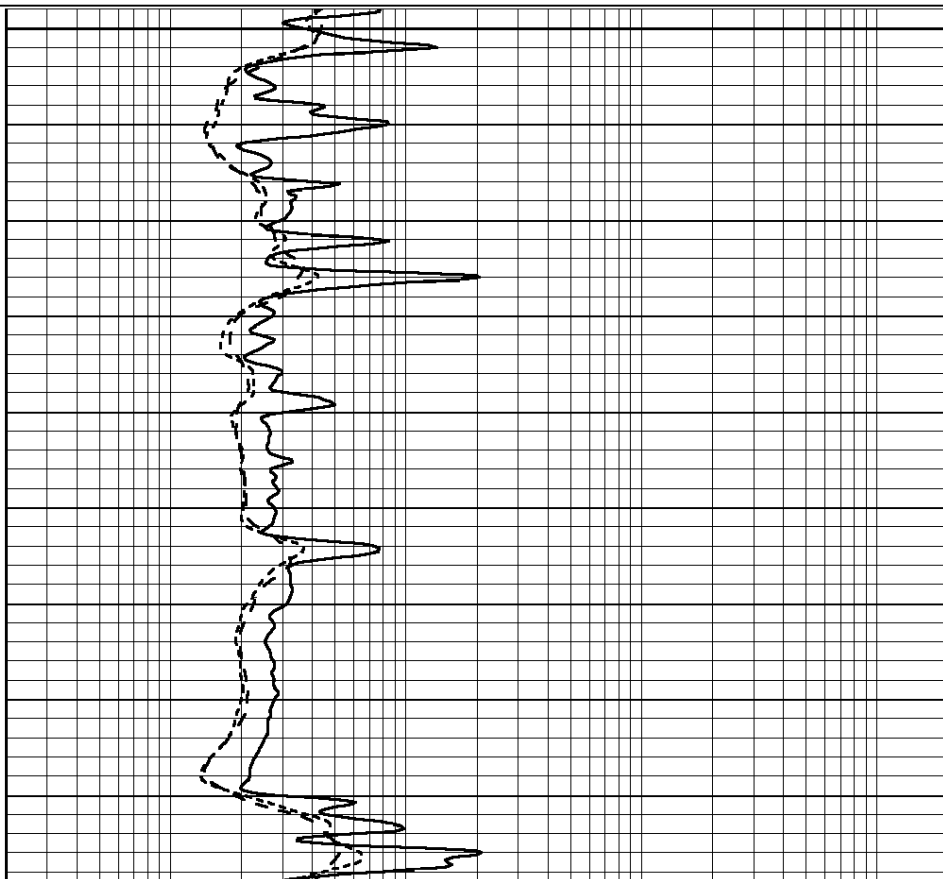

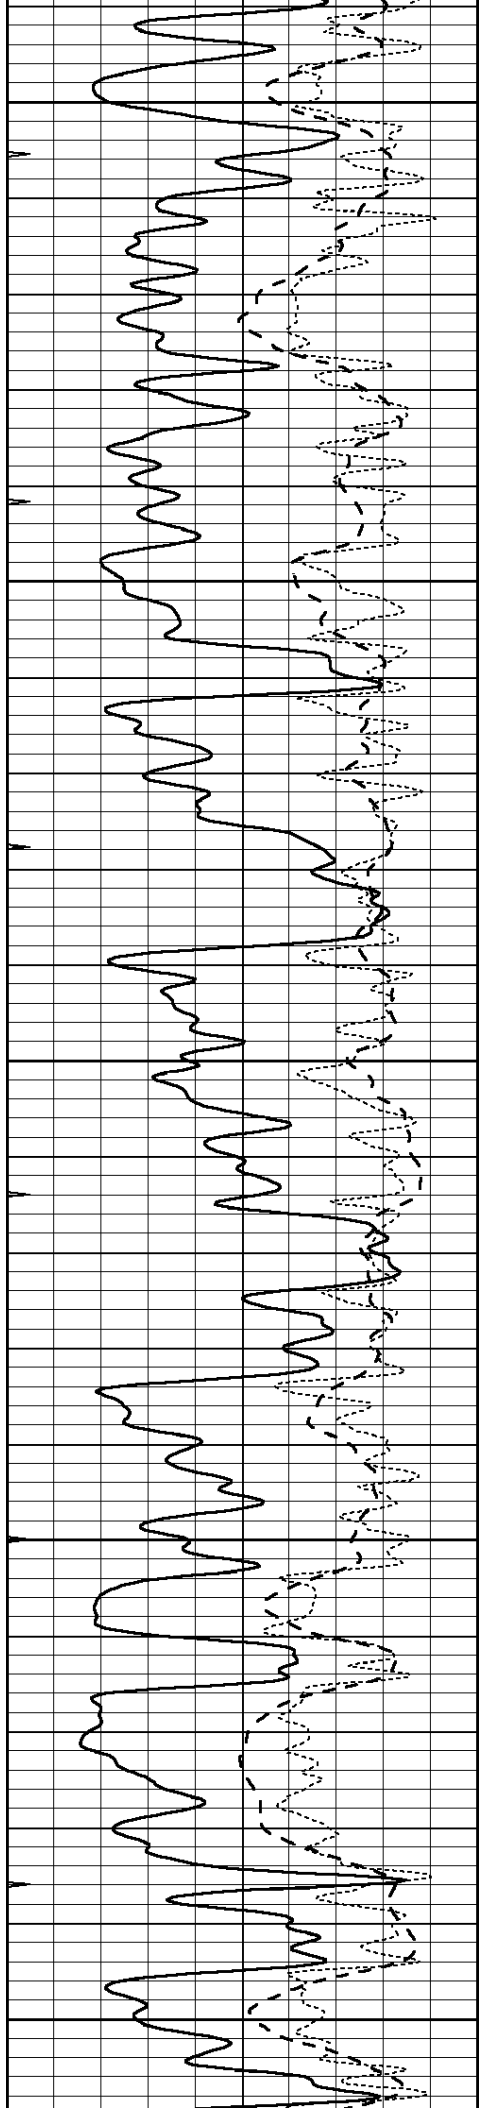


3300


3350

3400

3450

3500

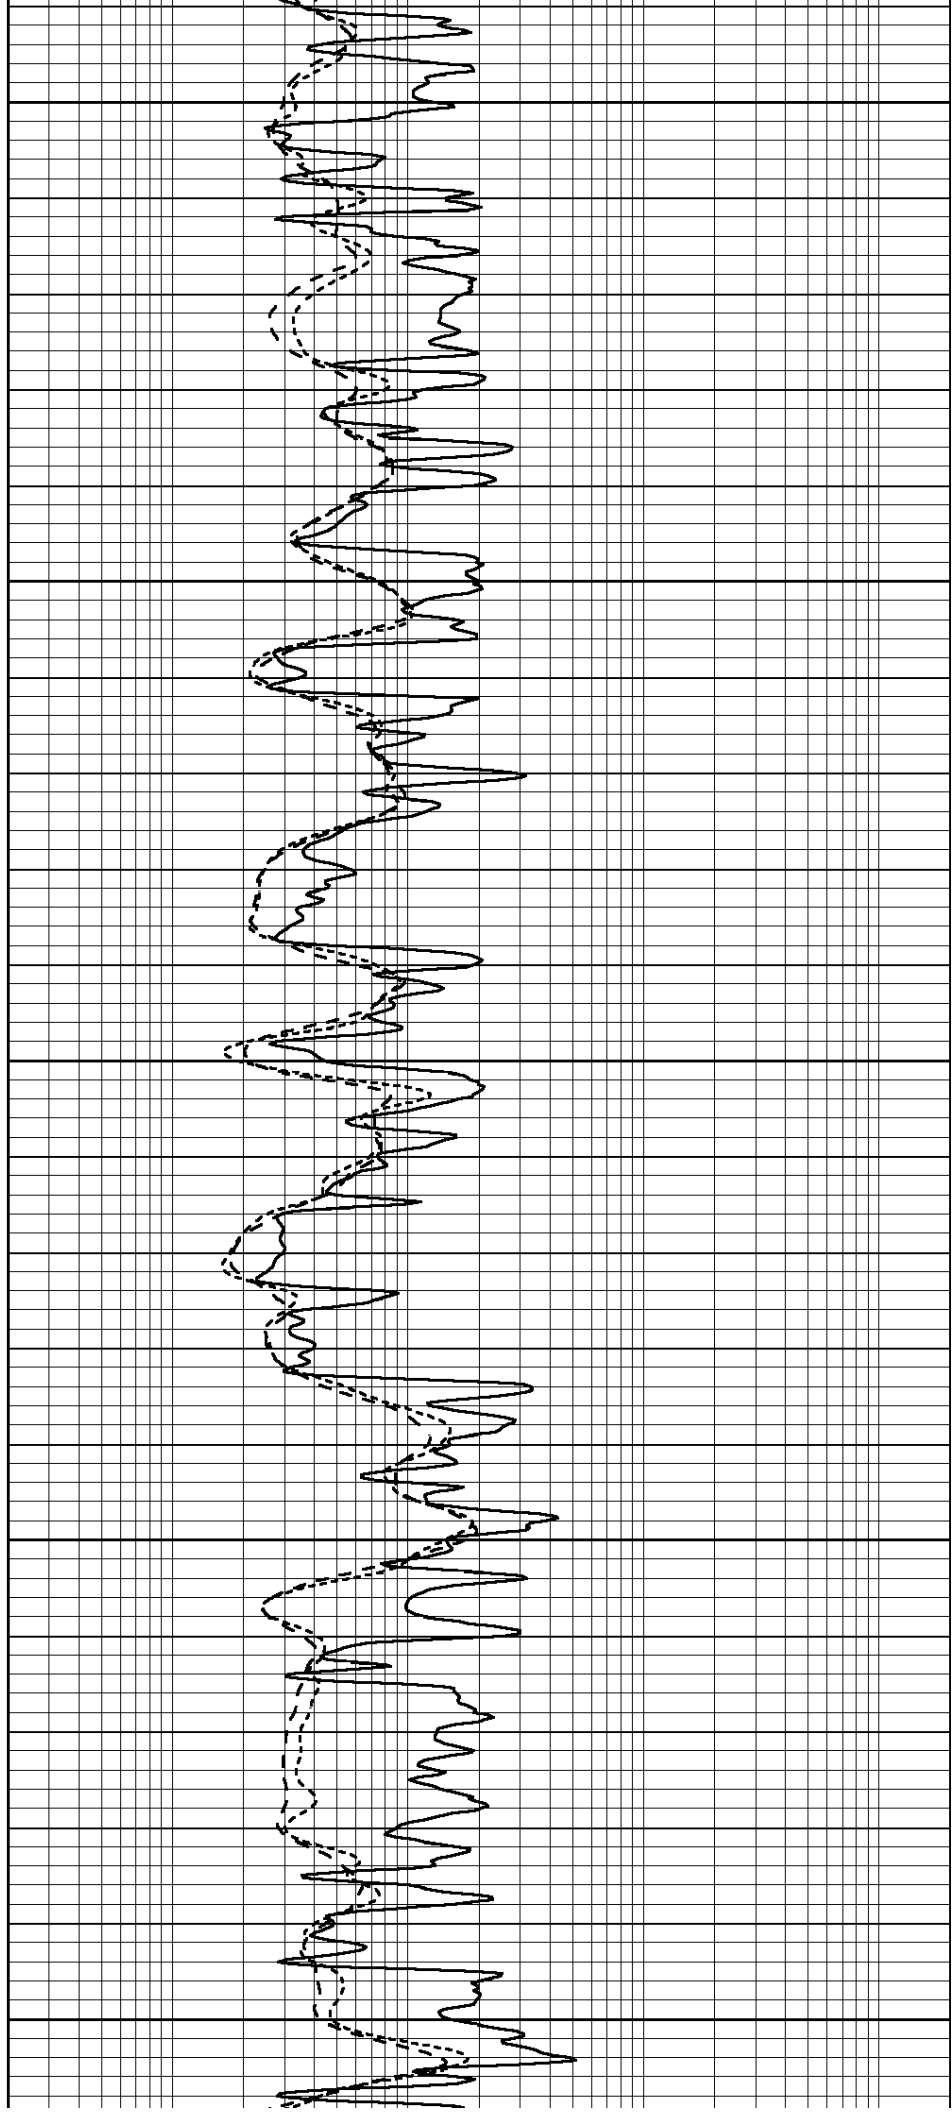

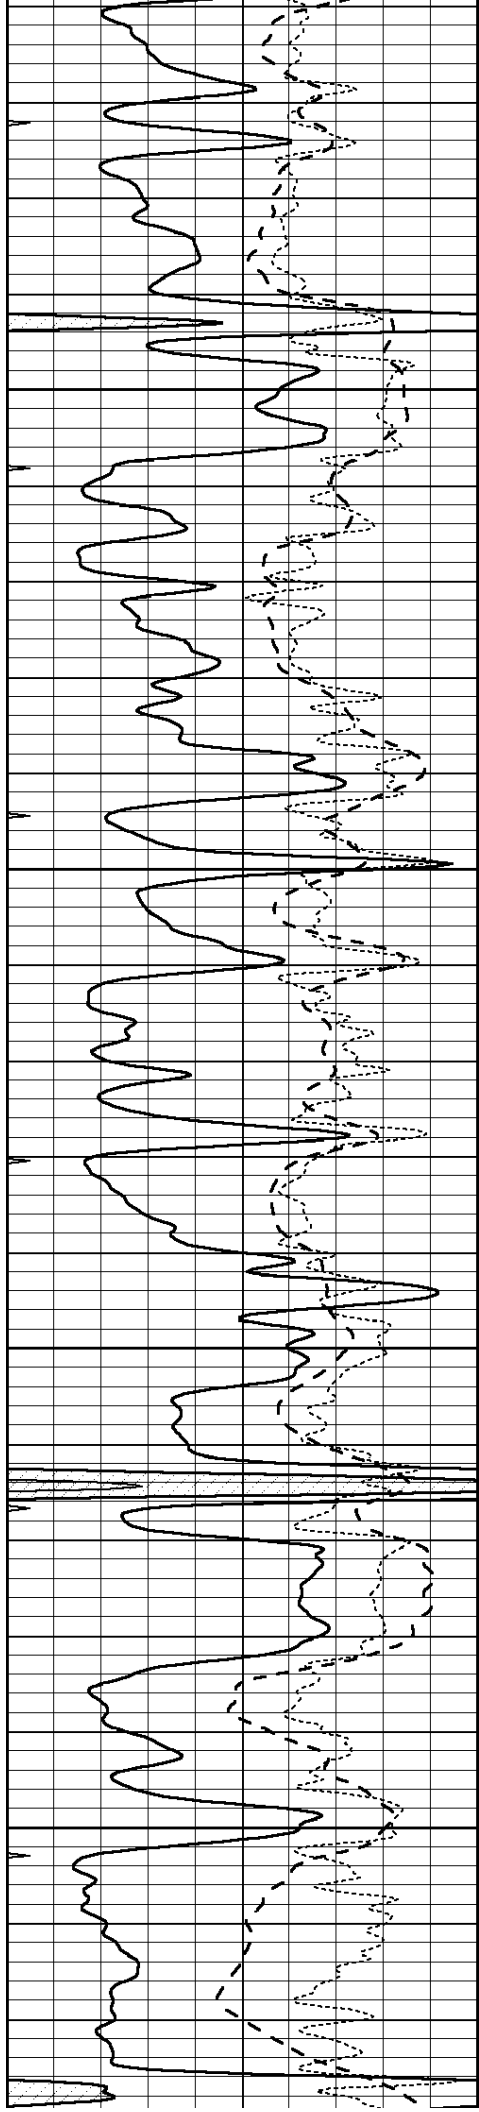



3550

3600

3650

3700

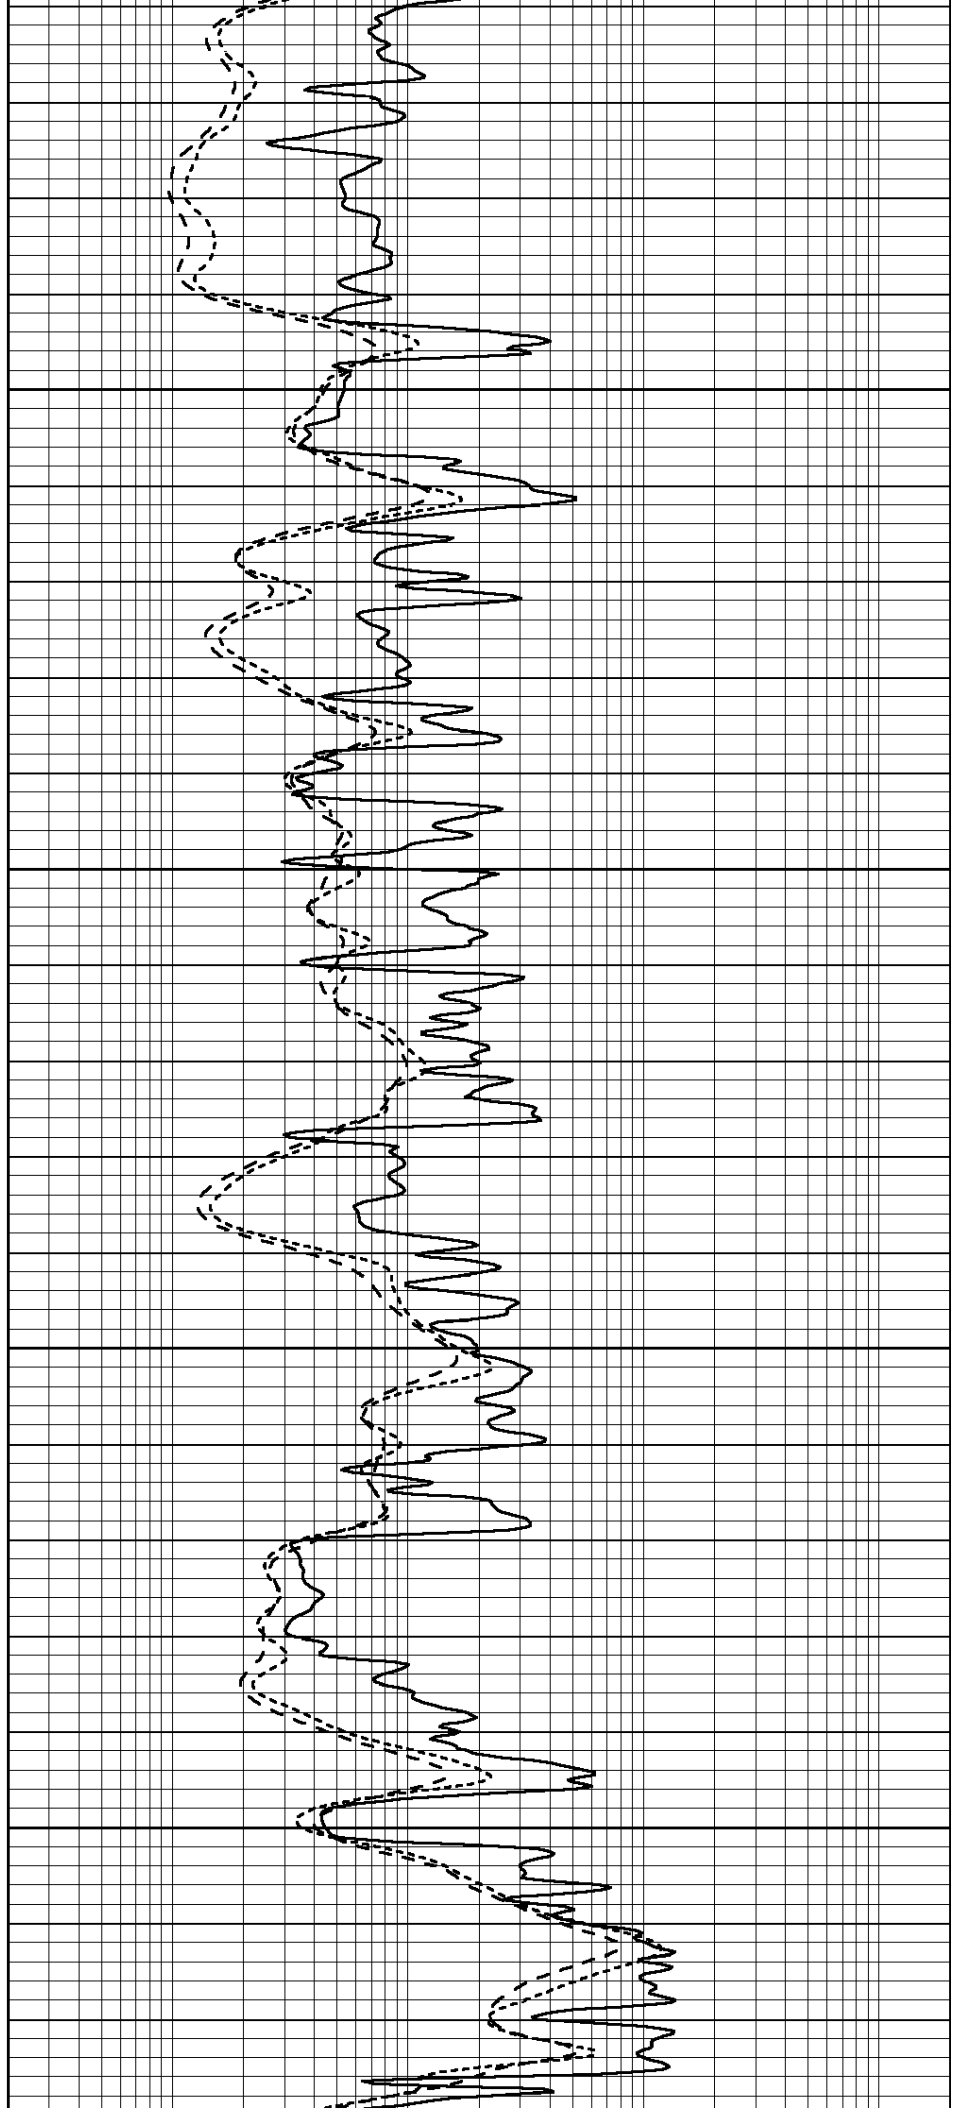

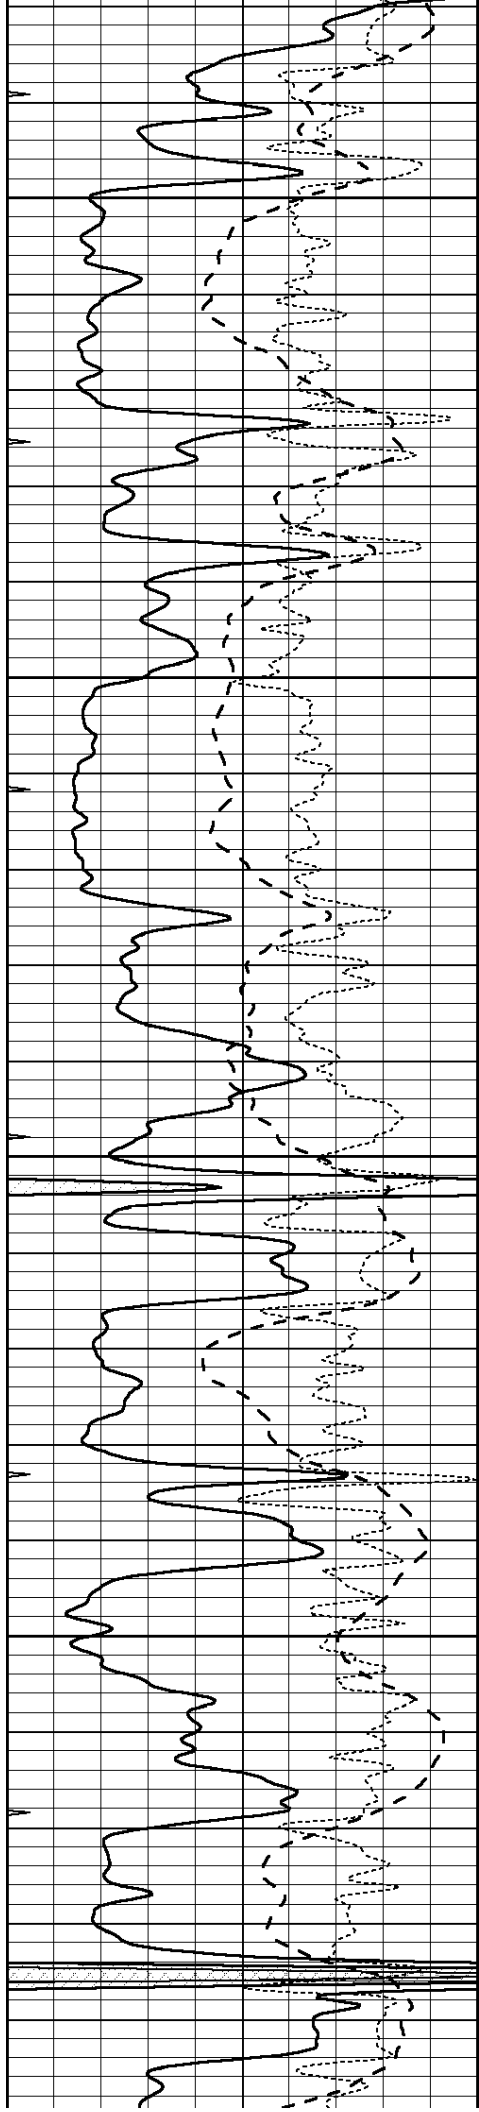


3750

3800

3850

3900

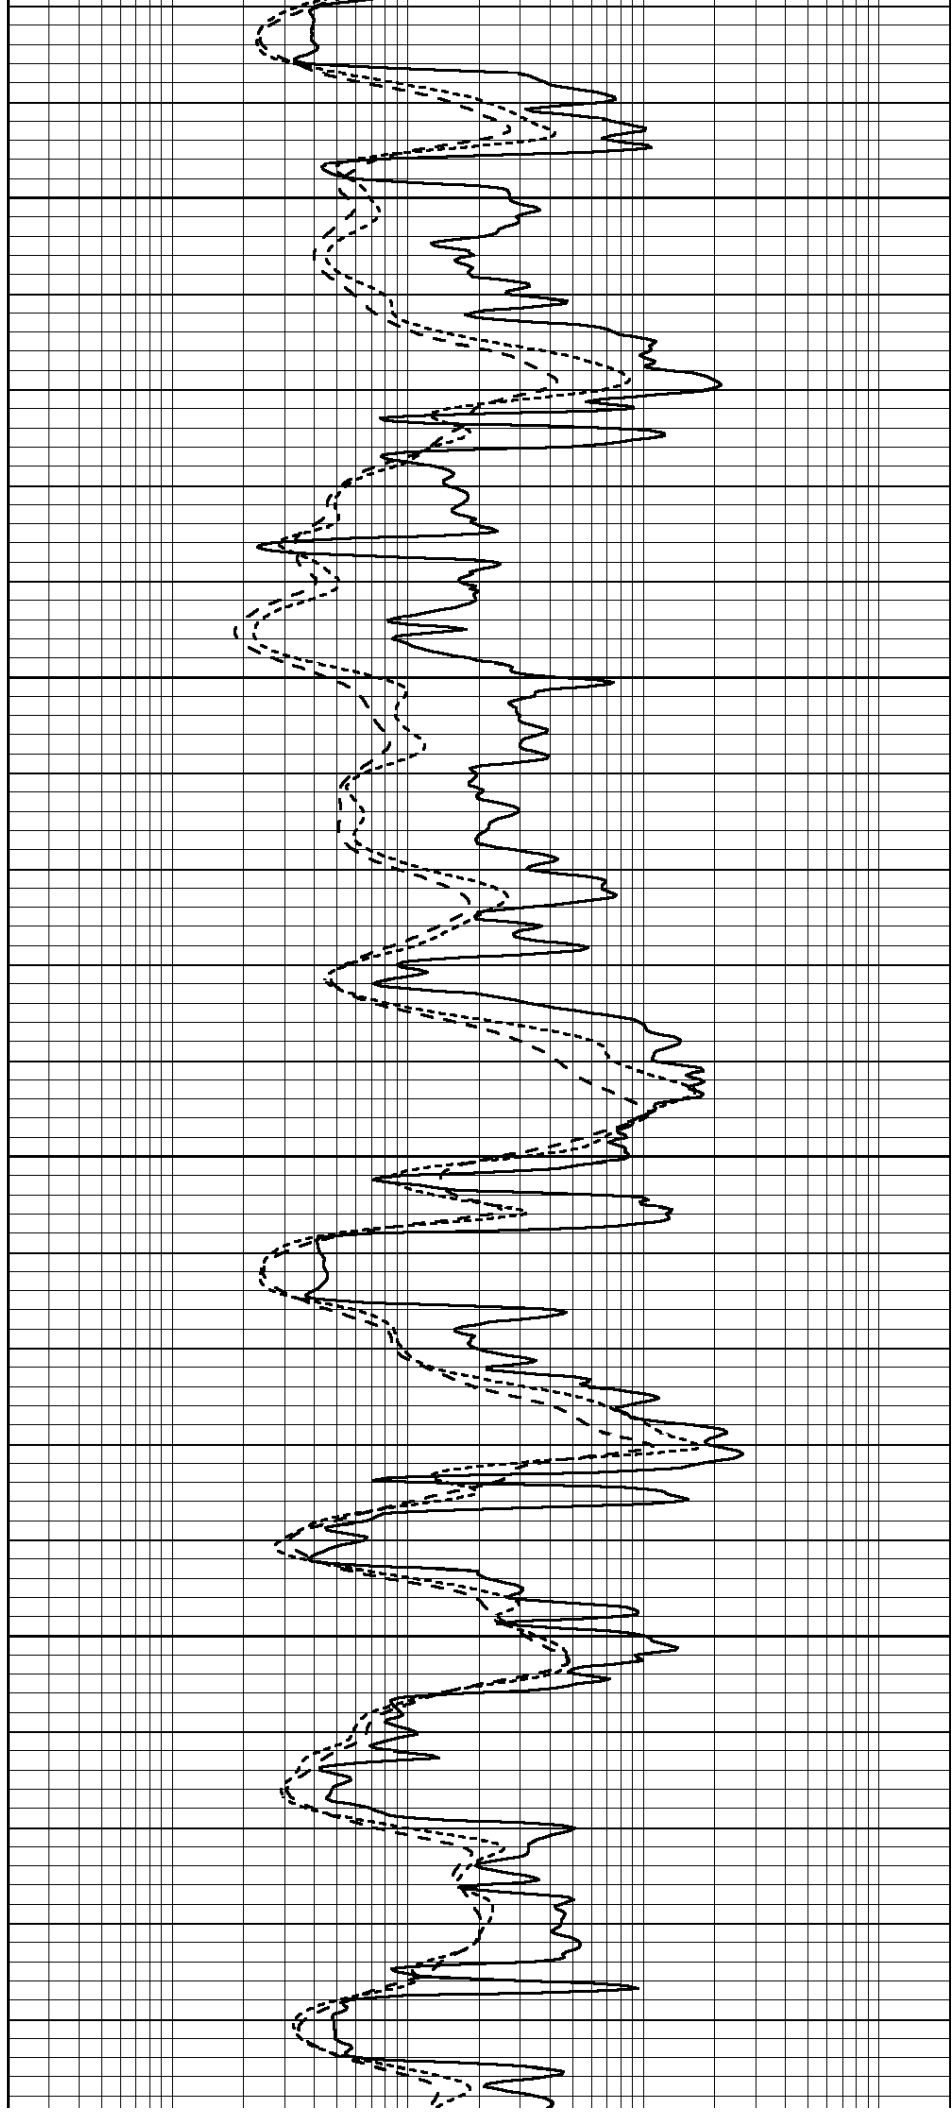


3750

3800

3850

3900

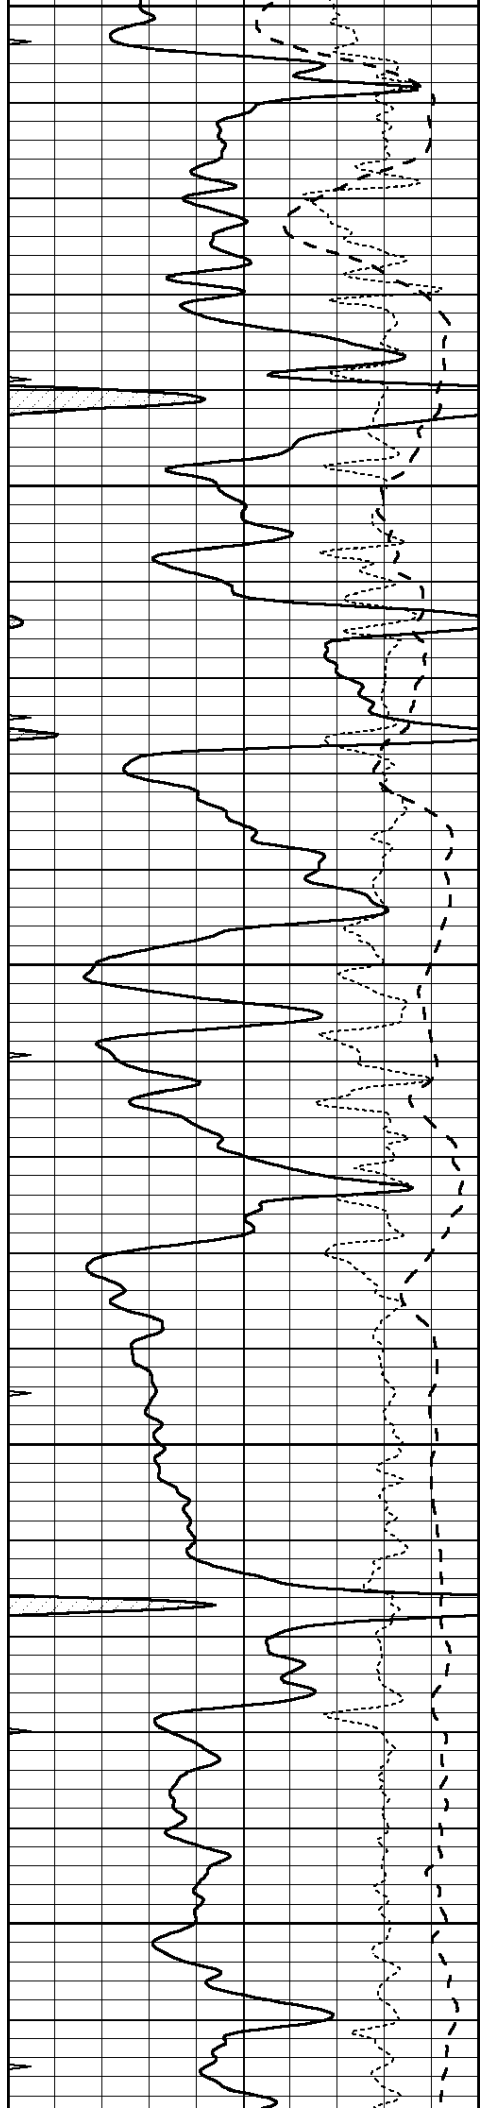


3950


4000

4050

4100

4150

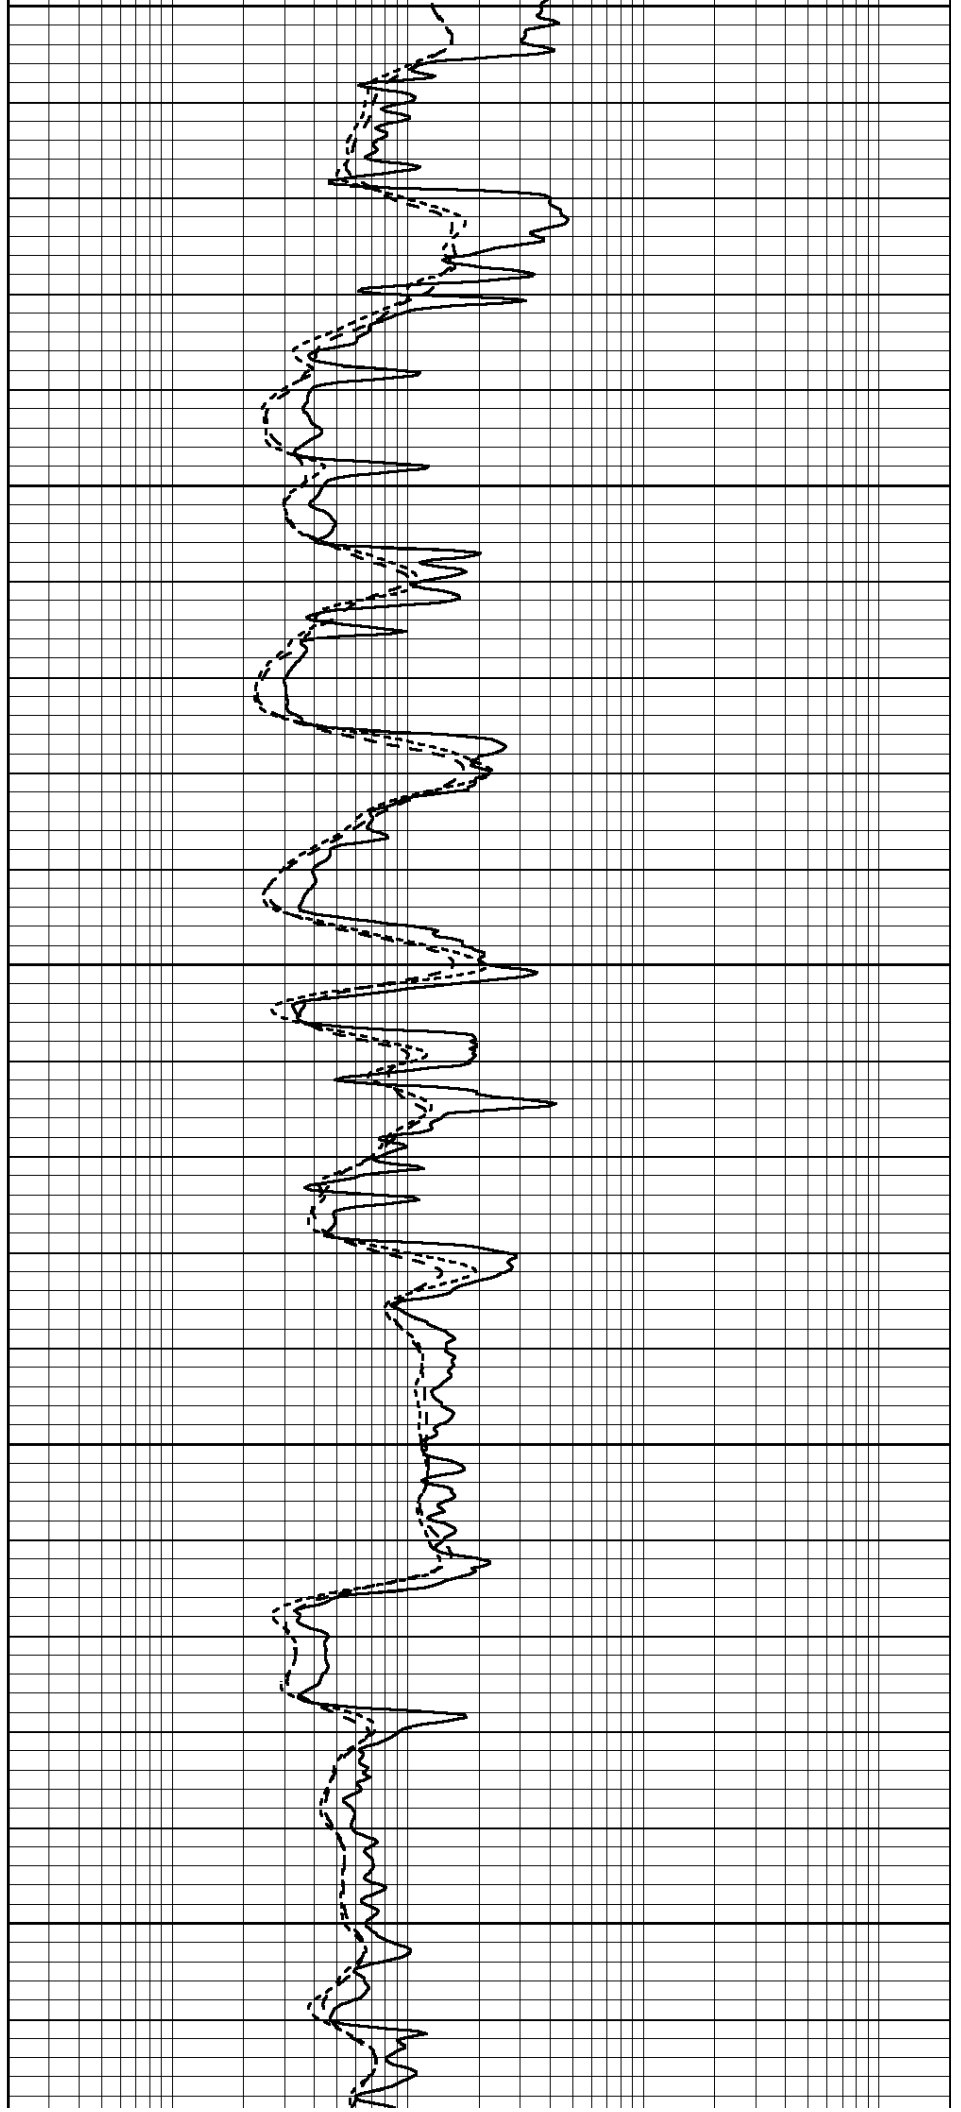

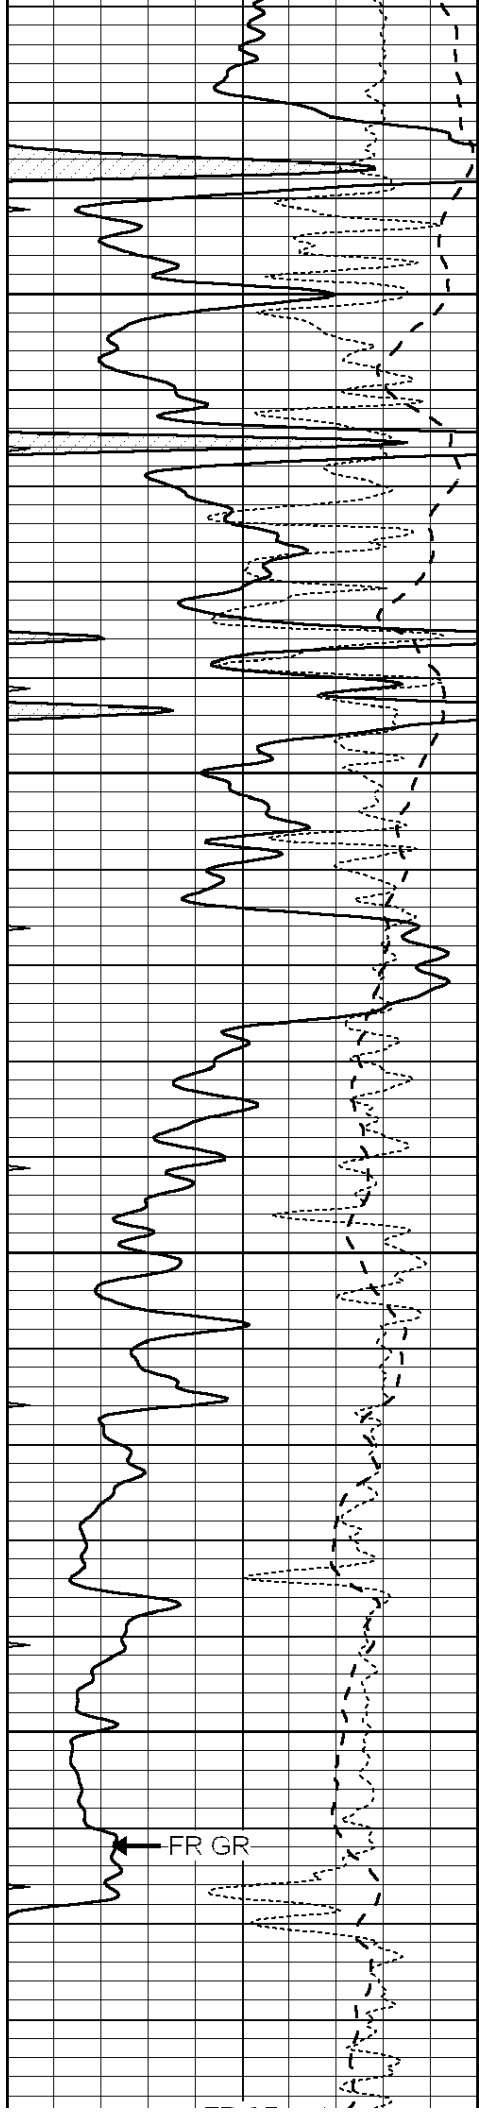


4200


4250

300

4350

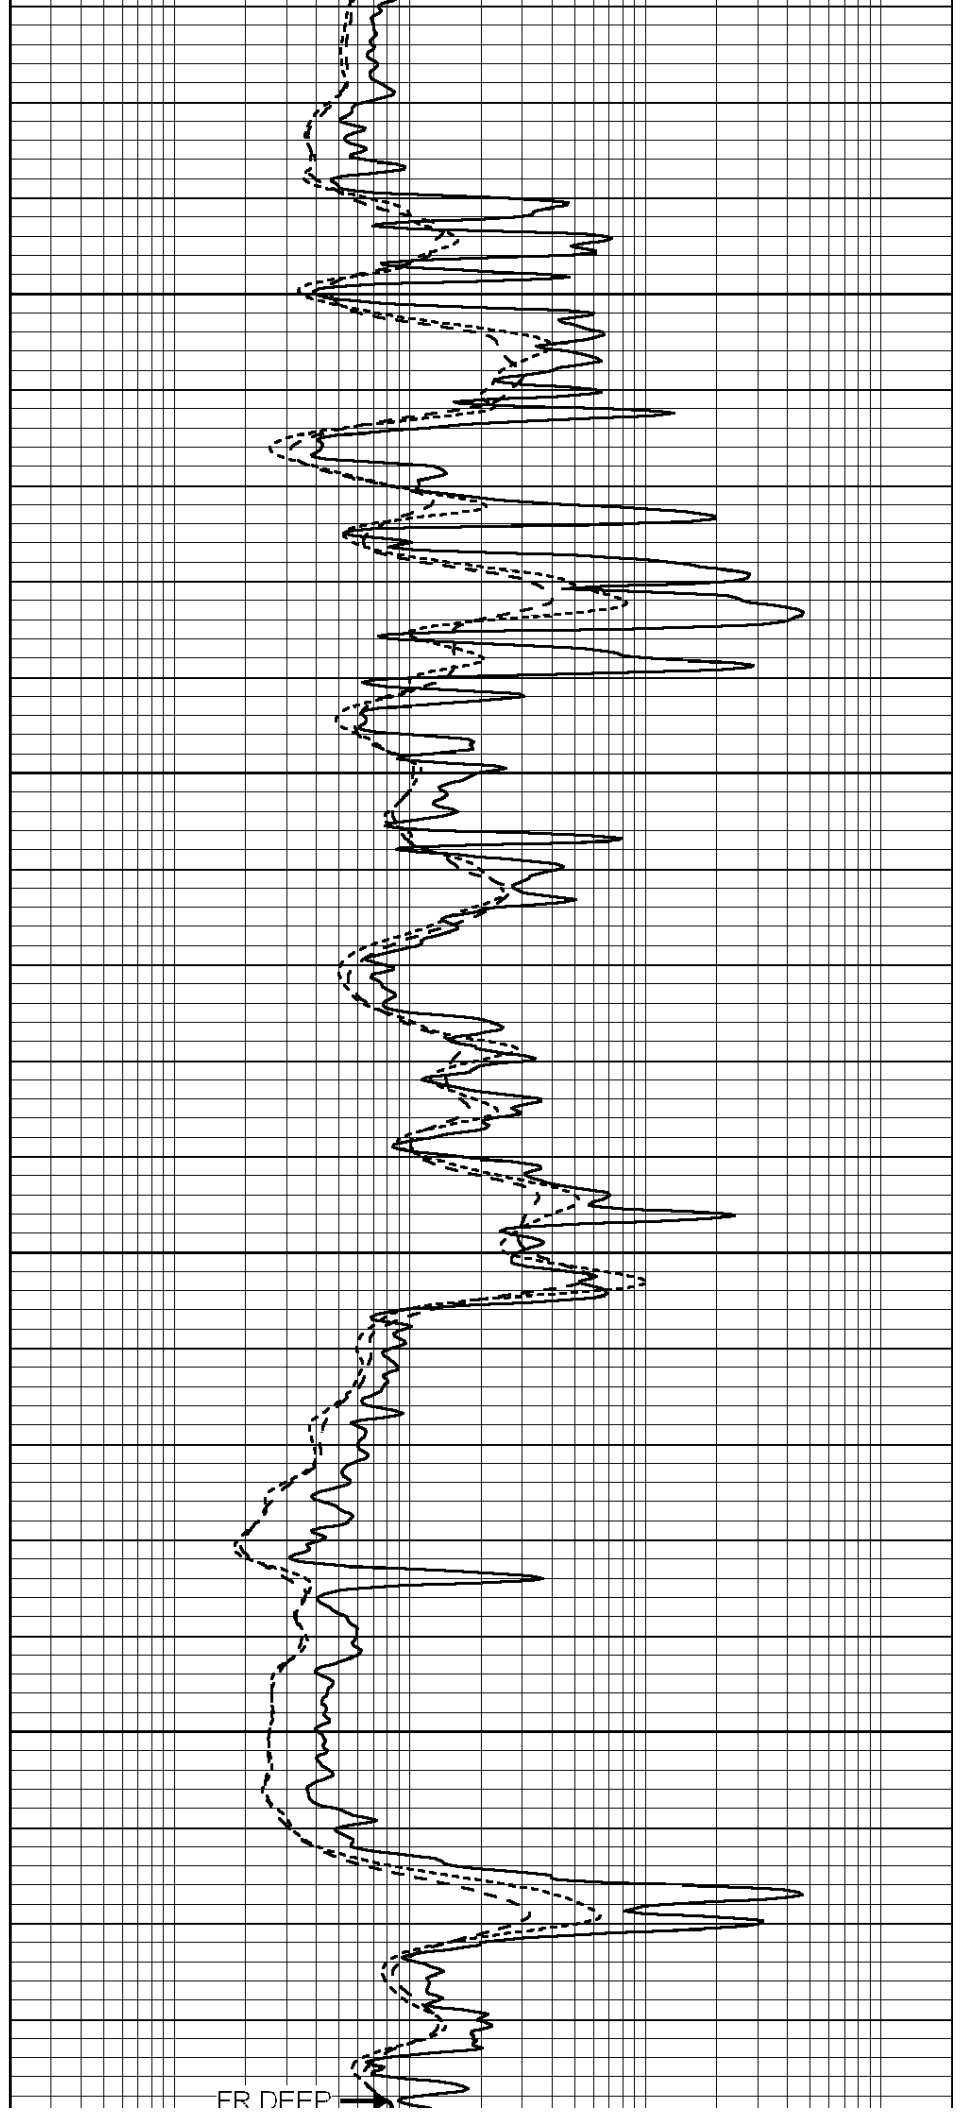




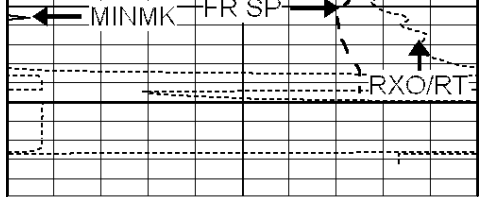

4400

0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50
0	MINMK	20

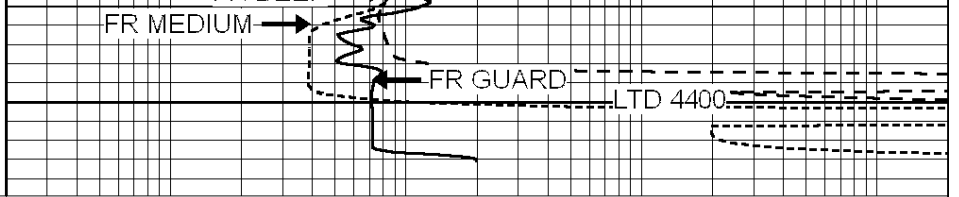

0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000




# REPEAT SECTION

Database File: 26631ddn.db  
 Dataset Pathname: pass2.4  
 Presentation Format: \_dil  
 Dataset Creation: Fri Aug 07 20:54:07 2015 by Calc SOC 120430  
 Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50
0	MINMK	20


0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000

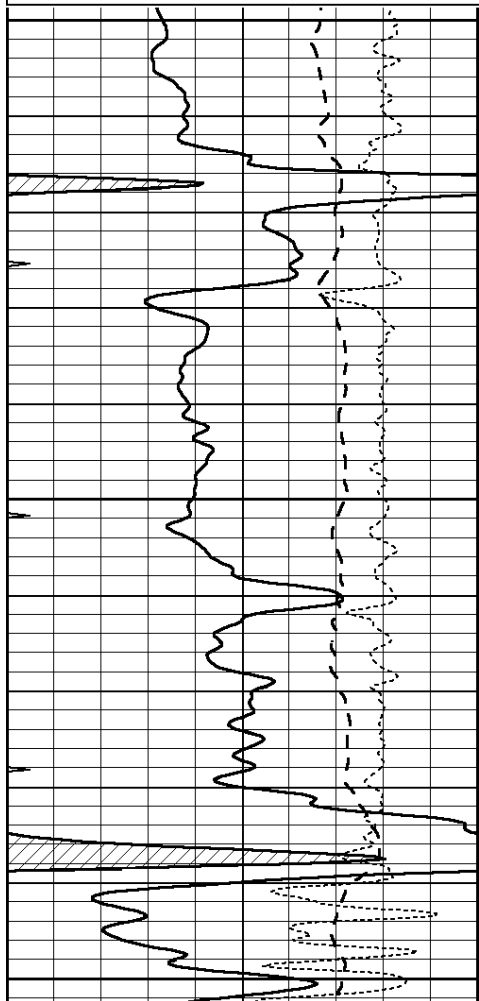


4100

4150

4200

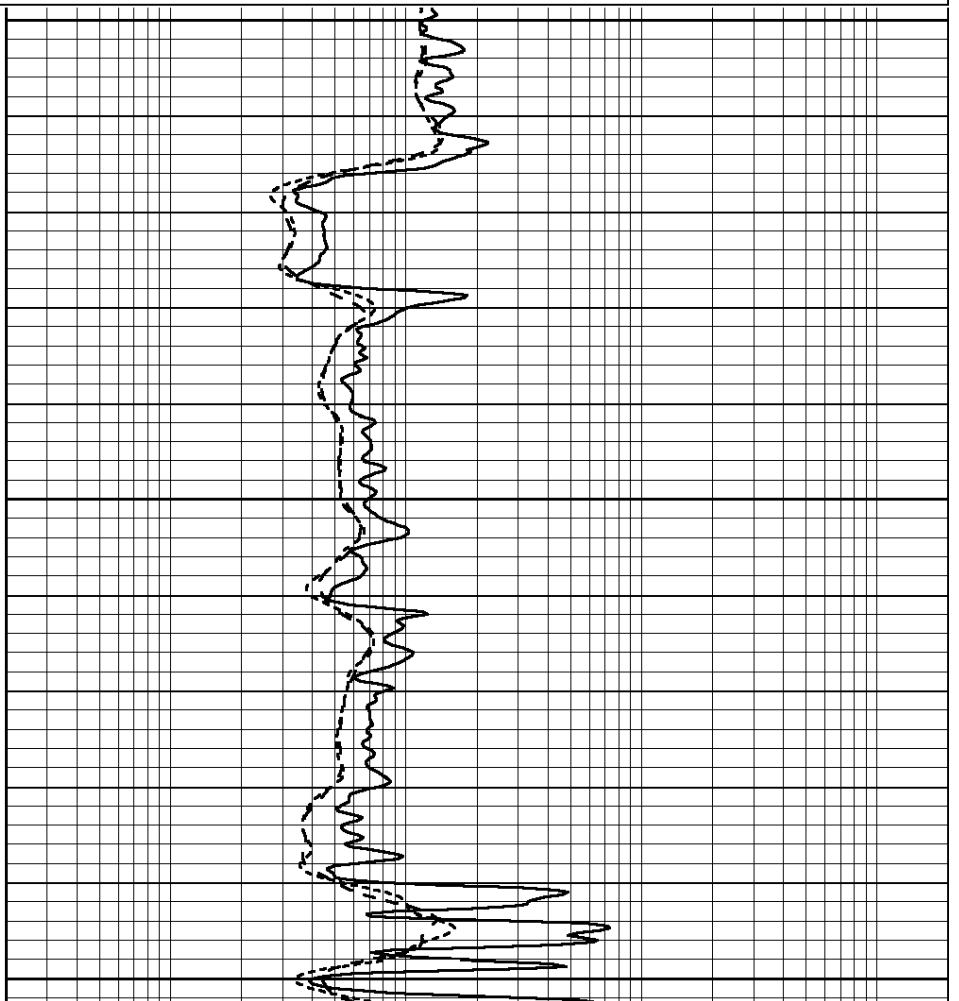

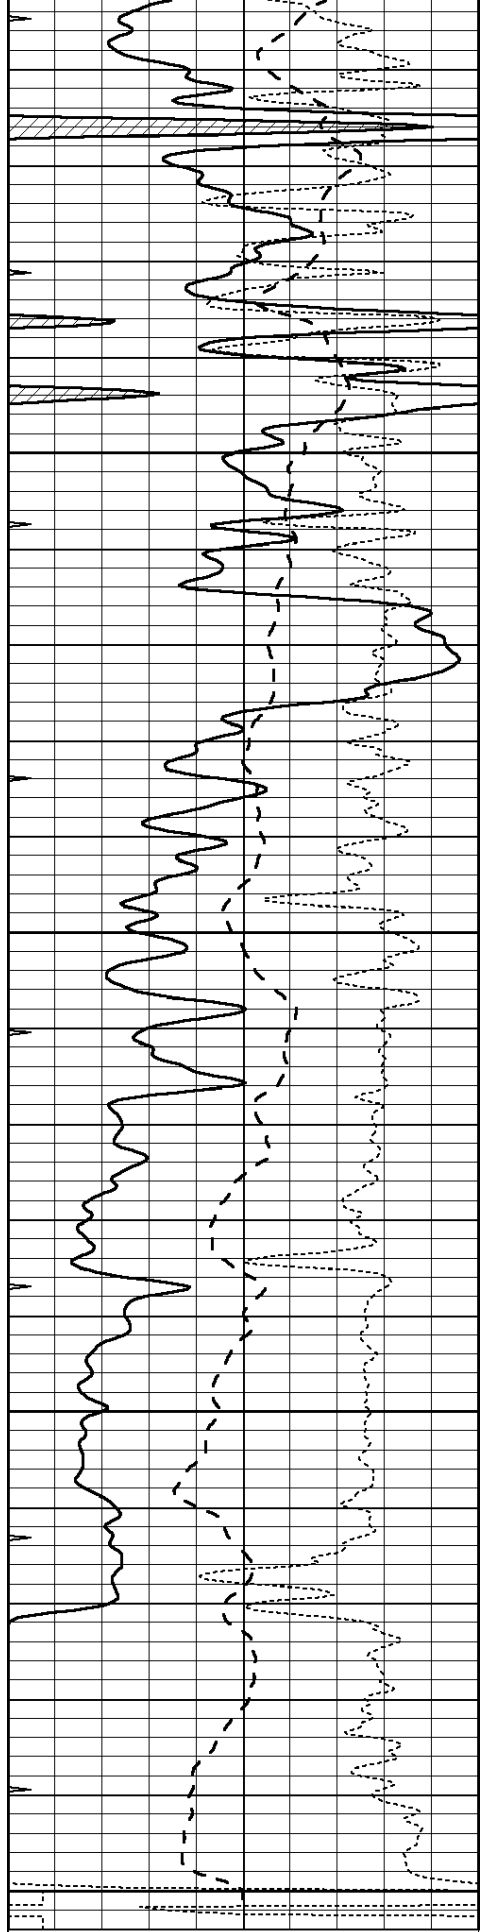


0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50
0	MINMK	20

4250

4300

4350

4400

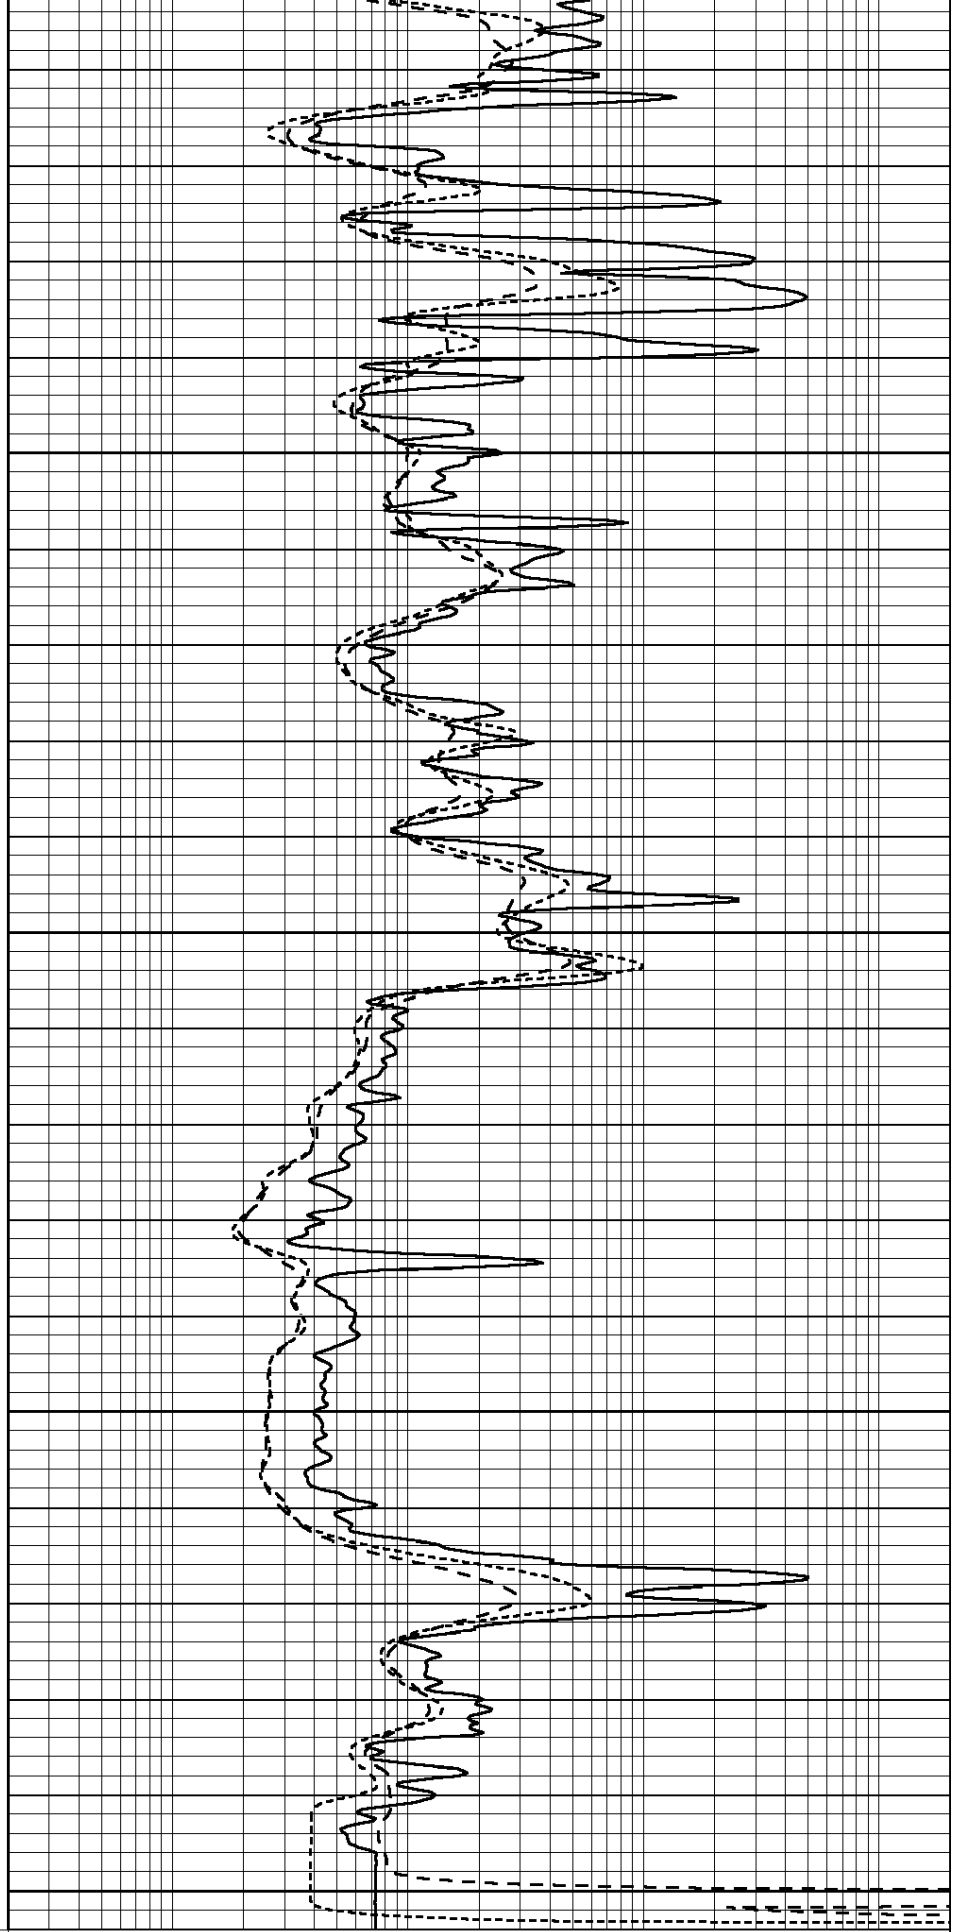

0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000

Calibration Report

Database File: 26631ddn.db  
 Dataset Pathname: pass3.8  
 Dataset Creation: Fri Aug 07 21:23:27 2015

Dual Induction Calibration Report

Serial-Model: PROBE9-DILG  
 Surface Cal Performed: Fri Aug 07 18:18:51 2015  
 Downhole Cal Performed: Mon Jul 28 12:02:56 2008  
 After Survey Verification Performed: Mon Jul 28 12:02:56 2008

Surface Calibration

Loop:	Readings			References			Results	
	Air	Loop		Air	Loop		m	b
Deep	-0.014	0.629	V	0.000	400.000	mmho/m	670.000	-25.000
Medium	0.039	0.728	V	0.000	464.000	mmho/m	670.000	-31.000
Internal:	Zero	Cal		Zero	Cal		m	b
Deep	0.011	0.610	V	0.000	400.000	mmho/m	667.135	-7.256
Medium	0.005	0.712	V	0.000	464.000	mmho/m	655.677	-3.102

Downhole Calibration

	Readings			References			Results	
	Zero	Cal		Zero	Cal		m'	b'
Deep	0.000	0.000	mmho/m	14.508	388.384	mmho/m	1.000	0.000
Medium	0.000	0.000	mmho/m	166.367	504.400	mmho/m	1.000	0.000
LL3		7.500	V		1400.000	Ohm-m		
		0.000	V		20.000	Ohm-m		
		-7.200	V		4000.000	mmho-m		

After Survey Verification

	Readings			Targets			Results	
	Zero	Cal		Zero	Cal		m'	b'
Deep	0.000	0.000	mmho/m	0.000	0.000	mmho/m	0.000	0.000
Medium	0.000	0.000	mmho/m	0.000	0.000	mmho/m	0.000	0.000
LL3		1.000	Ohm-m		1.000	Ohm-m		
		0.000	Ohm-m		0.000	Ohm-m		
		1.000	mmho-m		1.000	mmho-m		

Litho Density Calibration Report  
 Serial: 003N Model: PRB

Master Calibration

Performed Tue Sep 08 14:14:44 2009

	Background	Magnesium	Aluminum	Sandstone	
Window 1	2042.6	12312.8	4225.8	13758.4	cps
Window 2	1855.8	10134.7	3624.2	11113.1	cps
Window 3	1639.4	6760.2	2716.3	7260.3	cps
Window 4	466.4	469.2	466.1	476.5	cps
Long Space	0.0	8278.9	1768.4	9257.4	cps
Short Space	2.2	2377.3	1544.1	2574.2	cps
Rho		1.7100	2.5900	1.3800	g/cc
Pe		0.0000	2.5700	1.5500	
Rib Angle	: 44.4	Rib Slope	: 0.979	Density/Spine Ratio	: 0.549
Spine Angle	: 74.4	Spine Slope	: 3.577	Spine Intercept	: -18.8

Before Survey Verification

Performed Wed Dec 31 18:00:00 1969

Window 1	0.0	0.0	0.0	0.0	cps
Window 2	0.0	0.0	0.0	0.0	cps
Window 3	0.0	0.0	0.0	0.0	cps
Window 4	0.0	0.0	0.0	0.0	cps
Long Space	0.0	0.0	0.0	0.0	cps
Short Space	0.0	0.0	0.0	0.0	cps
Measured Rho		0.0000	0.0000	0.0000	g/cc
Measured Correction		0.0000	0.0000	0.0000	g/cc
Measured Pe			0.0000	0.0000	

After Survey Verification

Performed Wed Dec 31 18:00:00 1969

Window 1	0.0	0.0	0.0	0.0	cps
Window 2	0.0	0.0	0.0	0.0	cps
Window 3	0.0	0.0	0.0	0.0	cps
Window 4	0.0	0.0	0.0	0.0	cps
Long Space	0.0	0.0	0.0	0.0	cps
Short Space	0.0	0.0	0.0	0.0	cps
Measured Rho		0.0000	0.0000	0.0000	g/cc
Measured Correction		0.0000	0.0000	0.0000	g/cc
Measured Pe			0.0000	0.0000	

Compensated Neutron Calibration Report

Serial Number: 070808  
Tool Model: Probe

PRE-SURVEY VERIFICATION

Detector	Readings	Measured	Target
Short Space	cps		
Long Space	cps	pu	pu

POST-SURVEY VERIFICATION

Detector	Readings	Measured	Target
Short Space	cps		
Long Space	cps	pu	pu

Gamma Ray Calibration Report

Serial Number: 070558  
 Tool Model: OPEN\_GR  
 Performed: Fri Jul 31 03:05:12 2015

Calibrator Value: 1.0 GAPI

Background Reading: 0.0 cps  
 Calibrator Reading: 1.0 cps

Sensitivity: 0.2800 GAPI/cps