


STATE OF KANSAS  
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
212 No. Market  
Wichita, Kansas

WELL PLUGGING RECORD

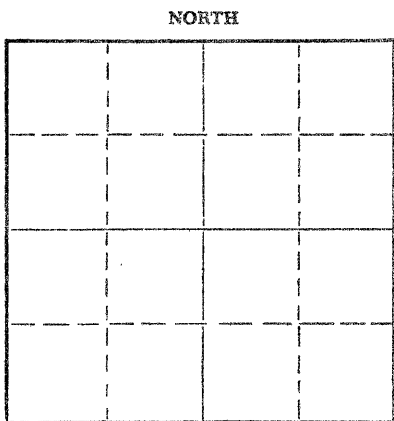

Locate well correctly on above  
Section Plat

Graham County. Sec. 33 Twp. 7S Rge. 22 (E) (W) X  
Location as "NE/CNW/SW" or footage from lines NE NE NE  
Lease Owner Charles L. Carlock  
Lease Name Worcester Well No. 1  
Office Address 1515 Hillcrest Newton, Kansas  
Character of Well (completed as Oil, Gas or Dry Hole)  
Date well completed 19  
Application for plugging filed 5-14-69 19  
Application for plugging approved 5-15-69 19  
Plugging commenced 5-27-69 19  
Plugging completed 5-30-69 19  
Reason for abandonment of well or producing formation

If a producing well is abandoned, date of last production 19  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well W. L. Nichols  
Producing formation Depth to top Bottom Total Depth of Well 3832 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 7/8	200	None
				4 1/2	None	2145

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Moved in. Cleaned out cellar. Rigged up unit.

Sanded to 3575'. Dumped 3 sacks of cement. Working pipe.

Working pipe. Shot pipe at 2800' - 2600' - 2400' - 2300' - 2200' and 2130'.  
Pulling pipe.

Plugging well. Mixed and pumped 19 sacks of mud, 5 sacks of hulls, 100 sacks of cement. Dumped 8 sacks of mud and 20 sacks of cement. Dumped 3 sacks of mud and 10 sacks of cement for cap.

RECEIVED  
STATE CORPORATION COMMISSION  
JUN 4 1969  
CONSERVATION DIVISION  
Wichita, Kansas  
6/4/69

(If additional description is necessary, use BACK of this sheet)  
Name of Plugging Contractor Forbes Casing Pulling Company, Inc.  
Address P. O. Box 221 Great Bend, Kansas 67530

STATE OF Kansas, COUNTY OF Barton, ss.  
James W. Rockhold (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) James W. Rockhold  
P. O. Box 221 Great Bend, Kansas  
(Address)

SUBSCRIBED AND SWORN TO before me this 3 day of June 19 69

My commission expires May 27, 1973

Notary Public.