

TO: STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-189-22429-00-00
Spot: W2E2SESW Sec/Twnshp/Rge: 2-34S-37W
685 feet from S Section Line, 2100 feet from W Section Line
Lease Name: HJV MAHONEY A Well #: 1
County: STEVENS Total Vertical Depth: 6820 feet

Operator License No.: 4549
Op Name: ANADARKO PETROLEUM CORPORATI
Address: 1201 LAKE ROBBINS DRIVE
THE WOODLANDS, TX 77380

String	Size	Depth (ft)	Pulled (ft)	Comment
DVT		3589		
PROD	5.5	6820	2016	WITH 140 SX CMT
SURF	8.625	1772		WITH 535 SX CMT

#221⁶⁵

Well Type: OIL UIC Docket No: _____ Date/Time to Plug: 01/18/2006 1:00 PM
Plug Co. License No.: 31151 Plug Co. Name: SARGENT AND HORTON PLUGGING, INC.
Proposal Rcvd. from: DON HORTON Company: SARGENT AND HORTON PLUGGI Phone: (580) 854-6515

Proposed Plugging Method: PUMP 20 SX CMT & 200# HULLS. PLUG AT 1800' WITH 50 SX CMT. PLUG AT 600' WITH 50 SX CMT. PLUG AT 40' WITH 10 SX CMT.

Plugging Proposal Received By: KEN JEHLIK WitnessType: COMPLETE (100%)
Date/Time Plugging Completed: 01/19/2006 4:00 PM KCC Agent: JIM HOLLAND

Actual Plugging Report:

PUMP 20 SX CMT & 200# HULLS. DISPLACE WITH MUD. PRESSURE TO 1500#. 1ST PLUG PULL OUT OF HOLE TO 1800'. LOAD HOLE WITH MUD & PUMP 50 SX CMT. 2ND PLUG AT 600' WITH 50 SX CMT. 3RD PLUG AT 40' WITH 10 SX CMT.


Perfs:

Top	Bot	Thru	Comments
6692	6708		

Remarks: USED COMMON CEMENT BY SARGENTS.

Plugged through: CSG

District: 01

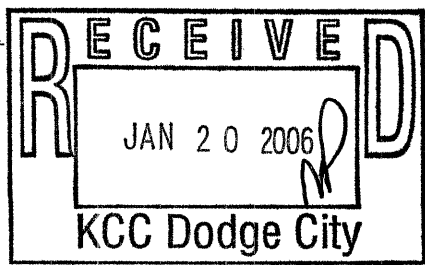

Signed Jim Holland (TECHNICIAN)

RECEIVED
JAN 25 2006
KCC WICHITA

INVOICED
DATE 1.25.06
INV. NO 2006060999