


15-065-00938-00-00

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

WELL PLUGGING RECORD

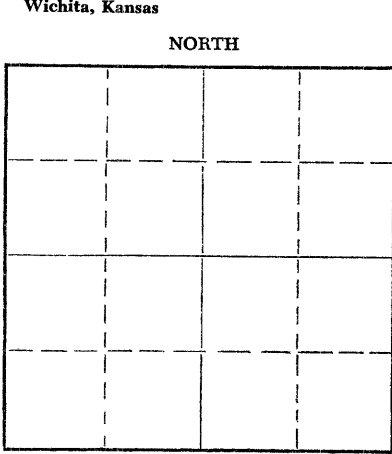

Graham County. Sec. 20 Twp. 7 Rge. (E) 24 (W)
Location as "NE/CNW/SW" or footage from lines. NW NW SE
Lease Owner John O. Farmer, Inc.
Lease Name Goddard #1 Well No. _____
Office Address Russell, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Oil
Date well completed 7/12/57 19____
Application for plugging filed 7/26/58 19____
Application for plugging approved 7/31/58 19____
Plugging commenced 7-30-58 19____
Plugging completed 8-5-58 19____
Reason for abandonment of well or producing formation Went to water

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Allan Fabricus
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3950 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	195	none
				5-1/2"	3950	1995'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Checked in on hole and found it open.
Filled w/sand to 3750' and dumped 4
sacks of cement with dump bailer.
Pulled 5 1/2" casing. Cleared hole and
bailed fluid to 600', set a 10' rock
bridge and ran 25 sacks of cement.
Mudded the hole to 40', set a 10' rock
bridge and ran 10 sacks of cement to
base of cellar.

AUG 15 1958
8-16-58

Name of Plugging Contractor West Supply Co., Inc. (If additional description is necessary, use BACK of this sheet)
Address Chase, Kansas

STATE OF KANSAS, COUNTY OF RICE, ss.
I, Noel J. Knight (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Noel Knight
Chase, Kansas (Address)

SUBSCRIBED AND SWORN TO before me this 9th day of August, 19 58

My commission expires 9-27-58
Thomas V. Duggin Notary Public.

PLUGGING
FILE SEC 20 T 7 R 24W
BOOK PAGE 119 LINE 19