



Weatherford

**COMPOSITE
DENSITY/NEUTRON/SONIC
INDUCTION/FE**

COMPANY				TAOS RESOURCES OPERATING CO.			
WELL				LFJ #2			
FIELD				MADDIX NORTH			
PROVINCE/COUNTY				COWLEY			
COUNTRY/STATE				U.S.A. / KANSAS			
LOCATION				1650' FNL & 330' FWL OF NW-SW-NW			
SEC 34	TWP 32S	RGE 5E	Other Services				
LATITUDE			NONE				
API NUMBER		15-035-24607					
Permanent Datum GL, Elevation 1266 feet							
Log Measured From KB							
Drilling Measured From KB							
Date	27-SEP-2014						
Run Number	ONE						
Service Order	6950-99011024						
Depth Driller	3700.00			feet			
Depth Logger	3698.00			feet			
First Reading	3695.00			feet			
Last Reading	264.00			feet			
Casing Driller	266.00			feet			
Casing Logger	264.00			feet			
Bit Size	7.875			inches			
Hole Fluid Type	CHEMICAL						
Density / Viscosity	9.50 lb/USg		49.00 s/qt				
PH / Fluid Loss	9.50		8.40 ml/30Min				
Sample Source	MUD PIT						
Rm @ Measured Temp	1.0 @ 95.0		ohm-m				
Rmf @ Measured Temp	0.80 @ 95.0		ohm-m				
Rmc @ Measured Temp	1.20 @ 95.0		ohm-m				
Source Rmf / Rmc	CALC	CALC					
Rm @ BHT	0.82 @117.0		ohm-m				
Time Since Circulation	4 HOURS						
Max Recorded Temp	117.00		deg F				
Equipment / Base	13226		OKC				
Recorded By	AXEL HANNENBERG						
Witnessed By	GARY HAEFELE			CHRIS HAEFELE			
Sales Engineer	BILL CONCHEWSKI						

BOREHOLE RECORD					Last Edited: 27-SEP-2014 14:27
Bit Size inches		Depth From feet		Depth To feet	
7.875		266.00		3700.00	
CASING RECORD					
Type	Size inches	Depth From feet	Shoe Depth feet	Weight pounds/ft	
SURFACE	8.625	0.00	266.00	24.00	

REMARKS
TOOLS RAN: MCG, MMR, MDN, MPD, MFE, MSS, MAI RAN IN COMBINATION
HARDWARE: MAI: TWO 0.5 INCH STANDOFFS USED. MFE: ONE 0.5 INCH STANDOFF USED. MDN: DUAL NEUTRON BOW SPRINGS USED. MPD: 8 INCH PROFILE PLATE USED. MSS: THREE 0.5 INCH STANDOFFS USED.
2.71 G/CC DENSITY MATRIX USED TO CALCULATE POROSITY **ALL INTERVALS LOGGED AND SCALED PER CUSTOMER'S REQUEST.**
TOTAL HOLE VOLUME FROM TD TO SURFACE CASING = 1410 CU.FT. ANNULAR HOLE VOLUME WITH 5.5 INCH PRODUCTION CASING FROM TD TO SURFACE CASING = 850 CU.FT.
*REPEAT AND HIGH-RESOLUTION PASSES TAKEN FROM TD TO 3090 FT AND DETAIL FROM TD TO SURFACE CASING AS PER CUSTOMER REQUEST. 608 FT (3090 TO 3698 FT) OF HI-RESOLUTION LOG WAS RUN AS PER CUSTOMER REQUEST *

DEPTH (0000 TO 0000 FT) OF THE RESOLUTION LOG WAS REQUESTED BY CUSTOMER REQUEST.
SMALL WRAPPING OF SP NEAR BOTTOM IS DUE TO TOOL PICK UP.

TICKET NUMBER: 6950-99011024

RIG: VAL RIG #3


OPERATOR(S): S. WORLEY





CHLORIDES: 1000 PPM


LCM: 3 LB/ BBL




HOLE WASHOUTS AND RUGOSITY WILL AFFECT LOG QUALITY AND REPEATABILITY


In interpreting, communicating or providing information and/or making recommendations, either written or oral, as to logs or test or other data, type or amount of material, or Work or other service to be furnished, or manner of performance, or in predicting results to be obtained, the Contractor will give the Company the benefit of the Contractor's best judgment based on its experience and will perform all such Work in a good and workmanlike manner. Any interpretation of test or other data, and any recommendation or reservoir description based upon such interpretations, are opinions based upon inferences from measurements and empirical relationships and assumptions, which inferences and assumptions are not infallible, and with respect to which professional engineers and analysts may differ. ACCORDINGLY ANY INTERPRETATION OR RECOMMENDATION RESULTING FROM THE SERVICES WILL BE AT THE SOLE RISK OF THE COMPANY, AND THE CONTRACTOR CANNOT AND DOES NOT WARRANT THE ACCURACY, CORRECTNESS OR COMPLETENESS OF ANY SUCH INTERPRETATION OR RECOMMENDATION, WHICH INTERPRETATIONS AND RECOMMENDATIONS SHOULD NOT, THEREFORE, UNDER ANY CIRCUMSTANCES BE RELIED UPON AS THE SOLE OR MAIN BASIS FOR ANY DRILLING, COMPLETION, WELL TREATMENT, PRODUCTION OR FINANCIAL DECISION, OR ANY PROCEDURE INVOLVING ANY RISK TO THE SAFETY OF ANY DRILLING ACTIVITY, DRILLING RIG OR ITS CREW OR ANY OTHER INDIVIDUAL. THE COMPANY HAS FULL RESPONSIBILITY FOR ALL DECISIONS CONCERNING THE SERVICES.

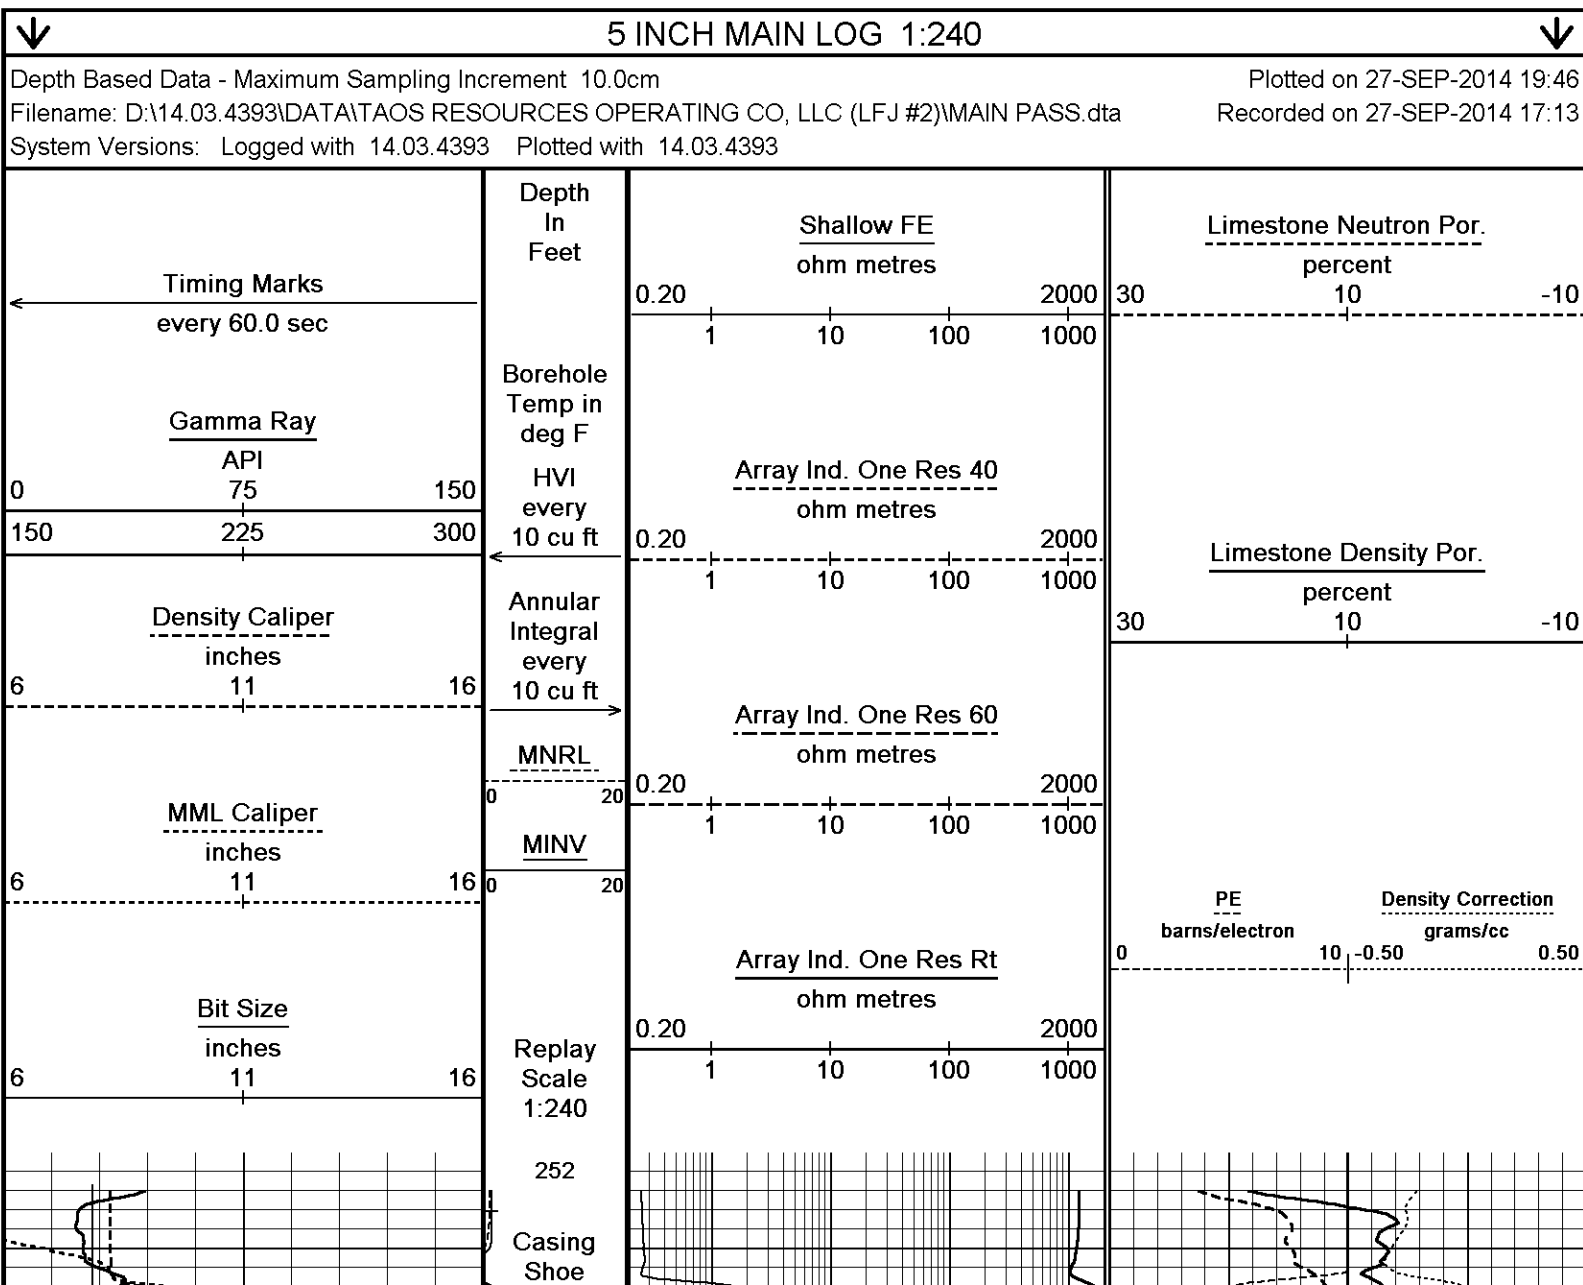


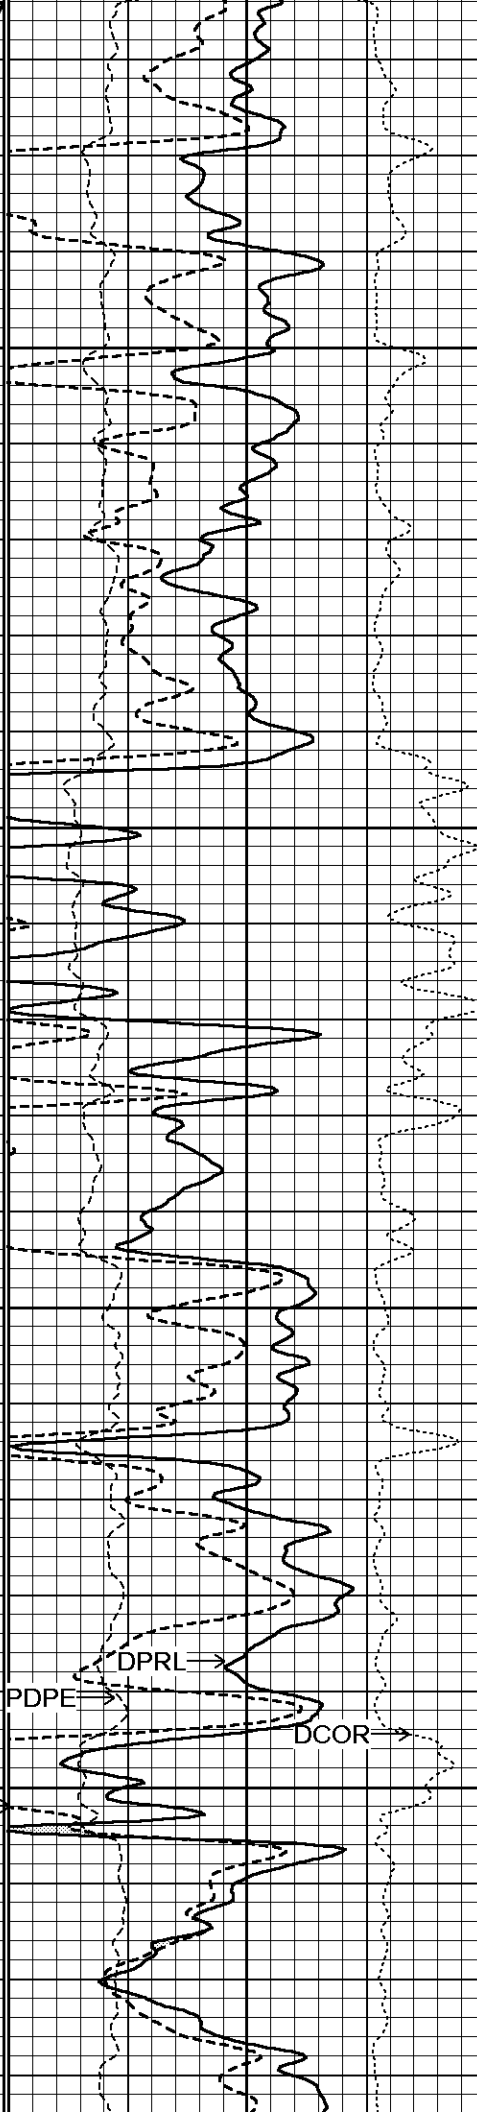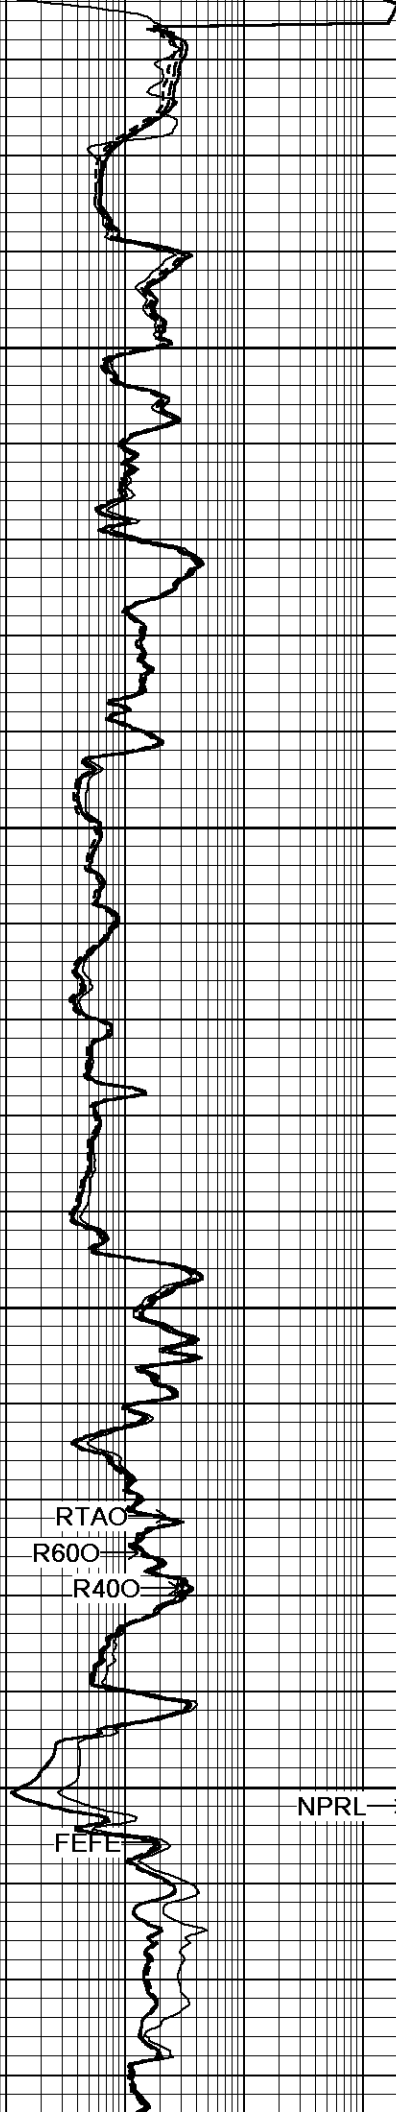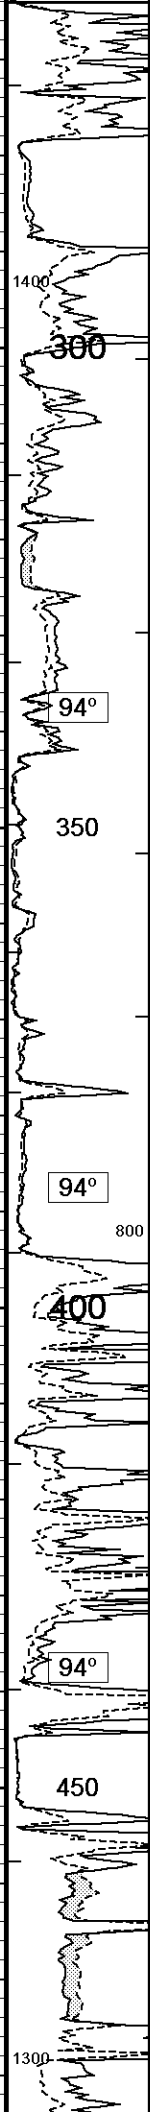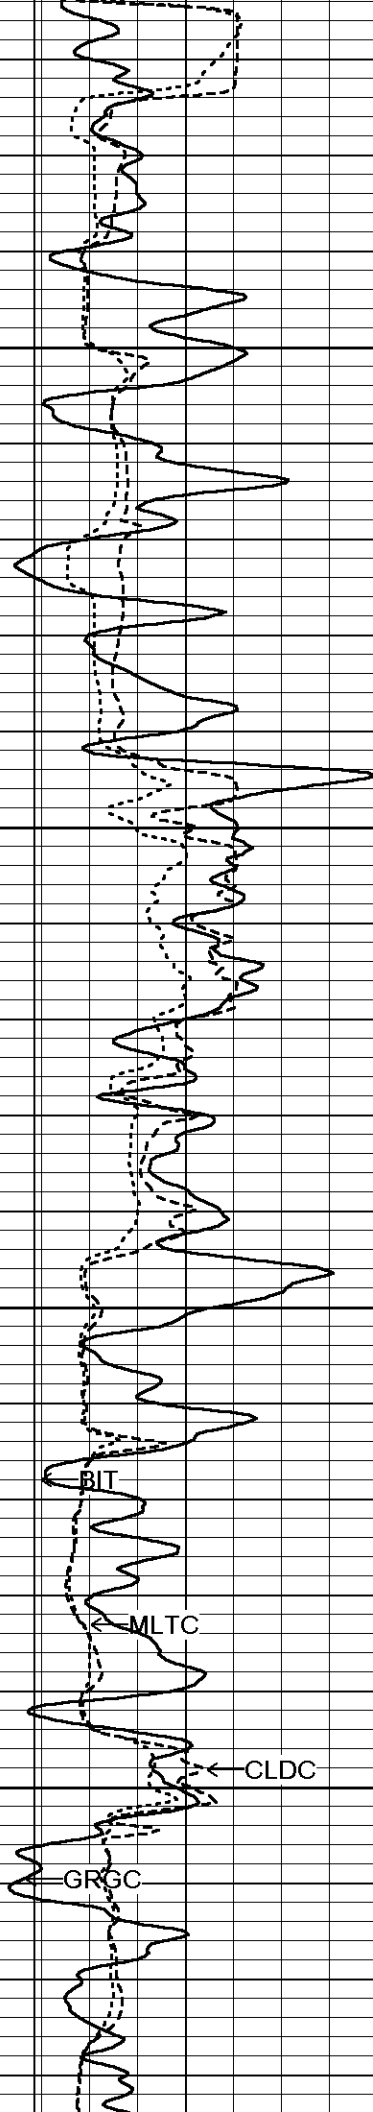




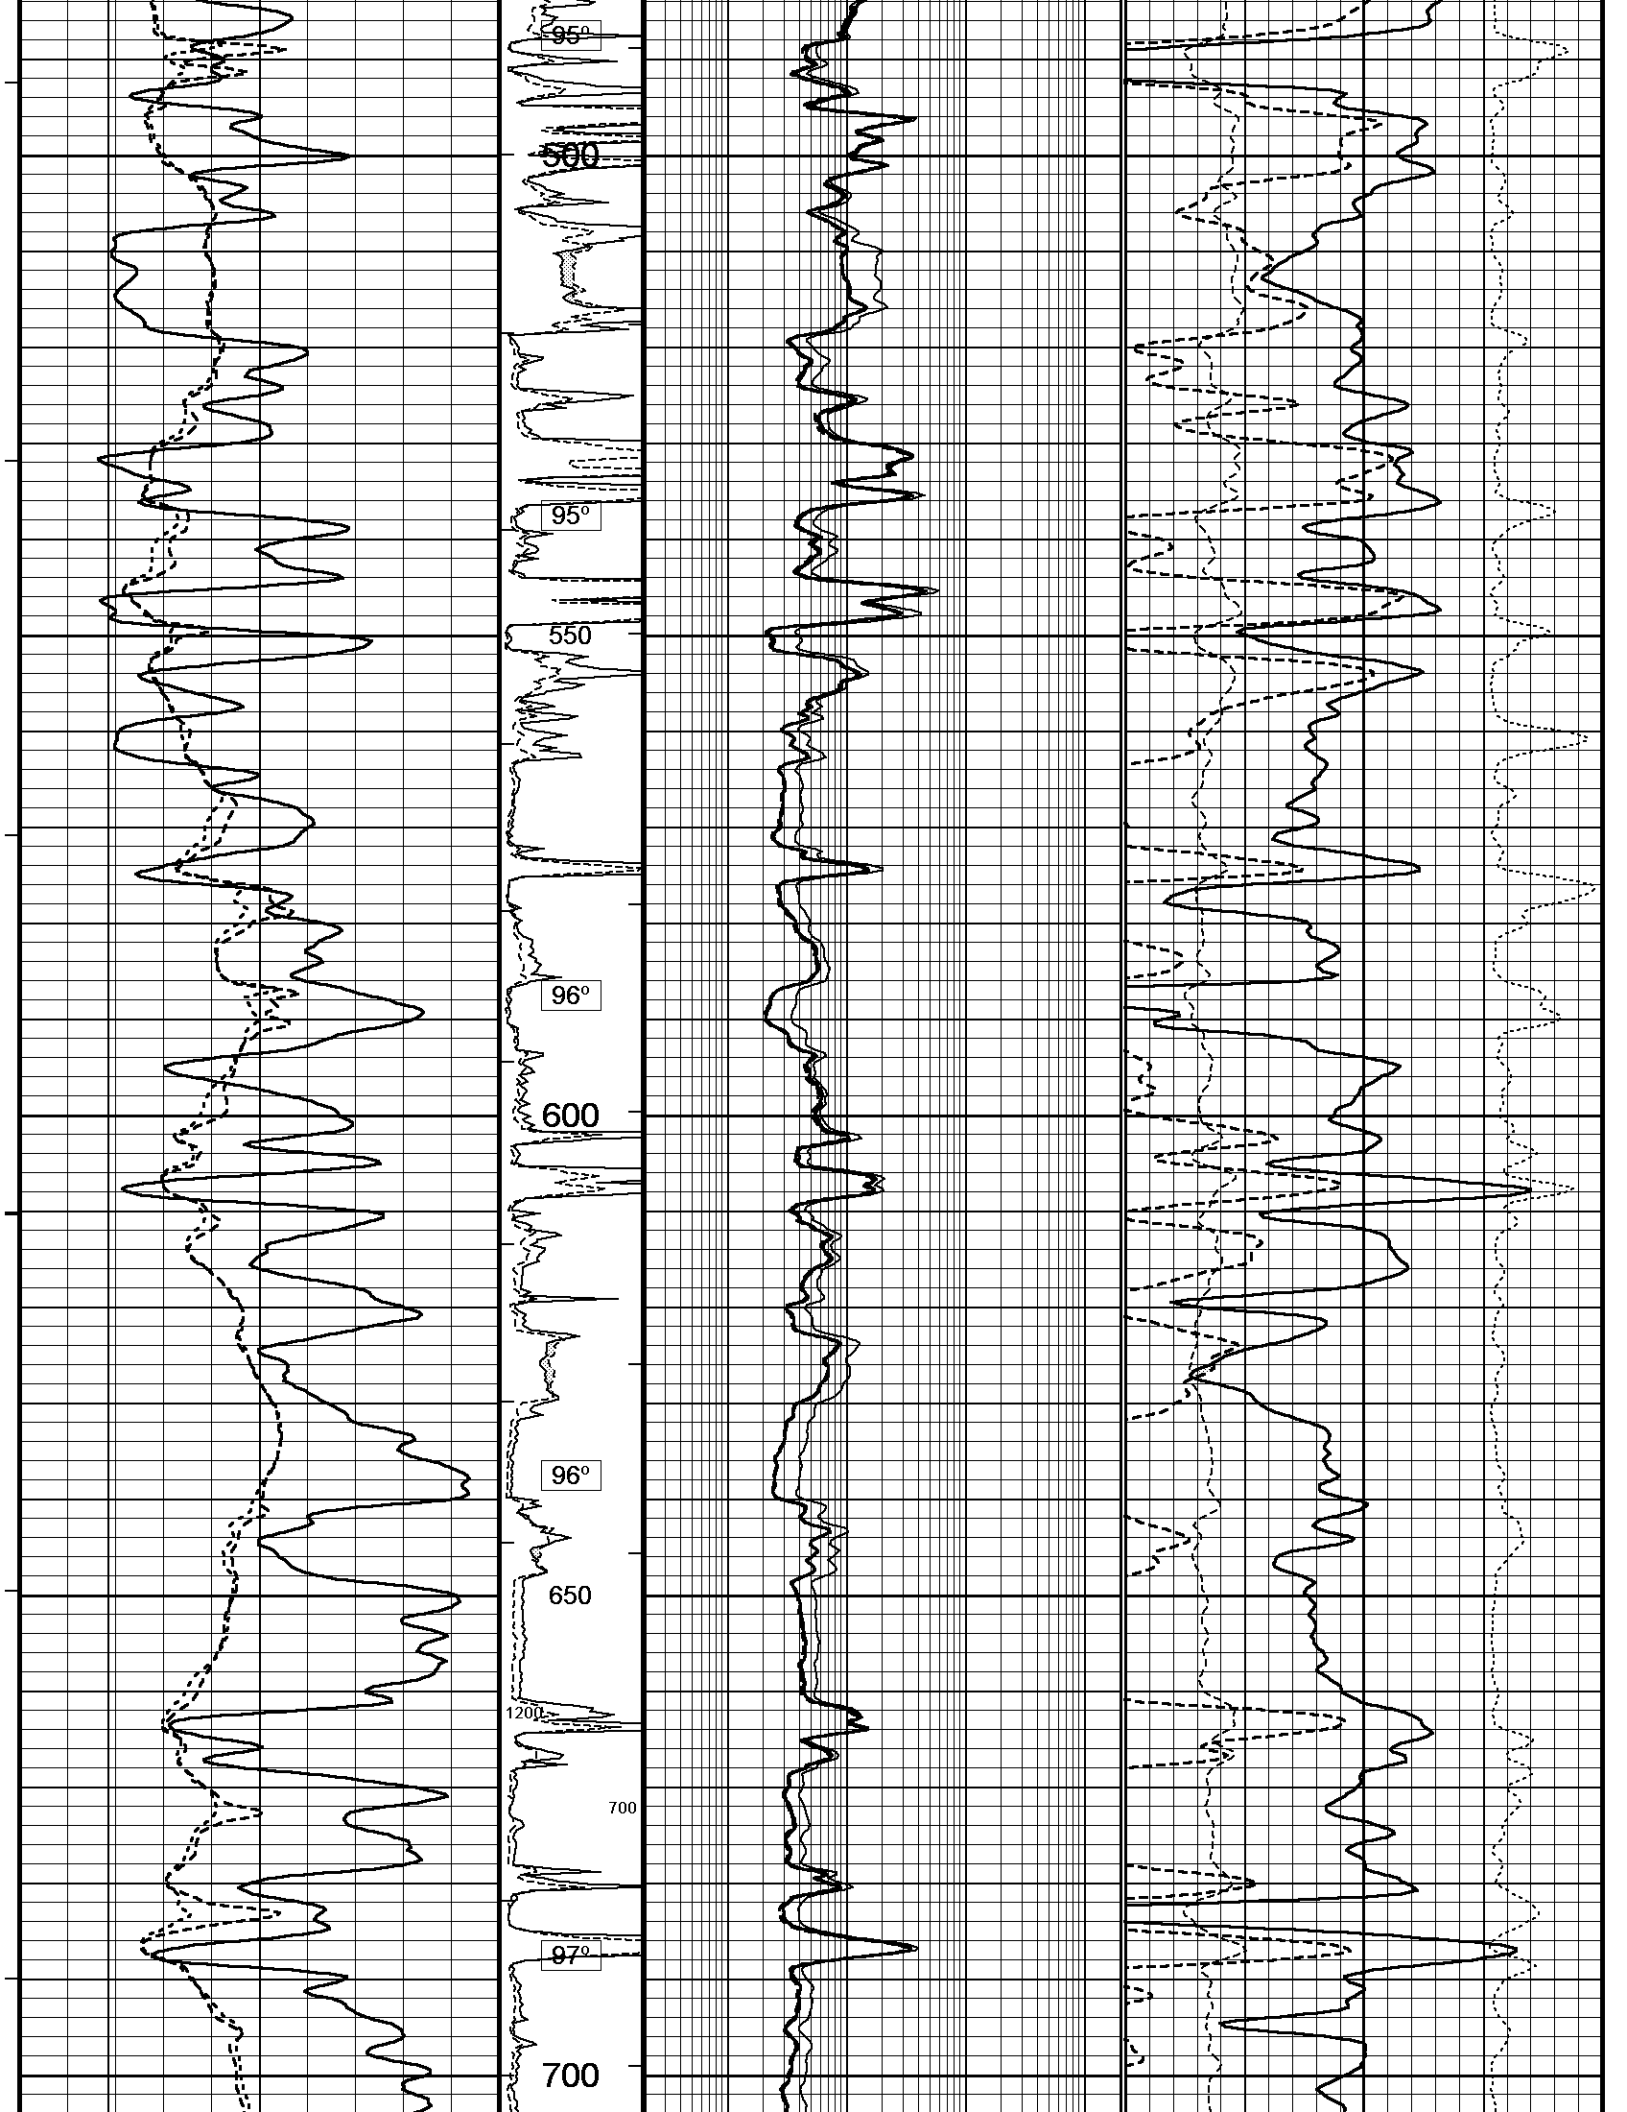


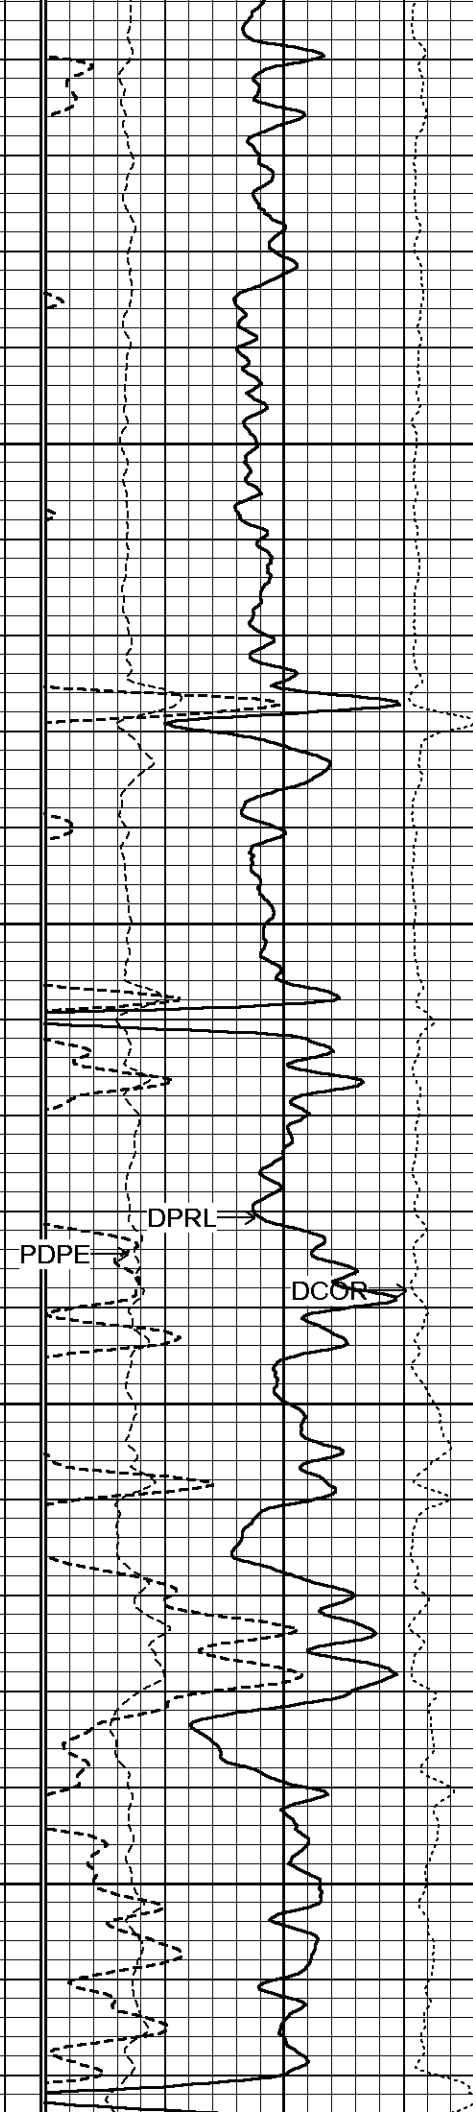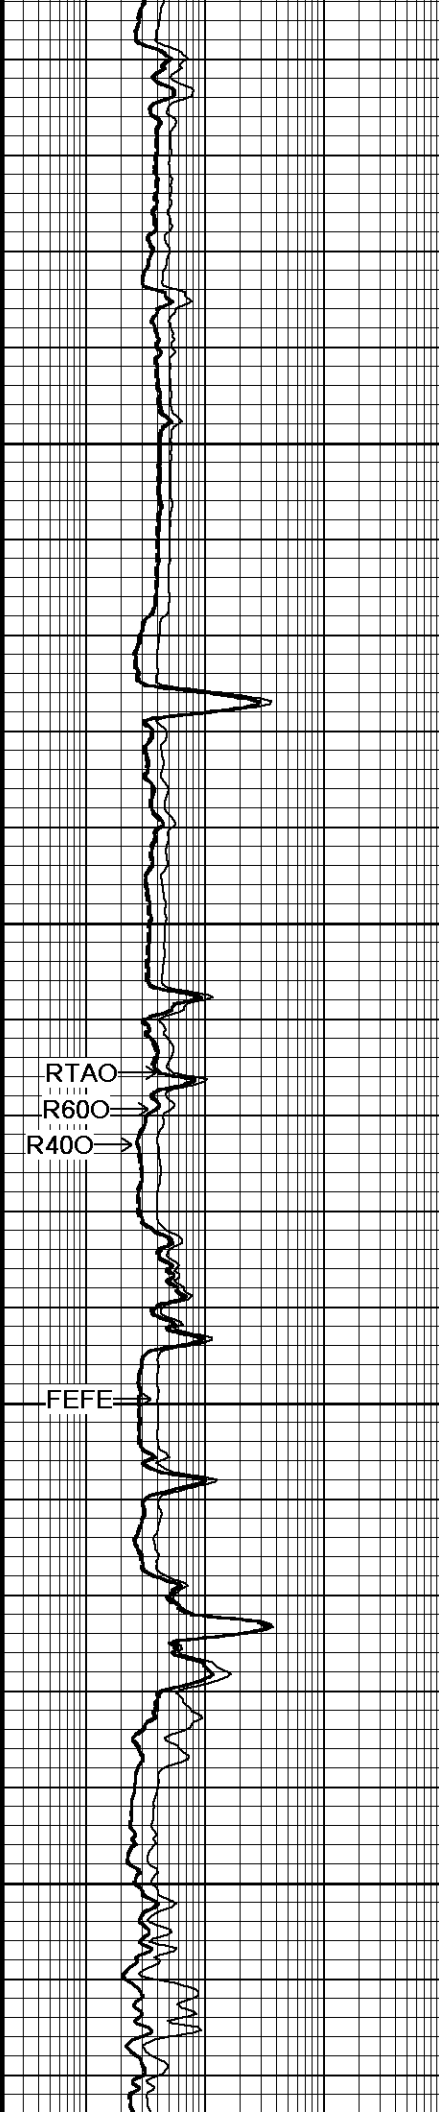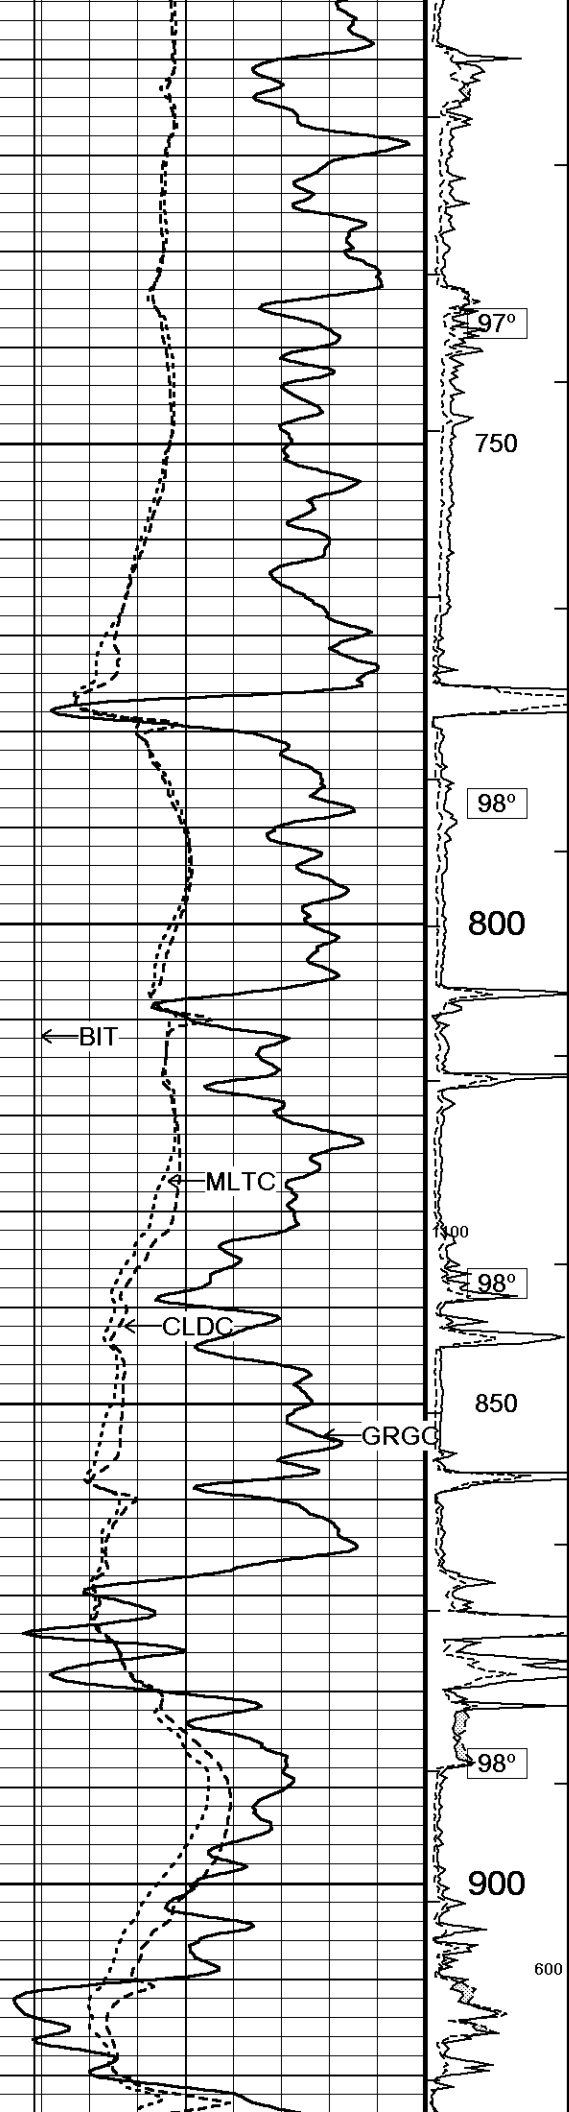




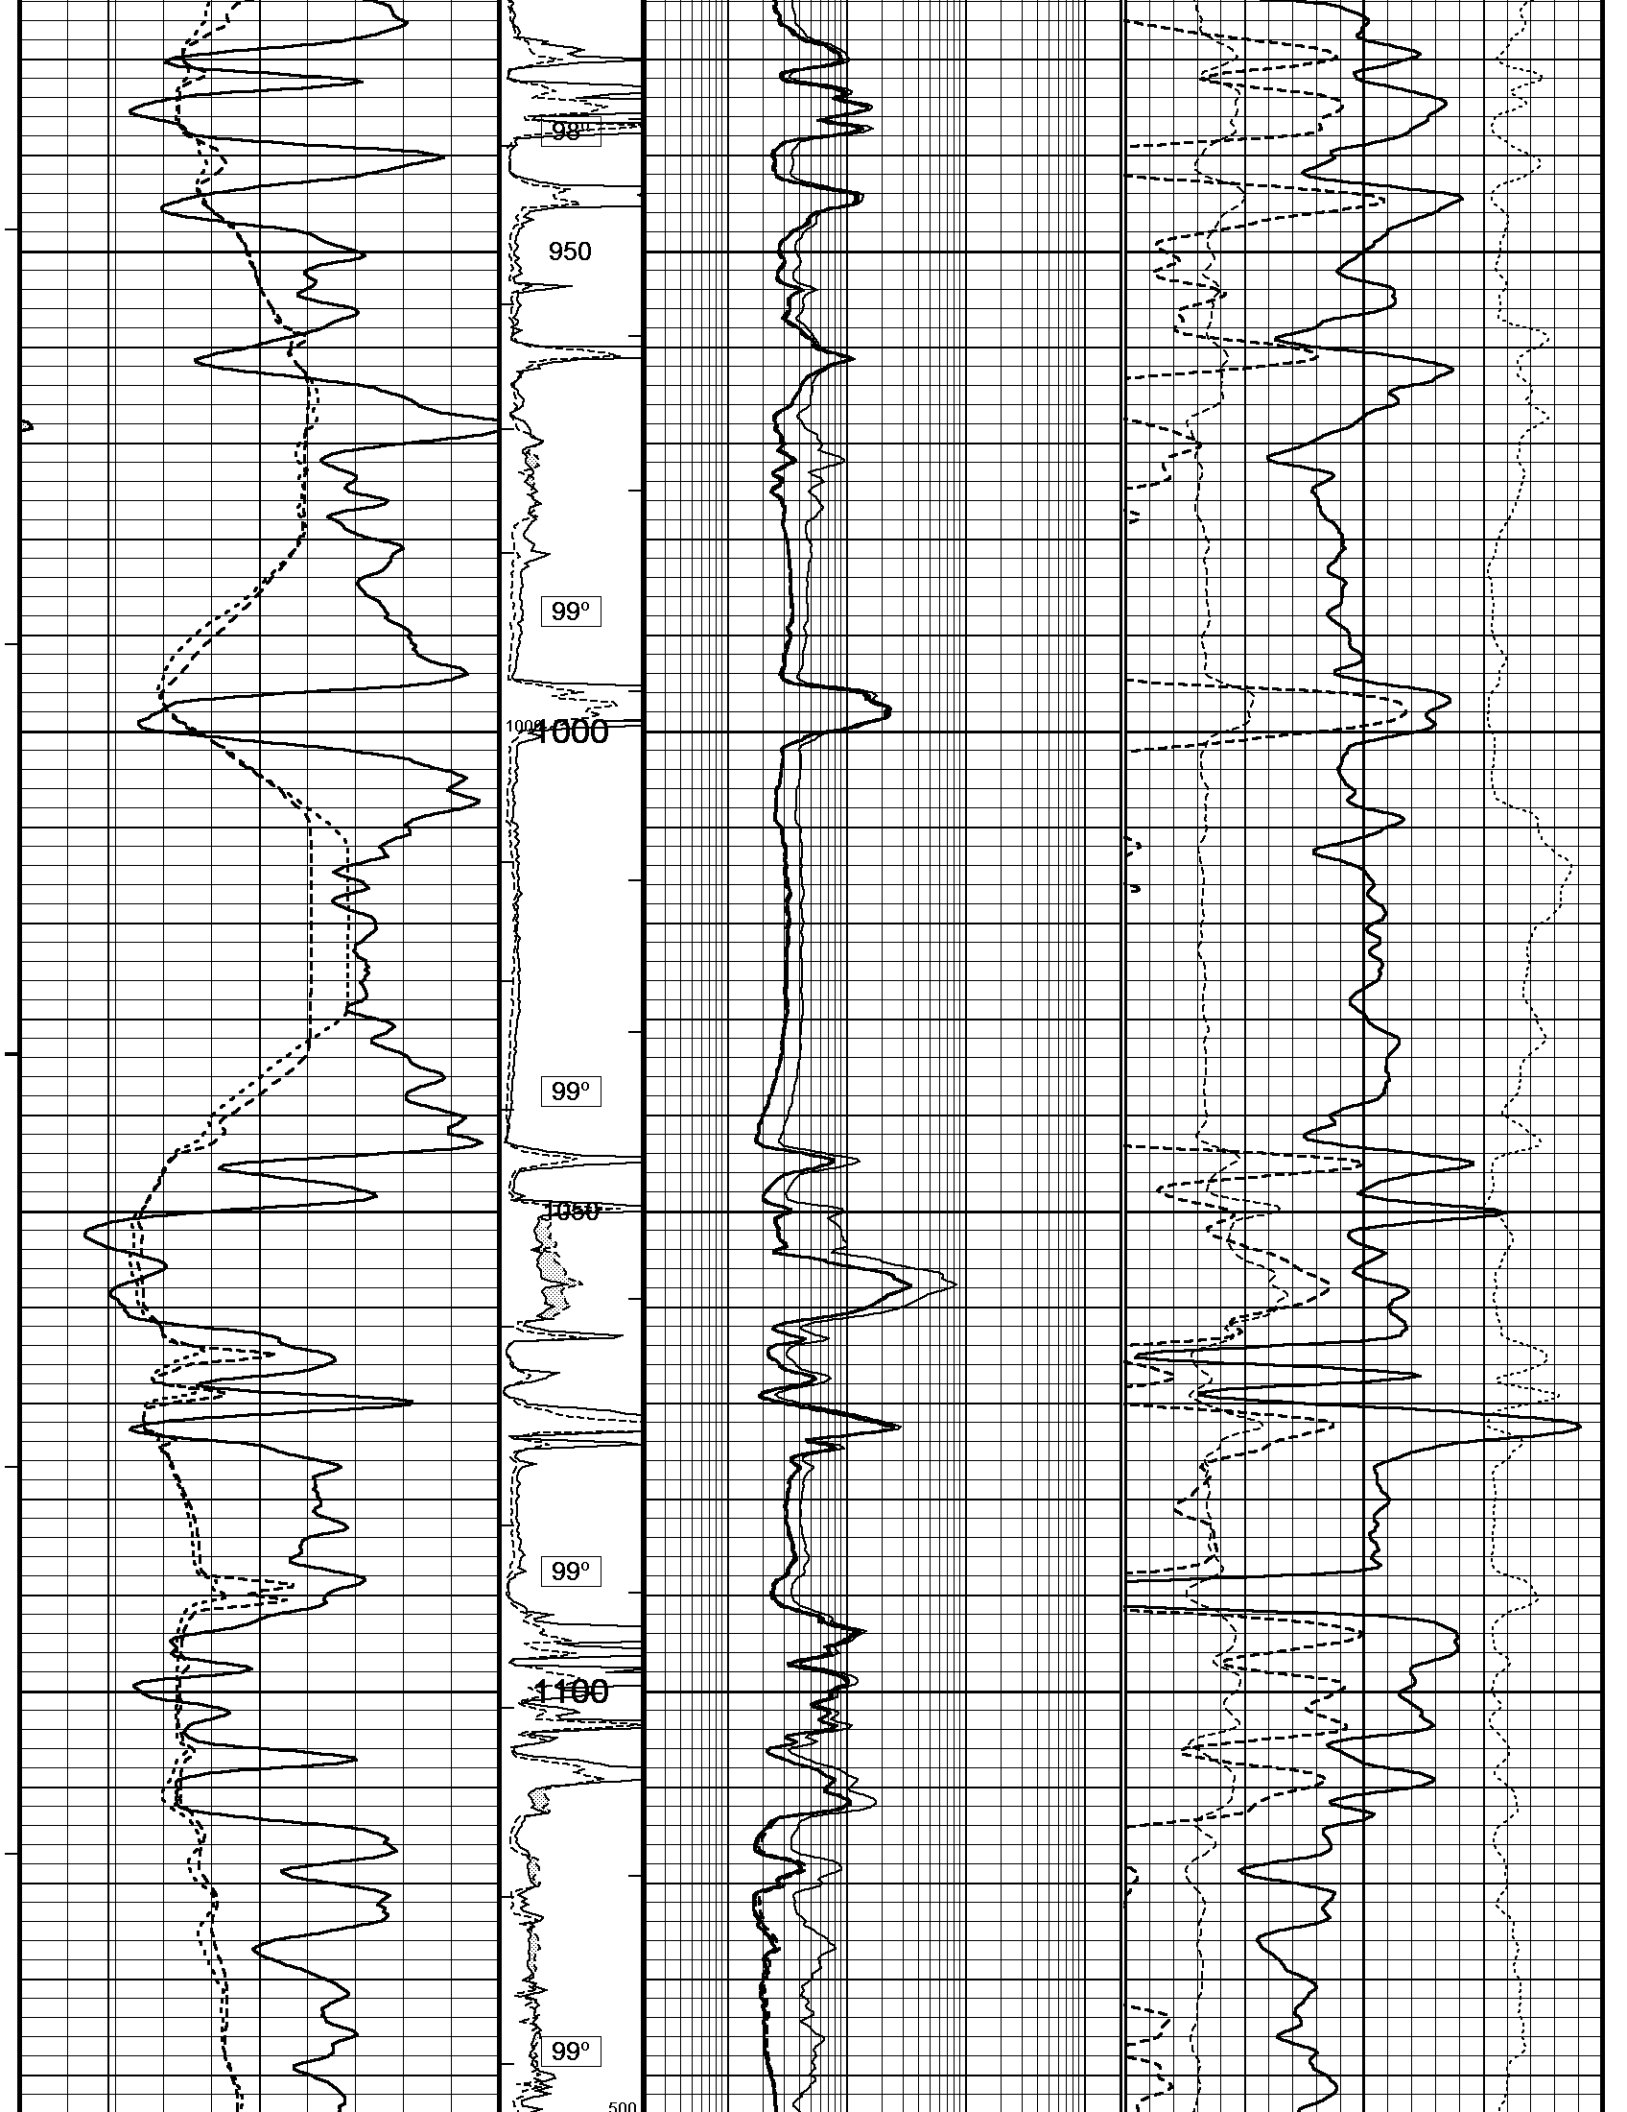


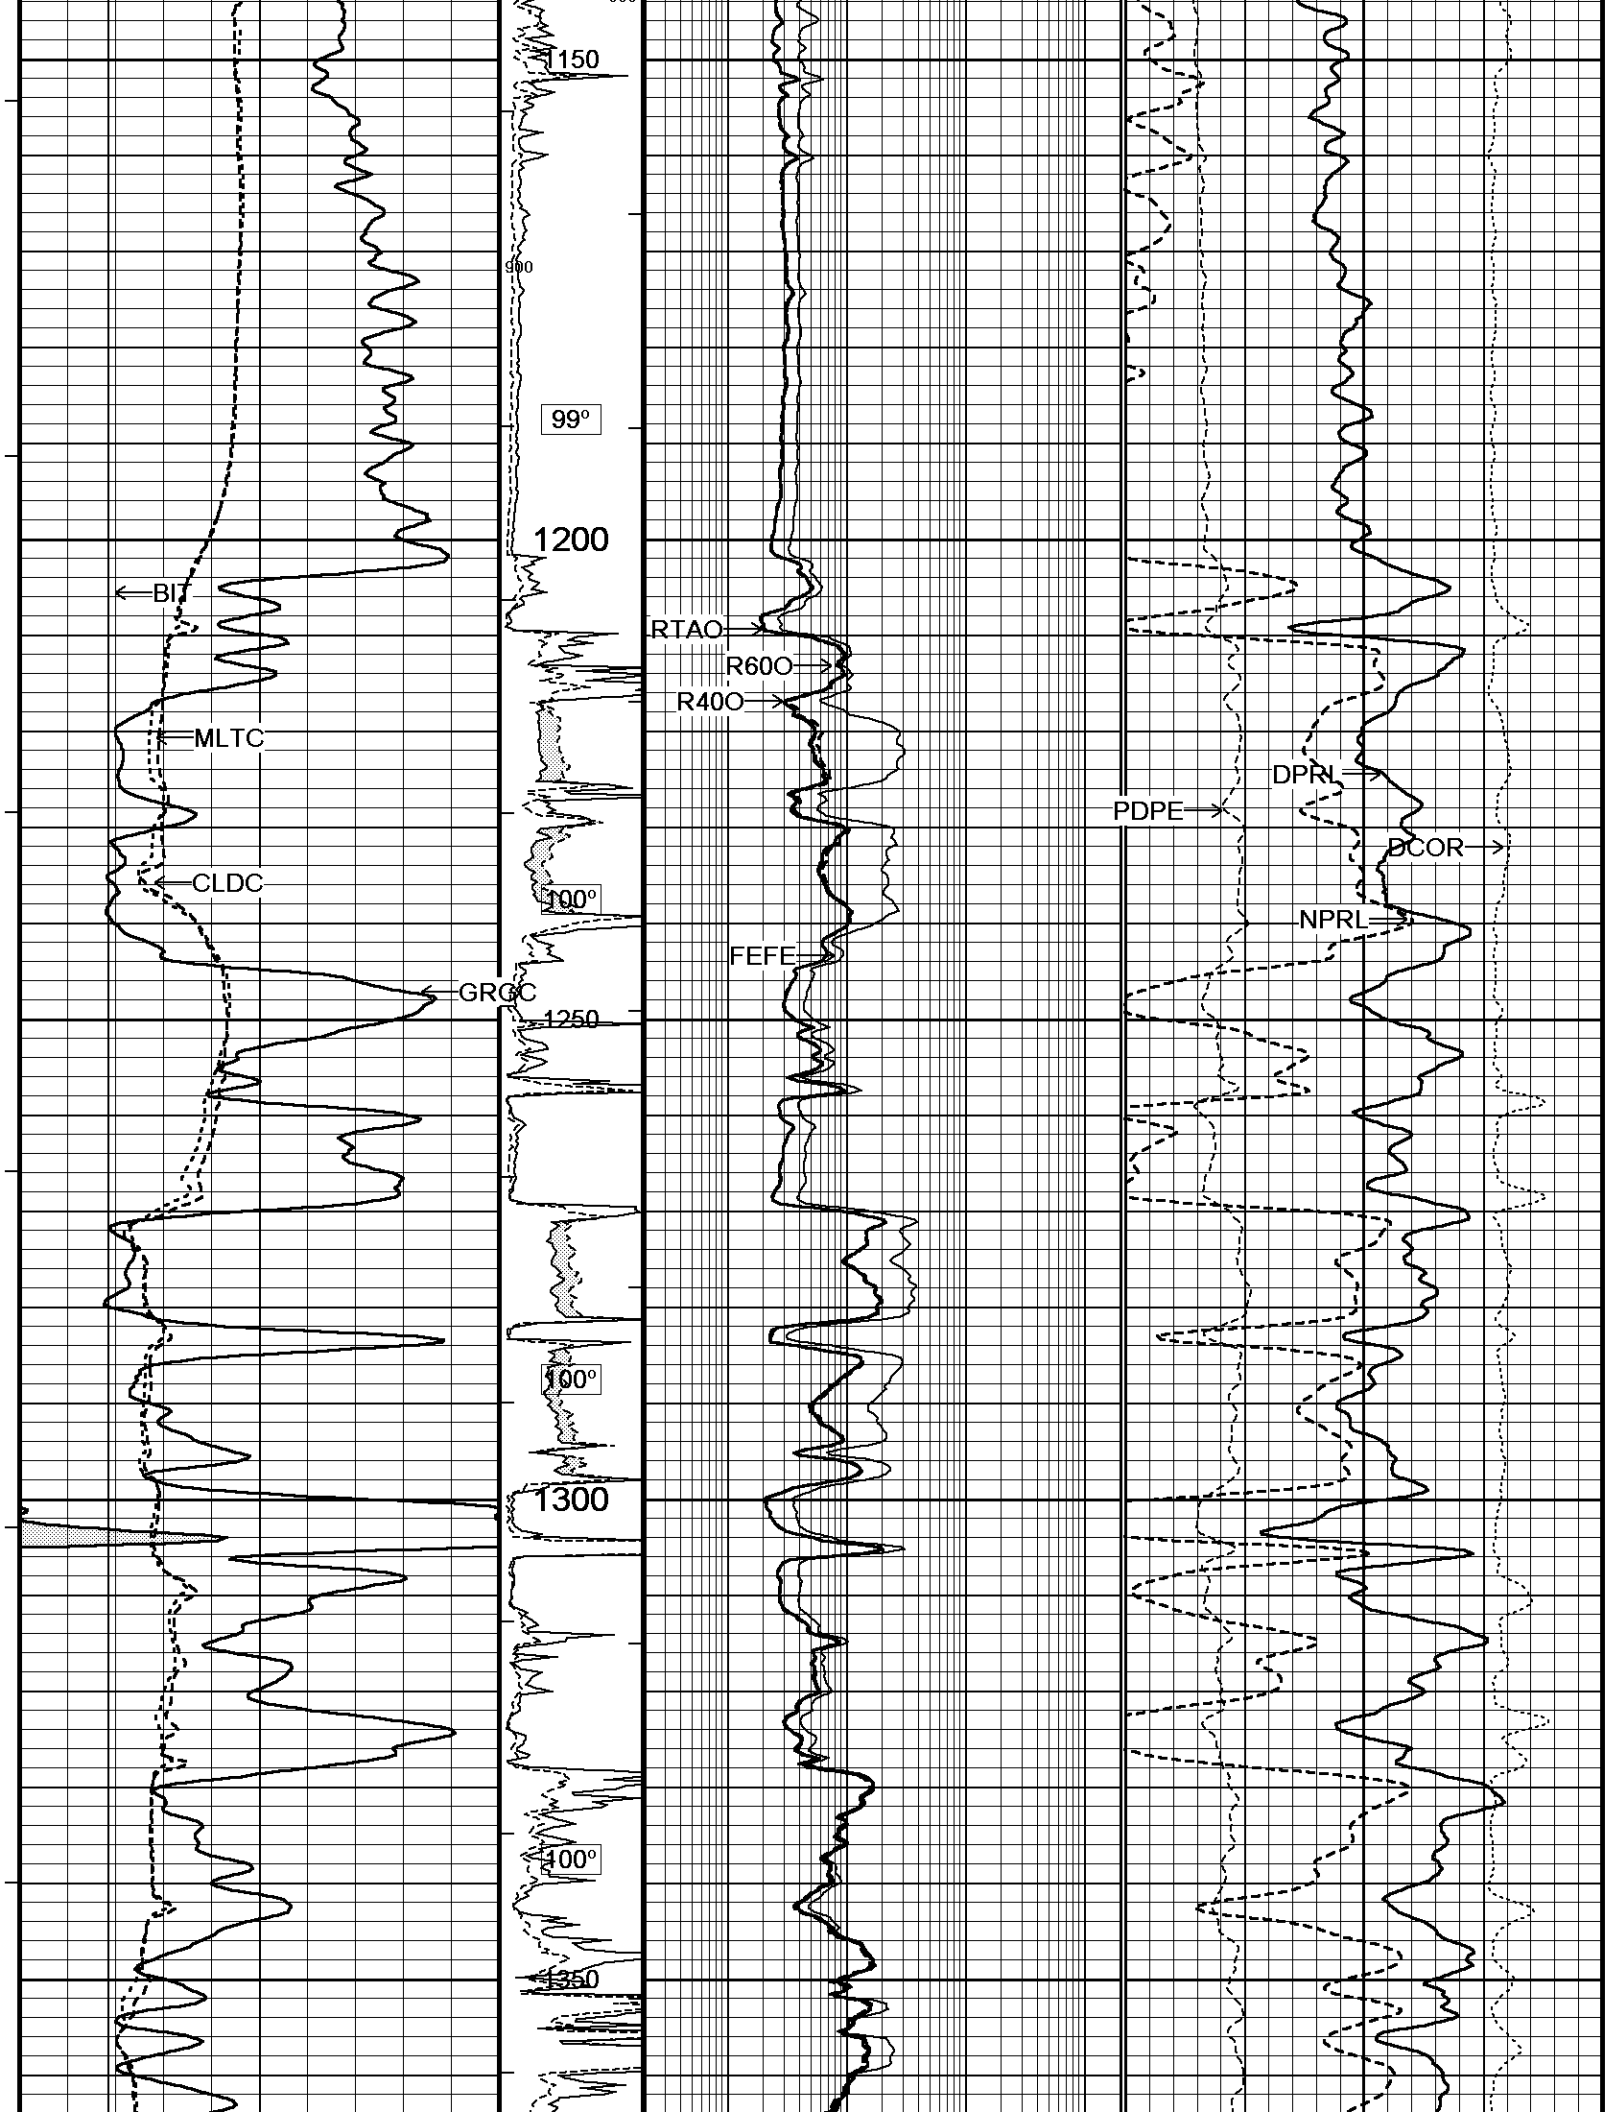


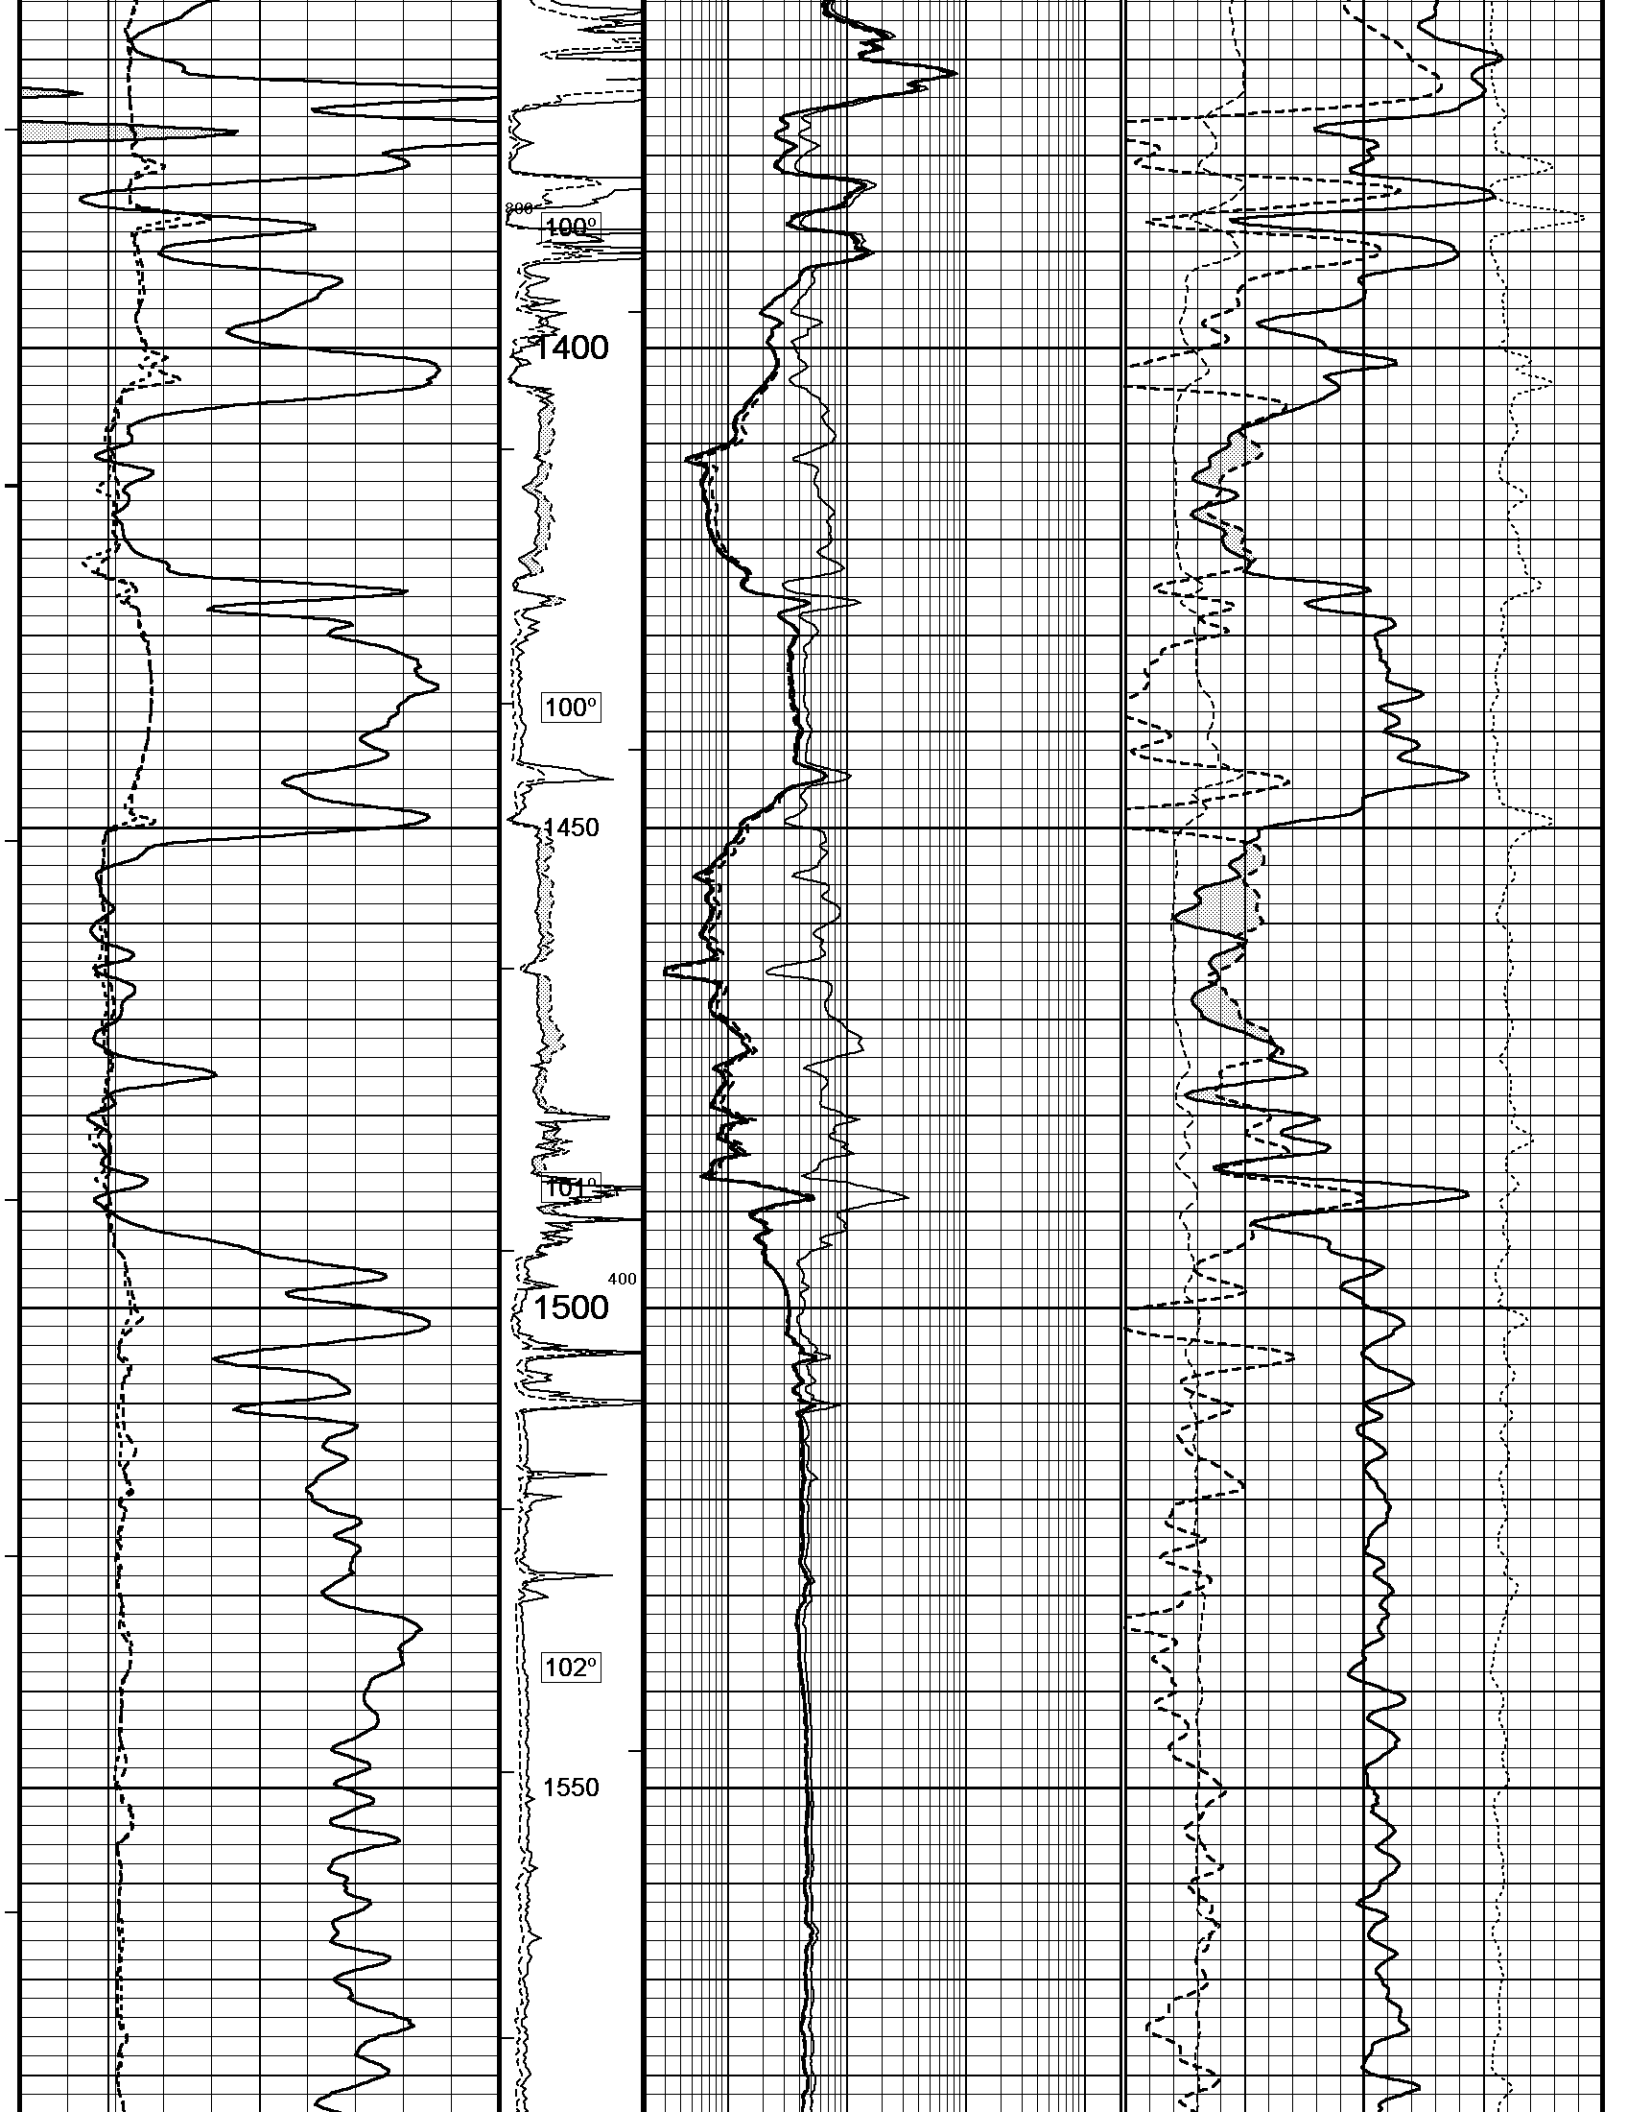


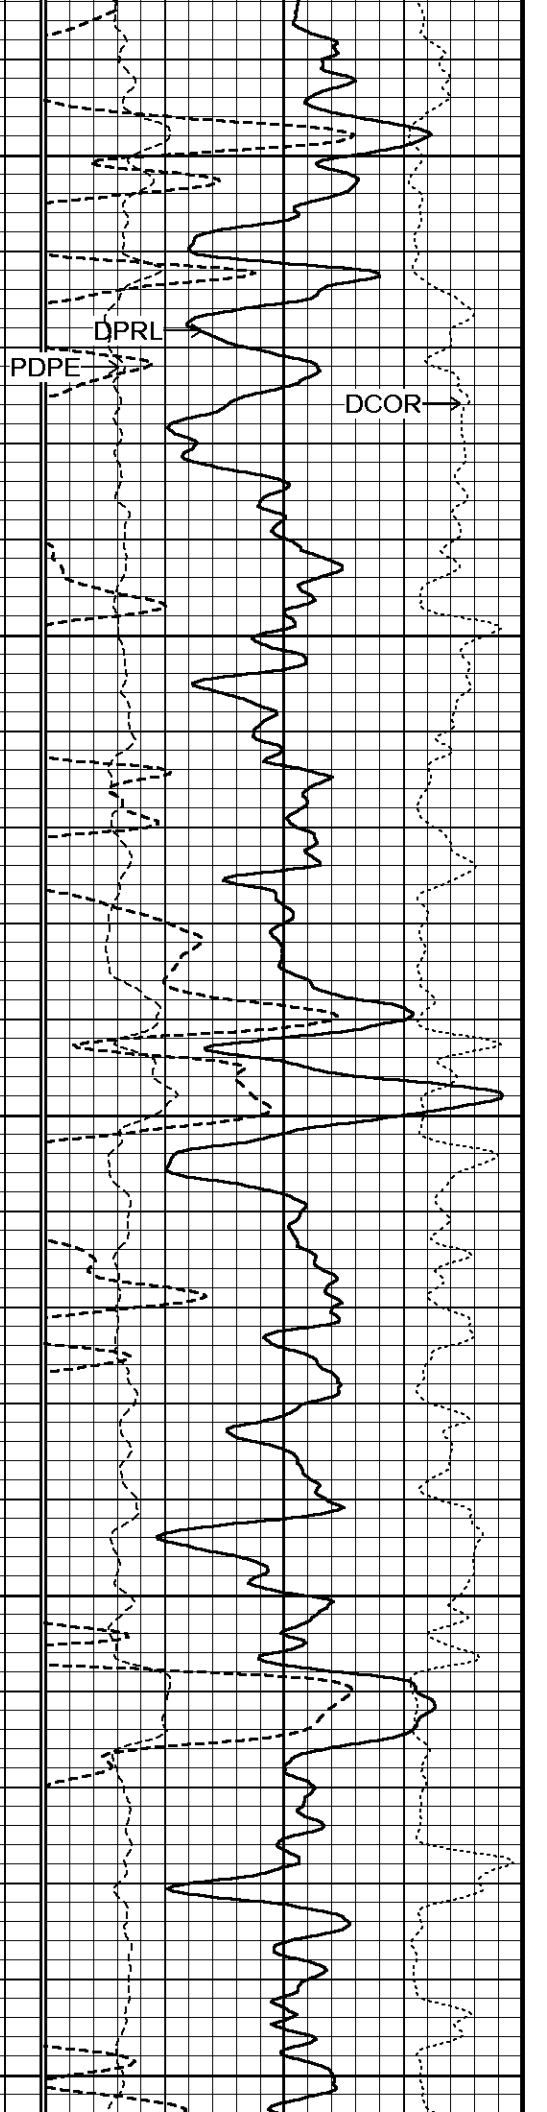
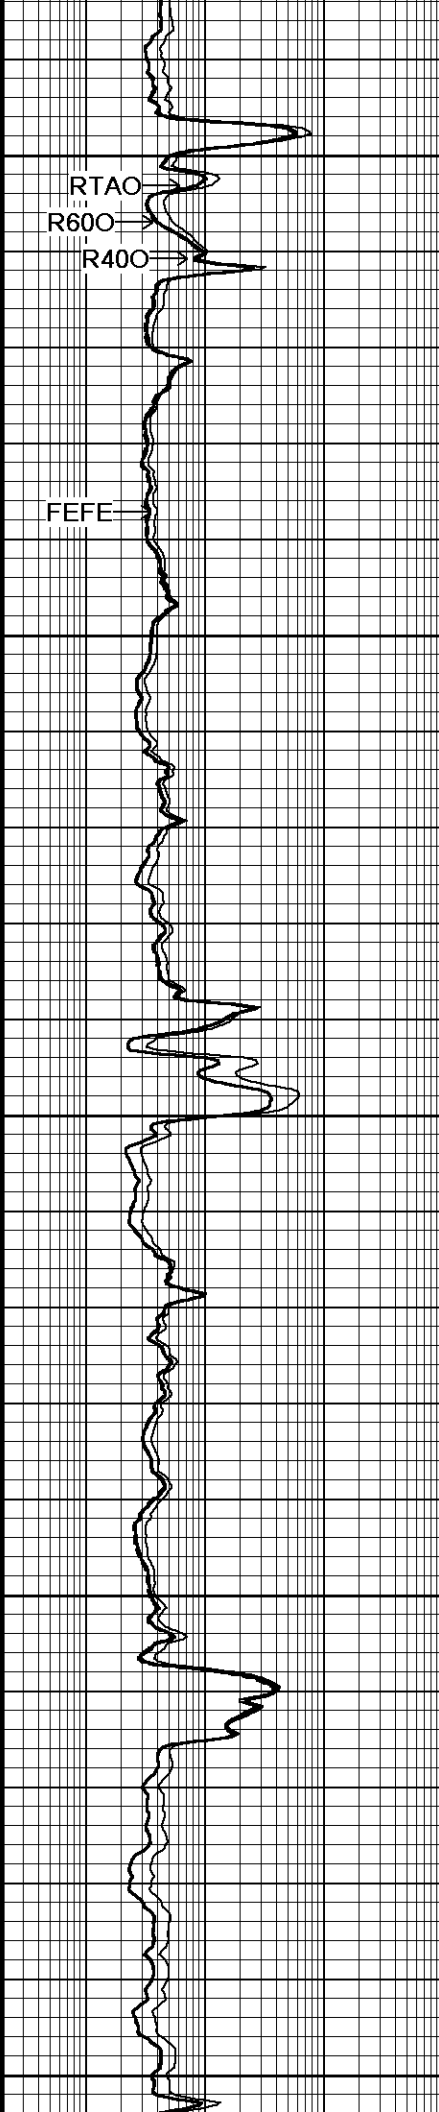
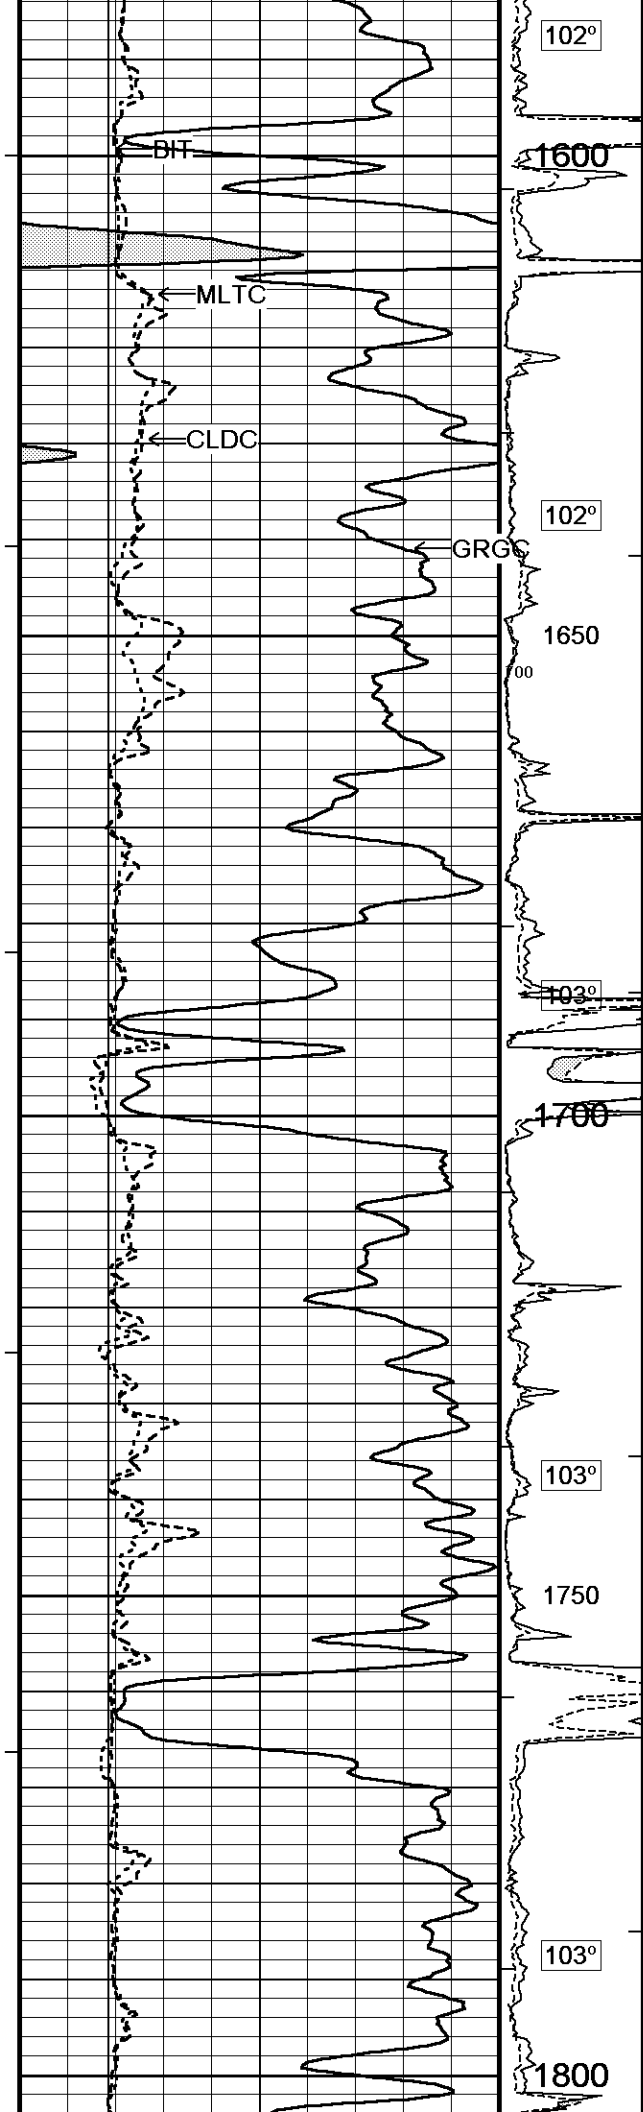




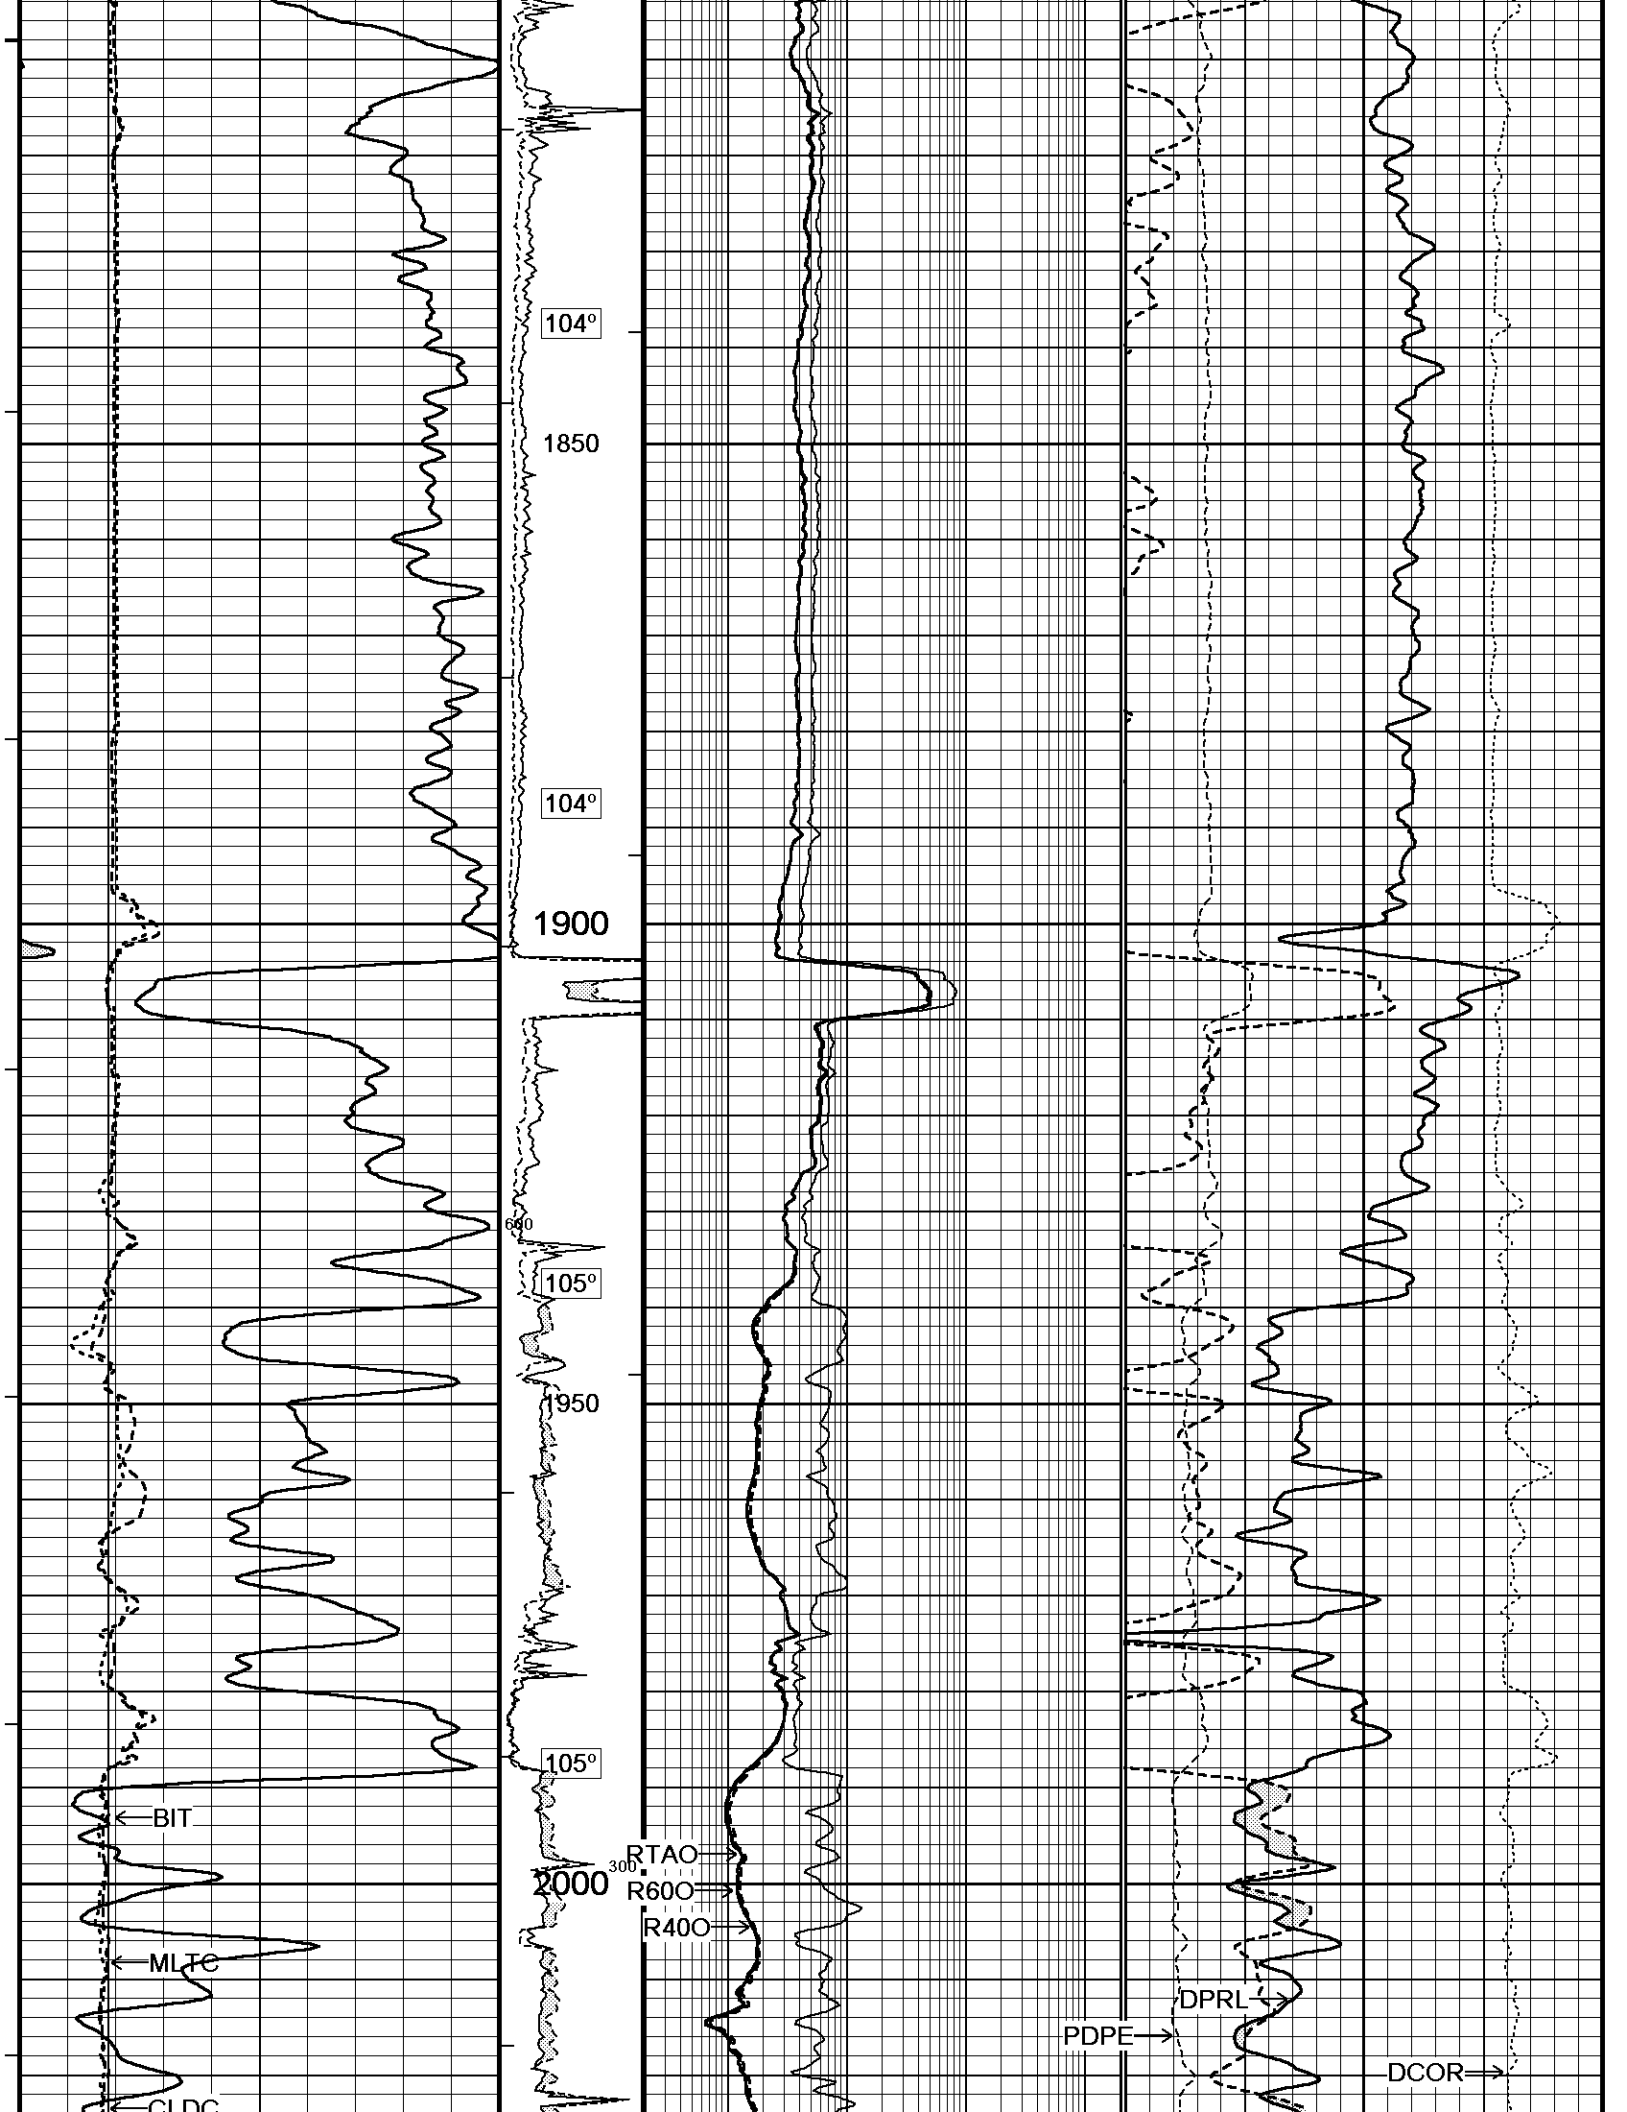


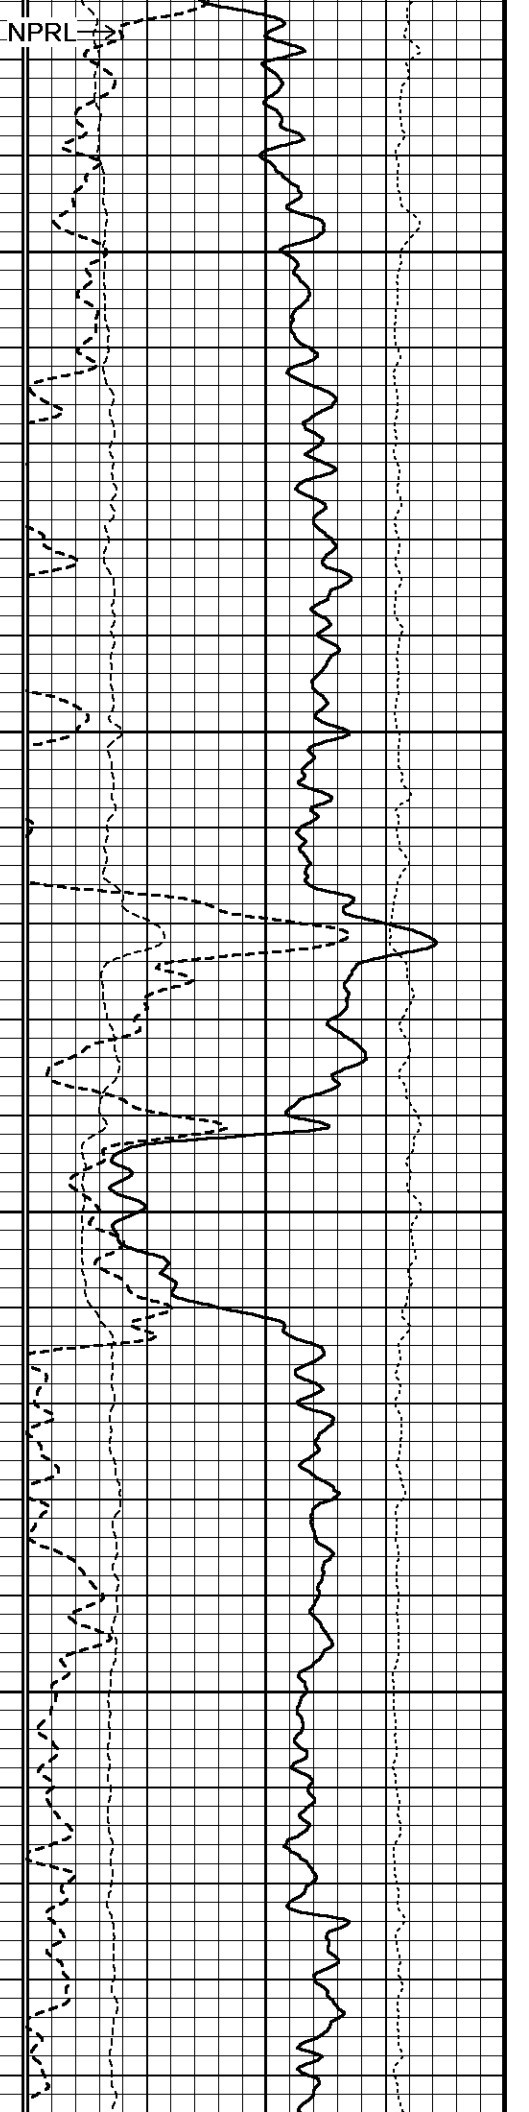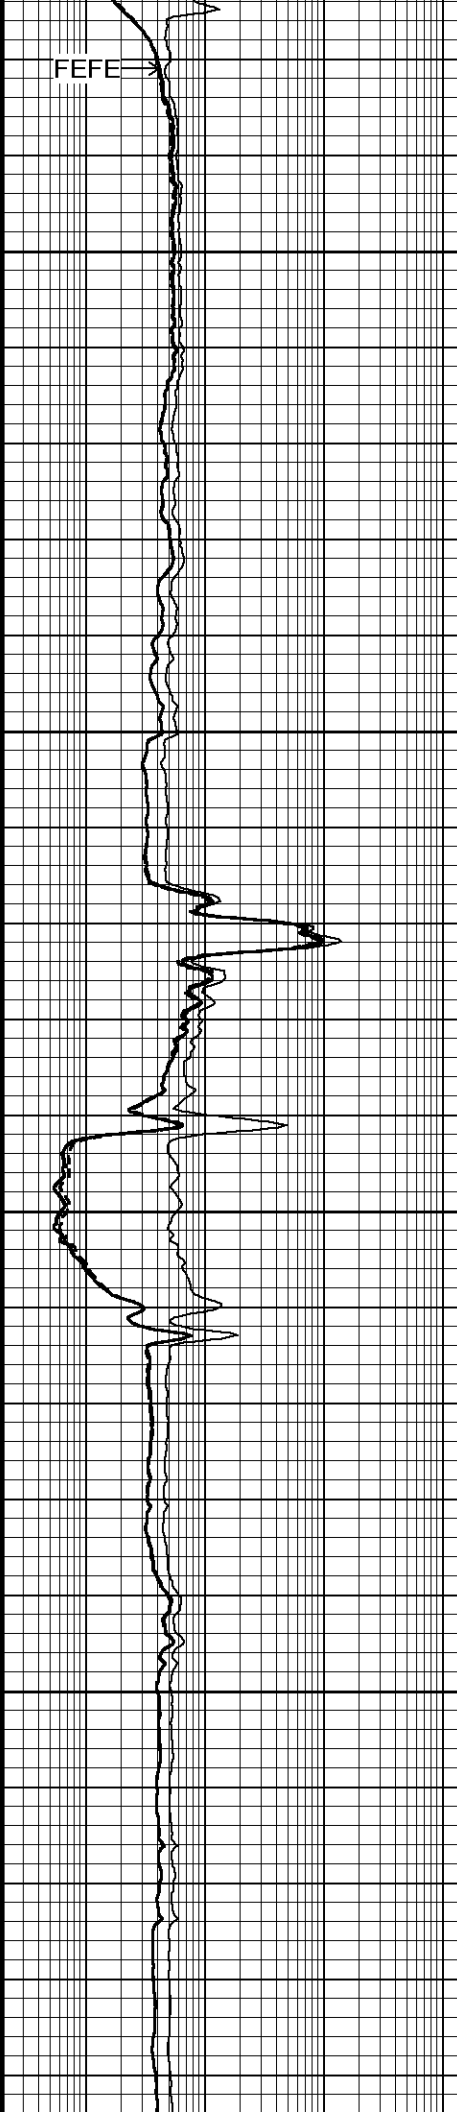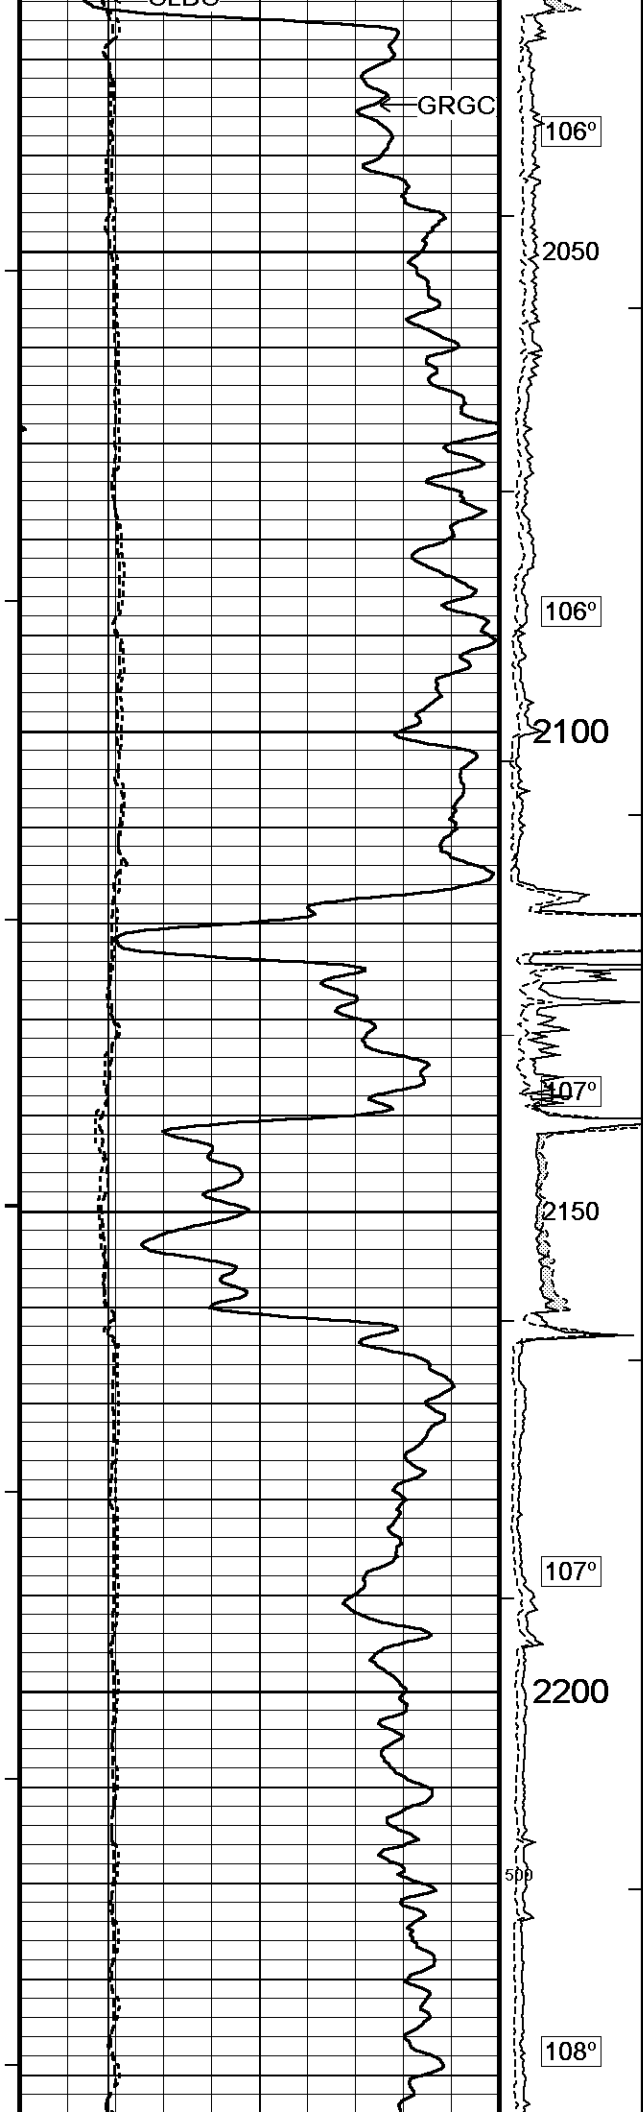




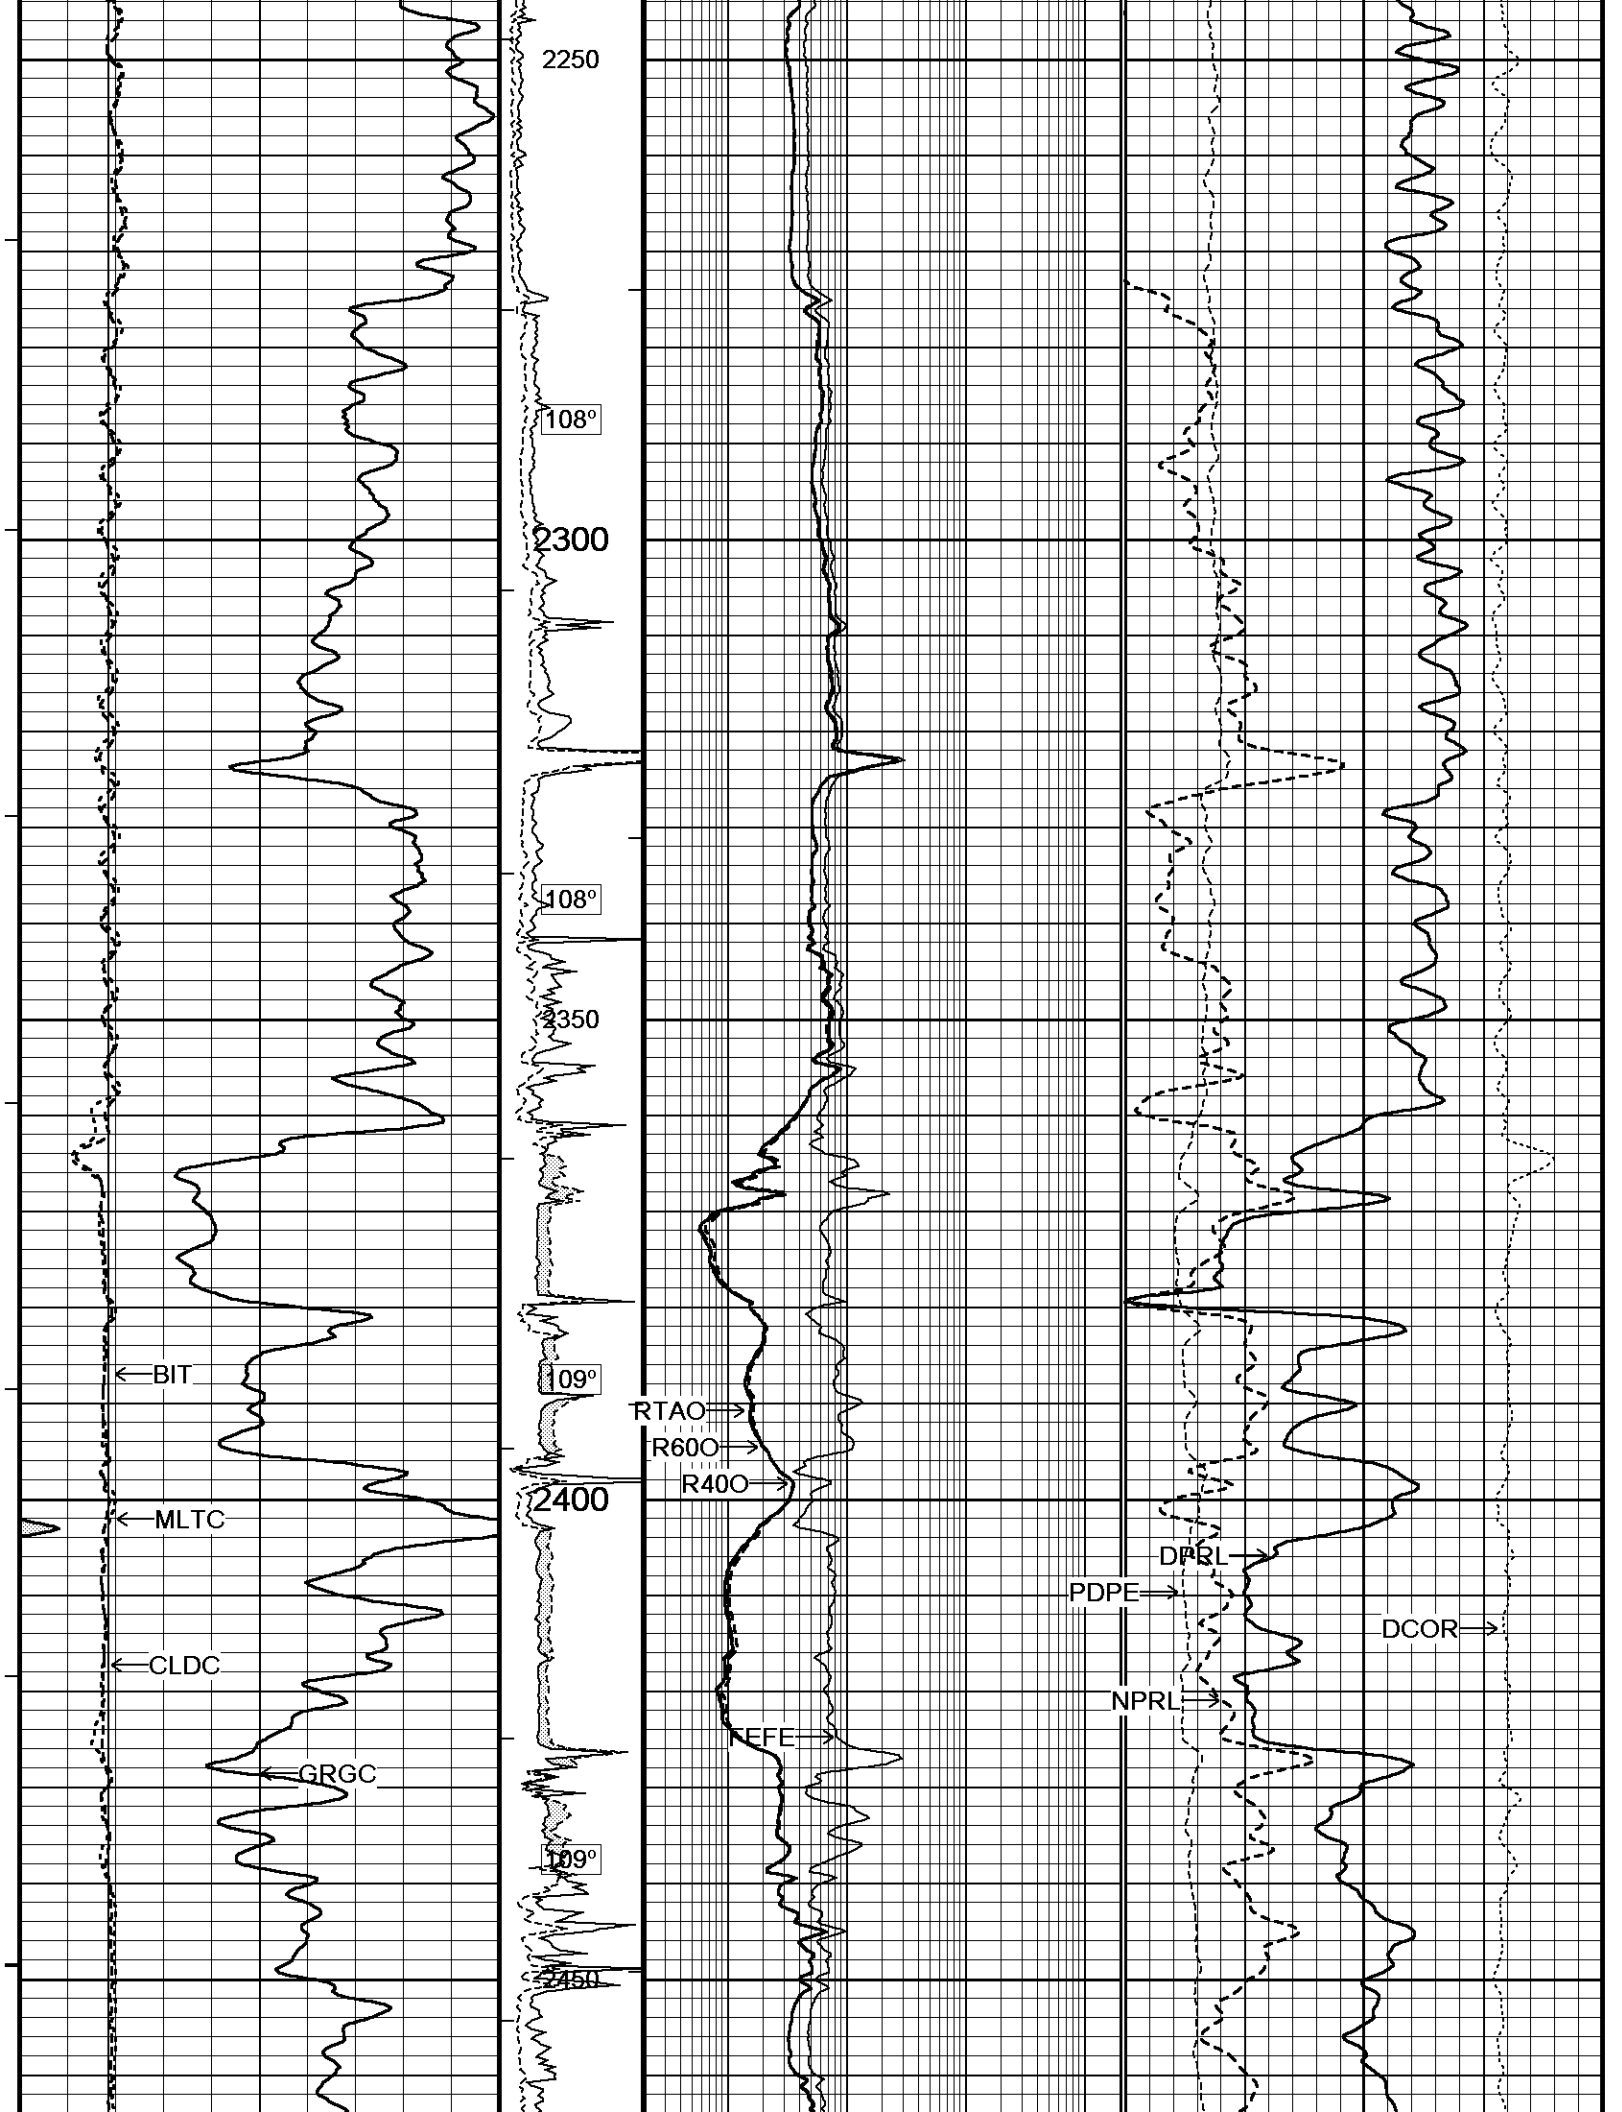



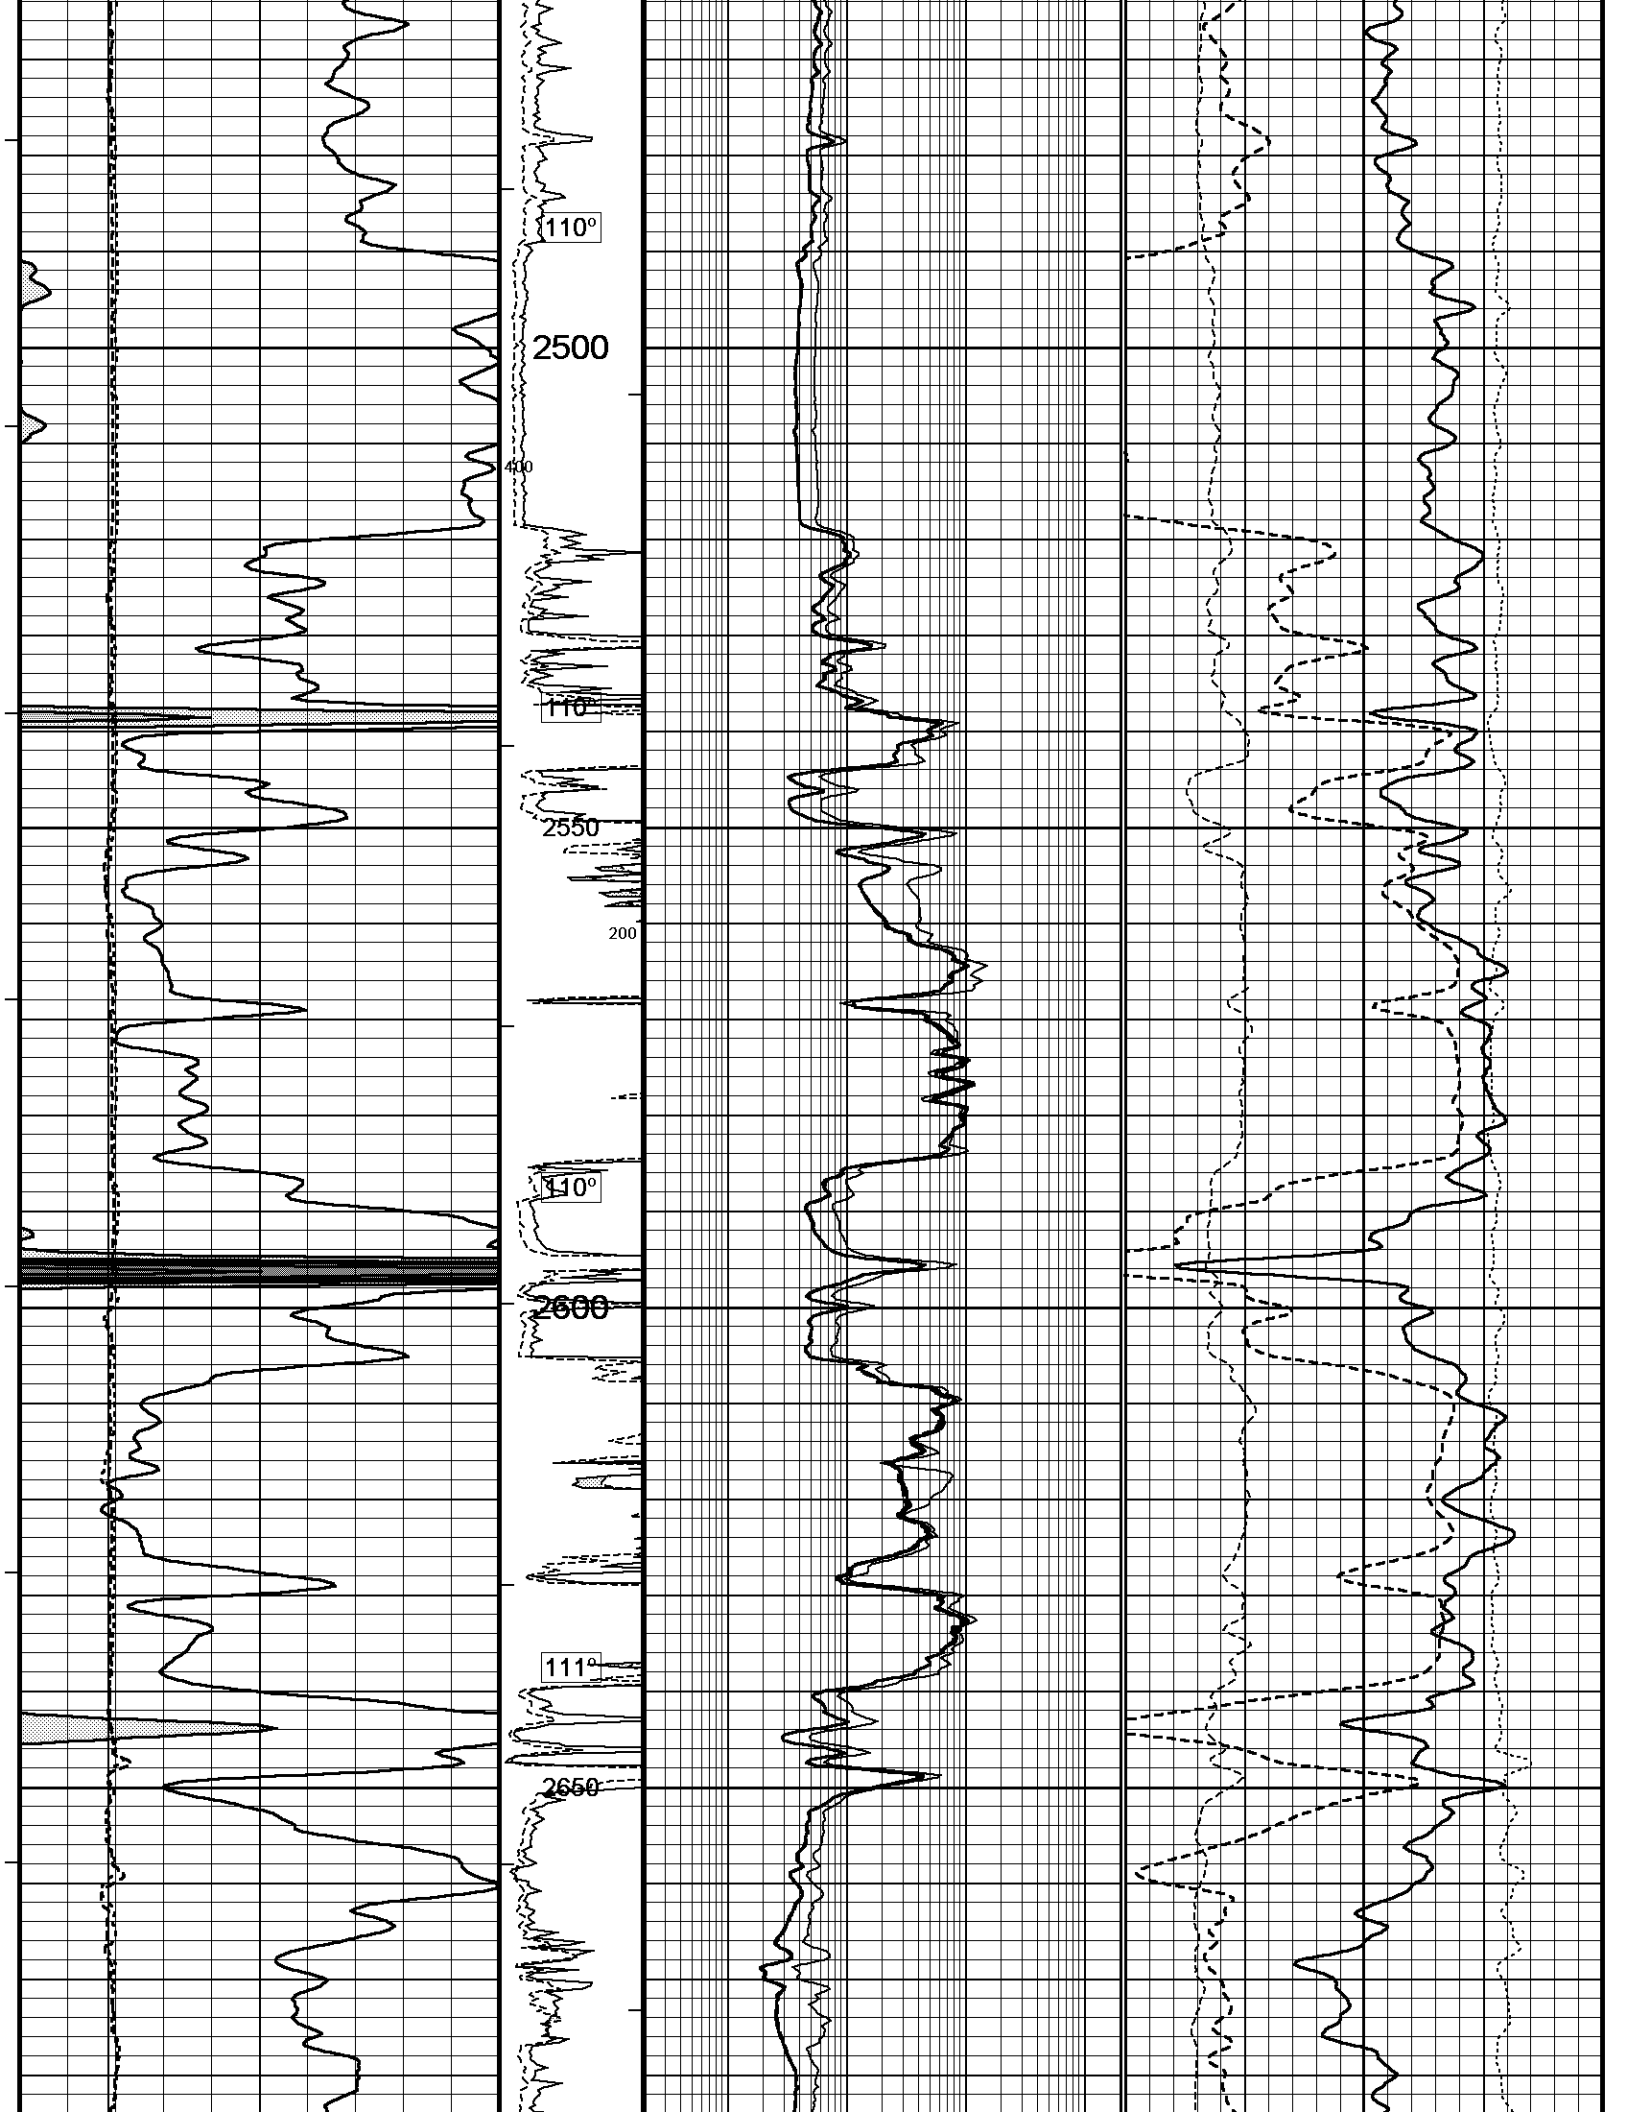


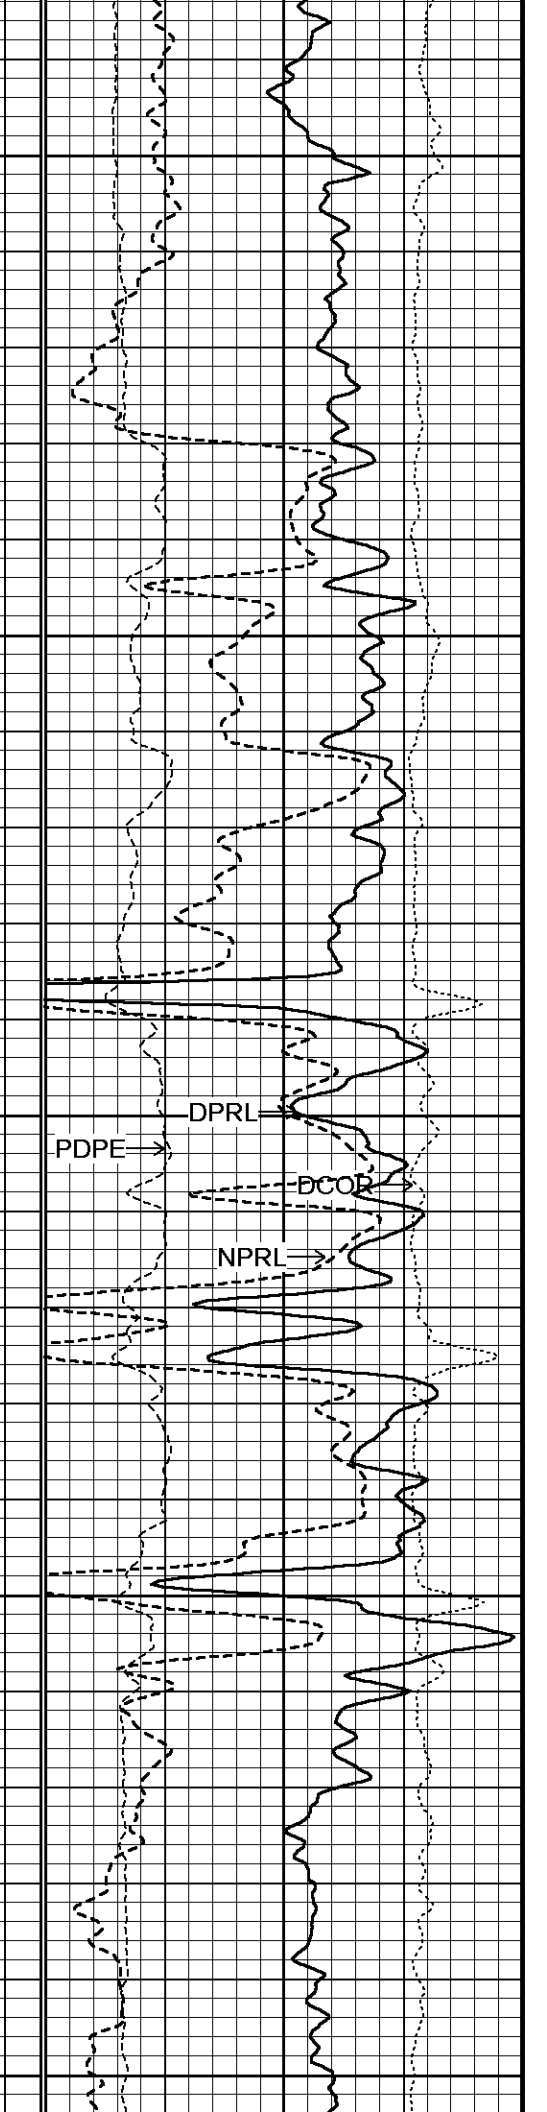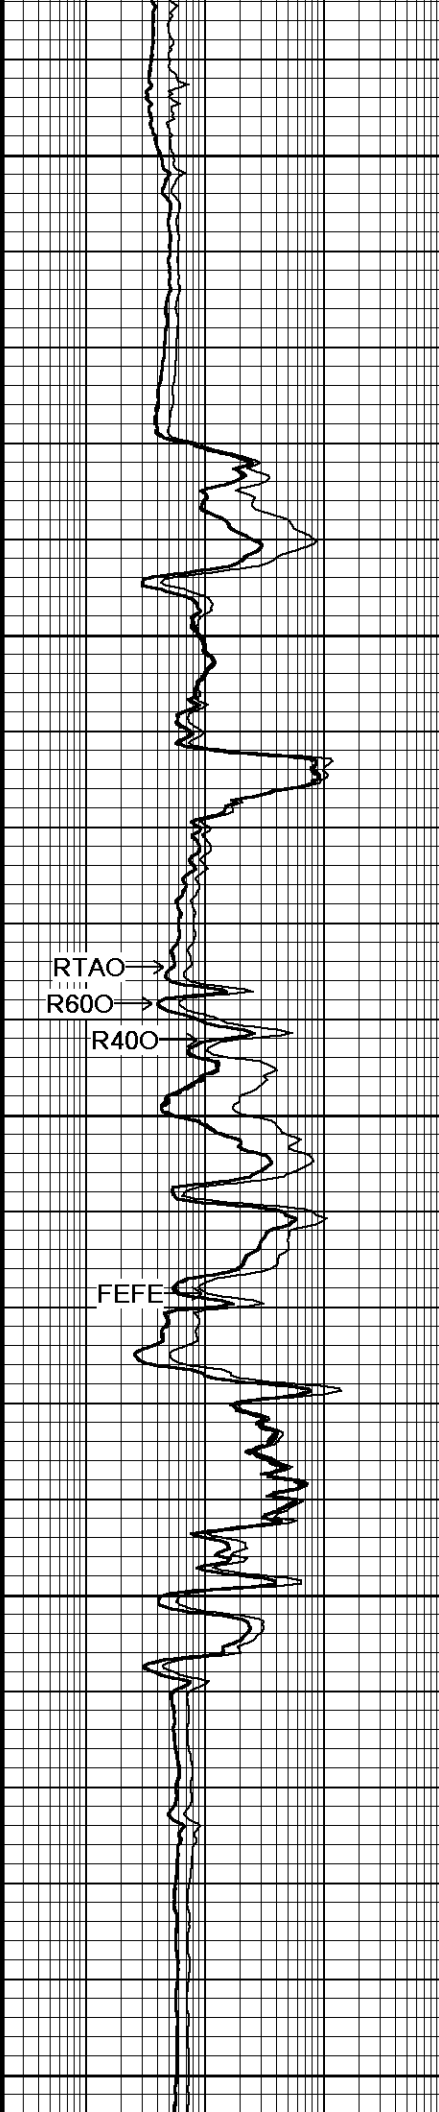
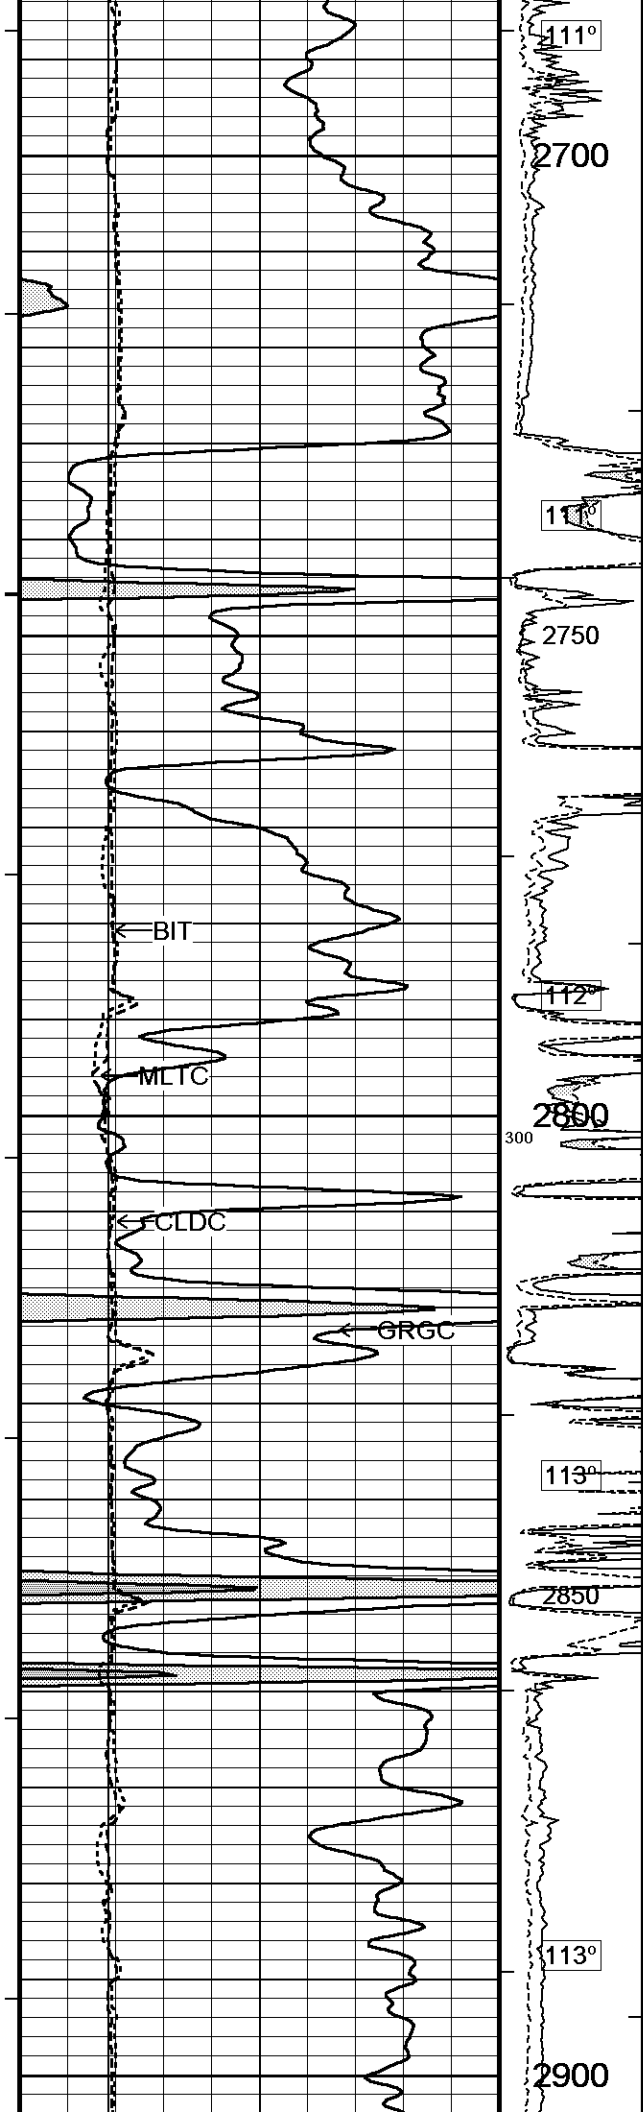


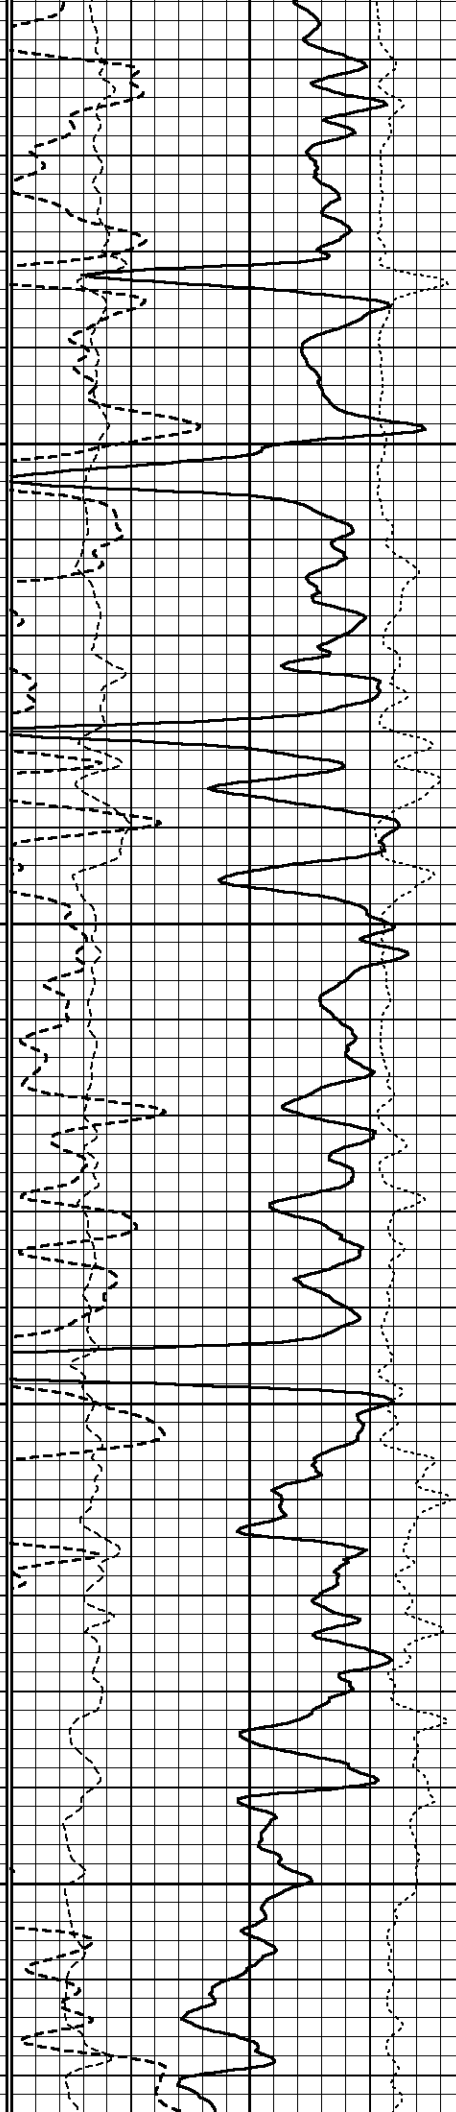
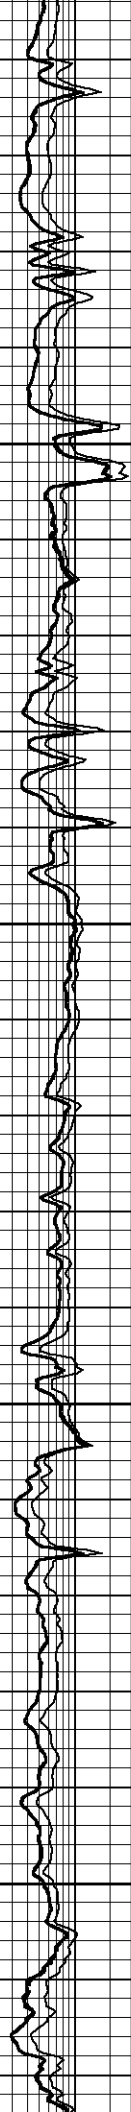
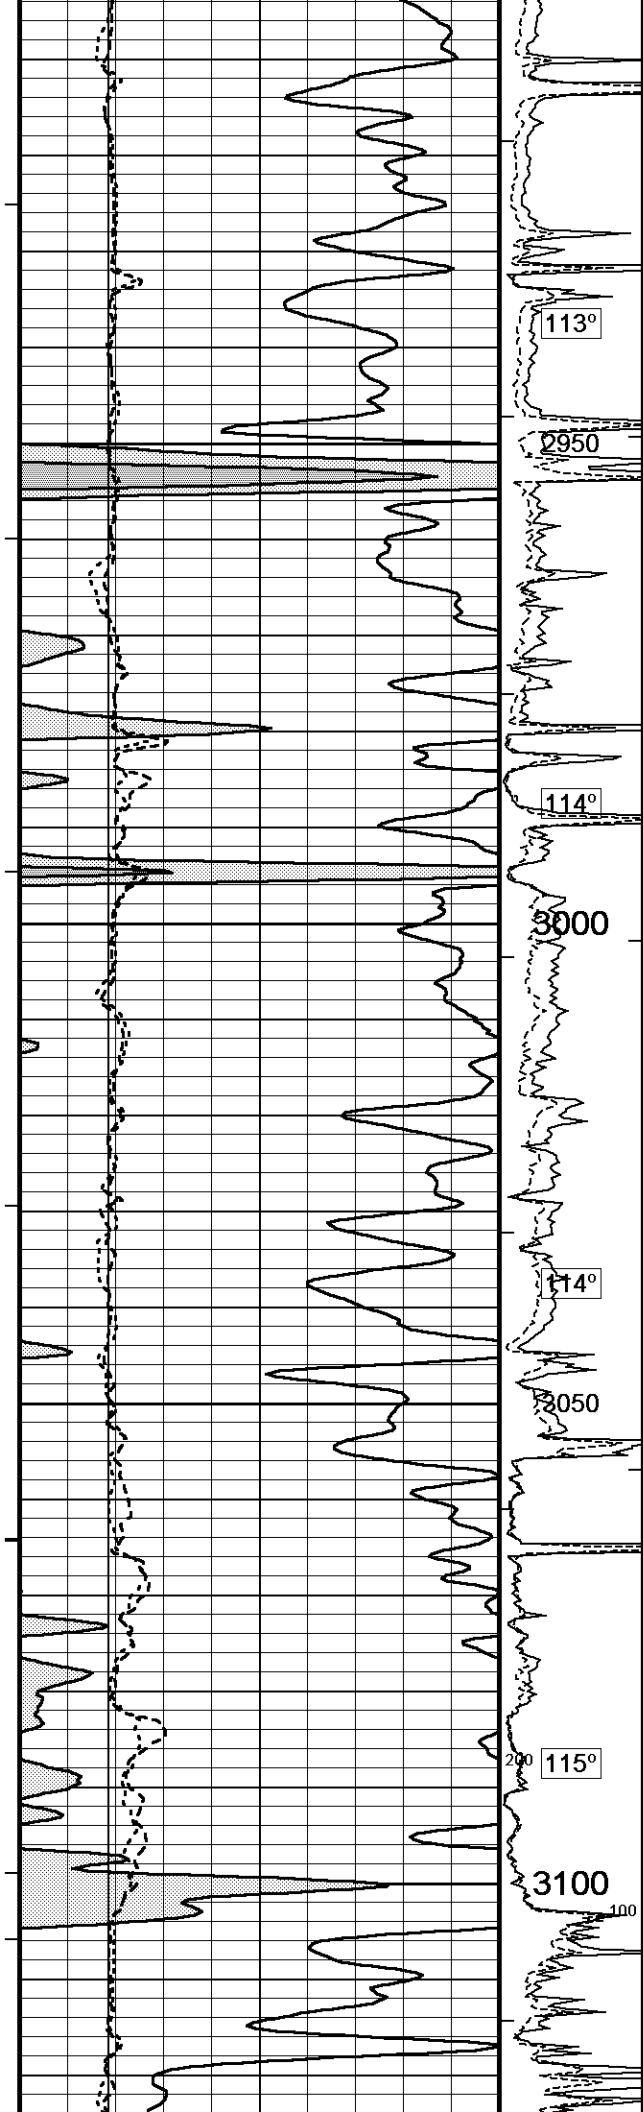


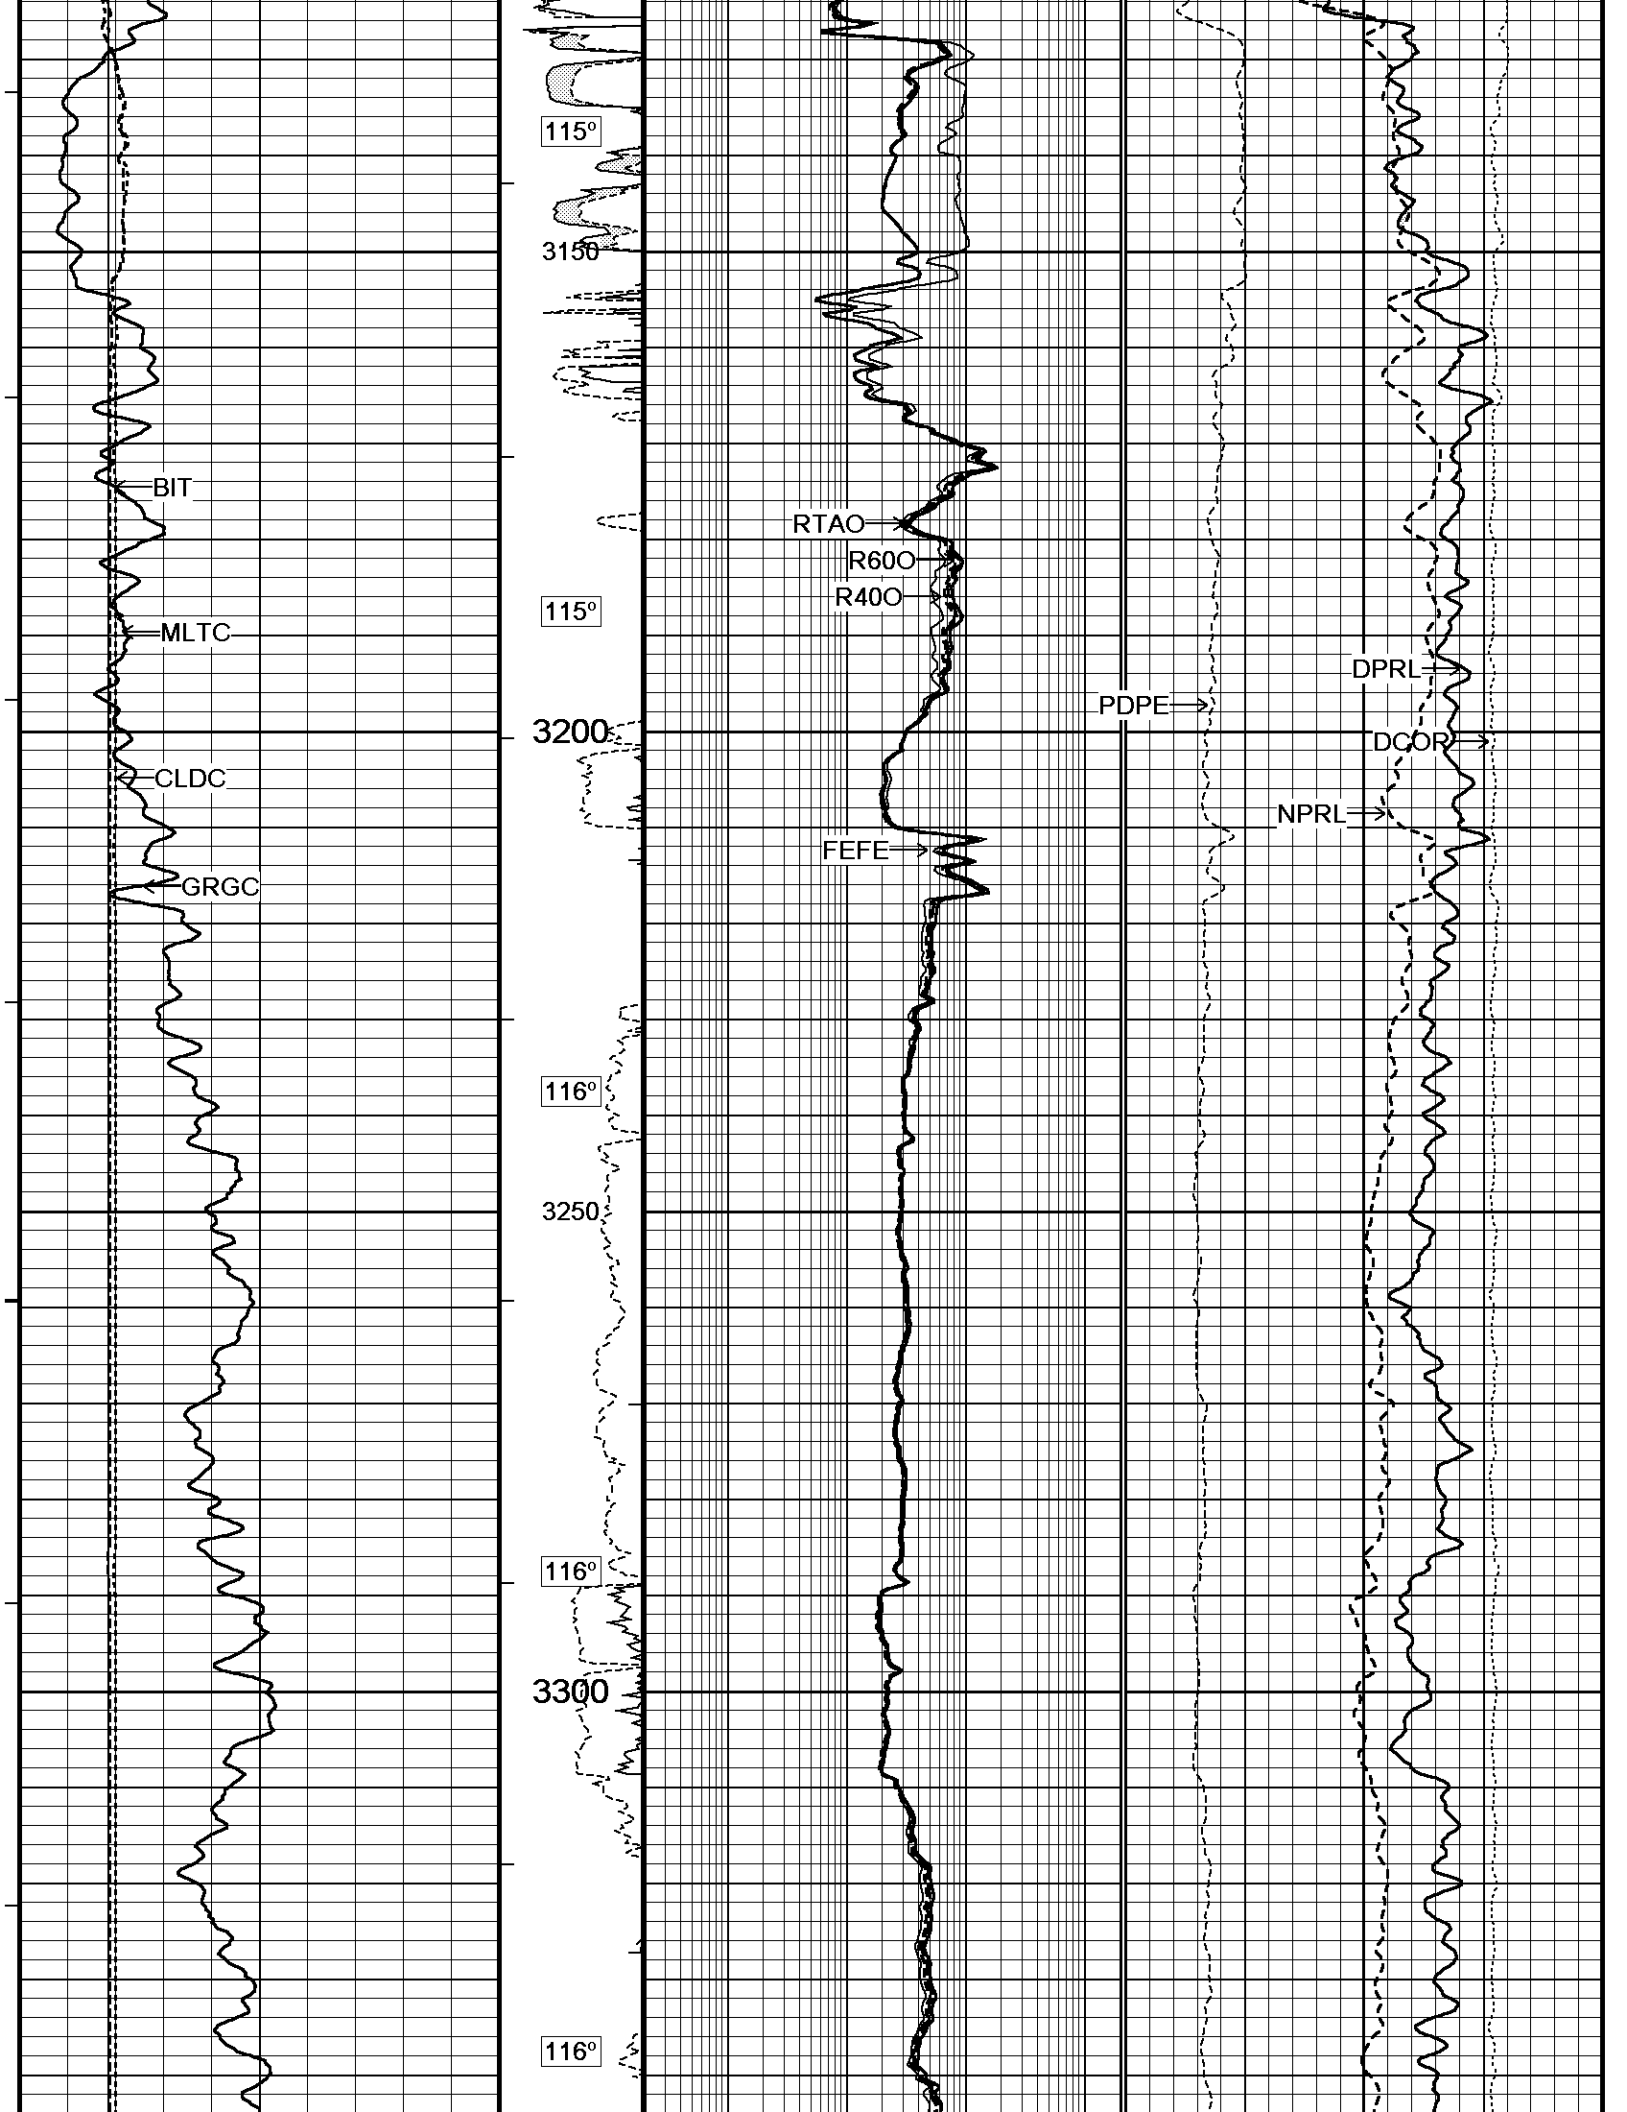


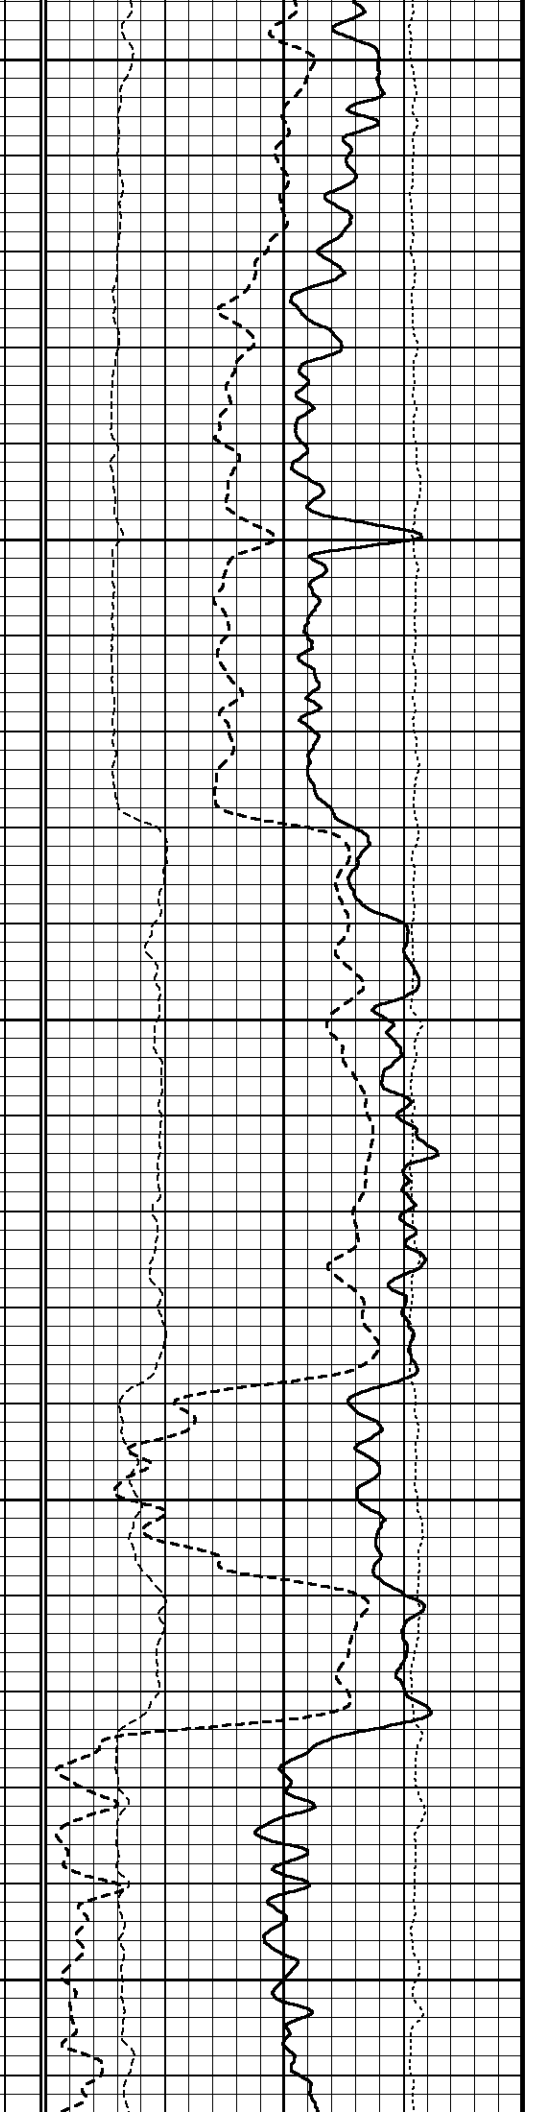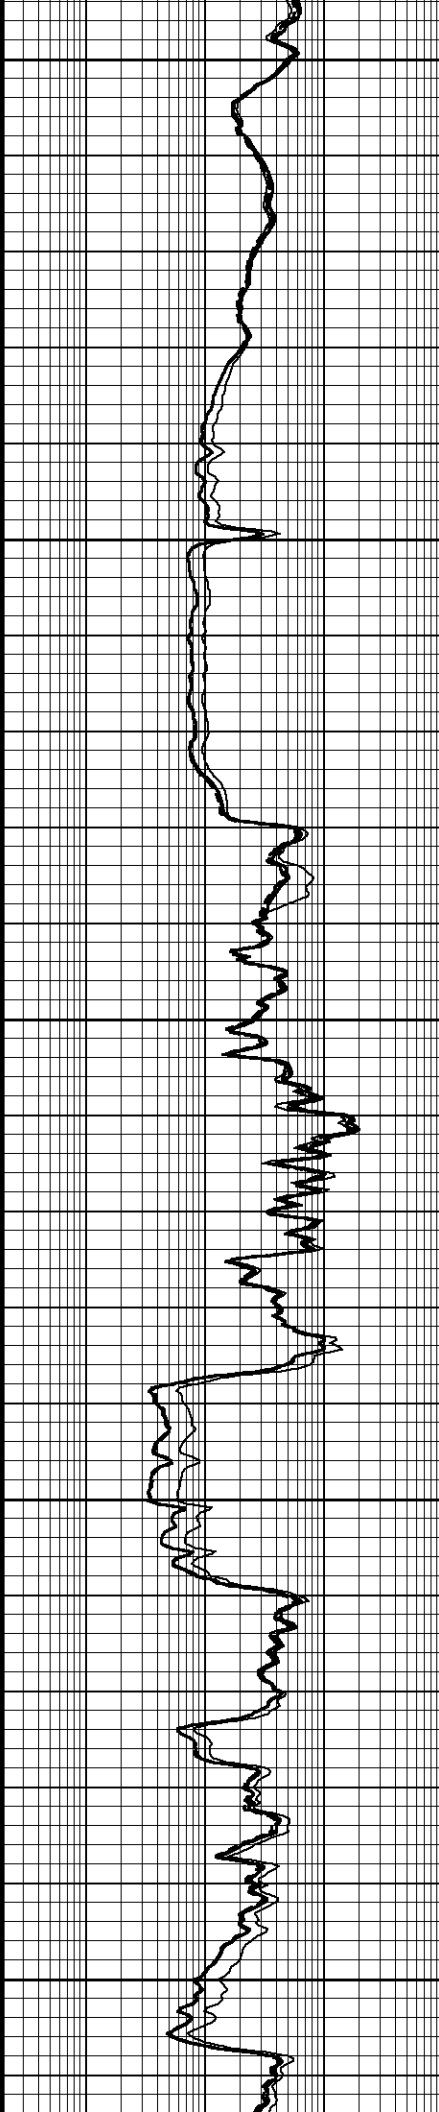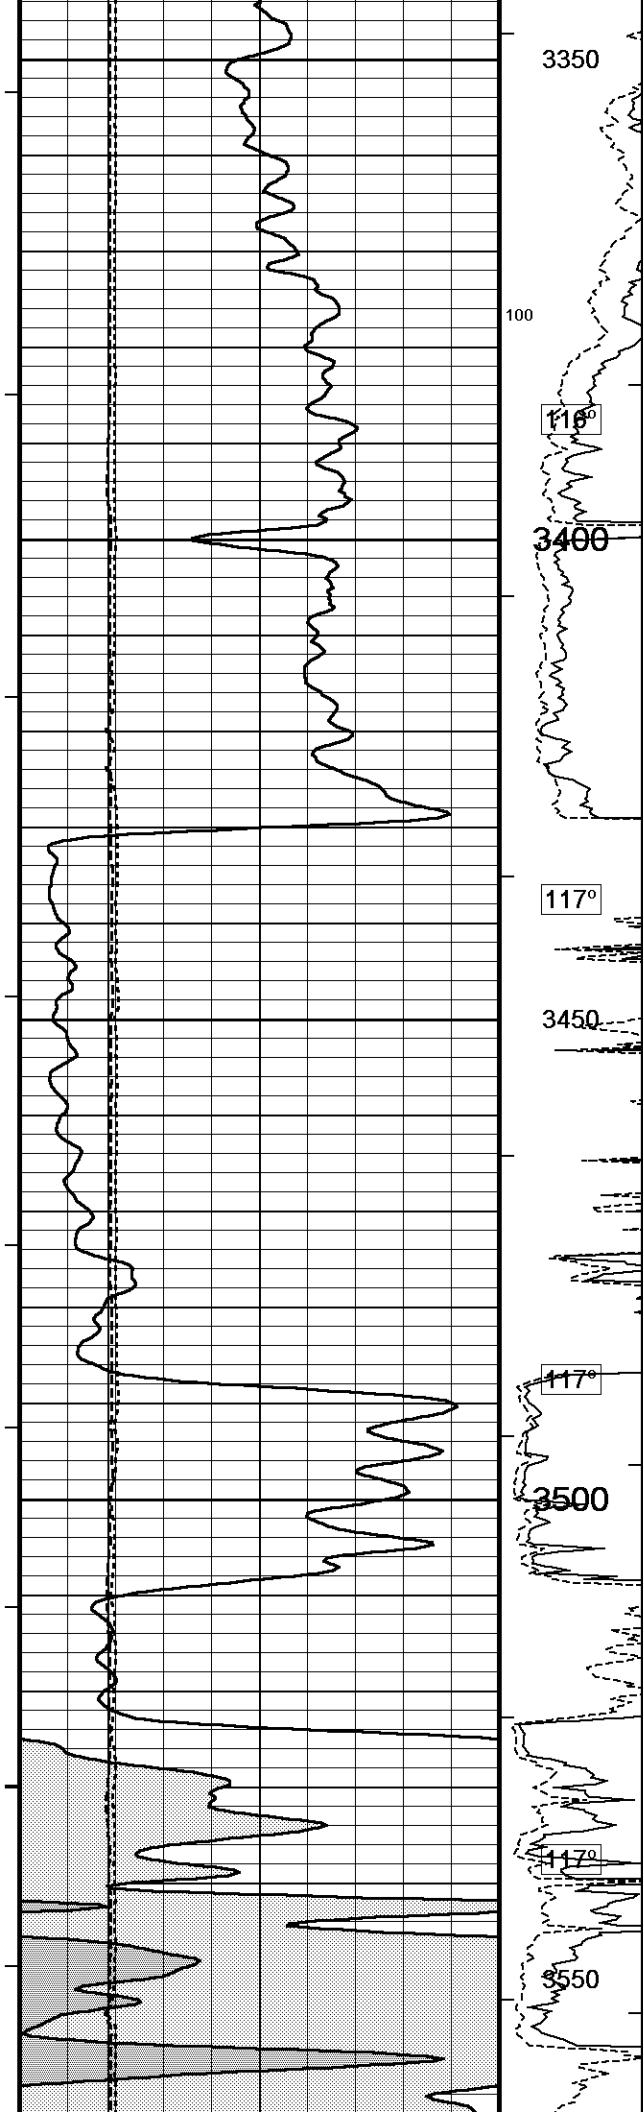




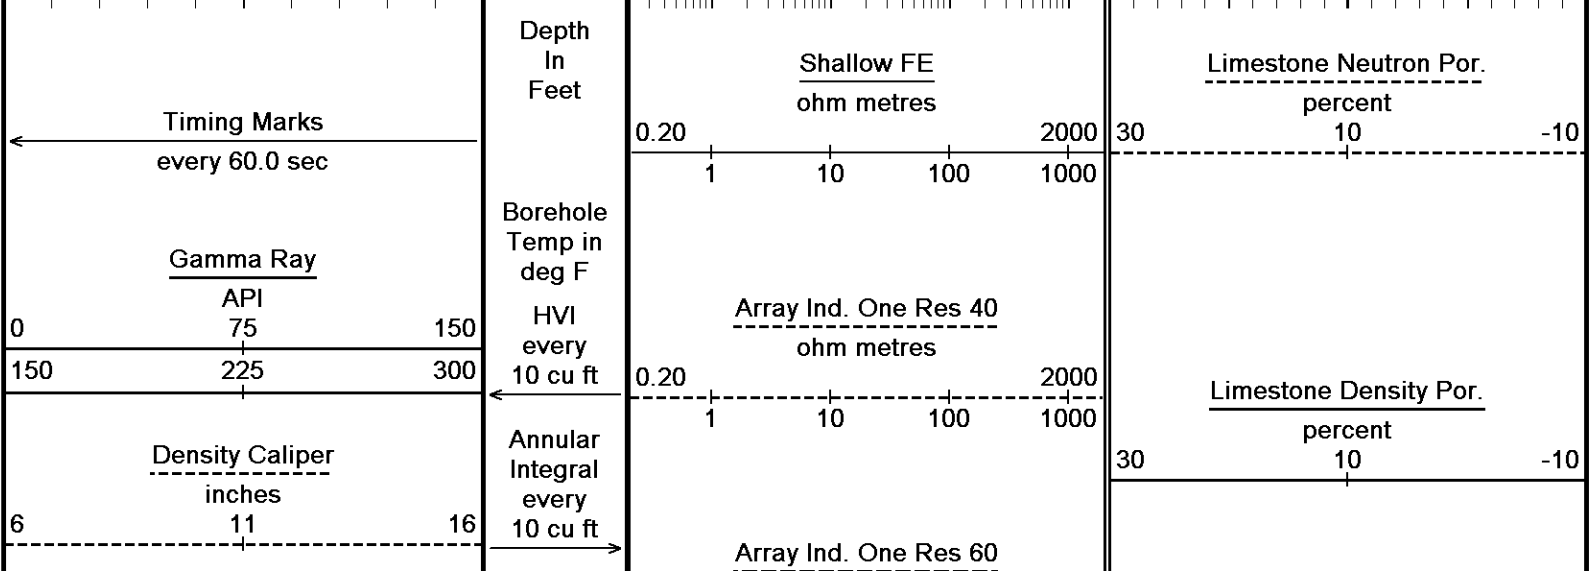
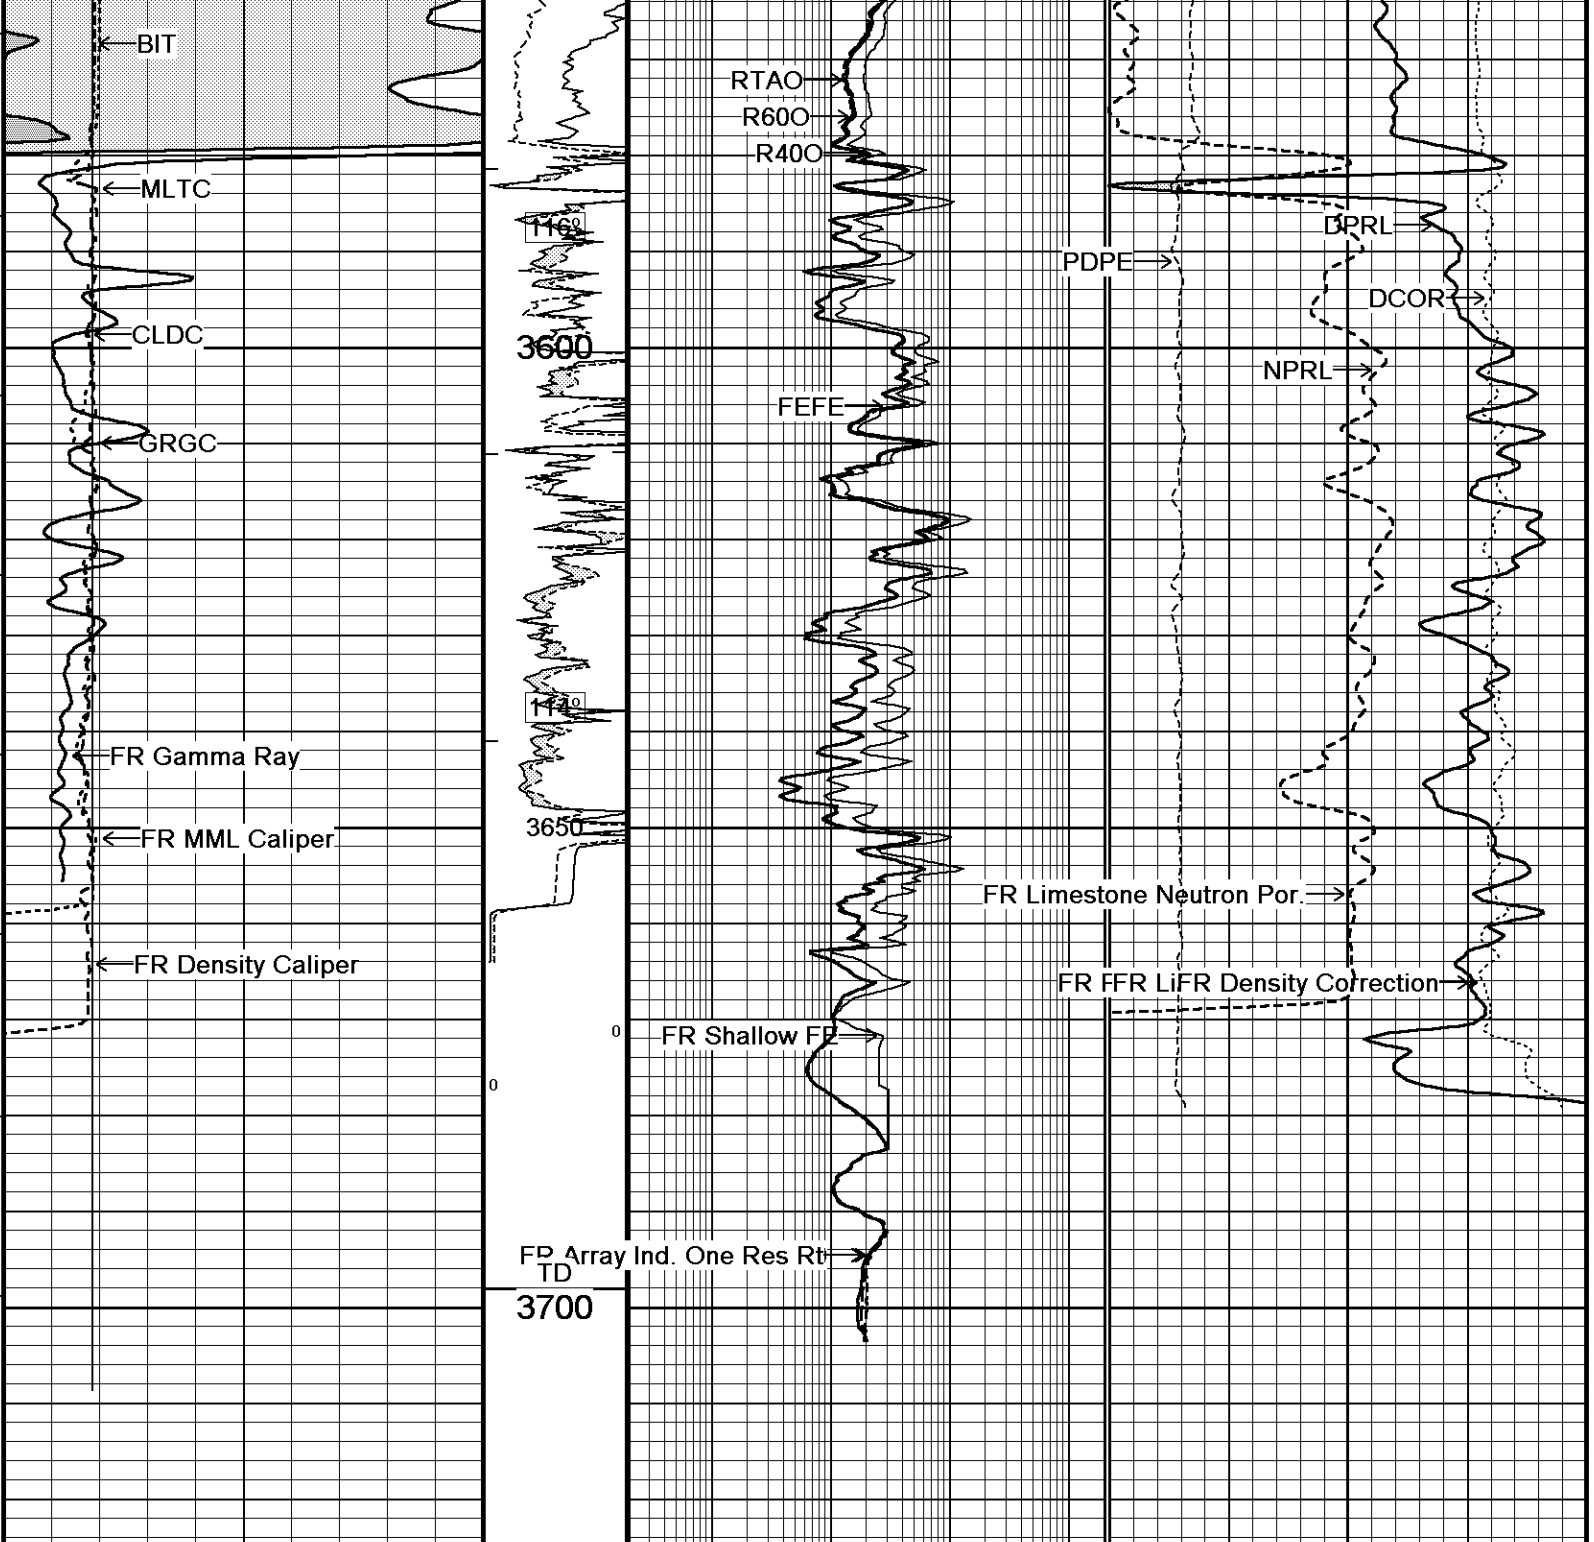



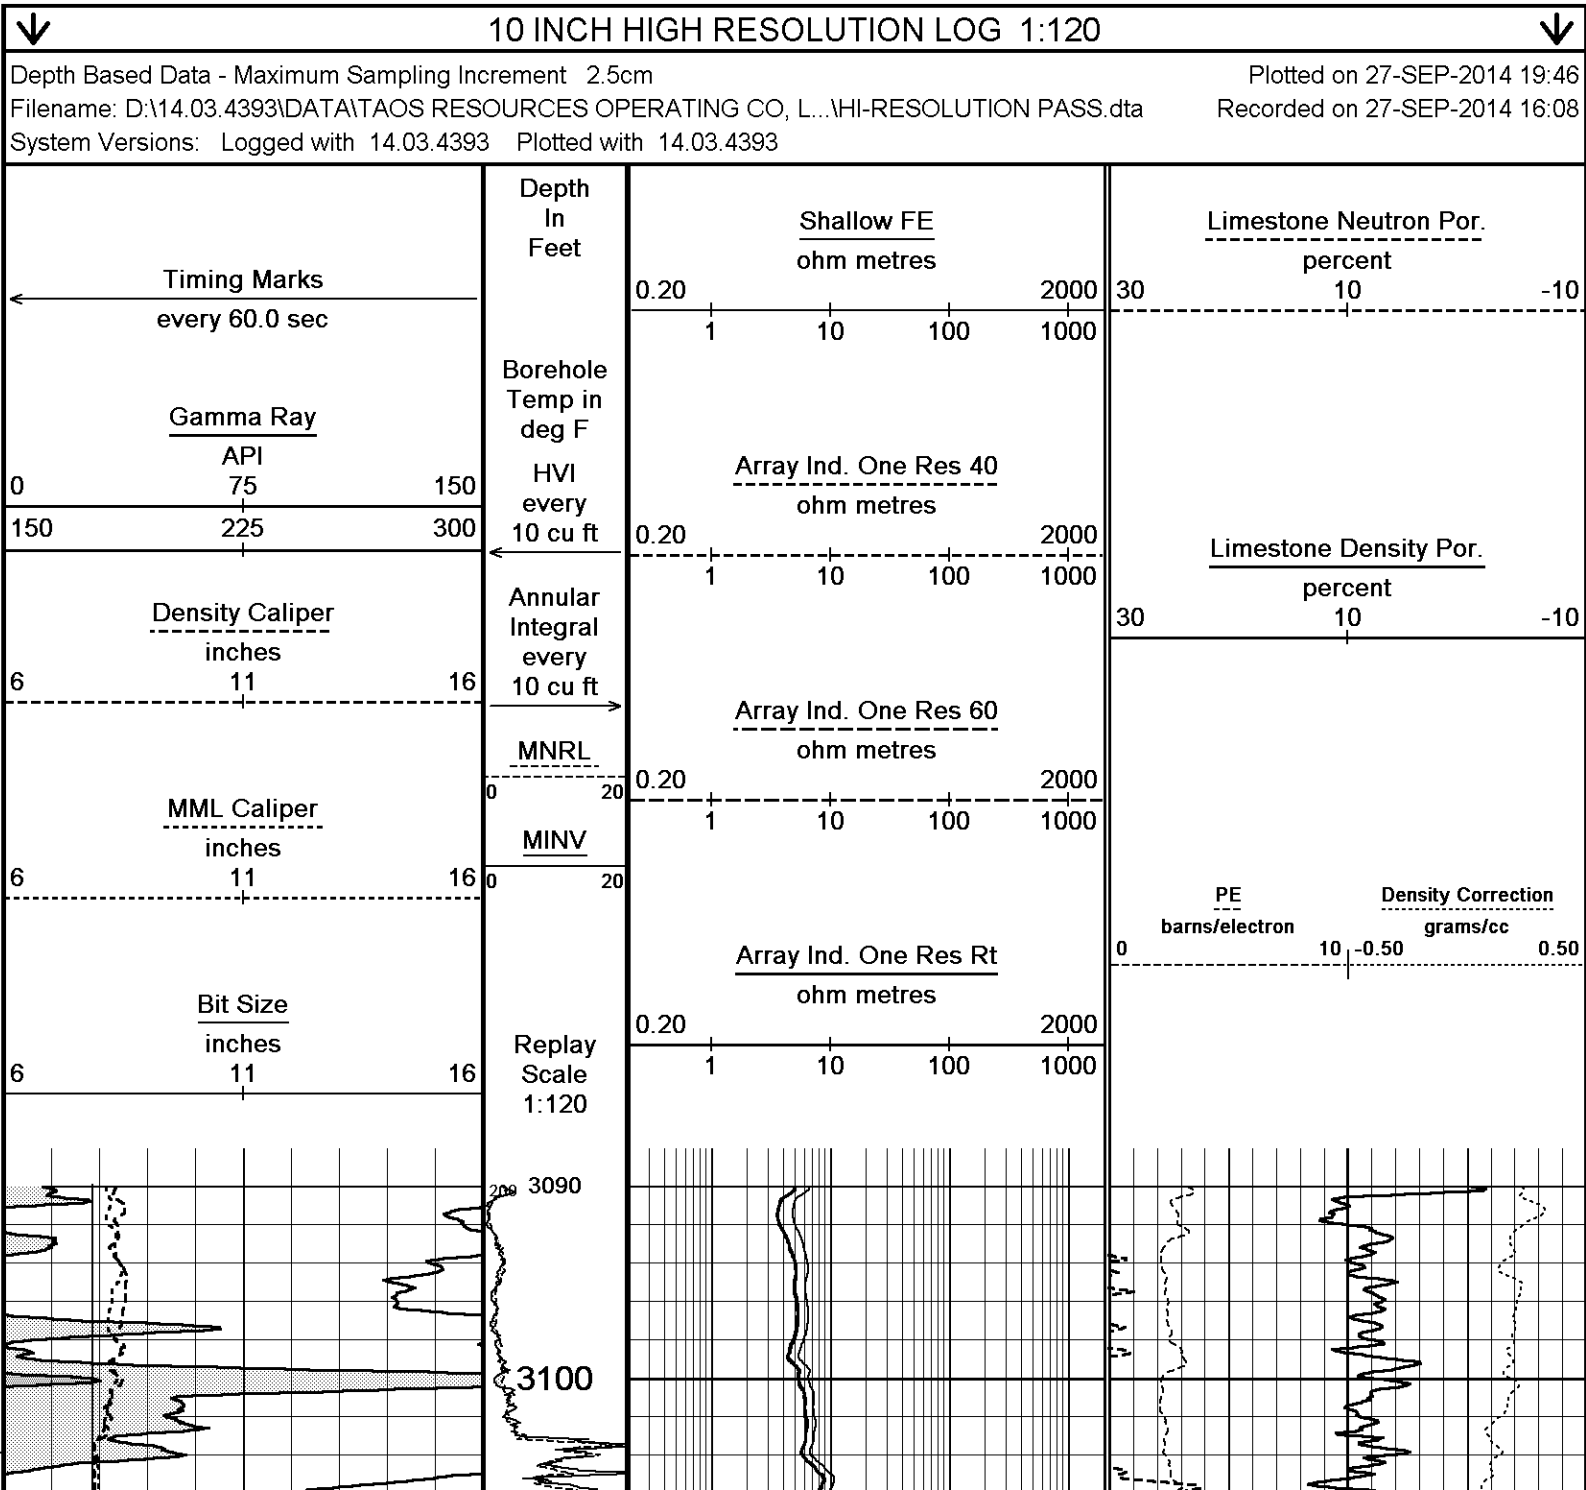
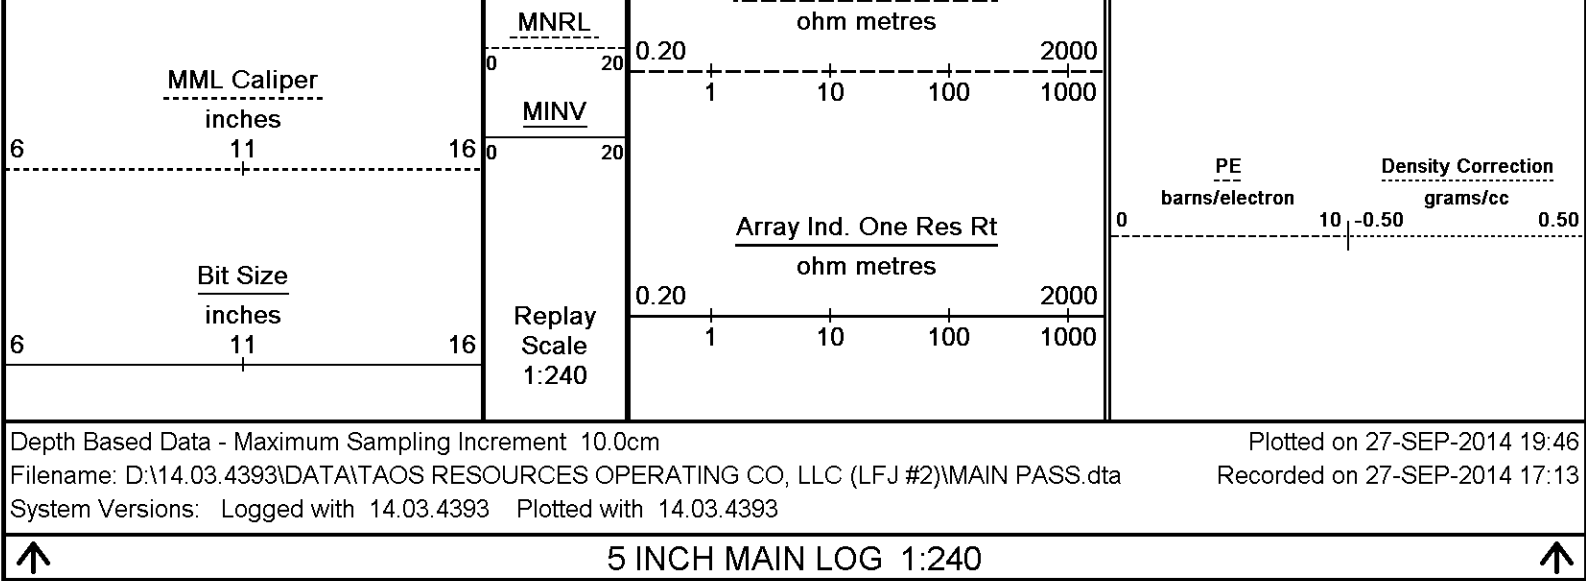


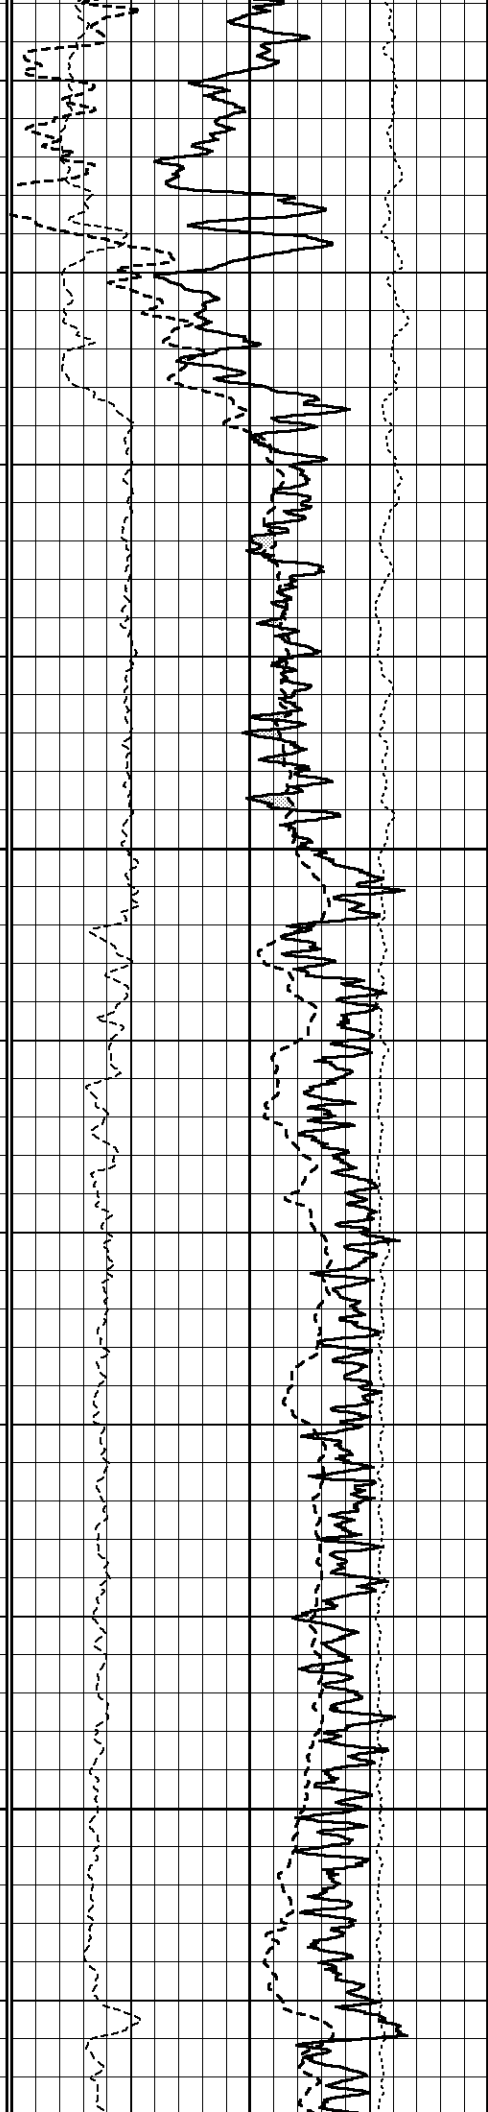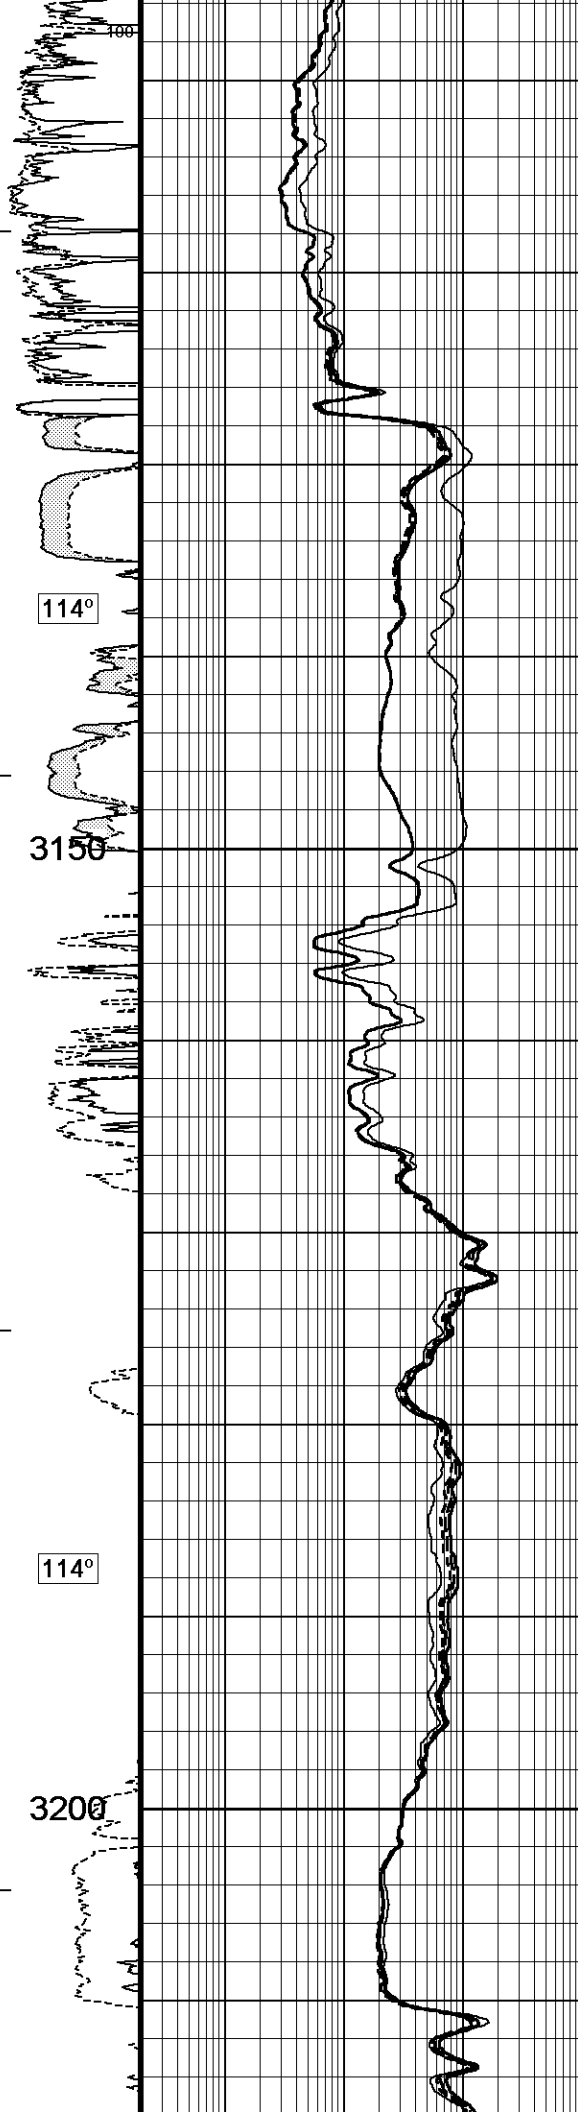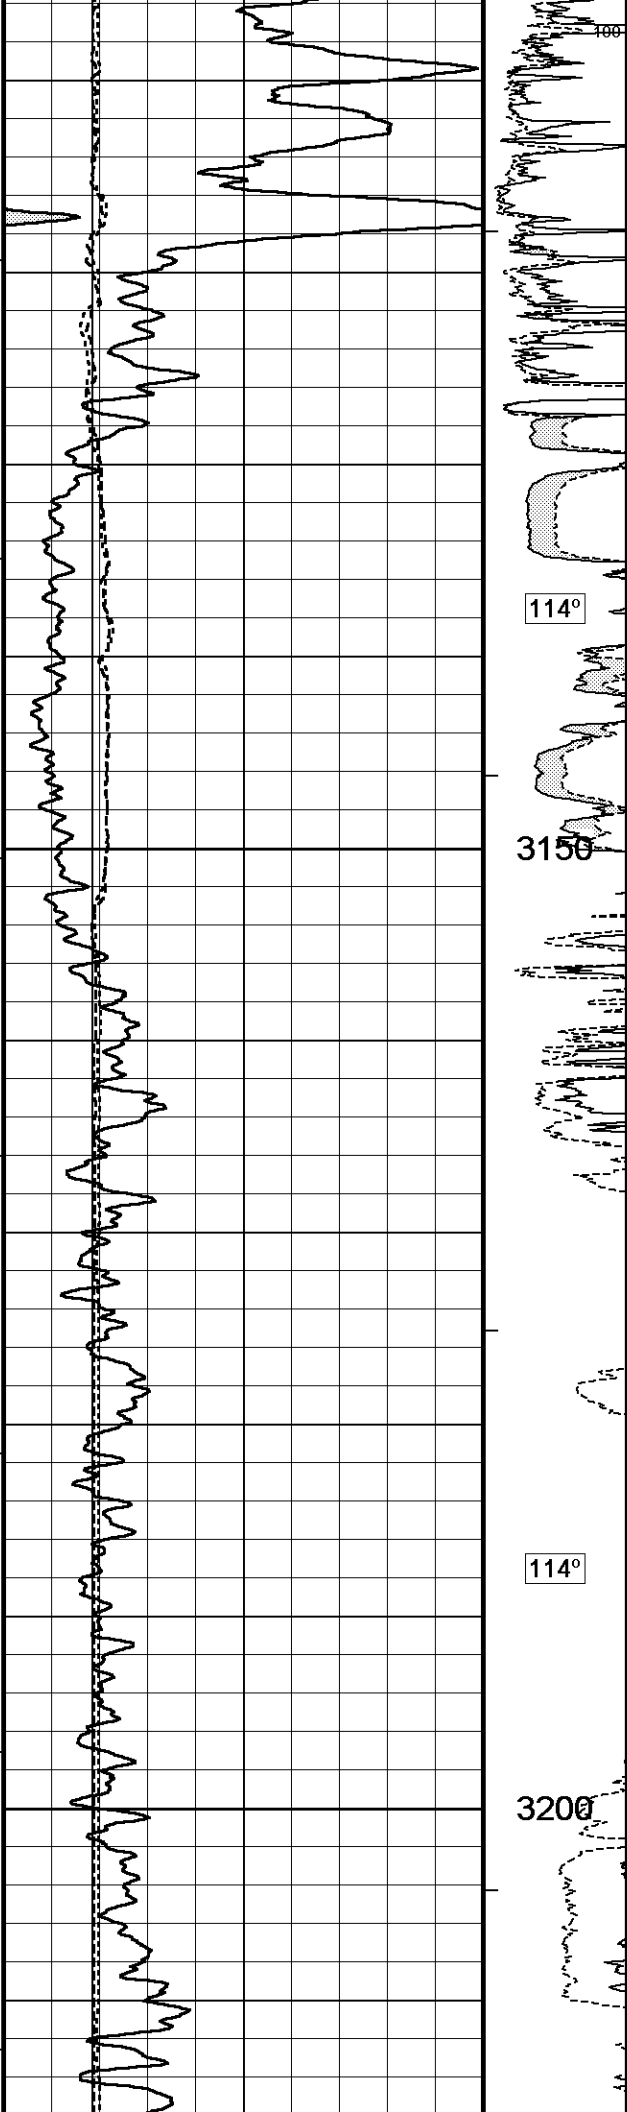


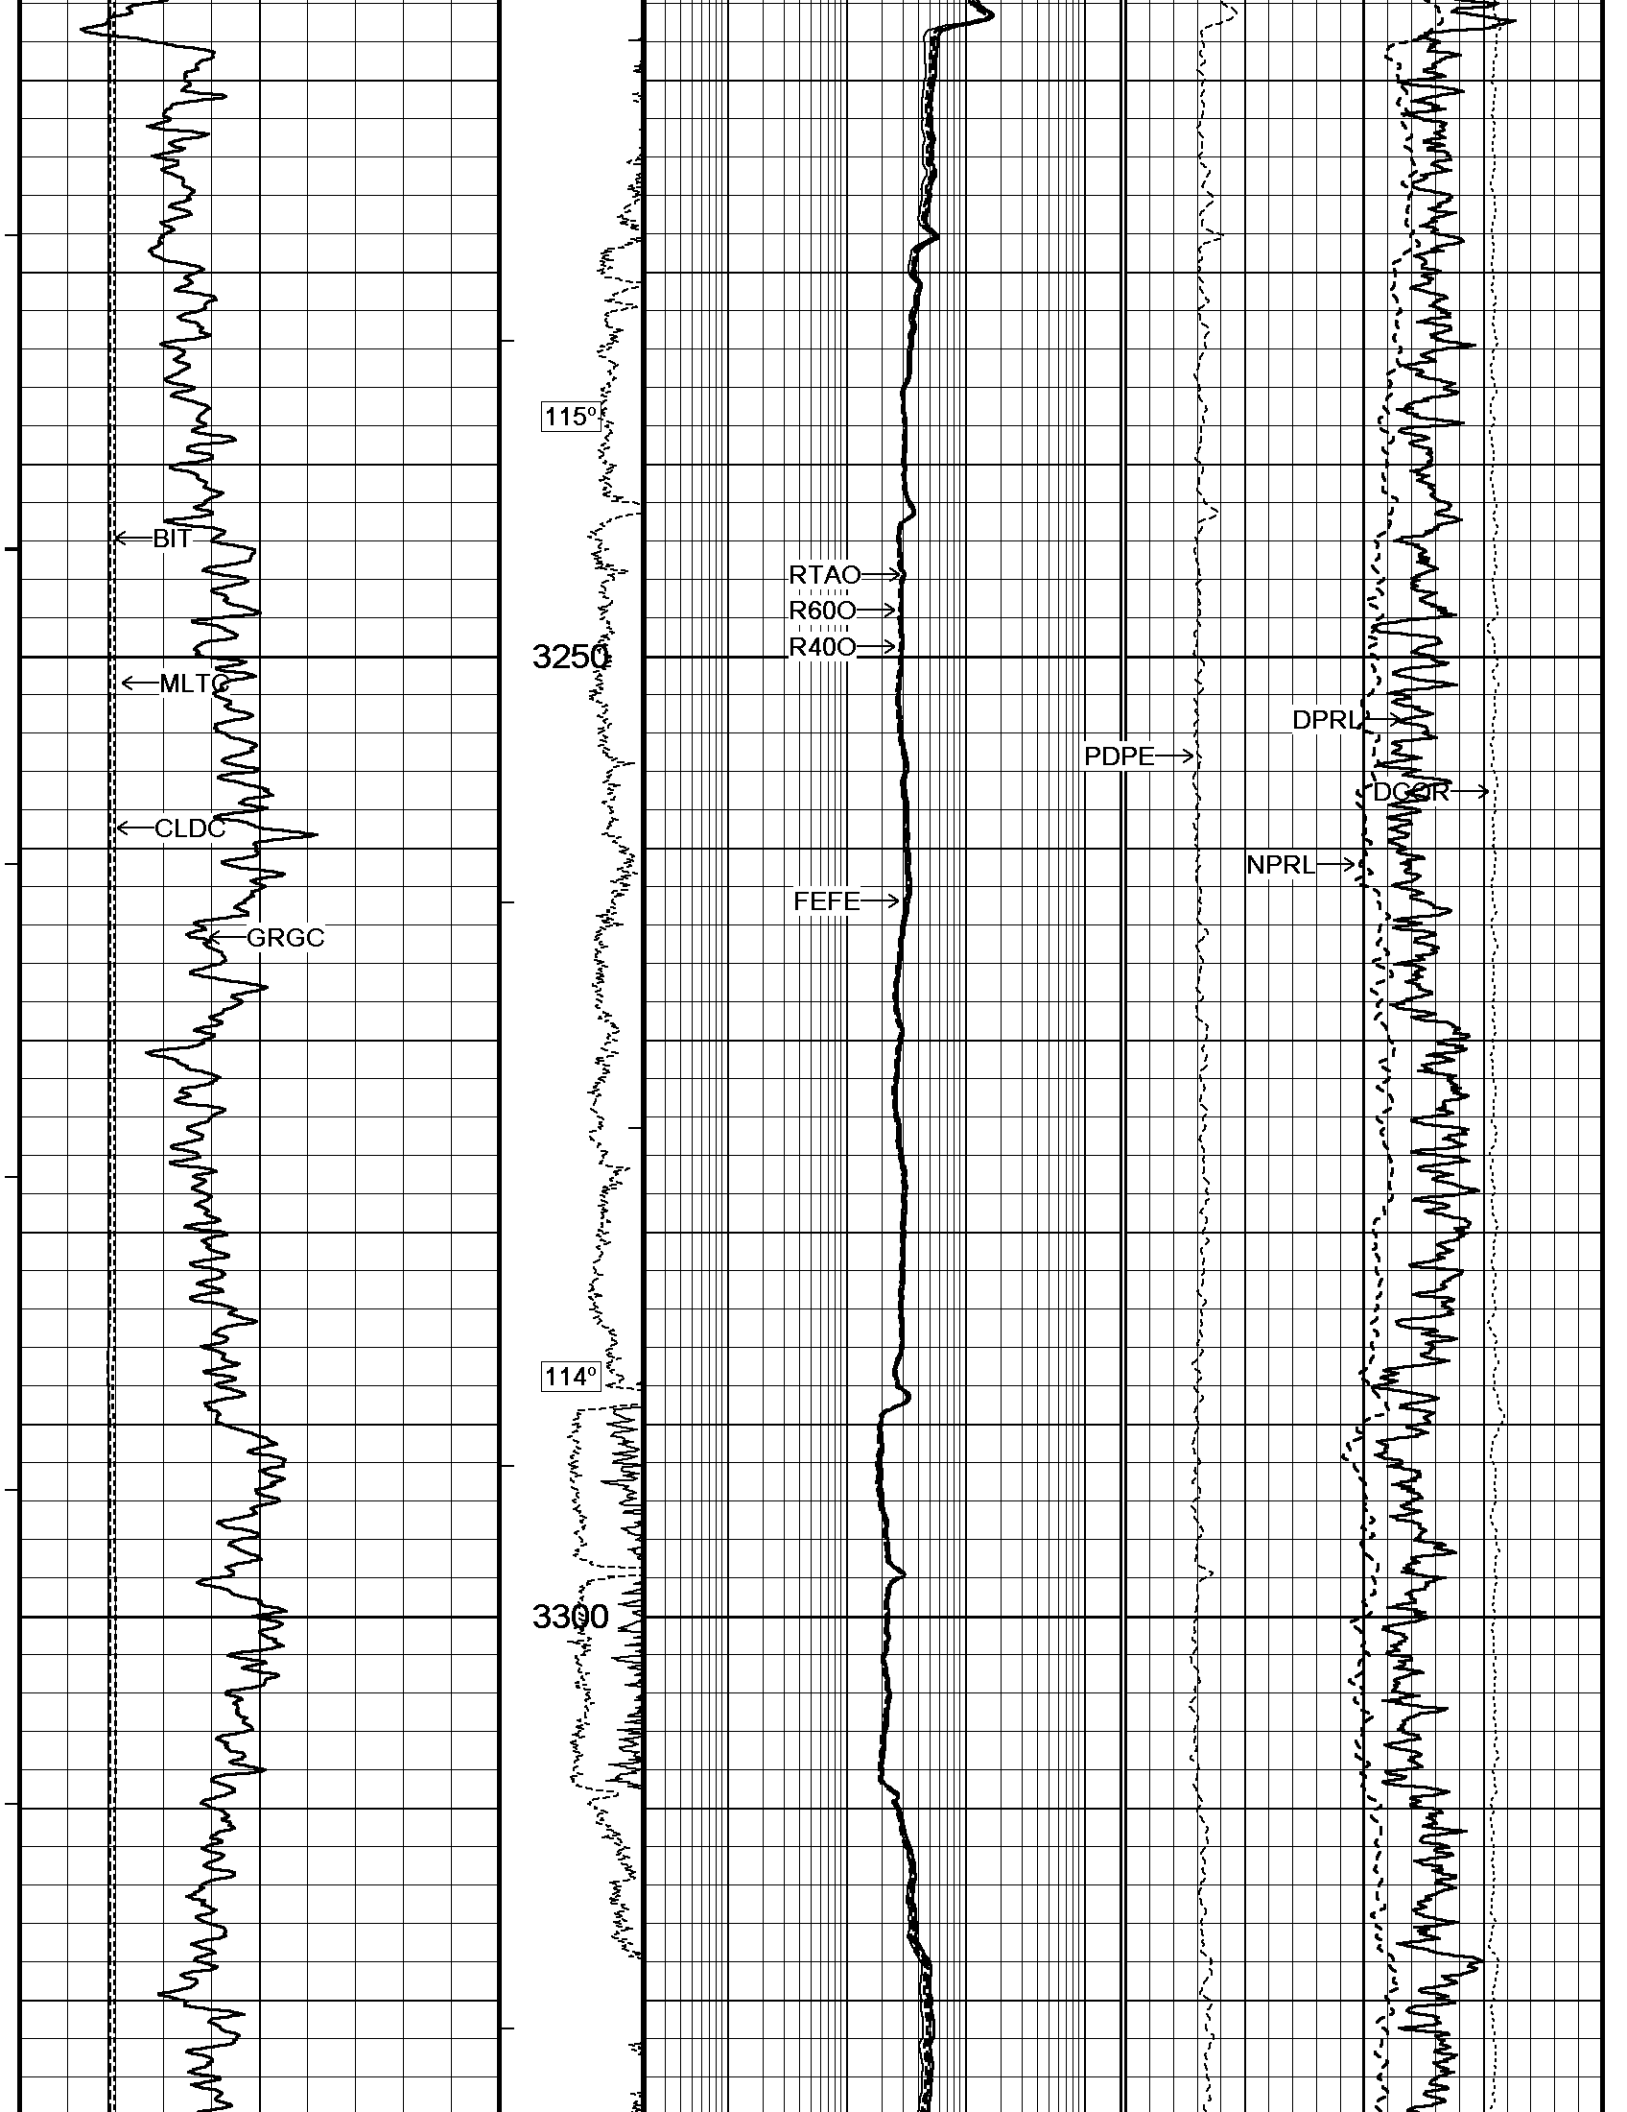

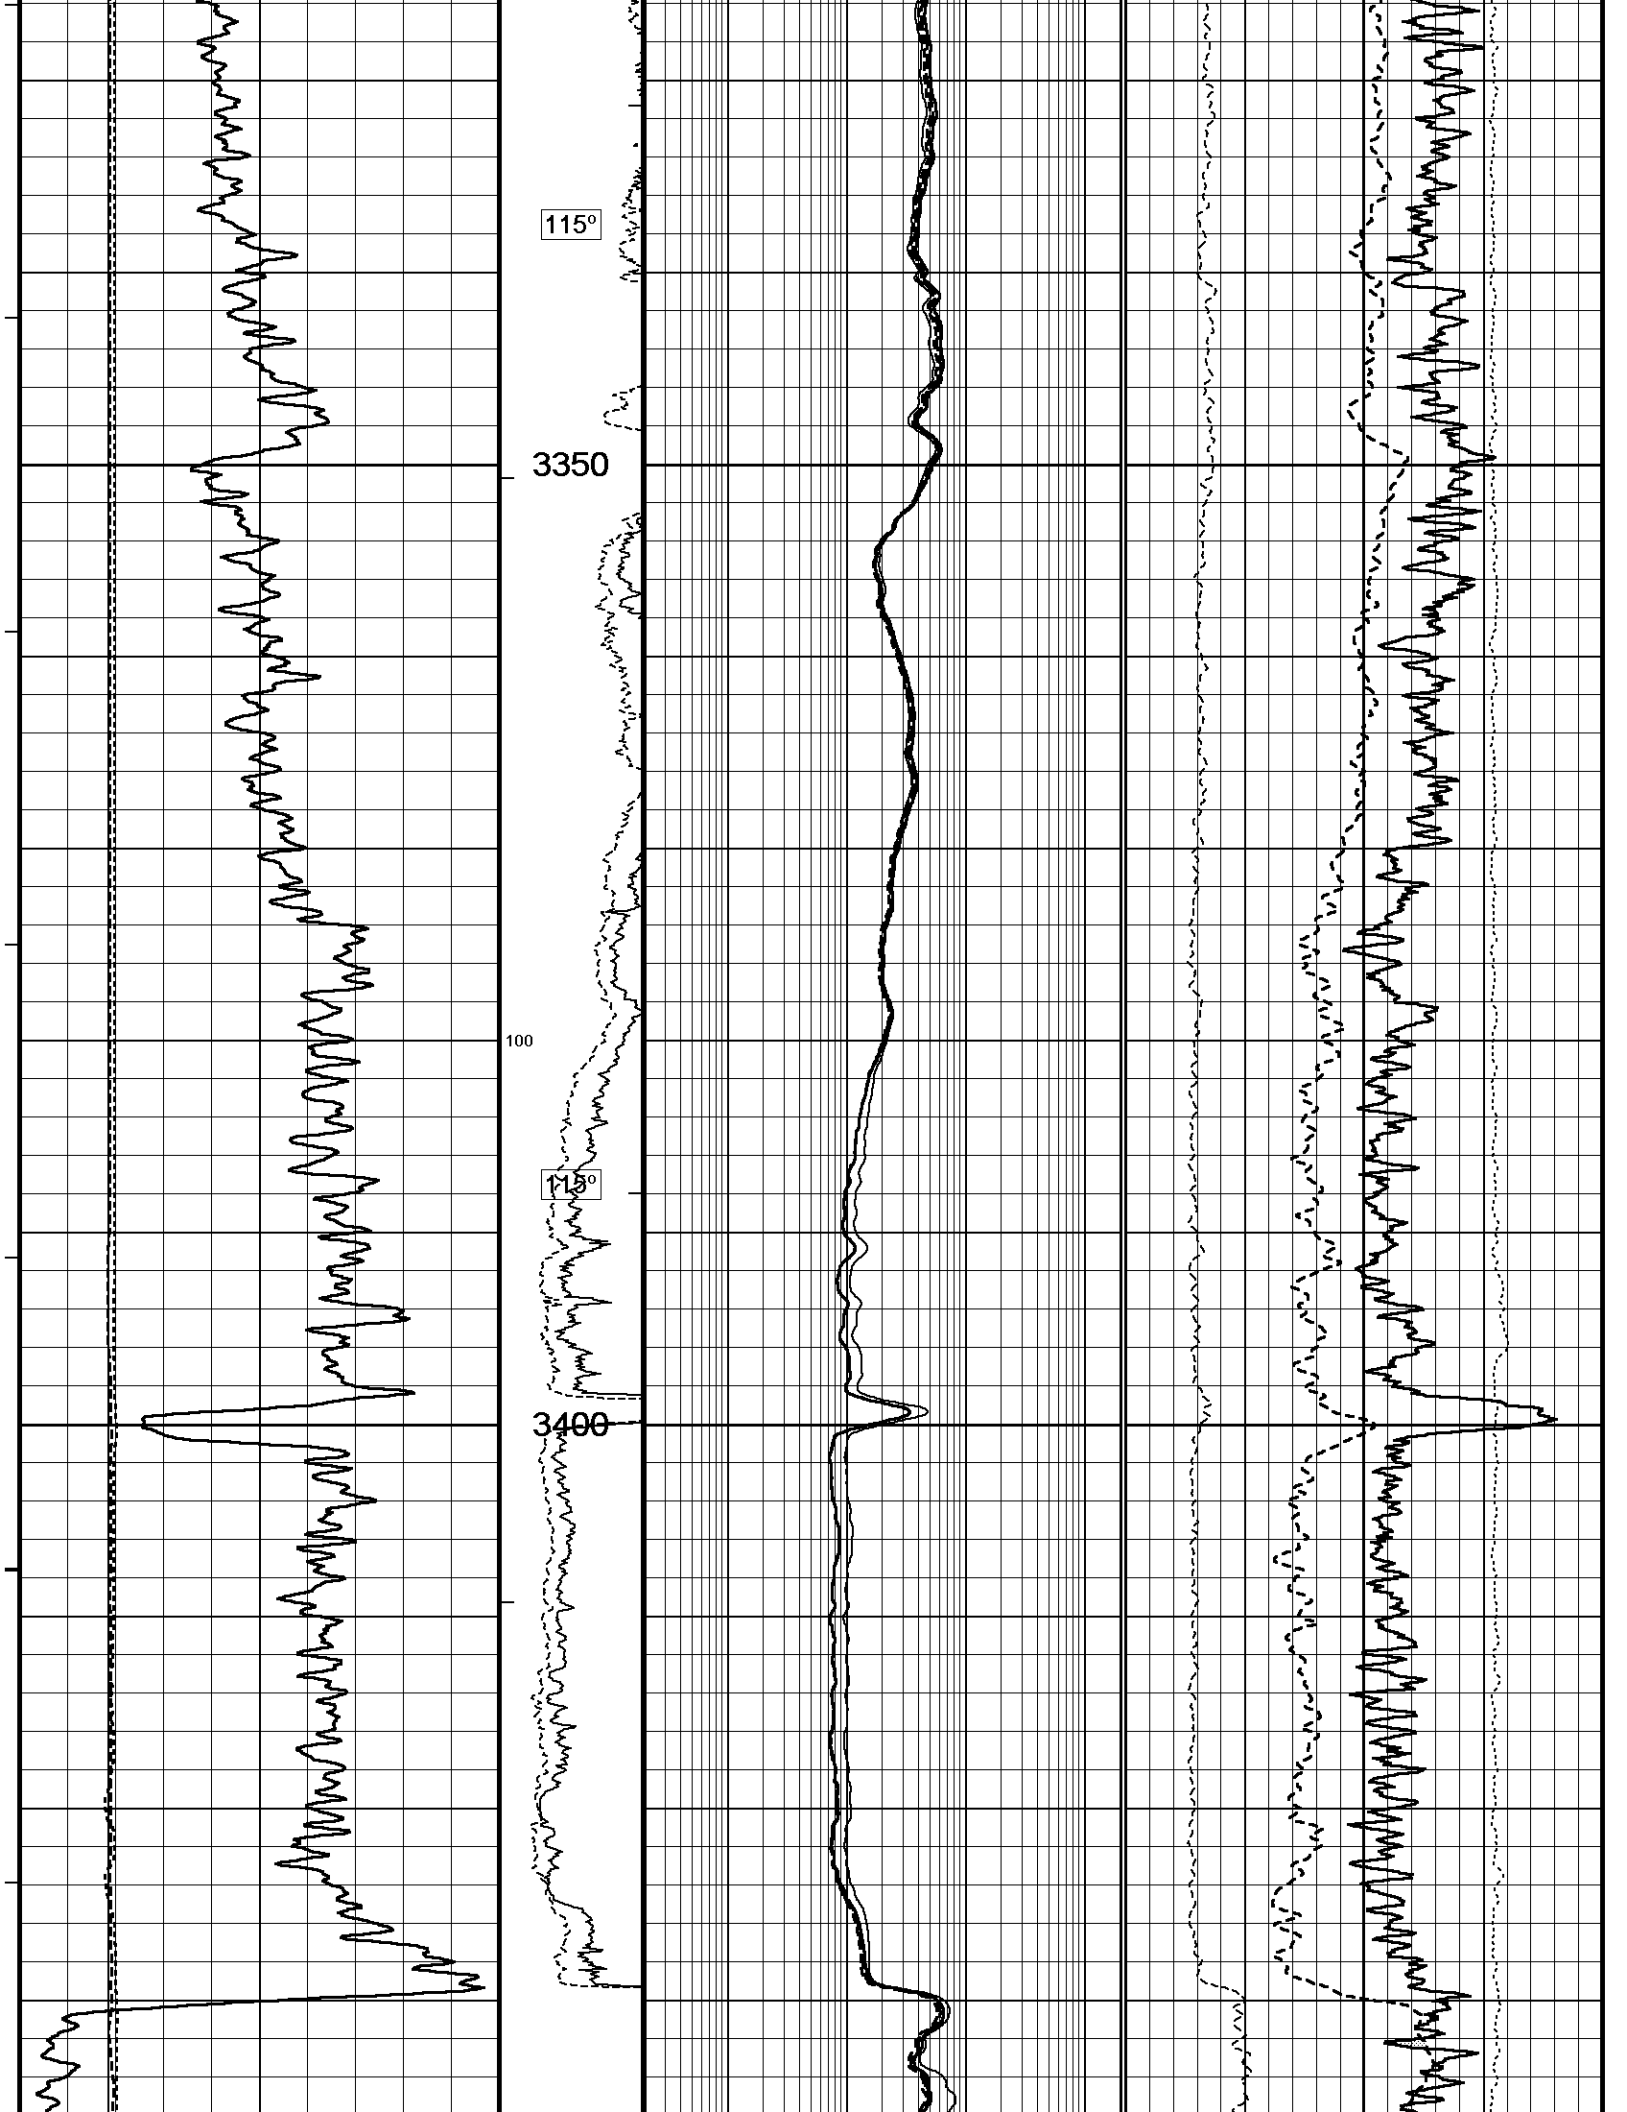

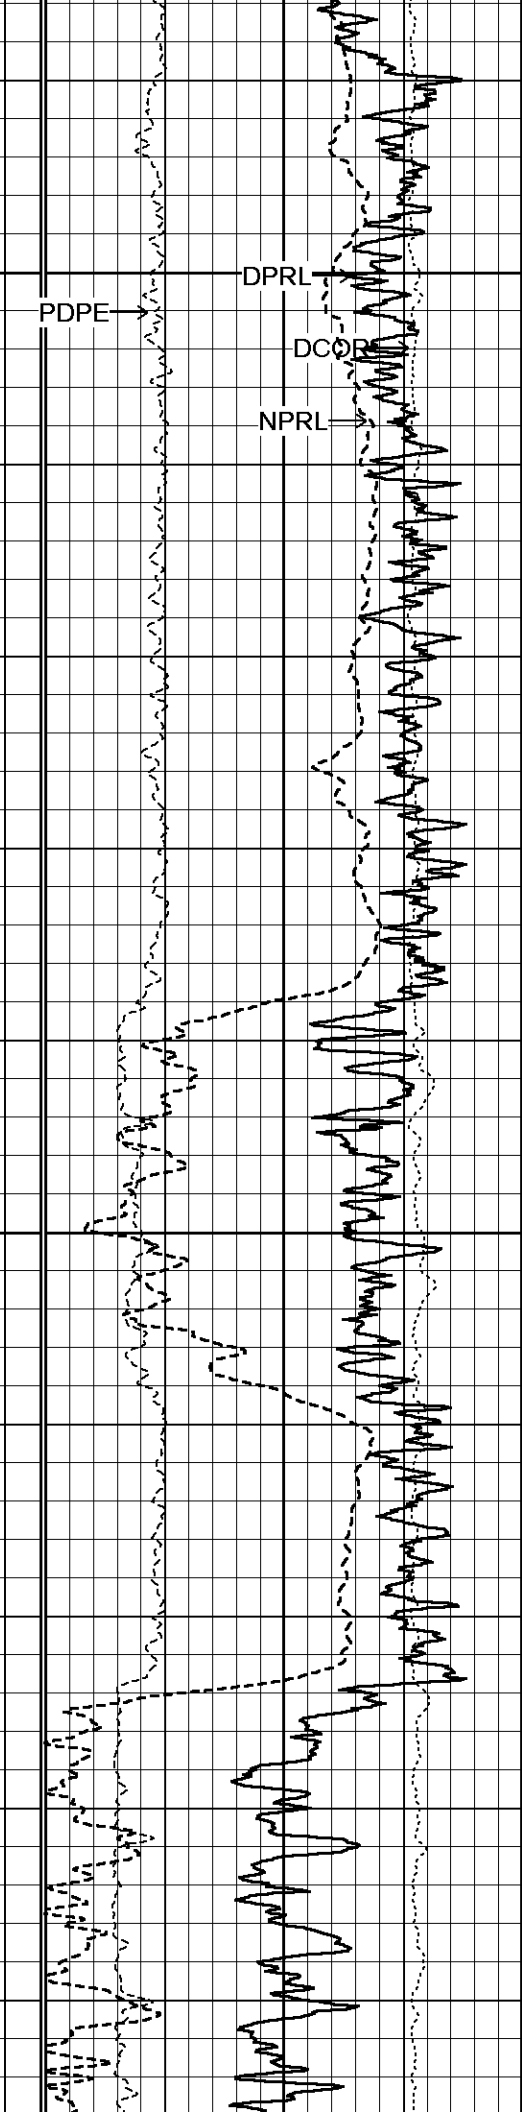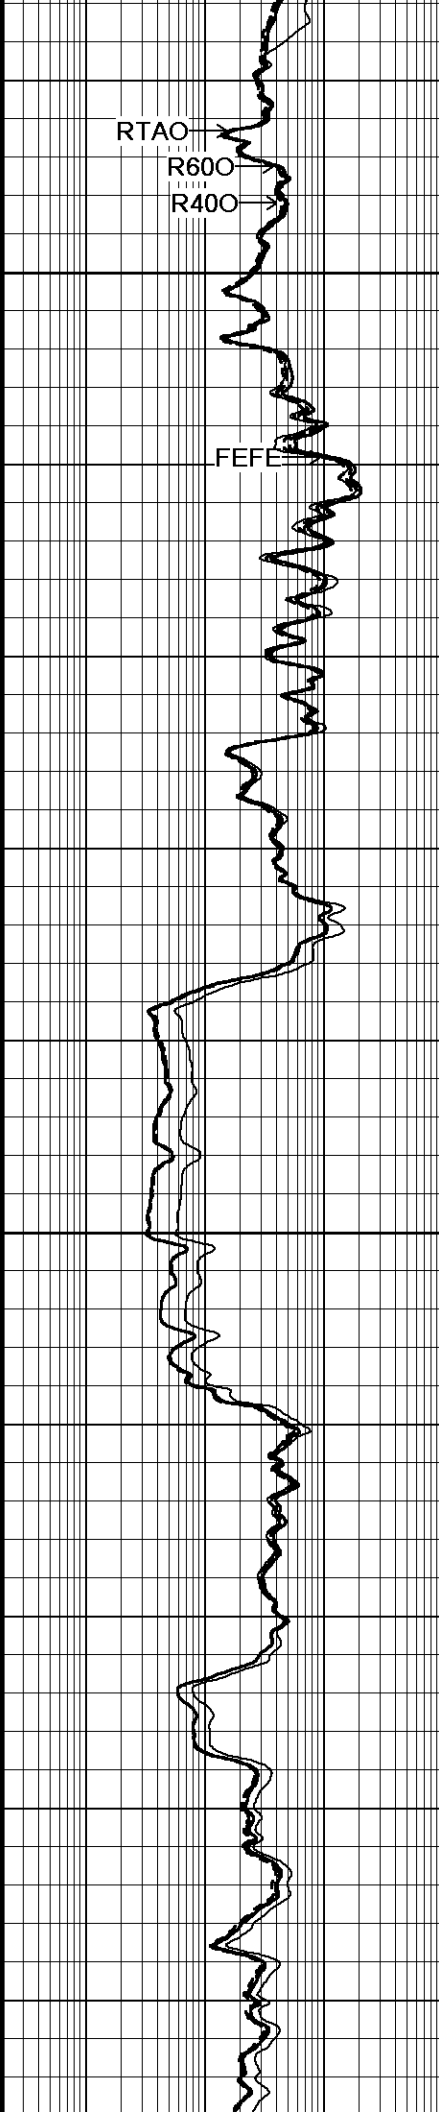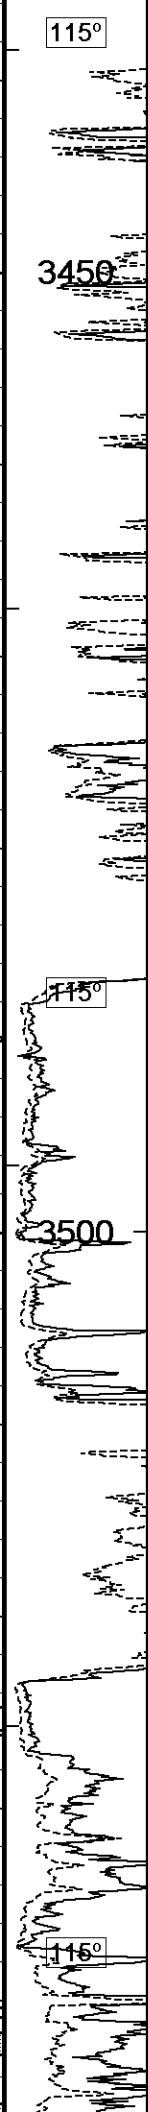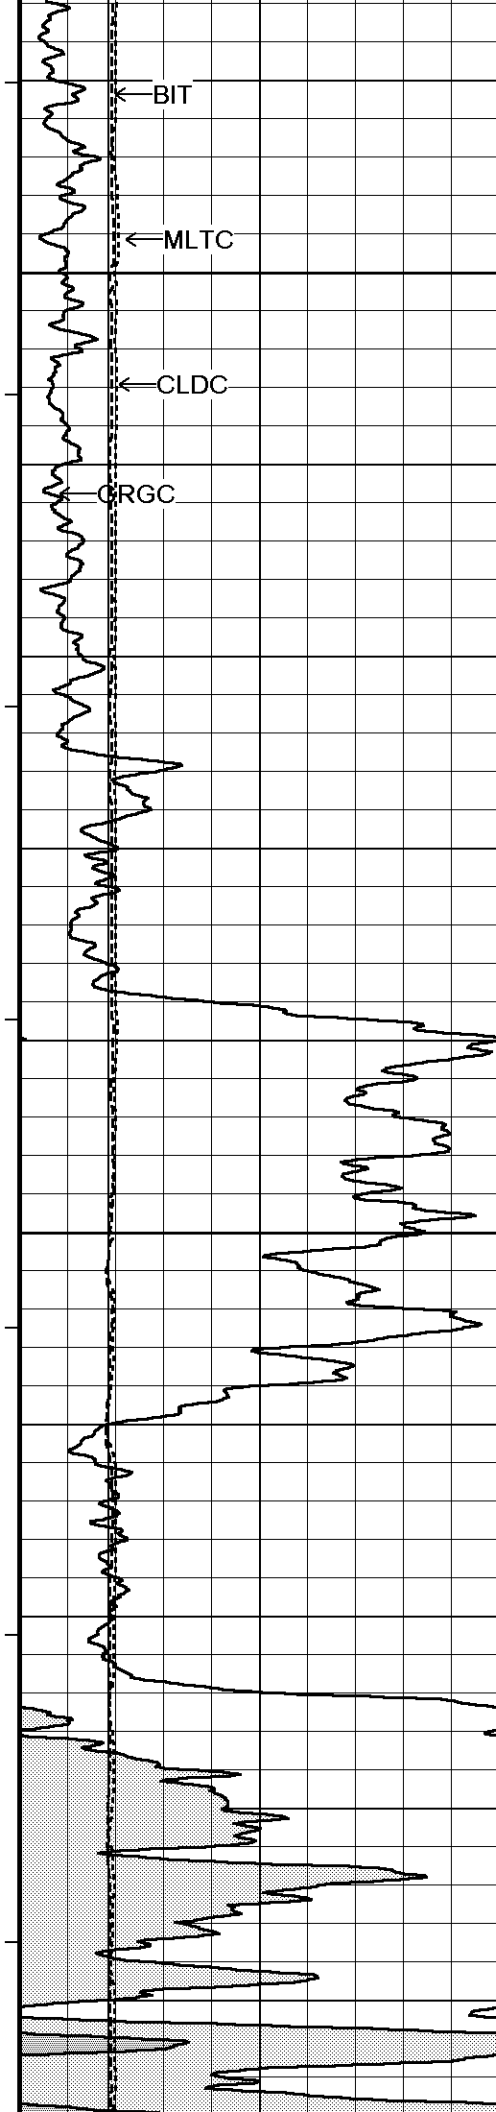

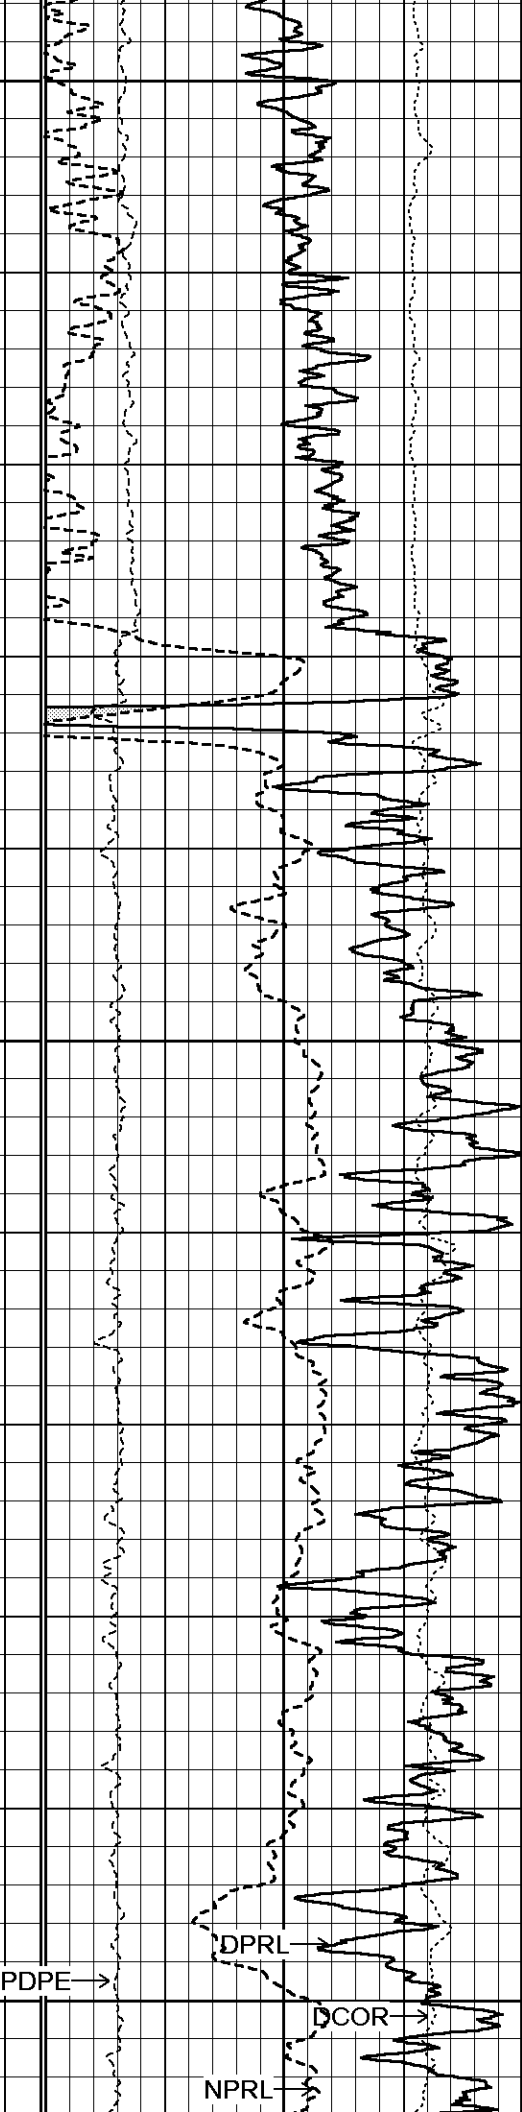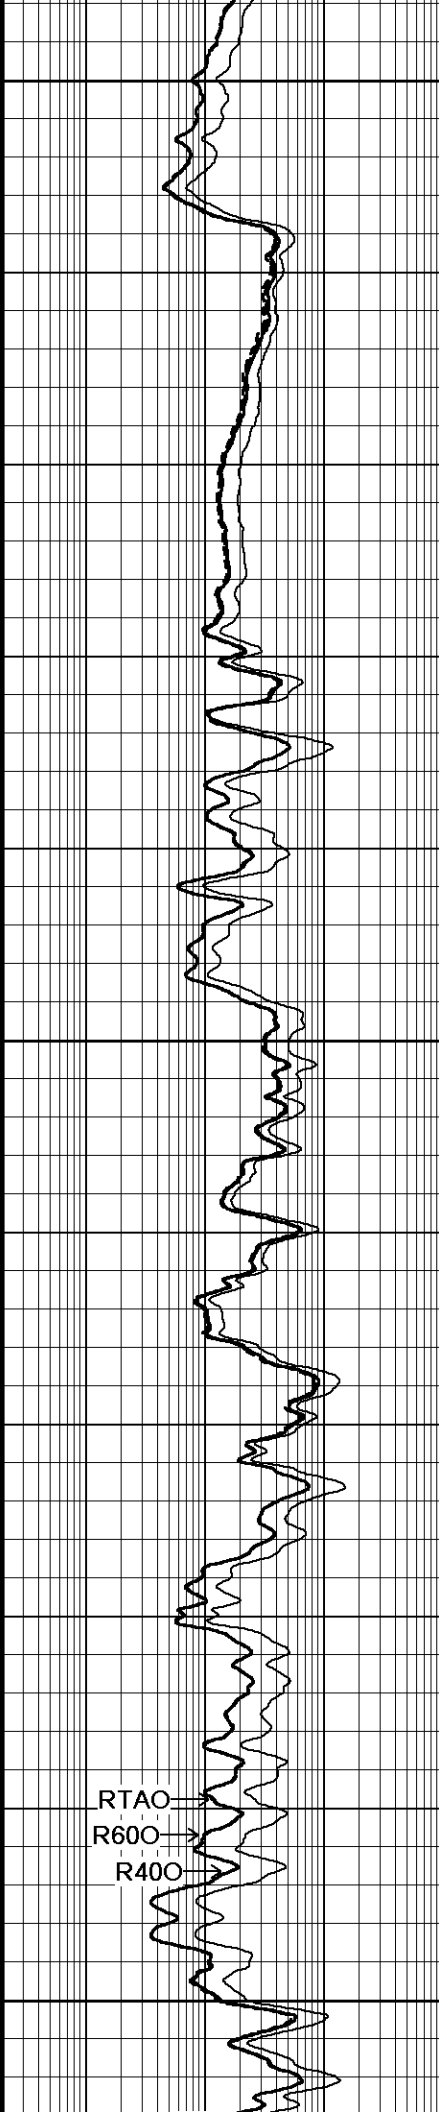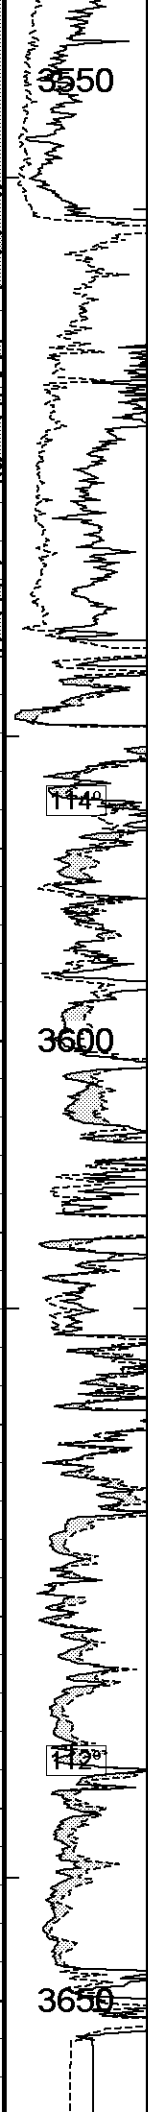

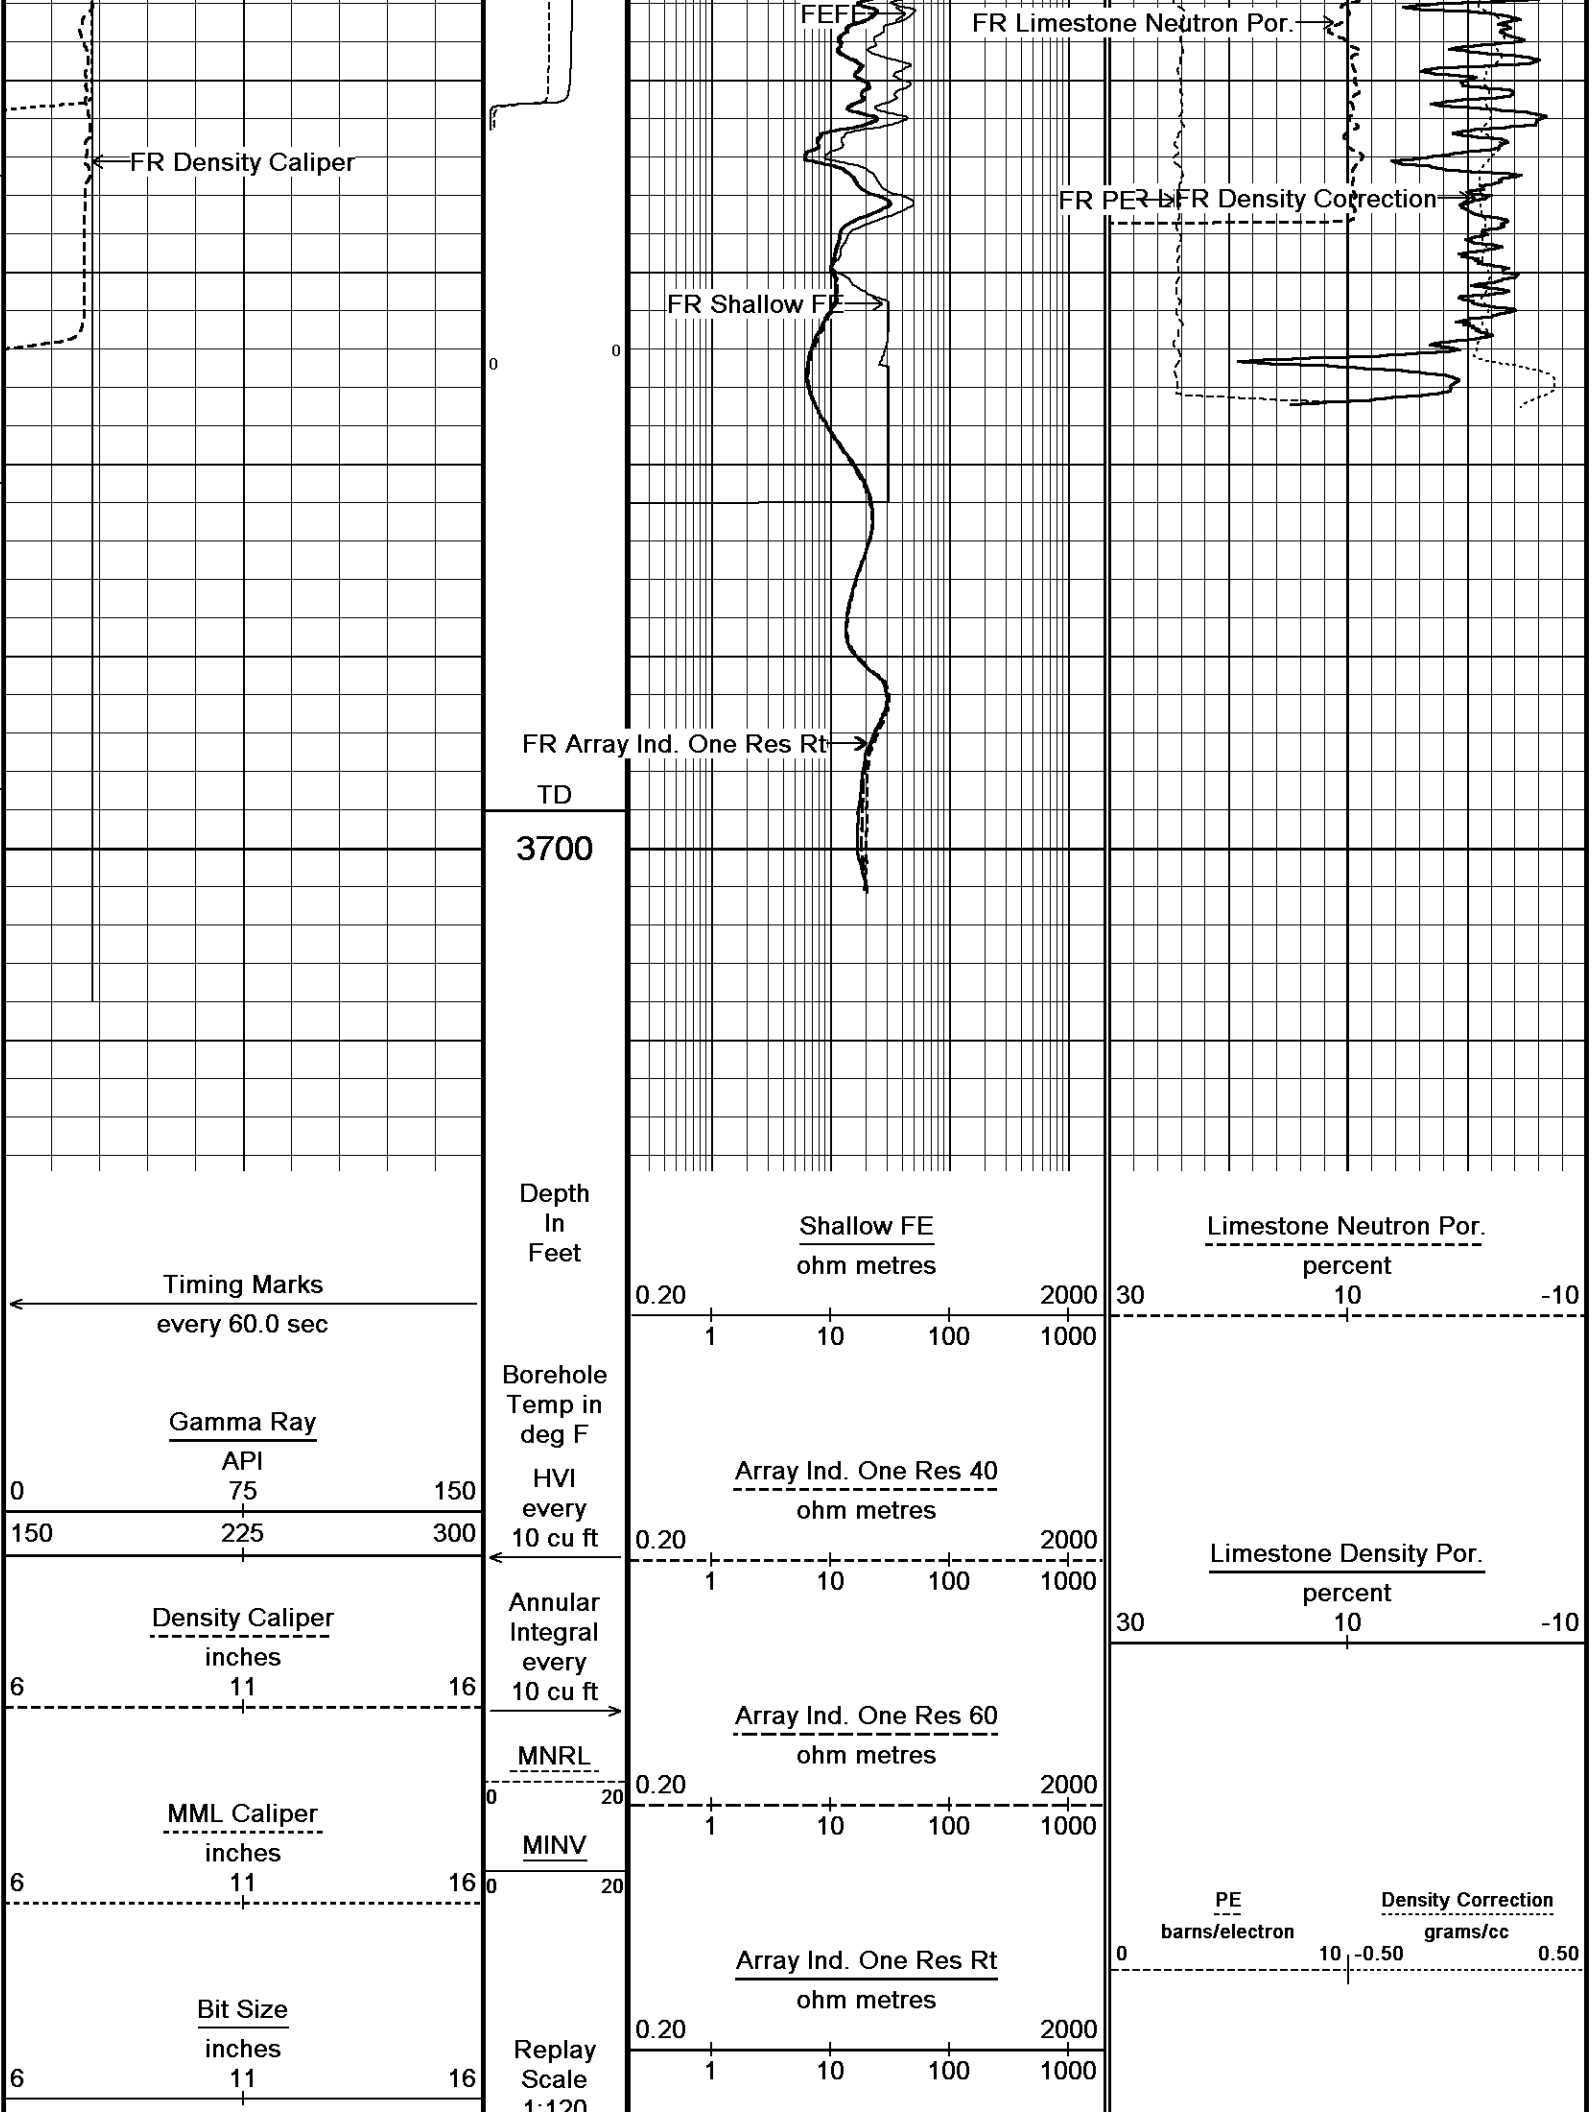

↑


10 INCH HIGH RESOLUTION LOG 1:120


↑



↓


5 INCH REPEAT 1:240

↓

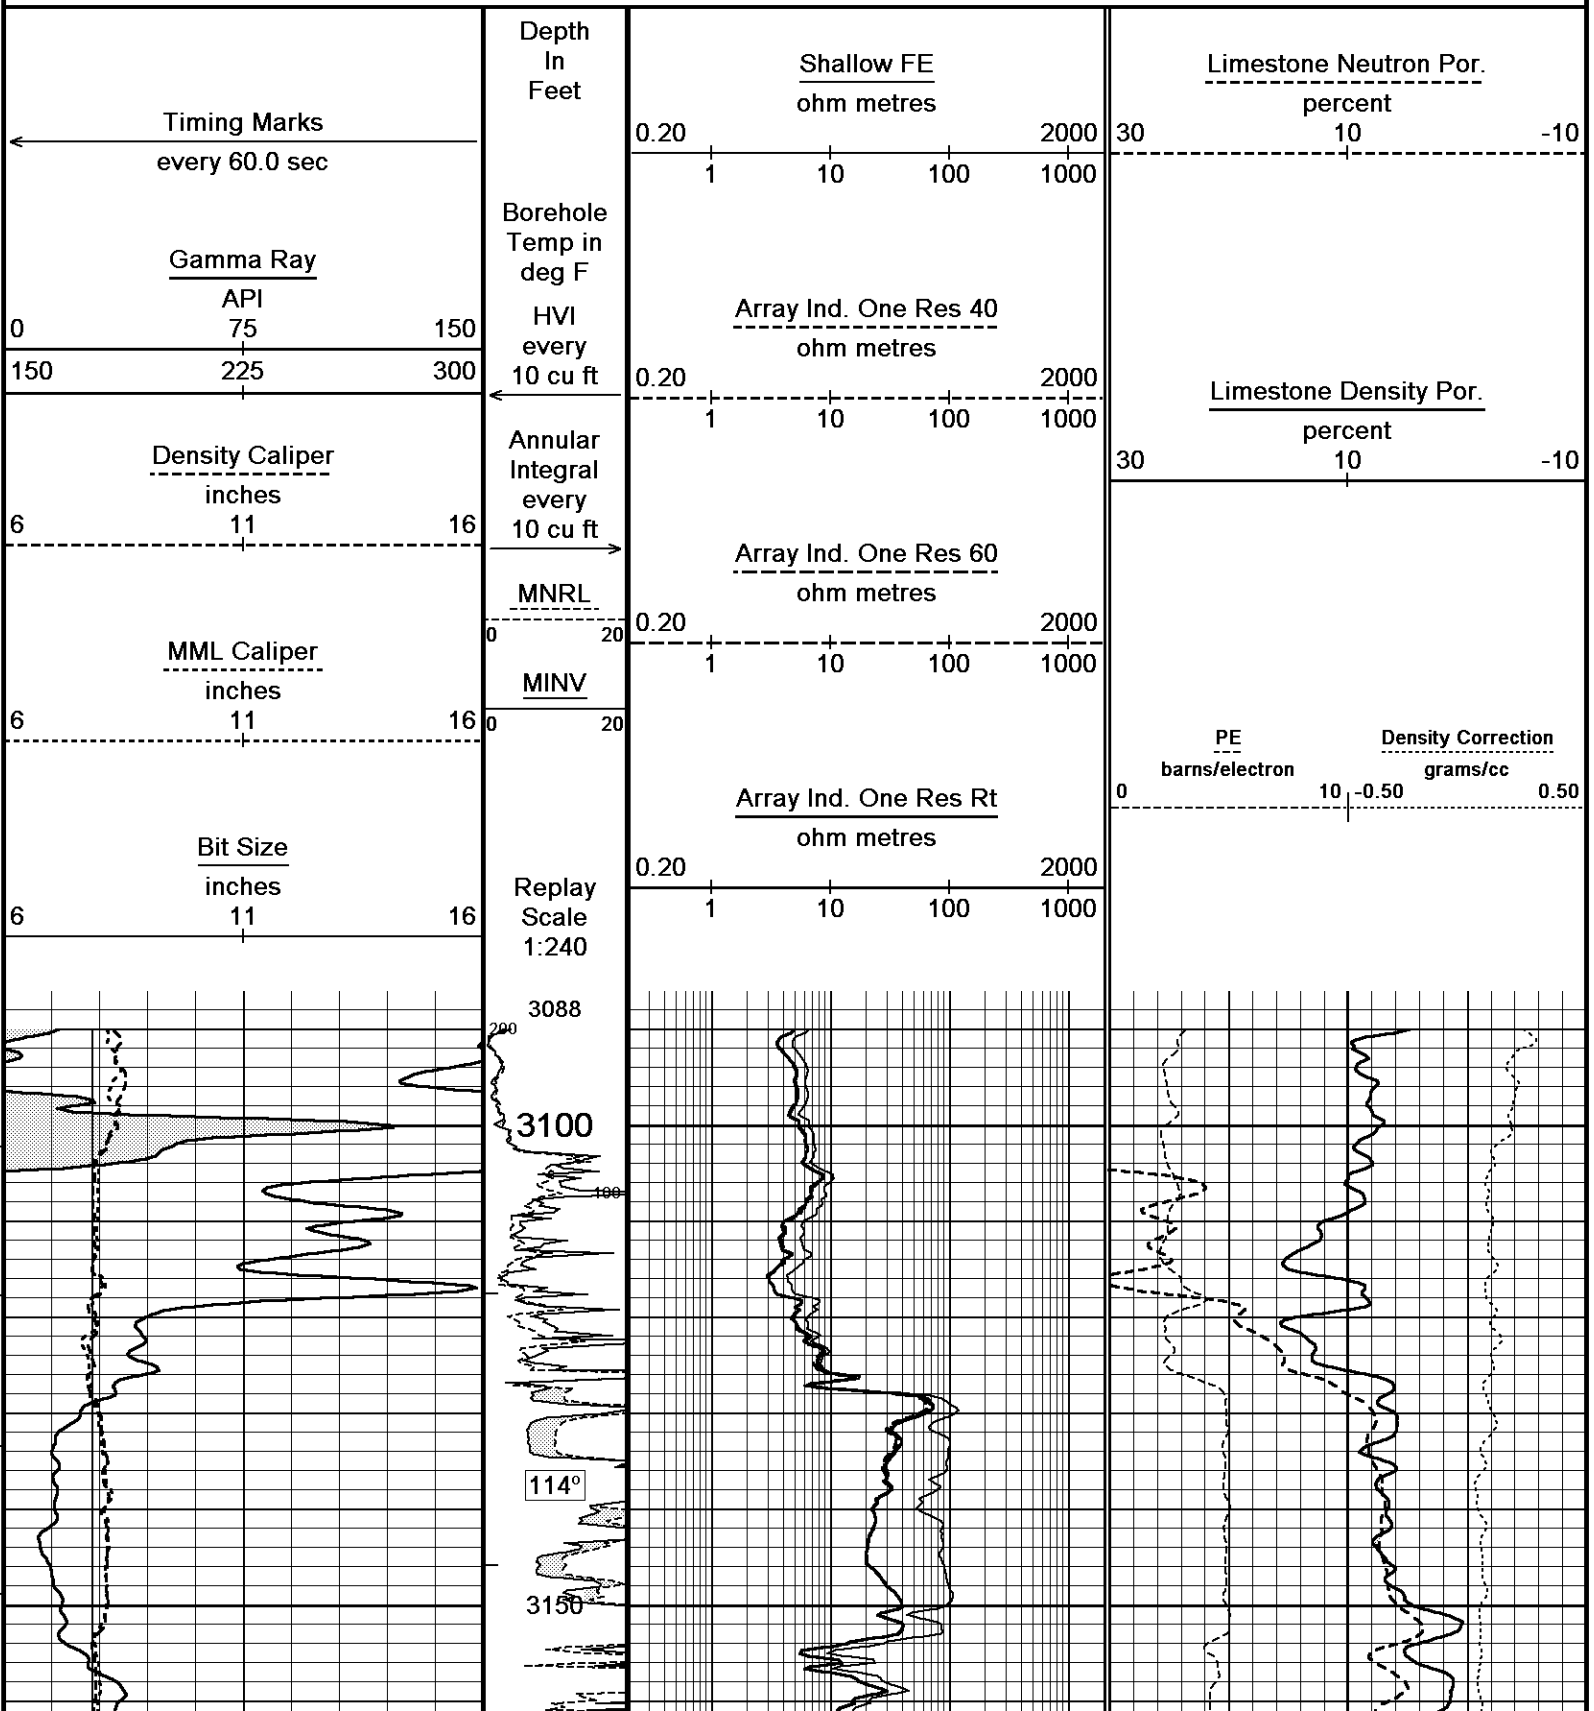

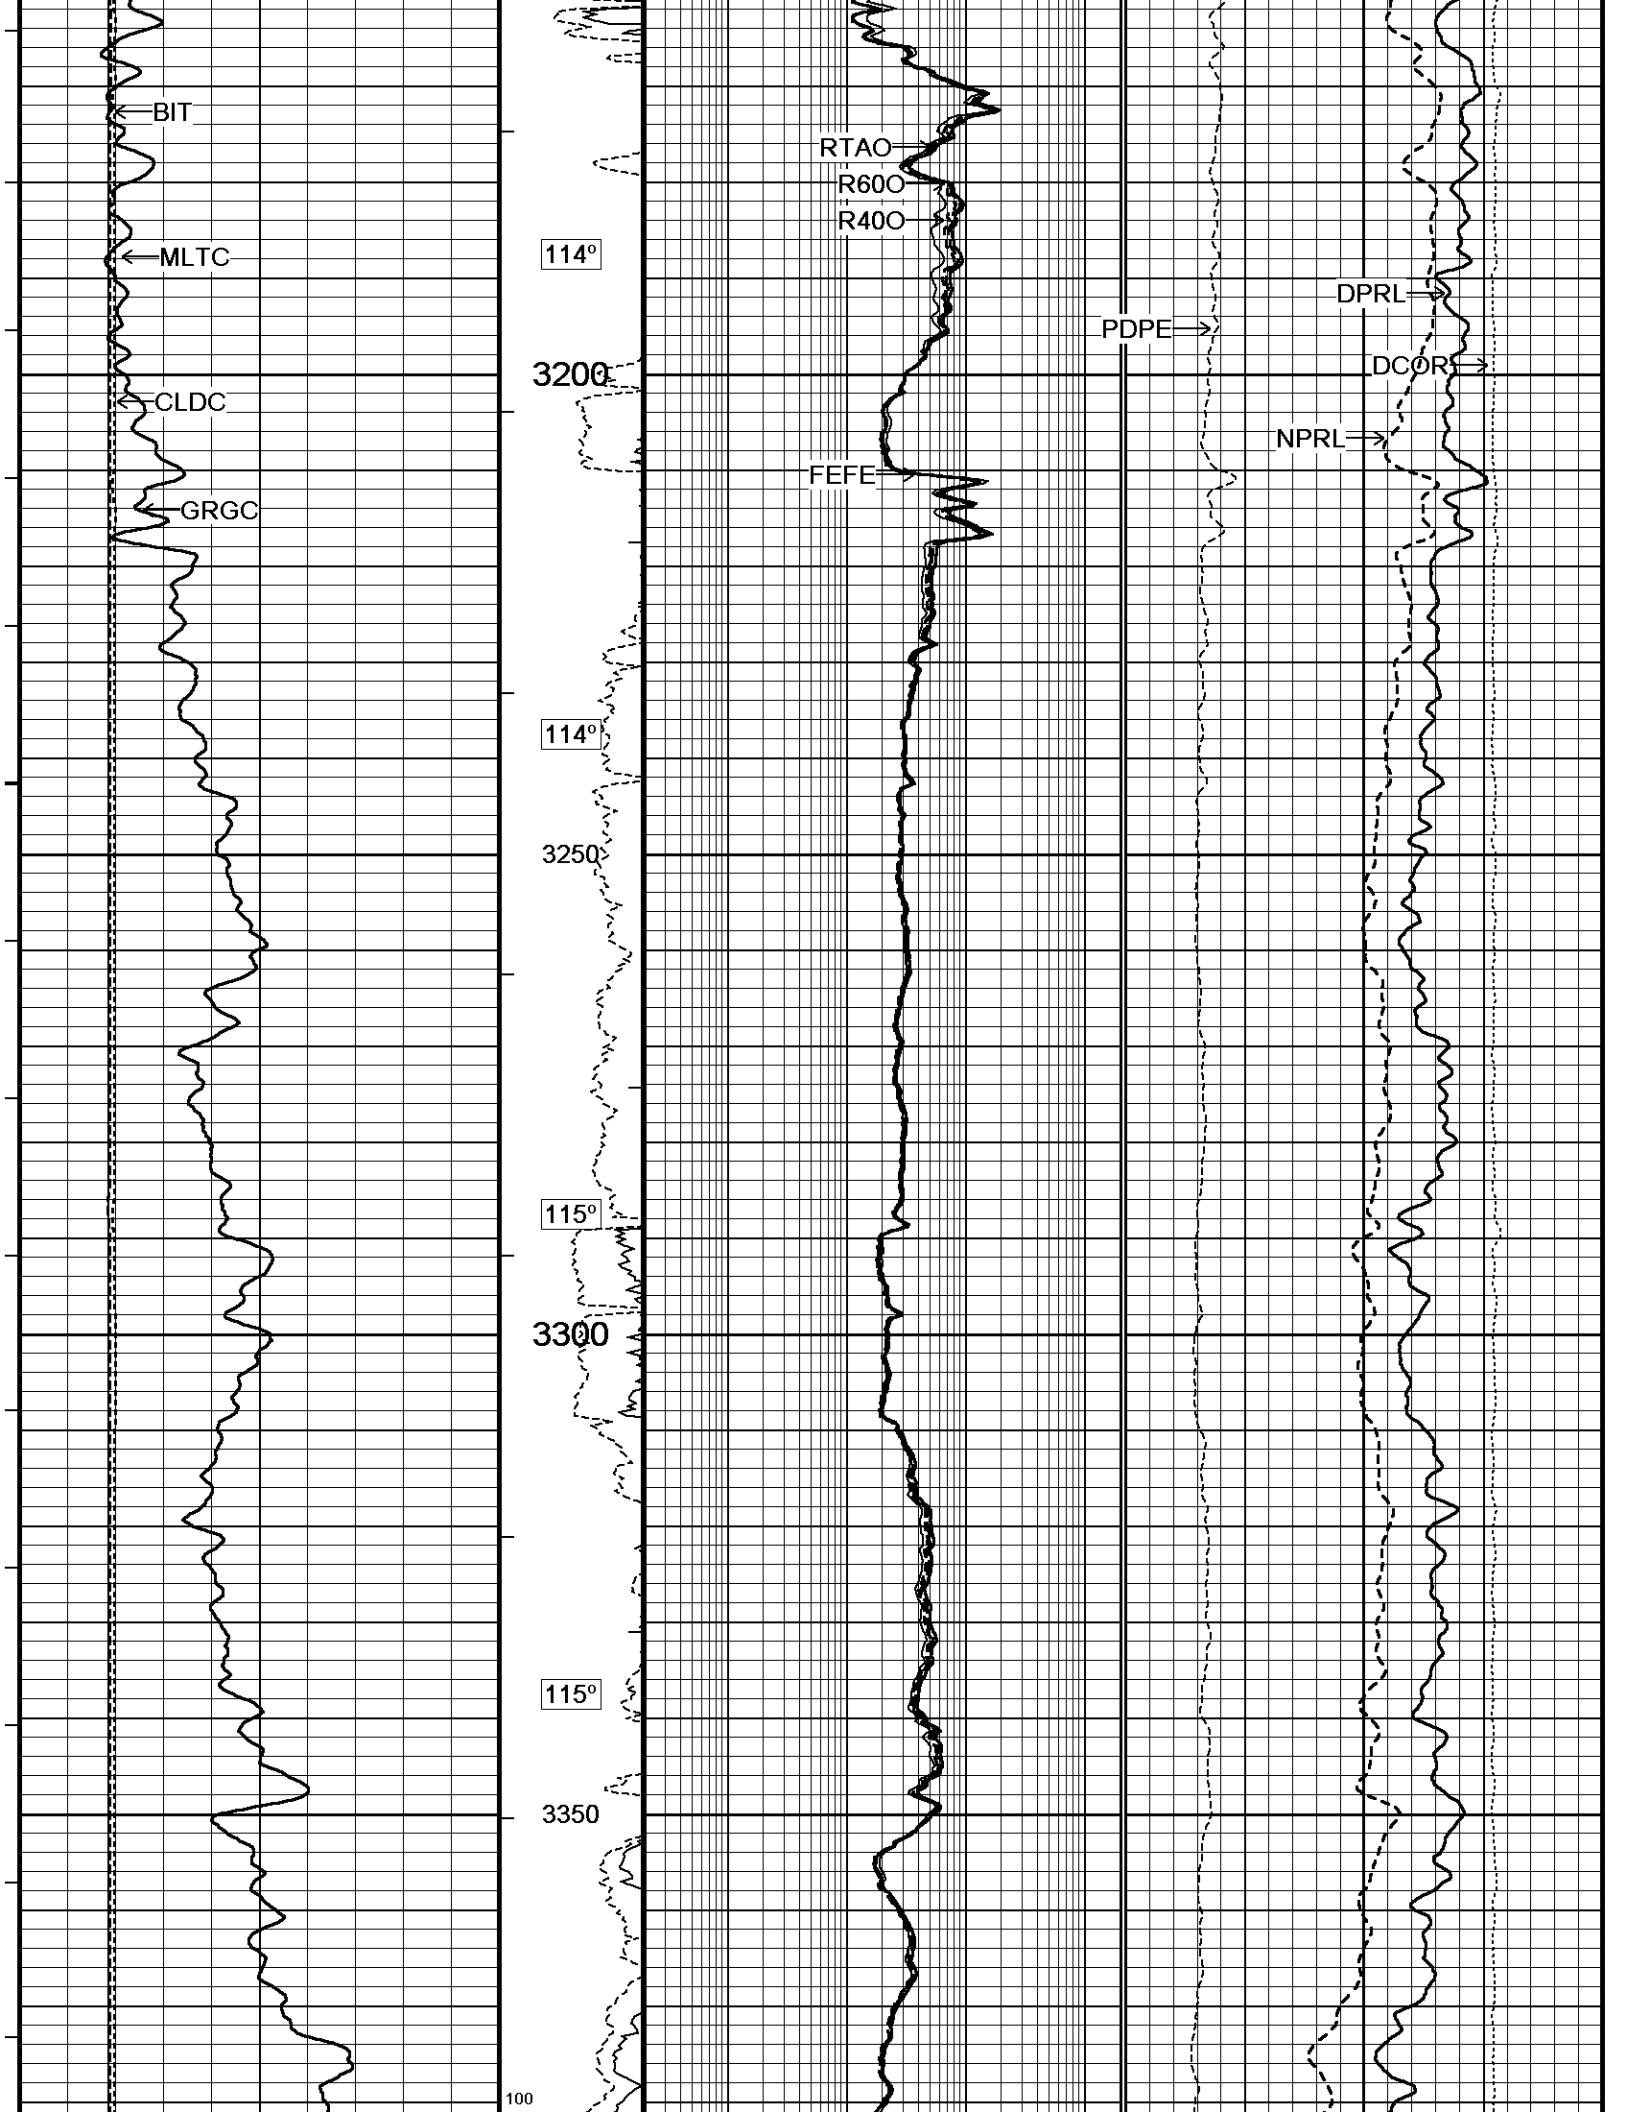

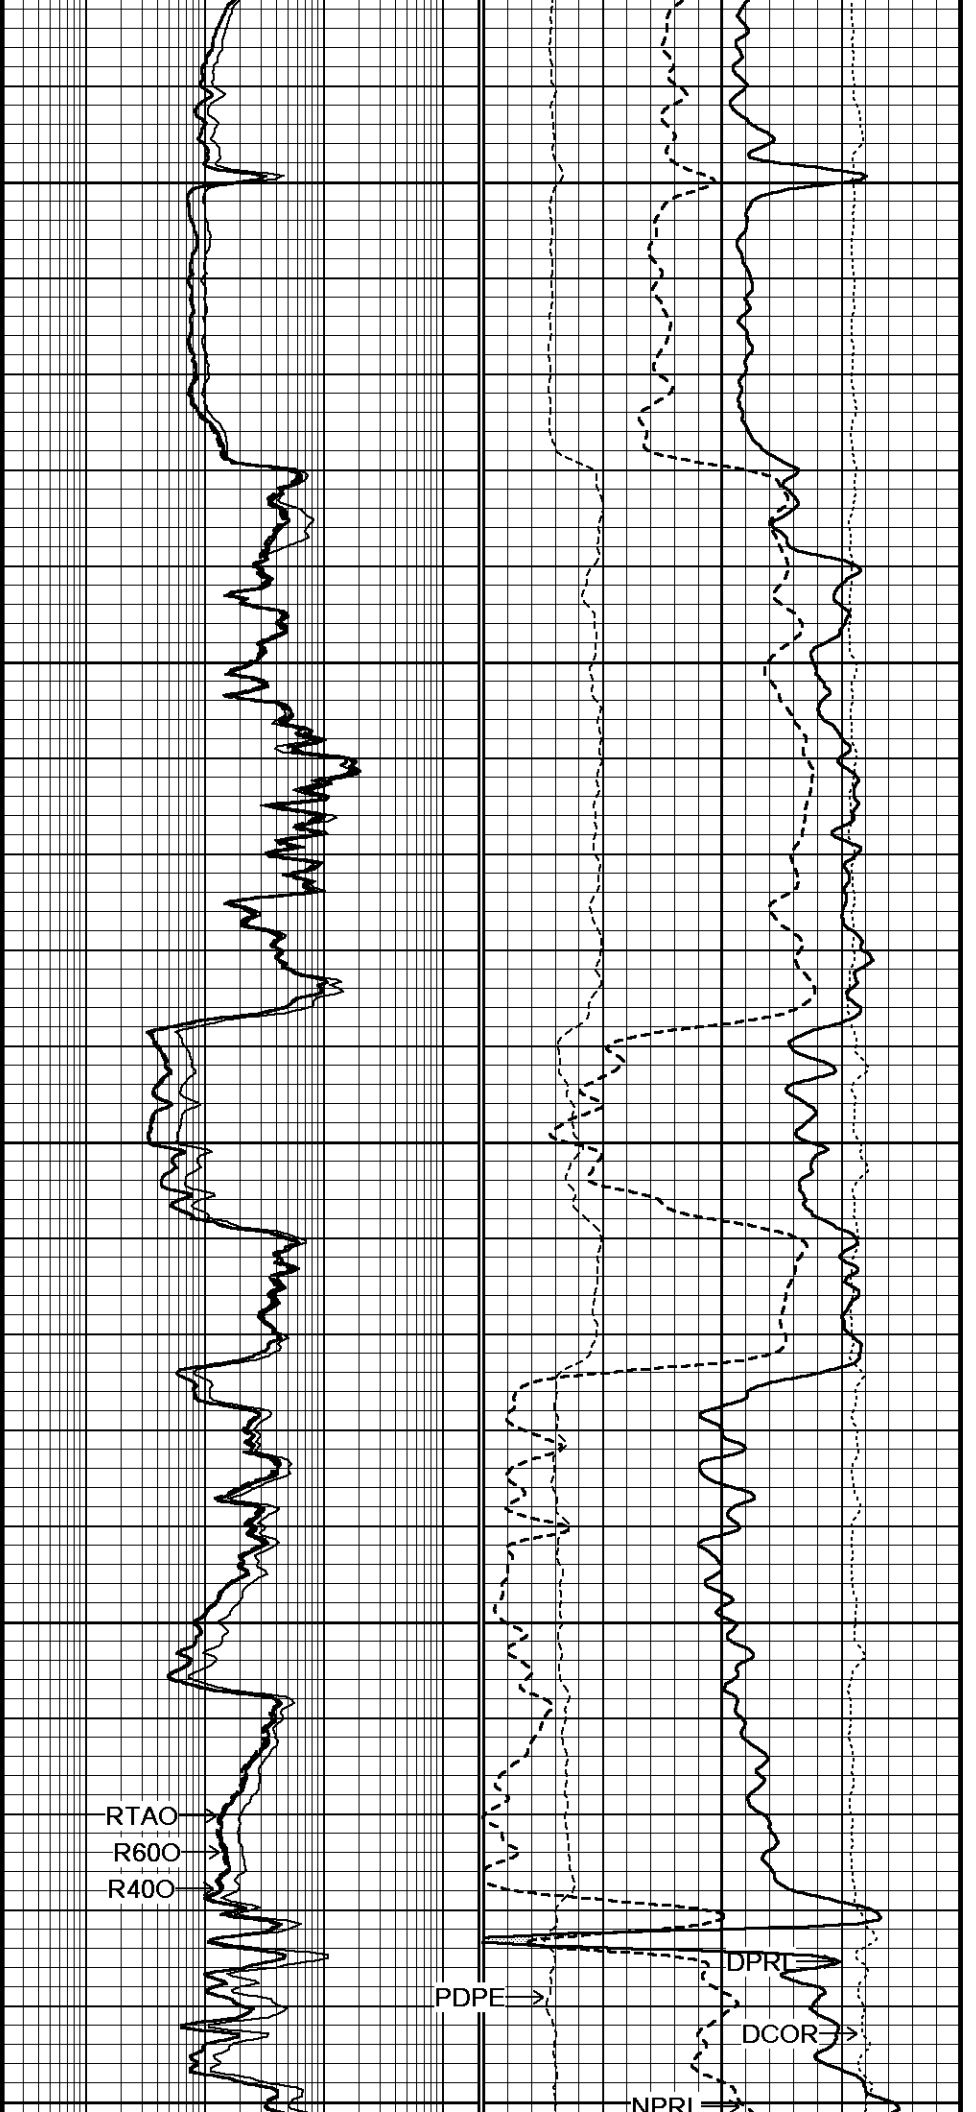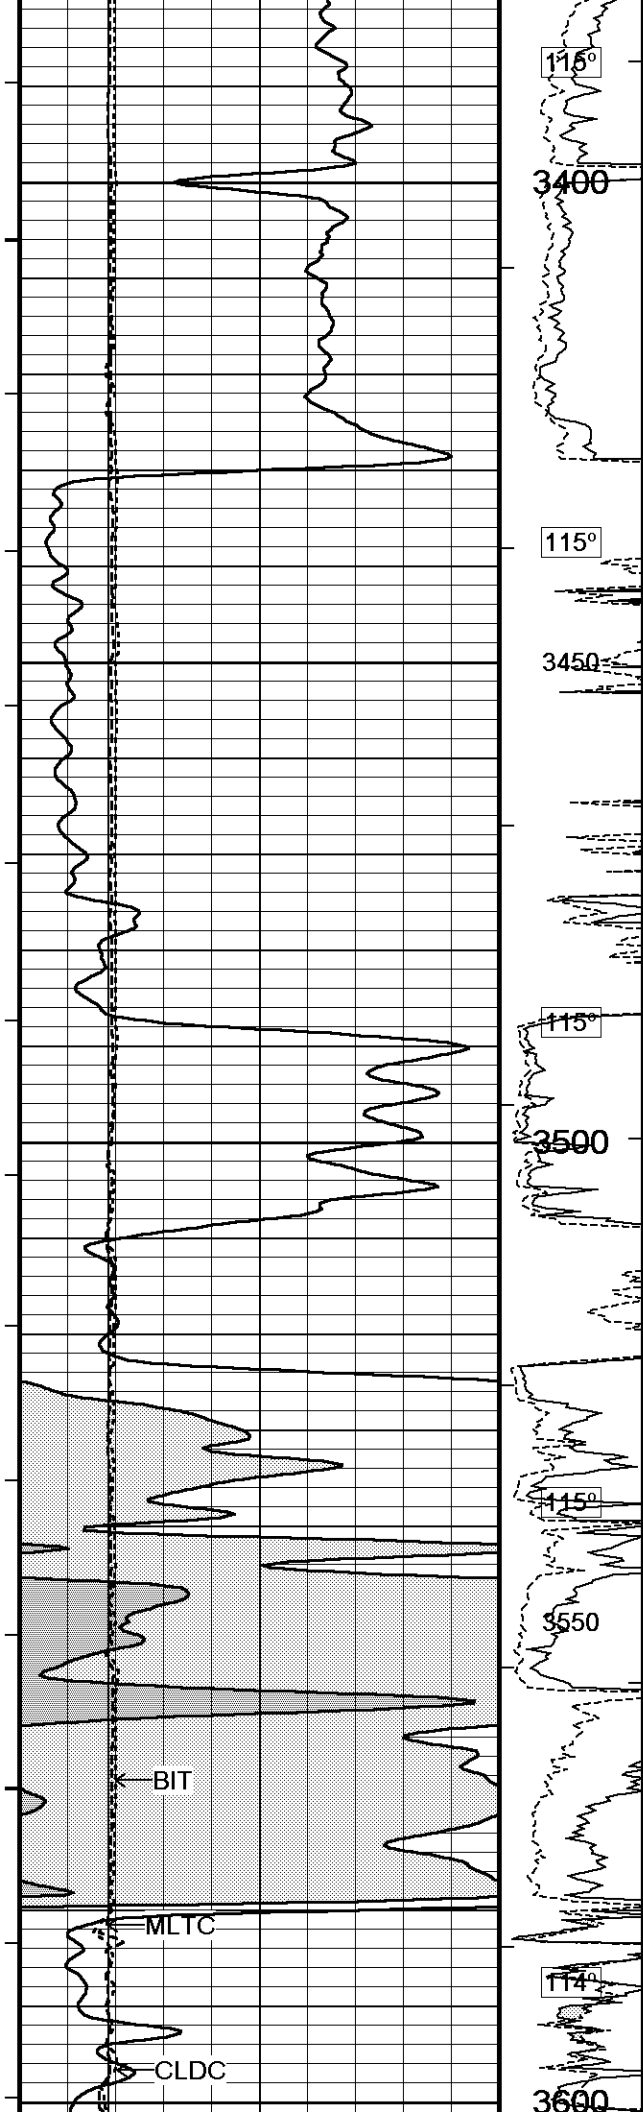

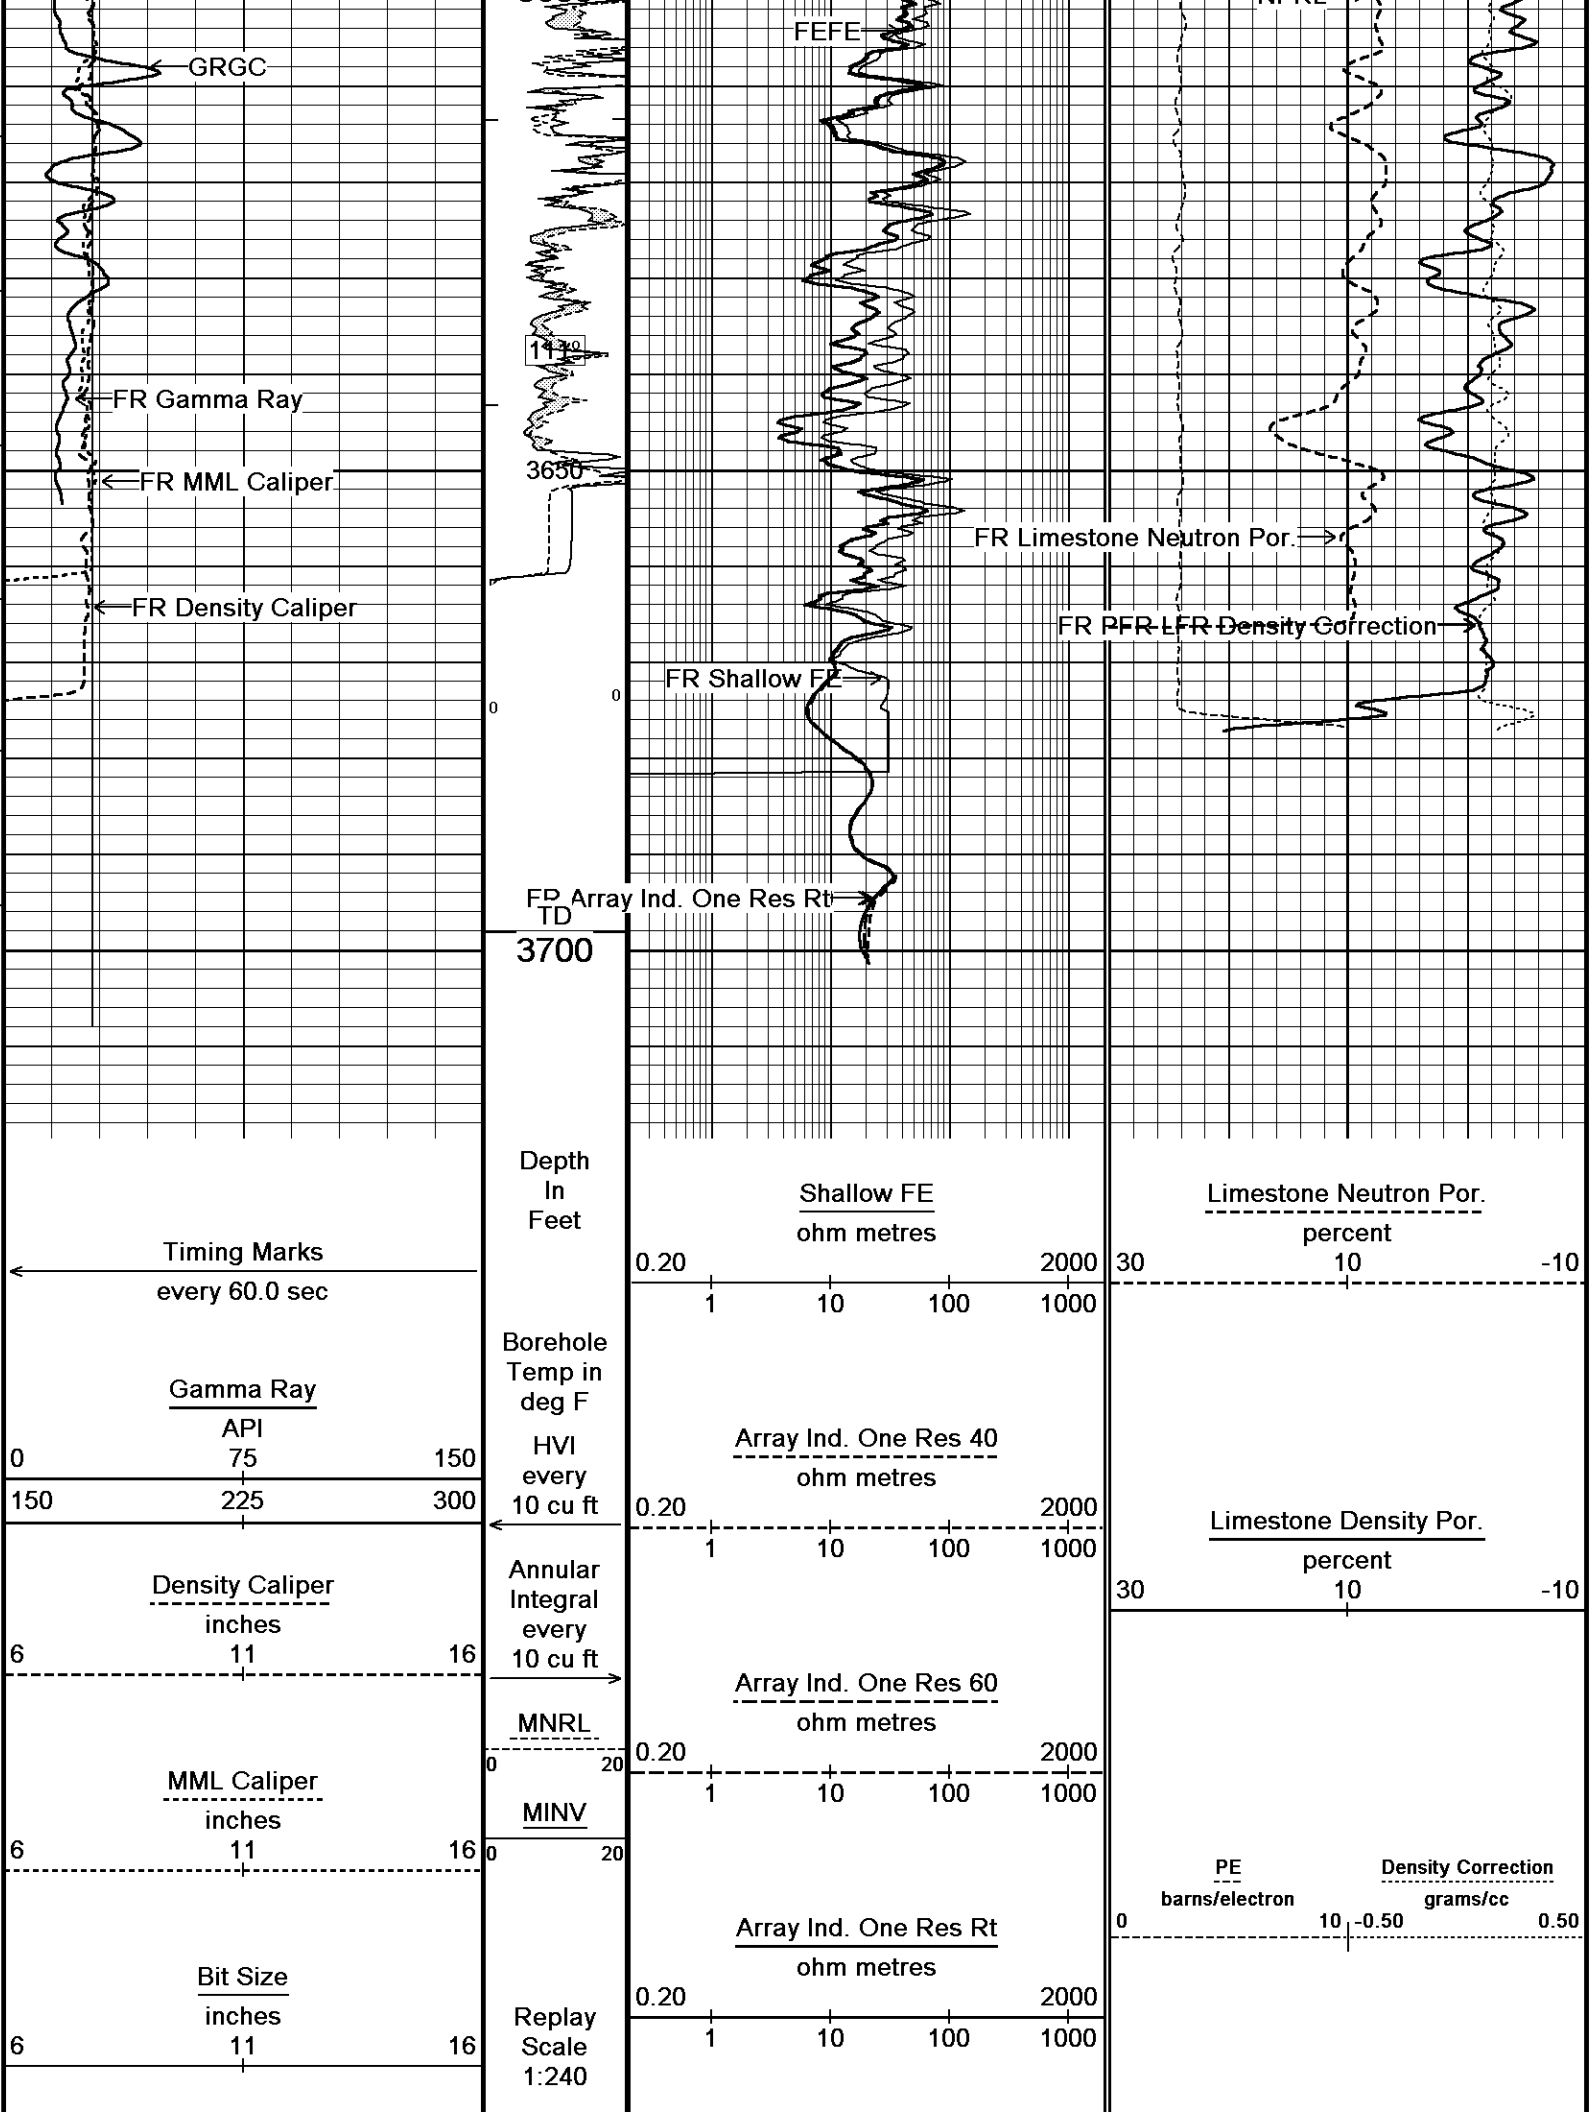

BEFORE SURVEY CALIBRATION

D:\14.03.4393\DATA\TAOS RESOURCES OPERATING CO, LLC (LFJ #2)\MAIN PASS.dta

General Constants All 000			Last Edited on 27-SEP-2014,14:30	
General Parameters				
Mud Resistivity	1.000	ohm-metres		
Mud Resistivity Temperature	95.000	degrees F		
Water Level	0.000	feet		
Borehole Fluid Processing	Wet Hole			
Hole/Annular Volume and Differential Caliper Parameters				
HVOL Method	Single Caliper			
HVOL Caliper 1	Density Caliper			
HVOL Caliper 2	N/A			
Annular Volume Diameter	5.500	inches		
Caliper for Differential Caliper	Density Caliper			
Rwa Parameters				
Porosity used	Base Density Porosity			
Resistivity used	Array Ind. One Res Rt			
RWA Constant A	0.610			
RWA Constant M	2.150			
SW/APOR Tool Source	0.000			

Down-hole Tension Calibration SMS 0		Field Calibration on 27-SEP-2014 00:38	
Reading No	Measured	Calibrated (lbs)	
1	16360.66	0.00	
2	16392.87	429.90	

High Resolution Temperature Calibration MCG-D.K 475		Field Calibration on 26-SEP-2014,17:58	
	Measured	Calibrated(Deg F)	
Lower	50.00	50.00	
Upper	100.00	100.00	

High Resolution Temperature Constants MCG-D.K 475		Last Edited on 28-JUL-2014,00:41	
Pre-filter Length	11		

SP Calibration MCG-D.K 475		Field Calibration on 26-SEP-2014,17:58	
	Measured	Calibrated (mV)	
Reference 1	100.0	100.0	
Reference 2	-100.0	-100.0	

Gamma Calibration MCG-D.K 475		Field Calibration on 26-SEP-2014 18:27	
	Measured	Calibrated (API)	
Background	37	25	
Calibrator (Gross)	1051	721	
Calibrator (Net)	1014	696	

Gamma Calibration Tolerances MCG-D.K 475			
Ratio	1.457	1.40 1.475 1.55	Counts/API

Gamma Constants MCG-D.K 475		Last Edited on 27-SEP-2014,14:30	
Gamma Calibrator Number	36		
GRC-M Calibrator Jig in Use?	NO		
Inactive Background Jig in Use?	NO		
Mud Density	1.14	gm/cc	
Caliper Source for Processing	Density Caliper		

Tool Position	Eccentred	
Concentration of KCl		kppm
K Mud Type	Chloride	
K Mud Concentration	0.00	%

Micro Normal and Micro Inverse Calibration MML-A 7

Base Calibration on 26-SEP-2014 18:07









Field Check on 26-SEP-2014 18:08

Base Calibration

Channel	Measured		Calibrated (ohm-m)	
	Resistor 1	Resistor 2	Resistor 1	Resistor 2
Micro Normal	11.8	60.2	5.0	25.0
Micro Inverse	15.7	78.1	5.0	25.0

Channel	Base Check (ohm-m)	Field Check (ohm-m)
Micro Normal	62.7	62.7
Micro Inverse	48.5	48.5

Micro Normal & Micro Inverse Calibration Tolerance MML-A 7

Micro Normal Res. 1	11.8		ohm	Micro Normal Res. 2	60.2		ohm
Micro Inverse Res. 1	15.7		ohm	Micro Inverse Res. 2	78.1		ohm
Micro Normal Base Check	62.7		ohm-m				
Micro Inverse Base Check	48.5		ohm-m				
Micro Normal Field Check	62.7		ohm-m				
Micro Inverse Field Check	48.5		ohm-m				

Micro Normal and Micro Inverse Constants MML-A 7

Last Edited on 27-SEP-2014,14:30

Pad Type	8-12 in Soft Rubber Inflatable 006-9011-159
Micro Normal K Factor	1.0000
Micro Inverse K Factor	1.0000
Standoff Offset	N/A inches

Caliper Calibration MML-A 7

Base Calibration on 19-AUG-2014 10:43

Field Calibration on 26-SEP-2014 18:13


Base Calibration

Reading No	Measured	Calibrator Size (in)
1	14683	5.96
2	18092	7.97
3	21306	9.84
4	25352	11.91
5	0	0.00
6	N/A	N/A

Field Calibration

Measured Caliper (in)	Actual Caliper (in)
9.89	9.84

Caliper Calibration Tolerances MML-A 7

Short Arm Field Cal.	9.89		in
----------------------	------	---	----

Neutron Calibration MDN-C.A 460

Base Calibration on 02-SEP-2014,03:53

Field Check on 26-SEP-2014 18:35

Base Calibration

Ratio	Measured		Calibrated (cps)	
	Near	Far	Near	Far
	3014	93	3714	110
	32.513		33.764	

Field Calibrator at Base

Ratio	Calibrated (cps)	
	2359	3502
	0.674	

Field Check

Ratio	Calibrated (cps)	
	2374	3469
	0.684	

Neutron Calibration Tolerances MDN-C.A 460

Near Reading	3014	-25% 3500 +25%	cps
Ratio	32.513	-5% 33 +5%	
Base Check	0.674	0.65 0.7 0.75	
Field Check	0.684	0.654 0.674 0.694	

Far Reading	93	-50% 106 +50%	cps
-------------	----	--	-----

Neutron Constants MDN-C.A 460

Last Edited on 26-SEP-2014,18:29

Neutron Source Id	P14043B	
Neutron Jig Number	N639	
Air Hole Processing	Legacy	
Caliper Source for Processing	Density Caliper	
Stand-off	0.00	inches
Mud Density	1.00	gm/cc
Limestone Sigma	7.10	cu
Sandstone Sigma	4.26	cu
Dolomite Sigma	4.70	cu
Formation Pressure Source	Constant Value	
Formation Pressure	0.00	kpsi
Temperature Source	Constant Value	
Temperature	68.00	degrees F
Mud Salinity	0.00	kppm
Salinity Correction	Not Applied	
Formation Fluid Salinity Source	Constant Value	
Formation Fluid Salinity	0.00	kppm
Barite Mud Correction	Not Applied	

FE Calibration MFE-A.A 54

Base Calibration on 03-SEP-2014 13:27
Field Check on 26-SEP-2014 17:53

Base Calibration		
	Measured	Calibrated (ohm-m)
Reference 1	0.0	0.0
Reference 2	971.3	126.8
Base Check		281.3
Field Check		281.3

FE Calibration Tolerances MFE-A.A 54

Reference 2	971.3	-3% 980.0 +3%	ohm
Base Check	281.3	-2% 277.0 +2%	ohm-m
Field Check	281.3	-2% 281.3 +2%	ohm-m

FE Constants MFE-A.A 54

Last Edited on 27-SEP-2014,14:31

Running Mode	No Sleeve	
MFE K Factor	0.1268	
Caliper Source for FE correction	Density Caliper	
Caliper Value for FE correction	N/A	inches
Rm Source for FE correction	Temperature Corr	
Temp. for Rm Corr.	MCG External Temperature	
Stand-off	0.5	inches

Sonic Constants MSS-C.K 336

Last Edited on

Maximum Boundary Contrast	100.00	micro-sec/ft
Fluid Transit Time	189.00	micro-sec/ft
Limestone Transit Time	47.50	micro-sec/ft
Sandstone Transit Time	55.50	micro-sec/ft
Dolomite Transit Time	43.50	micro-sec/ft
Sonic used for Porosities	3-5' Compensated	
Correction for Sonde Skew	Applied	
Cycle Stretch Algorithm	Applied	

Cycle Stretch Algorithm	Applied	
MN3FT	0.00	micro-sec
MX3FT	1500.00	micro-sec
Hunt-Raymer Constant	83.13	micro-sec/ft

Sonde Mode	Compensated
Hole Type	Open Hole

Sonde Parameters

	Measured	Calibrated
Offset	0.0000	0.0000
Free Pipe	0.0000	

Peak Amplitude Source

Waveform	Start Time (micro-sec)	Width (micro-sec)	Pre Gain	Start Gain	Discriminator (mV)
3'	N/A	N/A	N/A	N/A	N/A
4'	N/A	N/A	N/A	N/A	N/A
5'	N/A	N/A	N/A	N/A	N/A
6'	N/A	N/A	N/A	N/A	N/A

Processed Fixed Gate Parameters

Waveform Used For Processing	N/A			
Start Time (micro-sec)	End Time (micro-sec)	Discriminator (mV)	Depth (m)	
0.00	0.00	0.00	0.00	
0.00	0.00	0.00	0.00	
0.00	0.00	0.00	0.00	
0.00	0.00	0.00	0.00	
0.00	0.00	0.00	0.00	

Full Waveform Parameters

Use 3' Waveform to derive TR	No
Use 4' Waveform to derive TR	No
Use 5' Waveform to derive TR	No
Use 6' Waveform to derive TR	No
3' Waveform Discriminator Level	0.30 mV
4' Waveform Discriminator Level	0.30 mV
5' Waveform Discriminator Level	0.15 mV
6' Waveform Discriminator Level	0.15 mV
3' Waveform Filter	
4' Waveform Filter	
5' Waveform Filter	
6' Waveform Filter	

Semblance Level	0.50
Semblance Window Width	120.00 micro-sec
Sonic 1 Despiker	100.00 micro-sec/ft
Sonic 2 Despiker	100.00 micro-sec/ft

High Resolution Temperature Calibration MAI-A.A 102

Field Calibration on 26-SEP-2014,17:53

	Measured	Calibrated(Deg F)
Lower	50.00	50.00
Upper	100.00	100.00

High Resolution Temperature Constants MAI-A.A 102

Last Edited on 19-AUG-2014,10:02

Pre-filter Length	11
-------------------	----

Induction Calibration MAI-A.A 102

Base Calibration on 20-SEP-2014,11:39

Field Check on 26-SEP-2014 17:55

Base Calibration

Test Loop Calibration		Measured	Calibrated (mmho/m)
Channel	Low	High	Low High
1	18.0	481.9	9.3 966.2
2	6.6	378.8	7.6 821.4
3	4.0	256.0	5.2 566.0
4	3.8	134.5	2.6 279.2

Array Temperature	86.5	Deg F
-------------------	------	-------

Test Loop Calibration Verified

Channel	Base Check (mmho/m)		Field Check (mmho/m)	
	Low	High	Low	High
1			12.1	3808.8
2			29.8	3603.3
3			28.1	3131.1
4			15.9	2100.2
Deep			14.3	2018.9
Medium			44.6	4177.2
Shallow			48.2	5348.7
Array Temperature			84.4	Deg F

Induction Calibration Tolerances MAI-A.A 102

Low Conductivity 1	18.0		mmho/m High Conductivity 1	481.9		mmho/m
Low Conductivity 2	6.6		mmho/m High Conductivity 2	378.8		mmho/m
Low Conductivity 3	4.0		mmho/m High Conductivity 3	256.0		mmho/m
Low Conductivity 4	3.8		mmho/m High Conductivity 4	134.5		mmho/m
Background Vx 1	-121.6		mmho/m Phase Check Loop 1	-0.4		%
Background Vx 2	9.2		mmho/m Phase Check Loop 2	-0.6		%
Background Vx 3	-6.3		mmho/m Phase Check Loop 3	-0.7		%
Background Vx 4	-11.5		mmho/m Phase Check Loop 4	0.3		%

Induction Constants MAI-A.A 102

Last Edited on 27-SEP-2014,14:29

Induction Model	RtAP-WBM		
Caliper for Borehole Corr.	Density Caliper		
Hole Size for Borehole Correction	N/A	inches	
Tool Centred	No		
Stand-off Type	Fins		
Stand-off	0.50	inches	
Number of Fins on Stand-off	6.0000		
Stand-off Fin Angle	60.00	degrees	
Stand-off Fin Width	0.5000	inches	
Borehole Corr. Rm Source	Temperature Corr		
Temp. for Rm Corr.	MCG External Temperature		
Squasher Start	0.0020	mhos/metre	
Squasher Offset	N/A	mhos/metre	
Borehole Normalisation			
DRM1	0.0000	DRC1	0.0000
DRM2	0.0000	DRC2	0.0000
MRM1	0.0000	MRC1	0.0000
MRM2	0.0000	MRC2	0.0000
SRM1	0.0000	SRC1	0.0000
SRM2	0.0000	SRC2	0.0000

Calibration Site Corrections

Channel 1	0.00	mmhos/metre
Channel 2	0.00	mmhos/metre
Channel 3	0.00	mmhos/metre
Channel 4	0.00	mmhos/metre

Apparent Porosity and Water Saturation Constants

Archie Constant (A)	1.00	
Cementation Exponent (M)	2.00	
Saturation Exponent (N)	2.00	
Saturation of Water for Apor	100.00	percent
Resistivity of Water for Apor and Sw	0.05	ohm-m
Resistivity of Mud Filtrate for Sw	0.00	ohm-m
Source for Rt	0.00	
Source for Rxo	0.00	

Caliper Calibration MPD-A.A 11

Base Calibration on 11-JUL-2014 14:48
Field Calibration on 26-SEP-2014 18:15

Base Calibration

Reading No	Measured	Calibrator Size (in)
1	20532	3.98
2	29639	5.96
3	39502	7.97
4	49205	9.84
5	60303	11.91
6	N/A	N/A

Field Calibration

Measured Caliper (in)	Actual Caliper (in)
8.08	7.97

Caliper Calibration Tolerances MPD-A.A 11


Short Arm Field Cal.	8.08		in
----------------------	------	---	----

Photo Density Calibration MPD-A.A 11

Base Calibration on 03-SEP-2014,13:58
Field Check on 26-SEP-2014 18:04

Density Calibration Base Calibration

	Measured		Calibrated (sdu)	
	Near	Far	Near	Far
Background	1148	1239		
Reference 1	47250	25255	59869	31110
Reference 2	19742	2470	24557	2522

Field Check at Base

1148.1 1239.4

Field Check

1149.2 1235.9

PE Calibration

Base Calibration

	WS	Measured	Ratio	Calibrated
		WH		Ratio
Background	208	1022		
Reference 1	17525	47076	0.376	0.369
Reference 2	5284	19612	0.273	0.271


Field Check at Base


207.9 1022.4


Field Check


208.7 1025.6


Photo Density Calibration Tolerances MPD-A.A 11


Near Density Ratio	2.48	
--------------------	------	---


Far Density Ratio	19.51	
-------------------	-------	---

PE Calibration	0.096	
----------------	-------	---

Near Den. Field Check	1149.2	
-----------------------	--------	---

Far Den. Field Check	1235.9	
----------------------	--------	---

PE WS Field Check	208.7	
-------------------	-------	---

PE WH Field Check	1025.6	
-------------------	--------	---

Density Constants MPD-A.A 11

Last Edited on 27-SEP-2014,14:31

Density Source Id	263	
Nylon Calibrator Number	633	
Aluminium Calibrator Number	633	
Density Shoe Profile	8 inch	
Caliper Source for Processing	Density Caliper	
PE Correction to Density	Not Applied	
Mud Density	1.14	gm/cc
Mud Density Z/A Multiplier	1.11	
Mud Filtrate Density	1.00	gm/cc
Dry Hole Mud Filtrate Density	1.00	gm/cc
DNCT	0.00	gm/cc
CRCT	0.00	gm/cc
Density Z/A Correction	Hybrid	
Matrix Density (gm/cc)	Depth (ft)	
2.71	0.00	

0.00	0.00
0.00	0.00
0.00	0.00
0.00	0.00
0.00	0.00
0.00	0.00
0.00	0.00
0.00	0.00

DOWNHOLE EQUIPMENT

D:\14.03.4393\DATA\TAOS RESOURCES OPERATING CO, LLC (LFJ #2)\MAIN PASS.dta

Compact Comms Gamma
MCG-D.K 475 LG: 8.70 ft WT: 63.9 lb OD: 2.244 in

Compact Micro-log
MML-A 7 LG: 7.97 ft WT: 81.6 lb OD: 2.240 in

Compact Neutron
MDN-C.A 460 LG: 5.04 ft WT: 50.7 lb OD: 2.244 in


Compact Density/Caliper
MPD-A.A 11 LG: 9.53 ft WT: 90.4 lb OD: 2.449 in

Compact Focussed Electric
MFE-A.A 54 LG: 6.05 ft WT: 48.5 lb OD: 2.244 in

Compact Sonic
MSS-C.K 336 LG: 12.52 ft WT: 72.8 lb OD: 2.244 in

Compact Induction
MAI-A.A 102 LG: 10.81 ft WT: 48.5 lb OD: 2.240 in

Total Length: 60.61 ft Weight: 456.4 lb

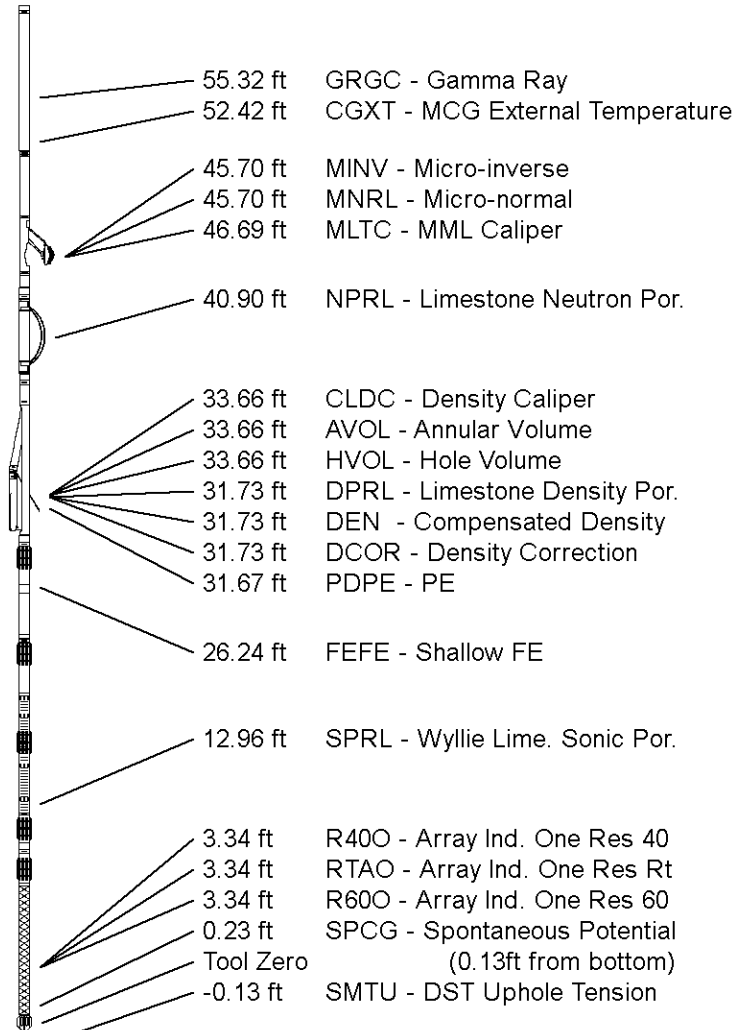

COMPANY	TAOS RESOURCES OPERATING CO.		
WELL	LFJ #2		
FIELD	MADDIX NORTH		
PROVINCE/COUNTY	COWLEY		
COUNTRY/STATE	U.S.A. / KANSAS		

Elevation Kelly Bushing	1276.00	feet	First Reading	3695.00	feet
Elevation Drill Floor	1274.00	feet	Depth Driller	3700.00	feet
Elevation Ground Level	1266.00	feet	Depth Logger	3698.00	feet



COMPOSITE
DENSITY/NEUTRON/SONIC
INDUCTION/FE

Weatherford®

