

15-065-30141-00-00


STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

NORTH



Locate well correctly on above
Section Plat

Graham County. Sec. 5 Twp. 7S Rge. (E) 25 (W)
Location as "NE/CNW/SW" or footage from lines NW SW SW
Lease Owner Abercrombie Drilling, Inc.
Lease Name SHUGHART Well No. 1
Office Address 801 Union Center, Wichita, Kansas, 67202
Character of Well (completed as Oil, Gas or Dry Hole) D & A
Date well completed November 29 19 65
Application for plugging filed verbally November 29 19 65
Application for plugging approved verbally November 29 19 65
Plugging commenced November 29 19 65
Plugging completed November 29 19 65
Reason for abandonment of well or producing formation D & A

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? verbally - yes

Name of Conservation Agent who supervised plugging of this well Bill Nichols 3829'
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3828' Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	281'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Set 1st plug at 540' w/15 sx cement
Set 2nd plug at 270' w/20 sx cement & 1/2 sk hulls
Set 3rd plug at 40' w/10 sx cement & 1/2 sk hulls

RECEIVED
STATE CORPORATION COMMISSION

DEC - 6 1965

CONSERVATION DIVISION
Wichita, Kansas

12-6-65

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Abercrombie Drilling, Inc.
Address 801 Union Center, Wichita, Kansas 67202


STATE OF Kansas, COUNTY OF Kansas, ss.
Mildred Saxton (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed, and that the same are true and correct. So help me God.

(Signature) Mildred Saxton
801 Union Center, Wichita, Kansas 67202
(Address)

SUBSCRIBED AND SWORN TO before me this 3rd day of December, 19 65

My commission expires June 16, 1967

Leah Faye Weike
Leah Faye Weike
Notary Public.

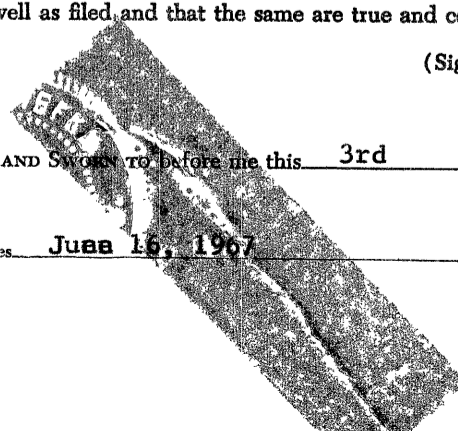

15-065-30141-00-00

CONTRACTOR'S WELL LOG

COMPANY: Abercrombie Drilling, Inc.
 CONTRACTOR: Abercrombie Drilling, Inc.
 FARM: SHUGHART #1
 LOCATION: C NW SW SW Sec. 5-7S-25W
 Graham County, Kansas
 COMMENCED: November 23, 1965
 COMPLETED: November 29, 1965

0	70	Clay
70	950	Sand & Shale
950	1351	Shale & Shells
1351	1965	Shale
1965	1984	Anhydrite
1984	2180	Shale & Lime
2180	2565	Shale
2565	3100	Shale & Lime
3100	3690	Lime & Shale
3690	3829	Lime
	3829	Rotary Total Depth

Set 8-5/8" surface at 281' w/200 sx cement, 3% Calcium Chloride

DRY & ABANDONED

ELEVATION: 2568' K. B.

TOPS:

Anhydrite	2159	(+ 409)
Heebner	3661'	(-1093)
Toronto	3682'	(-1114)
Lansing	3699'	(-1131)
Total Depth	3829'	(-1261)

RECEIVED
STATE PRODUCTION COMMISSION

DEC - 6 1965

PRODUCTION DIVISION
Wichita, Kansas

12-6-65

STATE OF KANSAS)
) SS
 COUNTY OF SEDGWICK)

I, Mildred Saxton, do hereby certify that the above and foregoing is a true and correct copy of the log of the SHUGHART #1, C NW SW SW, Section 5-7S-25W, Graham County, Kansas, as reflected by the files of Abercrombie Drilling, Inc.

Mildred Saxton
Mildred Saxton, Secretary

Subscribed and sworn to before me, a Notary Public, in and for Sedgwick County, Kansas, this 3rd day of December, 1965.

Leah Faye Hefke
Leah Faye Hefke, Notary Public

My commission expires June 16, 1967.