


15-069-20097-00-00

STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

Graham County. Sec. 7 Twp. 7 Rge. 25 (E) W (W)
Location as "NE/CNW/SW" or footage from lines SW SE NW
Lease Owner Paine Drilling Co., Inc.
Lease Name Wilcox Well No. 2
Office Address P O Box D, Hill City, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed October 18, 1967
Application for plugging filed October 18, 1967
Application for plugging approved October 18, 1967
Plugging commenced October 18, 1967
Plugging completed October 18, 1967
Reason for abandonment of well or producing formation Dry Hole

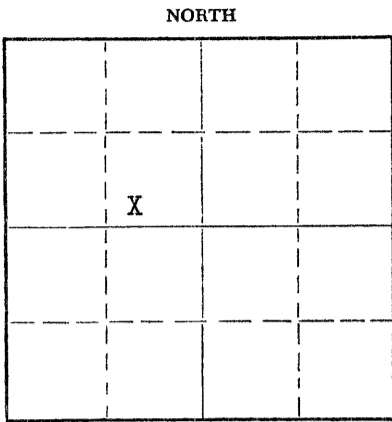

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well W. L. Nichol
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3835 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
		0	249	7"	238	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

1 from 990 to 670 W/55 Sacks Cement
2 from 270 to bottom of pipe W/15 sacks cement
3 from 40 to surface W/10 sacks cement

RECEIVED
OCT 23 1967

CONSERVATION DIVISION
Wichita, Kansas

10-22-67

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Halliburton Company
Address Hill City, Kansas


STATE OF Kansas, COUNTY OF Graham, ss.
Louis Edgett (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Louis Edgett
P O Box D, Hill City, Kansas 67642
(Address)

Subscribed and Sworn to before me this 20th day of October, 1967

My Commission Expires January 20, 1968

Lora Rexler
Notary Public.



15-065-20097-00-00

CONTRACTOR'S WELL LOG

COMPANY:	PAINÉ DRILLING CO., INC.
CONTRACTOR:	PAINÉ DRILLING CO., INC.
WELL:	WILCOX # 2
LOCATION:	SW SE NW Sec. 7-7-25W Graham County, Kansas
COMMENCED:	OCTOBER 10, 1967
COMPLETED:	OCTOBER 18, 1967

0	249	Surface Soils
249	1000	Sand & Shale
1000	1475	Shale & Sand
1475	1910	Shale & Shells
1910	2128	Shale
2128	2161	Andhydrite
2161	2485	Shale
2485	2805	Shale & Lime
2805	2963	Lime & Shale
2963	3060	Lime
3060	3122	Shale & Lime
3122	3185	Lime
3185	3285	Lime & Shale
3285	3540	Shale & Lime
3540	3645	Lime & Shale
3645	3835	Lime

RECEIVED
 OCT 23 1967
 1022-67
 CONSERVATION DIVISION
 Wichita, Kansas

SET 7" SURFACE PIPE AT 249' W/125 SACKS HA5 CEMENT


DRY & ABANDONED

WE HEREBY CERTIFY THAT THE ABOVE IS A CORRECT AND ACCURATE LOG OF THE ABOVE MENTIONED WELL, AS SHOWN ON THE DAILY DRILLING REPORTS.

PAINÉ DRILLING CO., INC.

BY Frank Edgett
BOOKKEEPER

SUBSCRIBED AND SWORN TO BEFORE ME THIS 23rd DAY OF OCTOBER, 1967.



Carl Deller
NOTARY PUBLIC