

Schlumberger

Company: **SANDRIDGE ENERGY**

Well: **RANDY 3508 2-3H 1L**

Field: **BOUSE**

County: **HARPER**

State: **KANSAS**

Well: **RANDY 3508 2-3H 1L**
Field: **BOUSE**
County: **HARPER**

State: **KANSAS**

Field: **BOUSE**
County: **HARPER** State: **KANSAS**

County: **HARPER** State: **KANSAS**

County: HARPER Field: BOUSE Location: 235' FSL & 1300' FWL Well: RANDY 3508 2-3H 1L Company: SANDRIDGE ENERGY				
ARRAY INDUCTION GAMMA RAY MEMORY LOG				
235' FSL & 1300' FWL		Elev.: K.B. 1283.00 ft G.L. 1261.00 ft D.F. 1283.00 ft		
Permanent Datum: Log Measured From: Drilling Measured From:	GROUND LEVEL K.B. K.B.		Elev.: 1261.00 ft 22.00 ft above Perm. Datum	
API Serial No. 15077220850200	Section 3	Township 35S	Range 8W	

Elev.:	K.B.	1283.00 ft
	G.L.	1261.00 ft
	D.F.	1283.00 ft

Elev.: 1261.00 ft

22.00 ft above Perm. Datum

Range
8W

County: HARPER

Field: BOUSE

Location: 235' FSL & 1300' FWL

Well: RANDY 3508 2-3H 1L

Company: SANDRIDGE ENERGY

Company: SANDRIDGE ENERGY

Well: RANDY 3508 2-3H 1L

Field: BOUSE


County: HARPER

State: KANSAS

ARRAY INDUCTION GAMMA RAY MEMORY LOG			
LOCATION			
235' FSL & 1300' FWL		Elev.: K.B. 1283.00 ft	
		G.L. 1261.00 ft	
		D.F. 1283.00 ft	
Permanent Datum:	GROUND LEVEL	Elev.: 1261.00 ft	
Log Measured From:	K.B.	22.00 ft	above Perm. Datum
Drilling Measured From:	K.B.		
API Serial No. 15077220850200	Section 3	Township 35S	Range 8W

Logging Date	17-Sep-2014			
Run Number	1			
Depth Driller	9872 ft			
Schlumberger Depth	9771 ft			
Bottom Log Interval	9760 ft			
Top Log Interval	5322 ft			
Casing Driller Size @ Depth	7.000 in @ 5334 ft			@
Casing Schlumberger	5322 ft			
Bit Size	6.125 in			
Type Fluid In Hole	WBM			
Density	Viscosity	8.5 lbm/gal		32 s
Fluid Loss	PH	60 cm3		9
Source Of Sample	MUD SENSOR			
RM @ Measured Temperature	2.690 ohm.m @ 65 degF			@
RMF @ Measured Temperature	2.290 ohm.m @ 65 degF			@
RMC @ Measured Temperature	3.090 ohm.m @ 65 degF			@
Source RMF	RMC	CALCULATED	CALCULATED	
RM @ MRT	RMF @ MRT	1.315 @ 140	1.120 @ 140	@
Maximum Recorded Temperatures	140 degF			@
Circulation Stopped	Time	16-Sep-2014		23:42
Logger On Bottom	Time	17-Sep-2014		0:22
Unit Number	Location	5 OKC		
Recorded By	C.PARKER			
Witnessed By	J.BIAA			

TMG-A 24
TILE-A
TBN-A 6
NNLS-EWA 4484
TBD-A 46
GGLS-FZ 3216
TBI-A 19

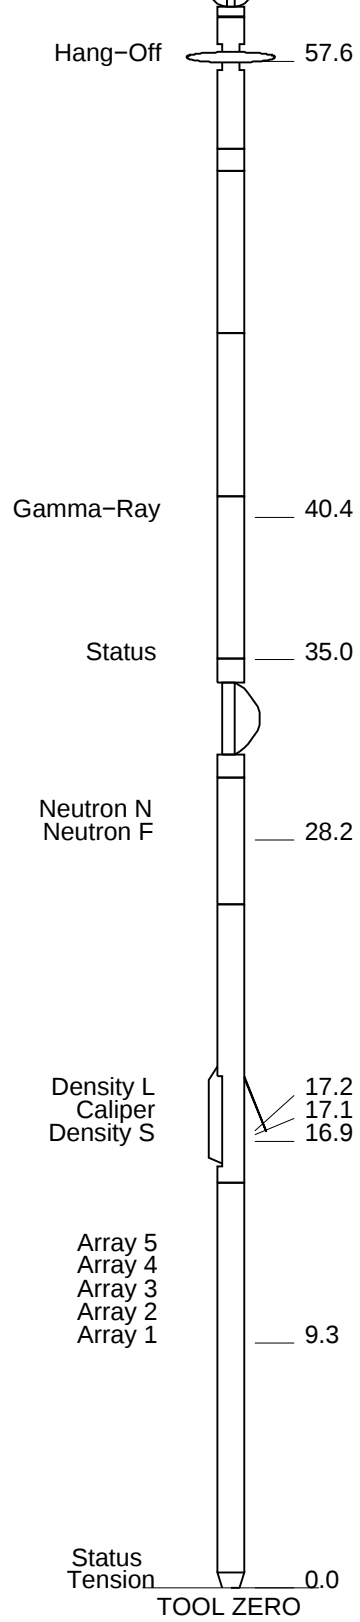

MAXIMUM STRING DIAMETER 2.13 IN
MEASUREMENTS RELATIVE TO TOOL ZERO
ALL LENGTHS IN FEET

Schlumberger

MAIN PASS

MAXIS Field Log

Company: SANDRIDGE ENERGY Well: RANDY 3508 2-3H 1L

Input DLIS Files				
ThruBit_003PUP	FN:2	17-Sep-2014 06:46	9765.0 FT	2970.0 FT

OP System Version: 19C2-270	
TBT	SRPC-5303-ThruBit

Relative Bearing (RB)		
0	(DEG)	940

gr wrap4
From LHT1 to GR4


gr wrap3
From LHT1 to GR3

gr wrap2
From LHT1 to GR2

gr wrap1
From LHT1 to GR1


Galiner (GAL)



Caliper (CALI)		
4	(IN)	14
Gamma Ray 4 (GR)		
600	(GAPI)	750
Gamma Ray 3 (GR)		
450	(GAPI)	600
Gamma Ray 2 (GR)		
300	(GAPI)	450
Gamma Ray 1 (GR)		
150	(GAPI)	300
Gamma Ray (GR)		
0	(GAPI)	150
Bit Size (BS)		
4	(IN)	14


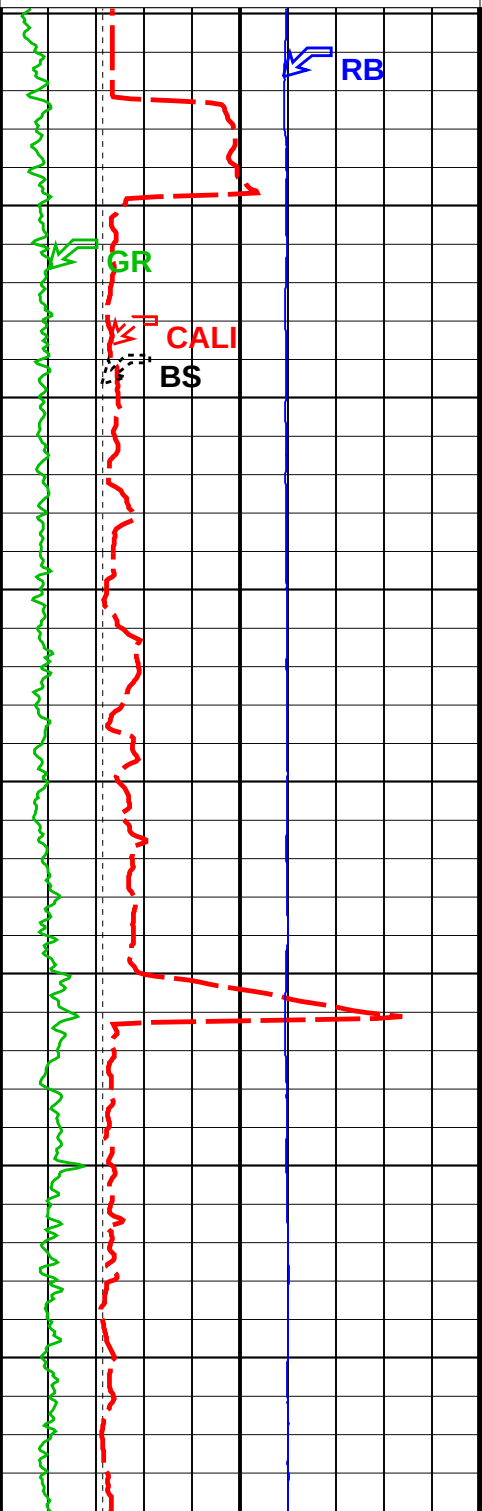




TBI 20 Inch Investigation (TBIT20)		
50	(OHMM)	500
TBI 90 Inch Investigation (TBIT90)		
50	(OHMM)	500
TBI 90 Inch Investigation (TBIT90)		
0	(OHMM)	50
TBI 20 Inch Investigation (TBIT20)		
0	(OHMM)	50



TBI 60 Inch Conductivity (ATCO90)		
1000	(MM/M)	0

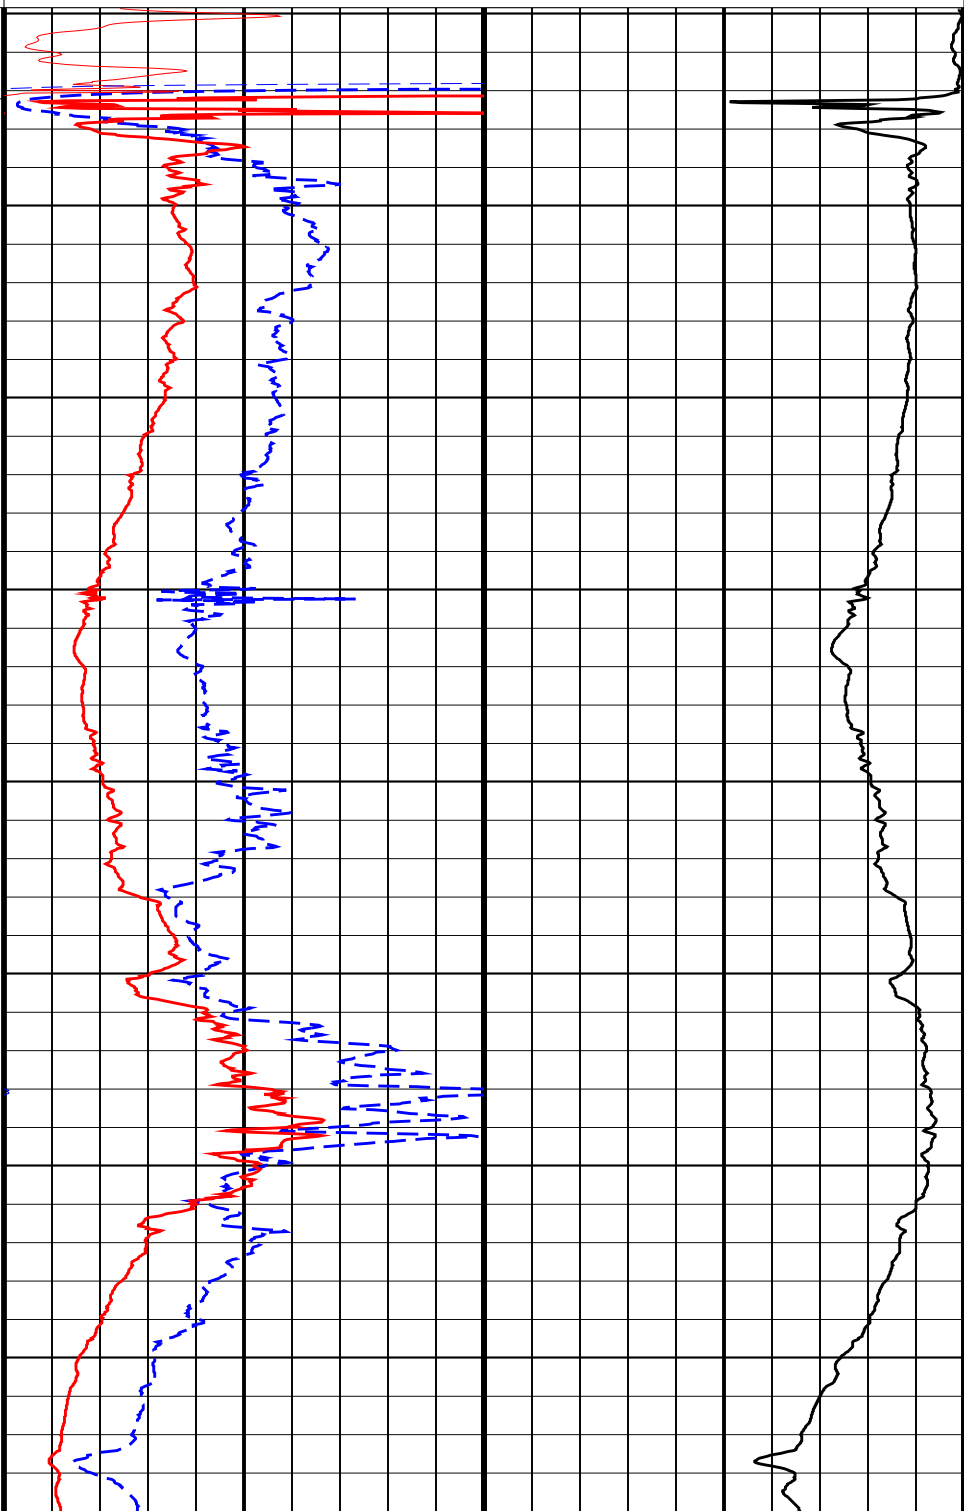


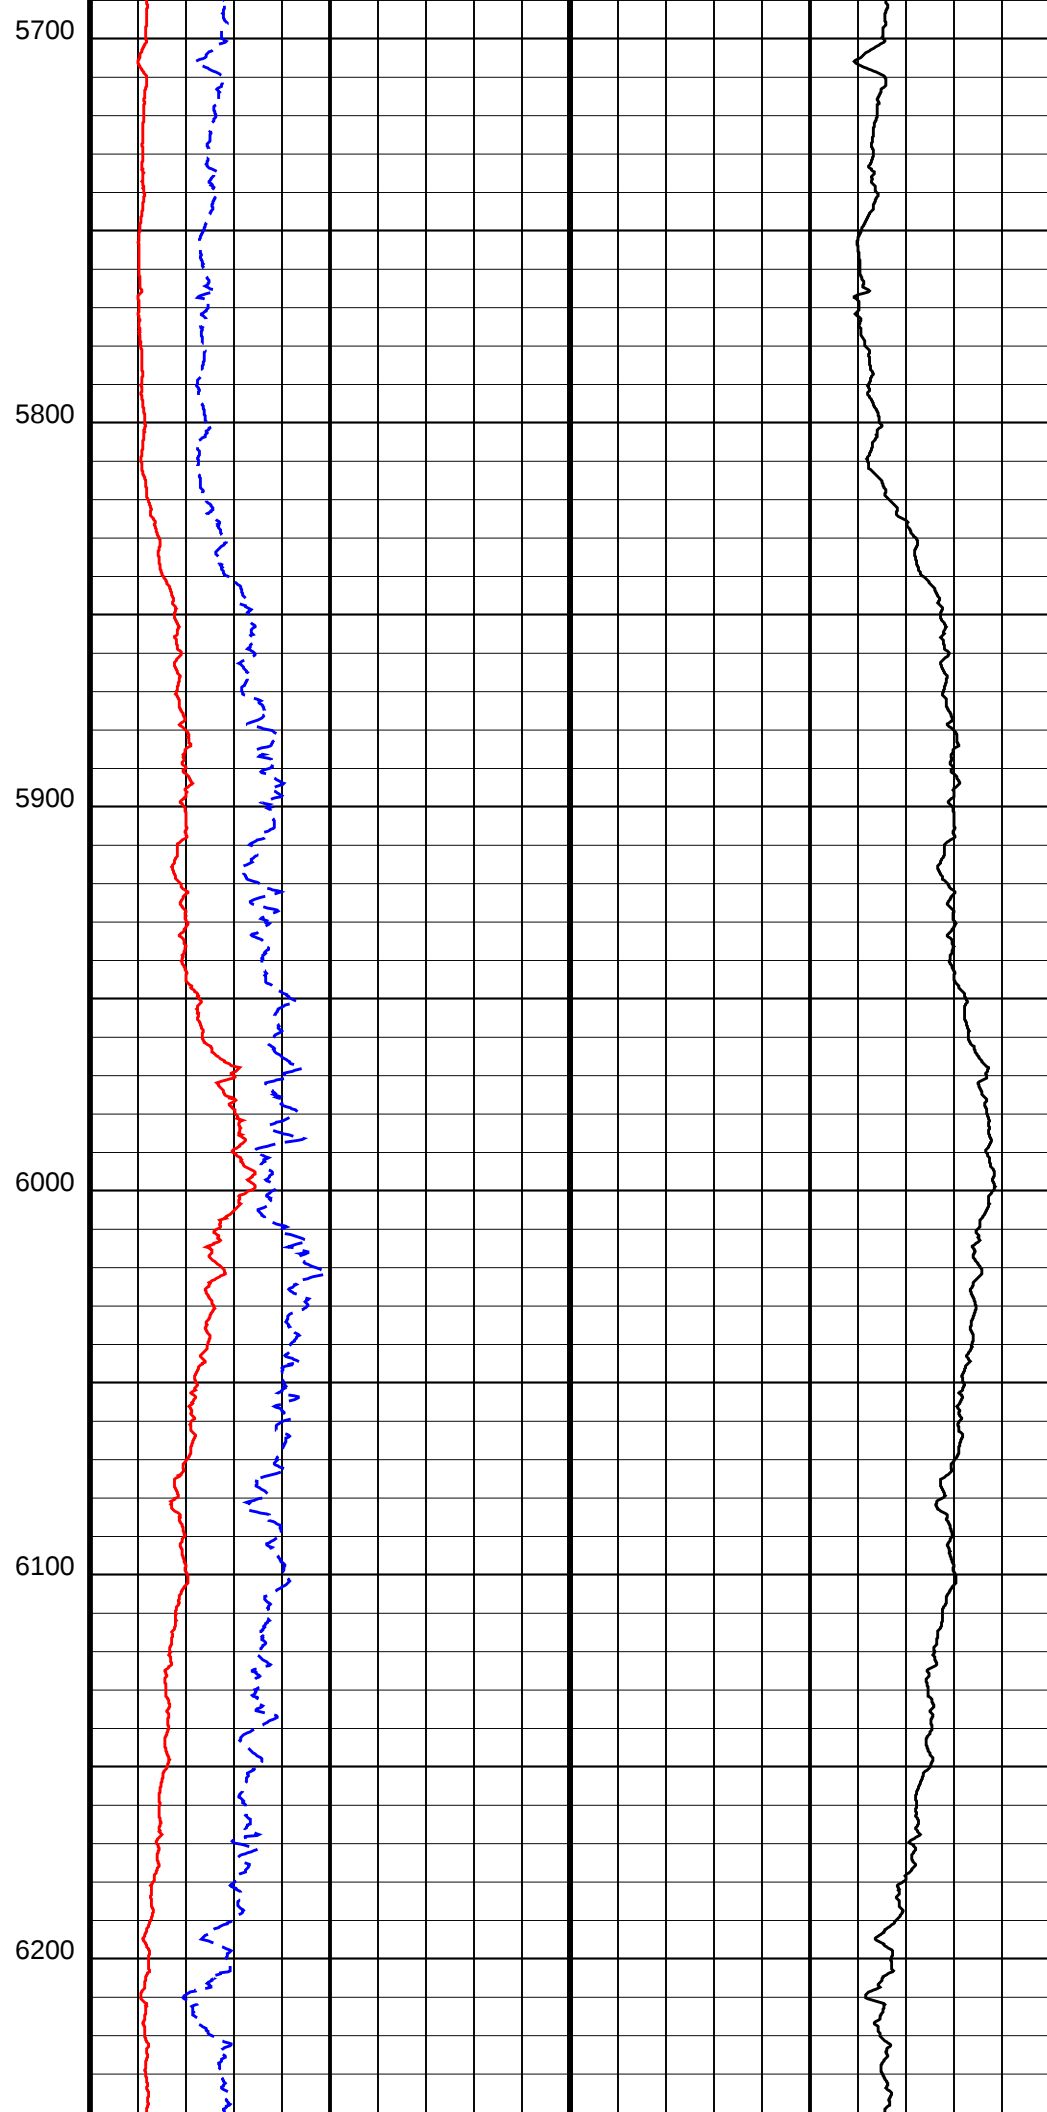
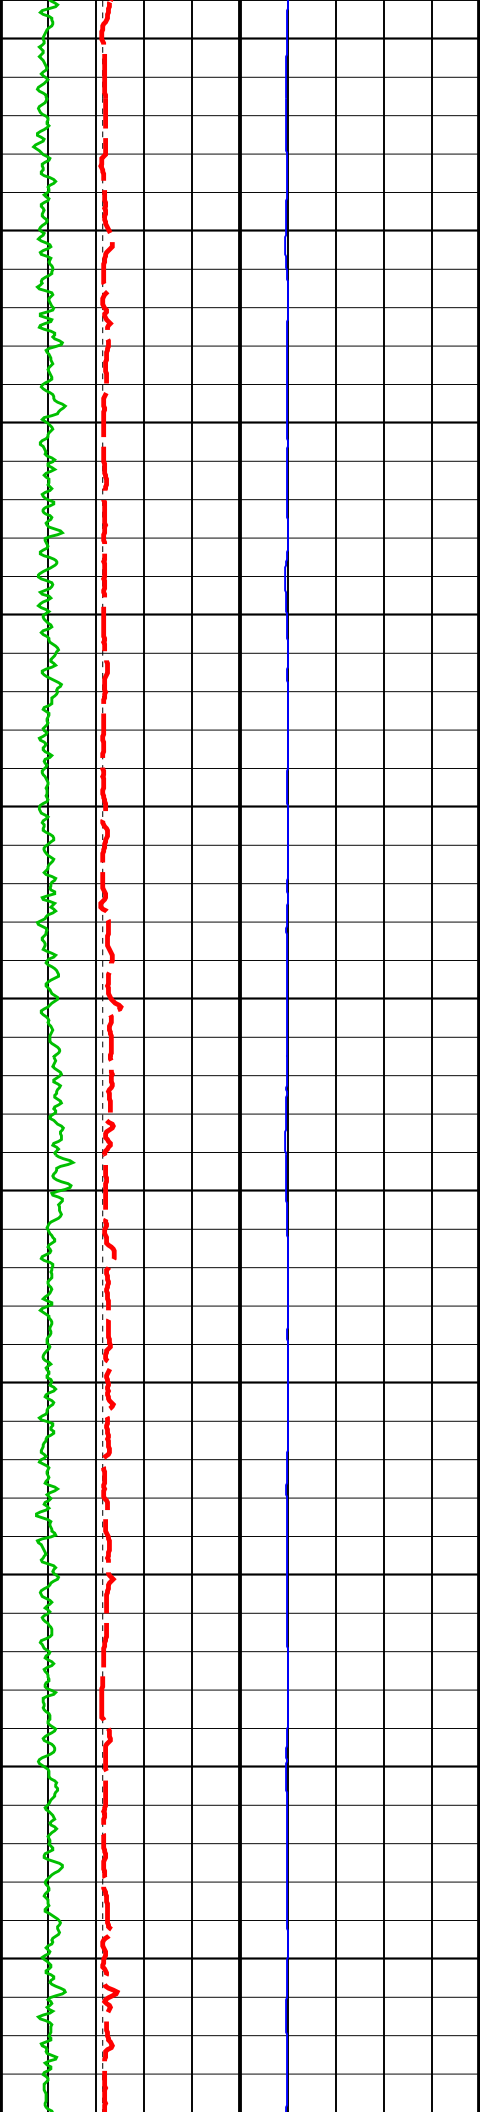


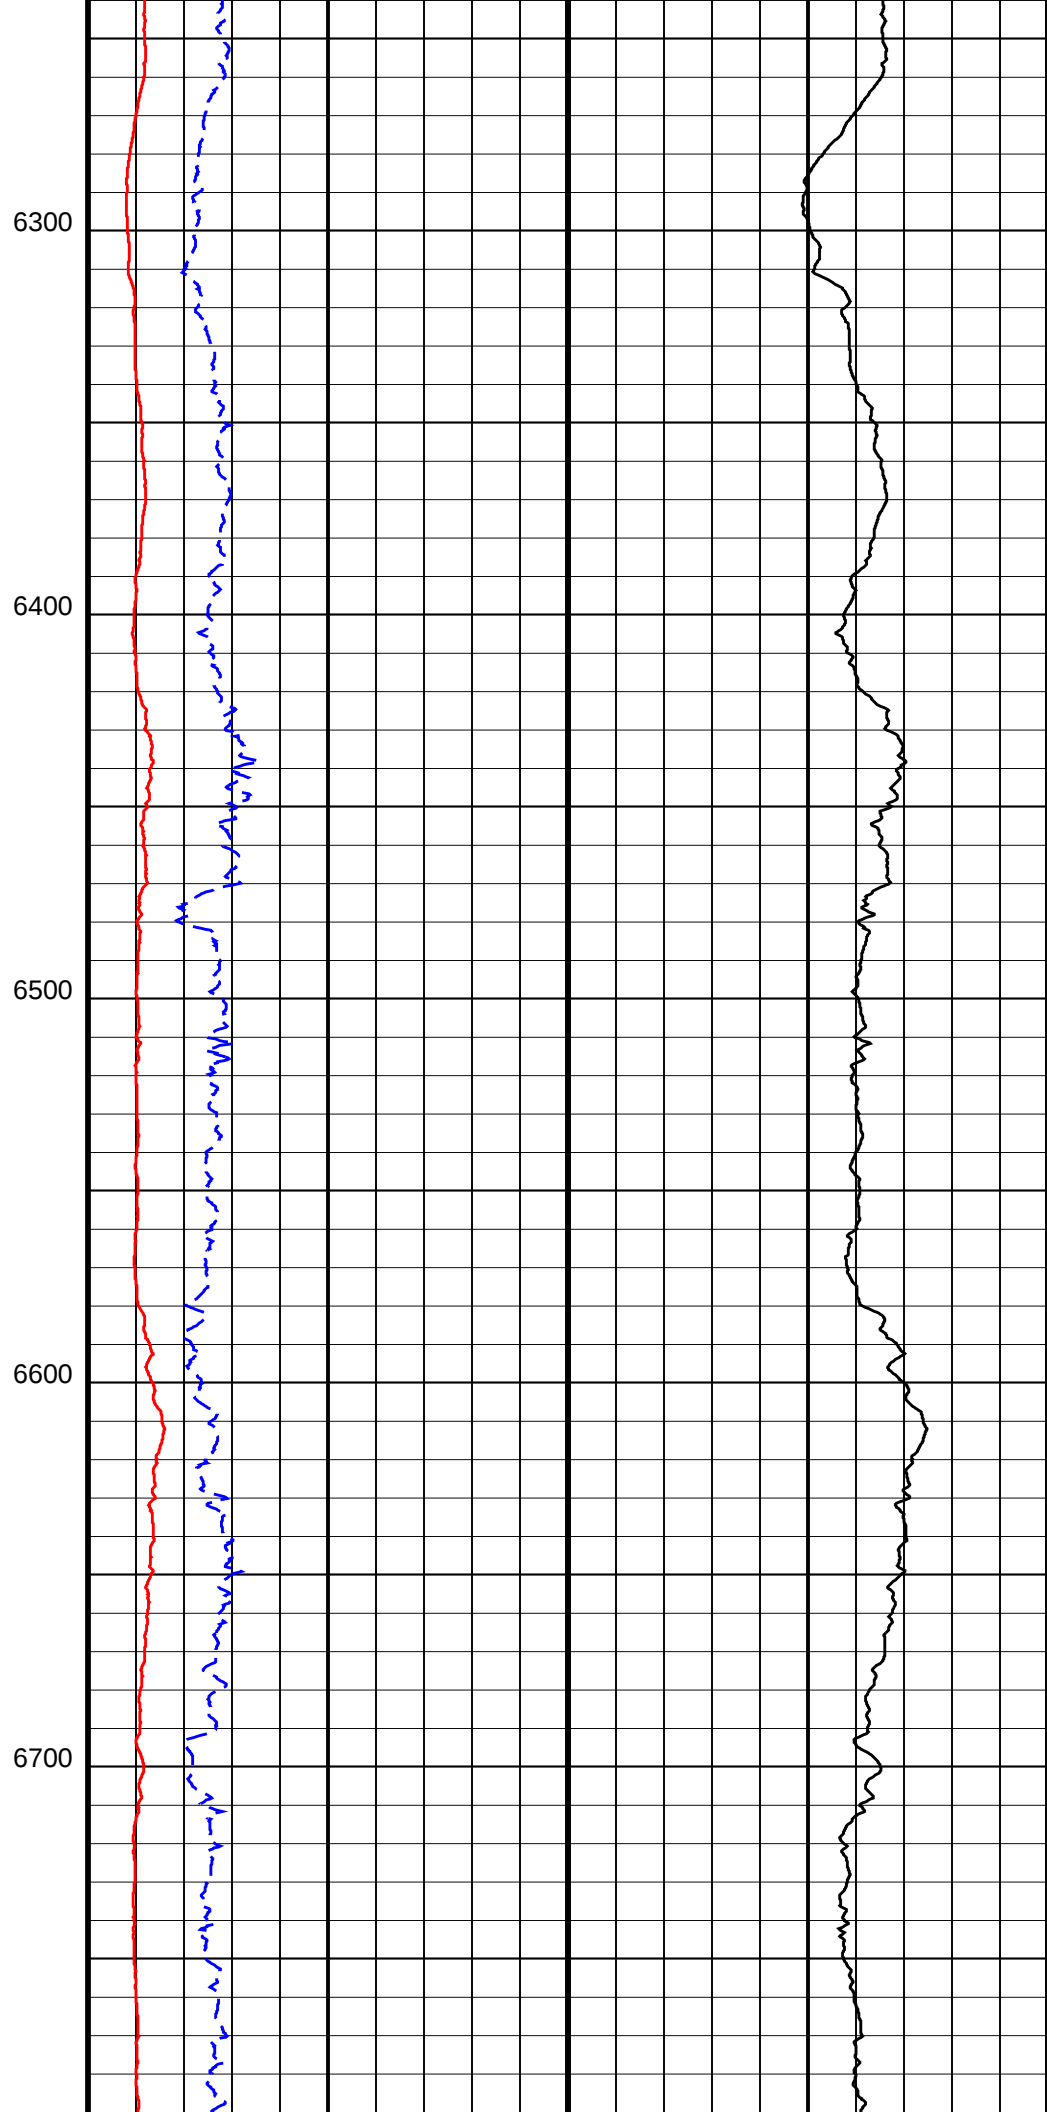
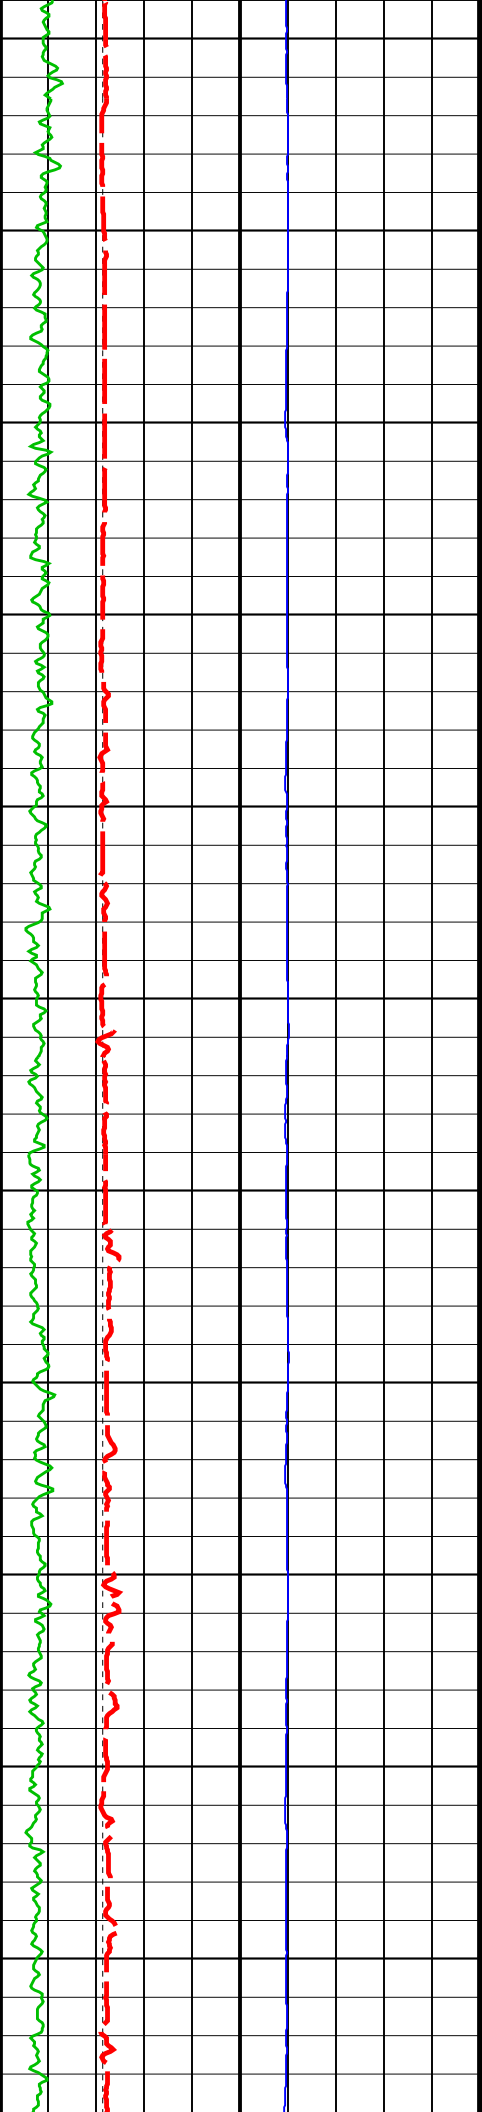


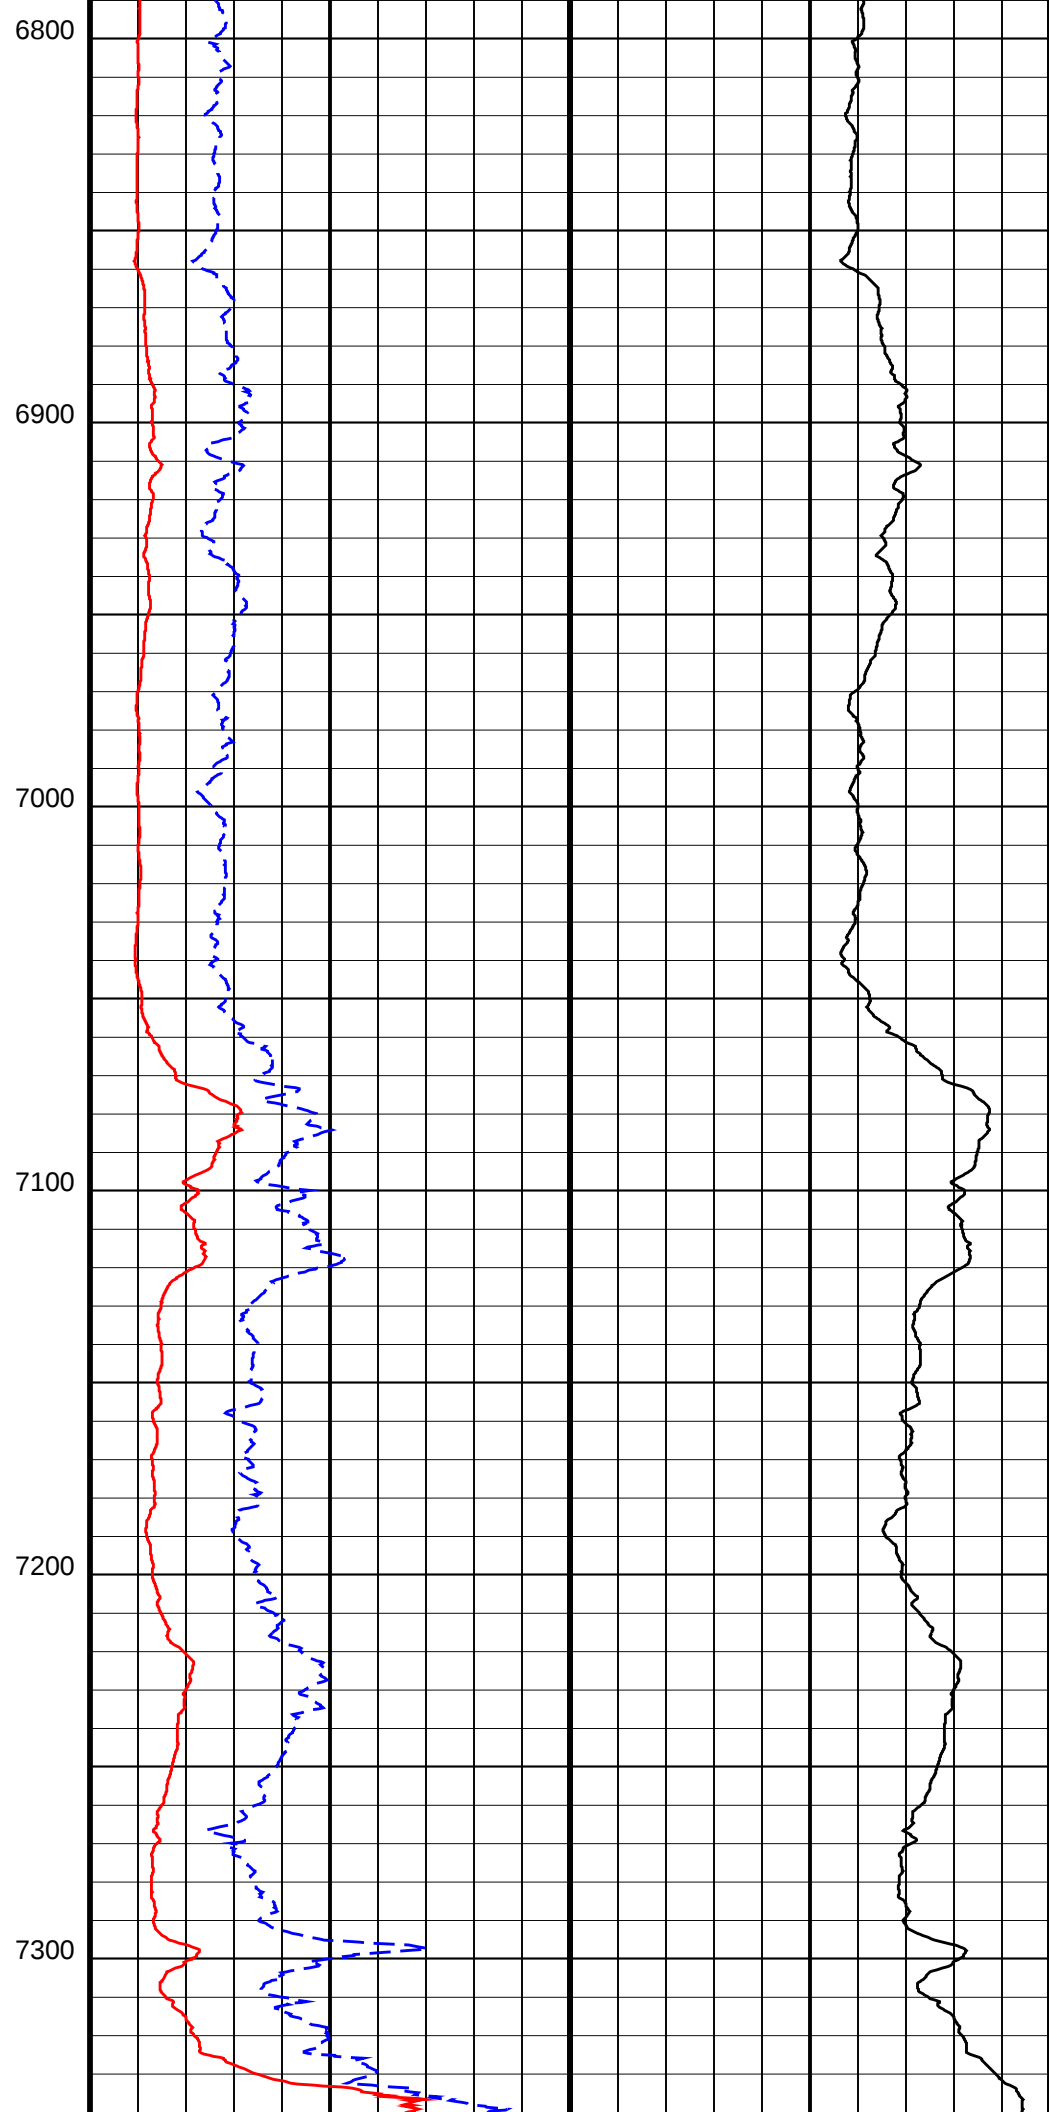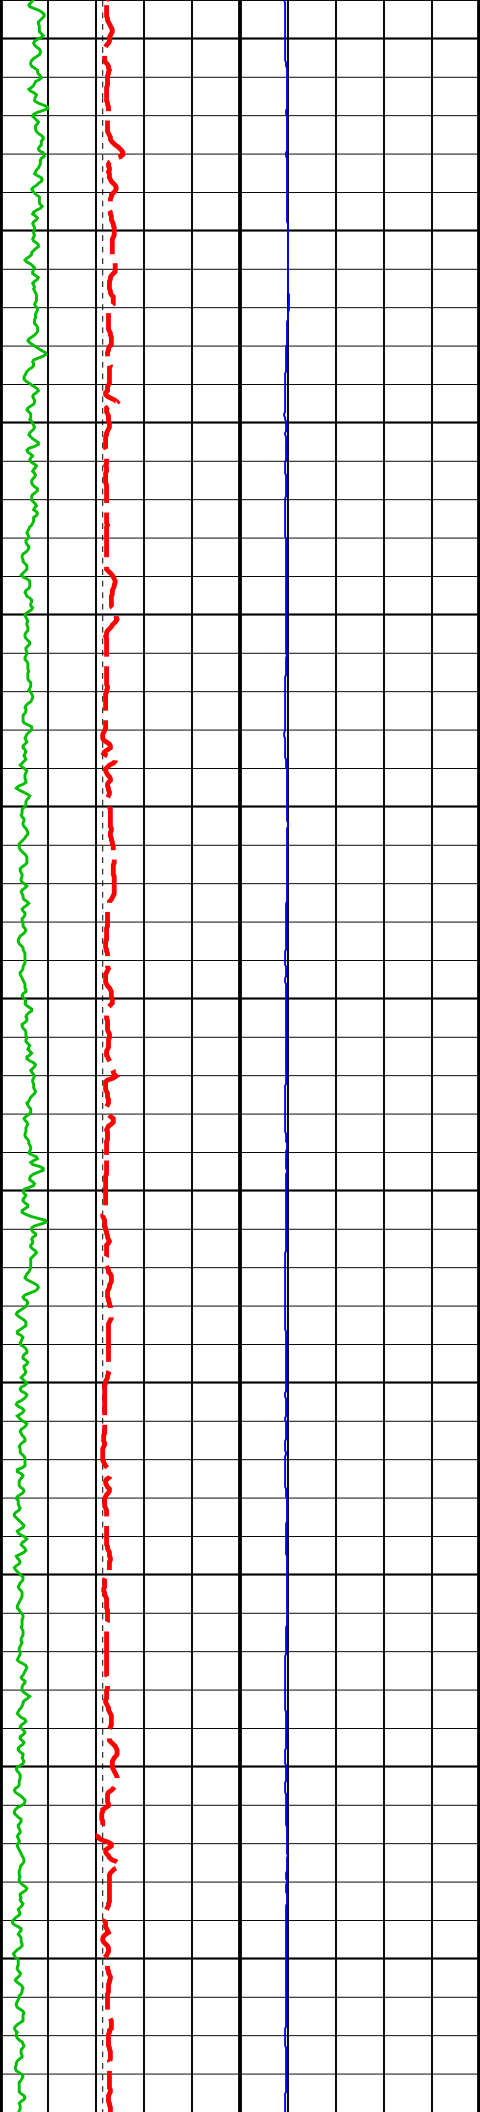


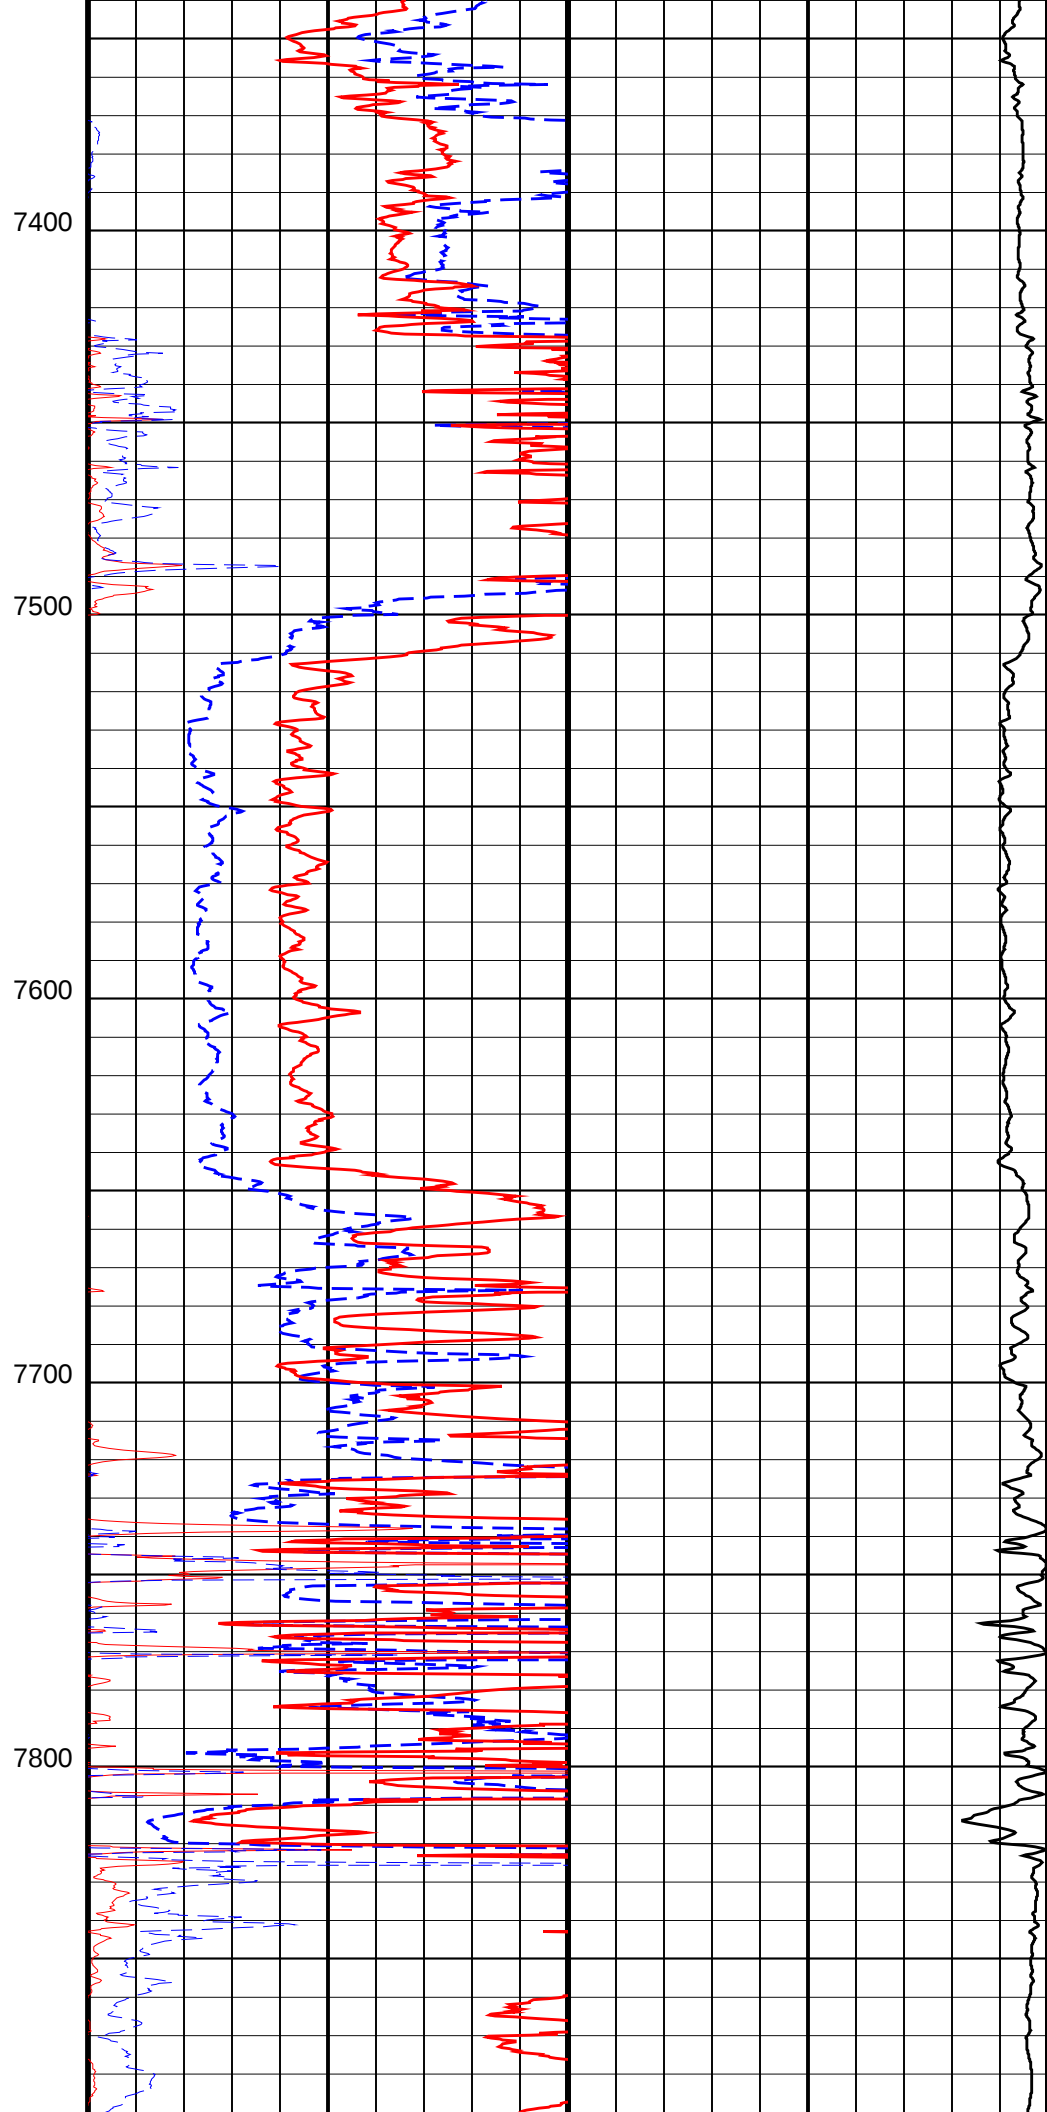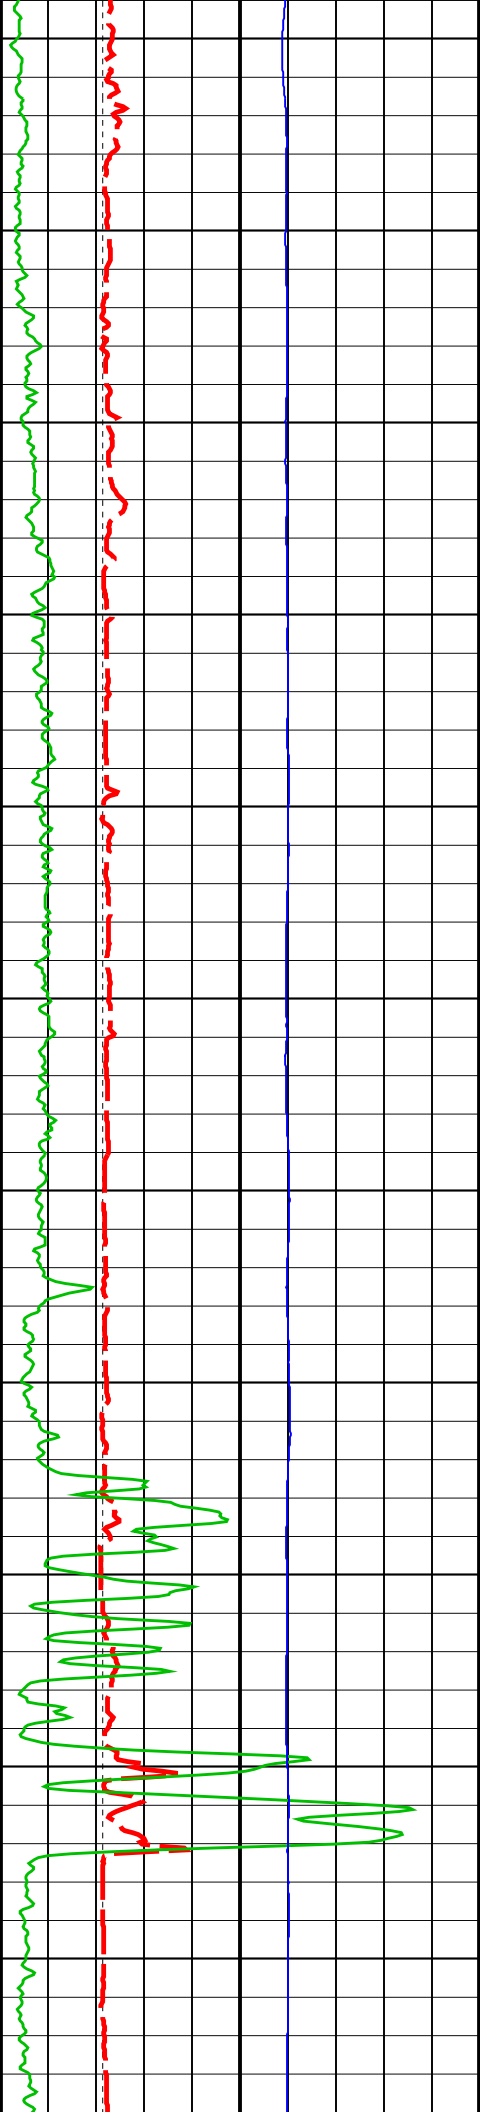

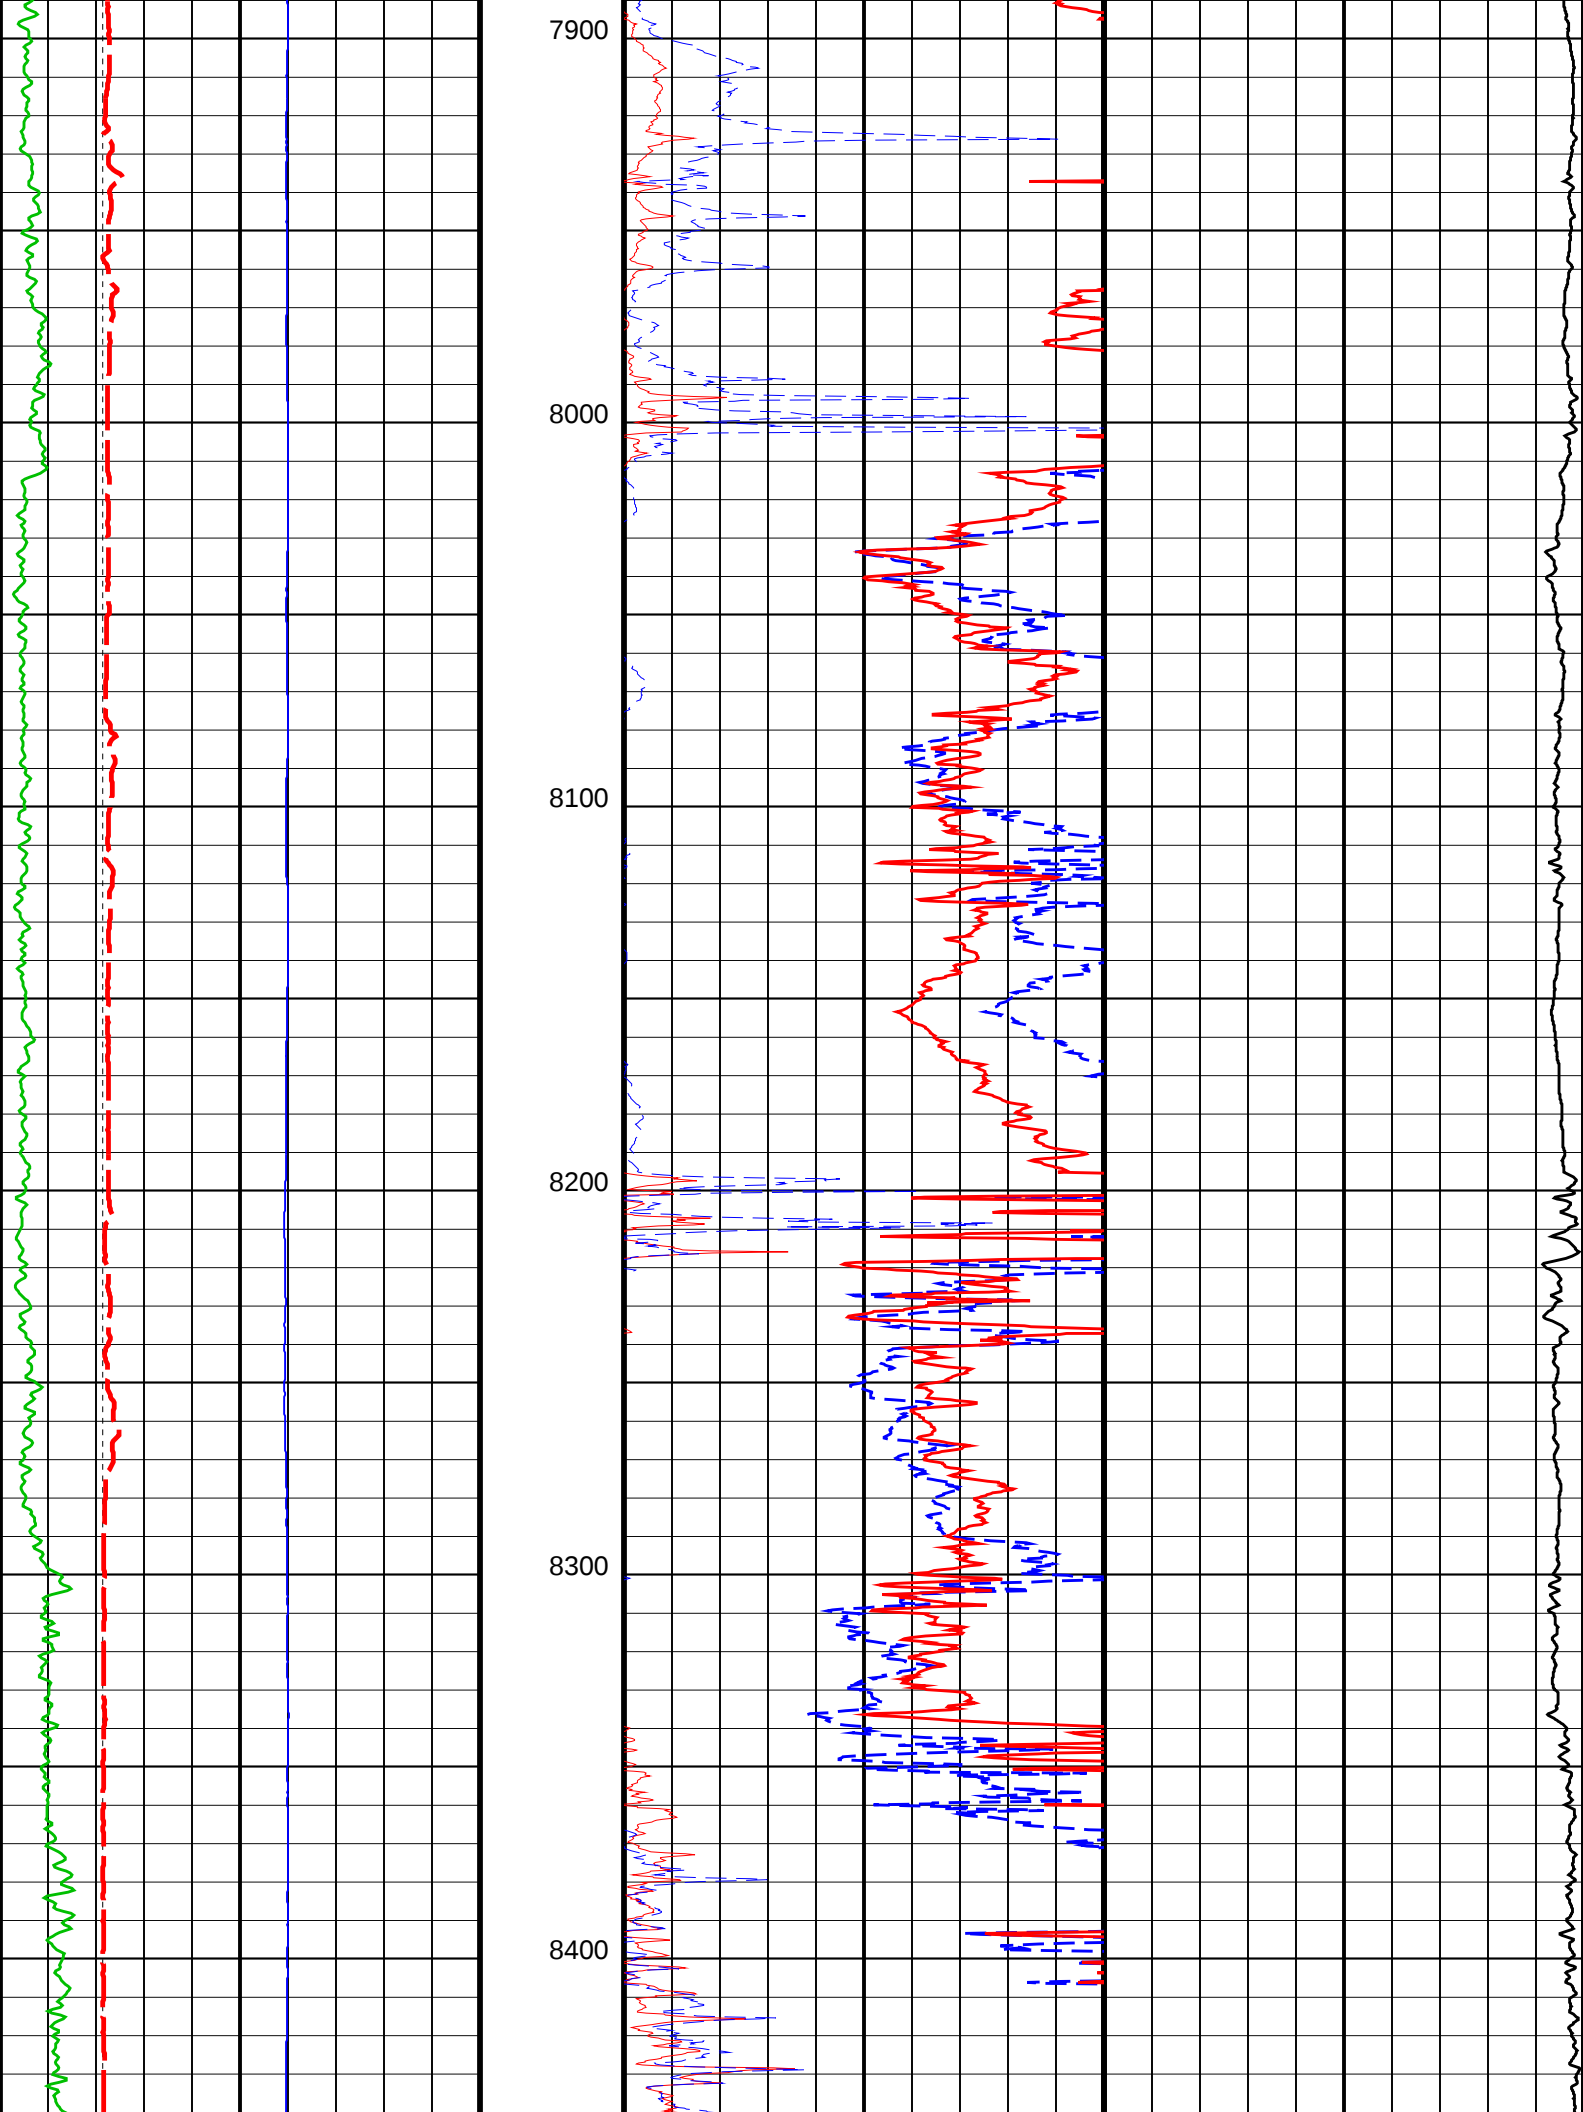

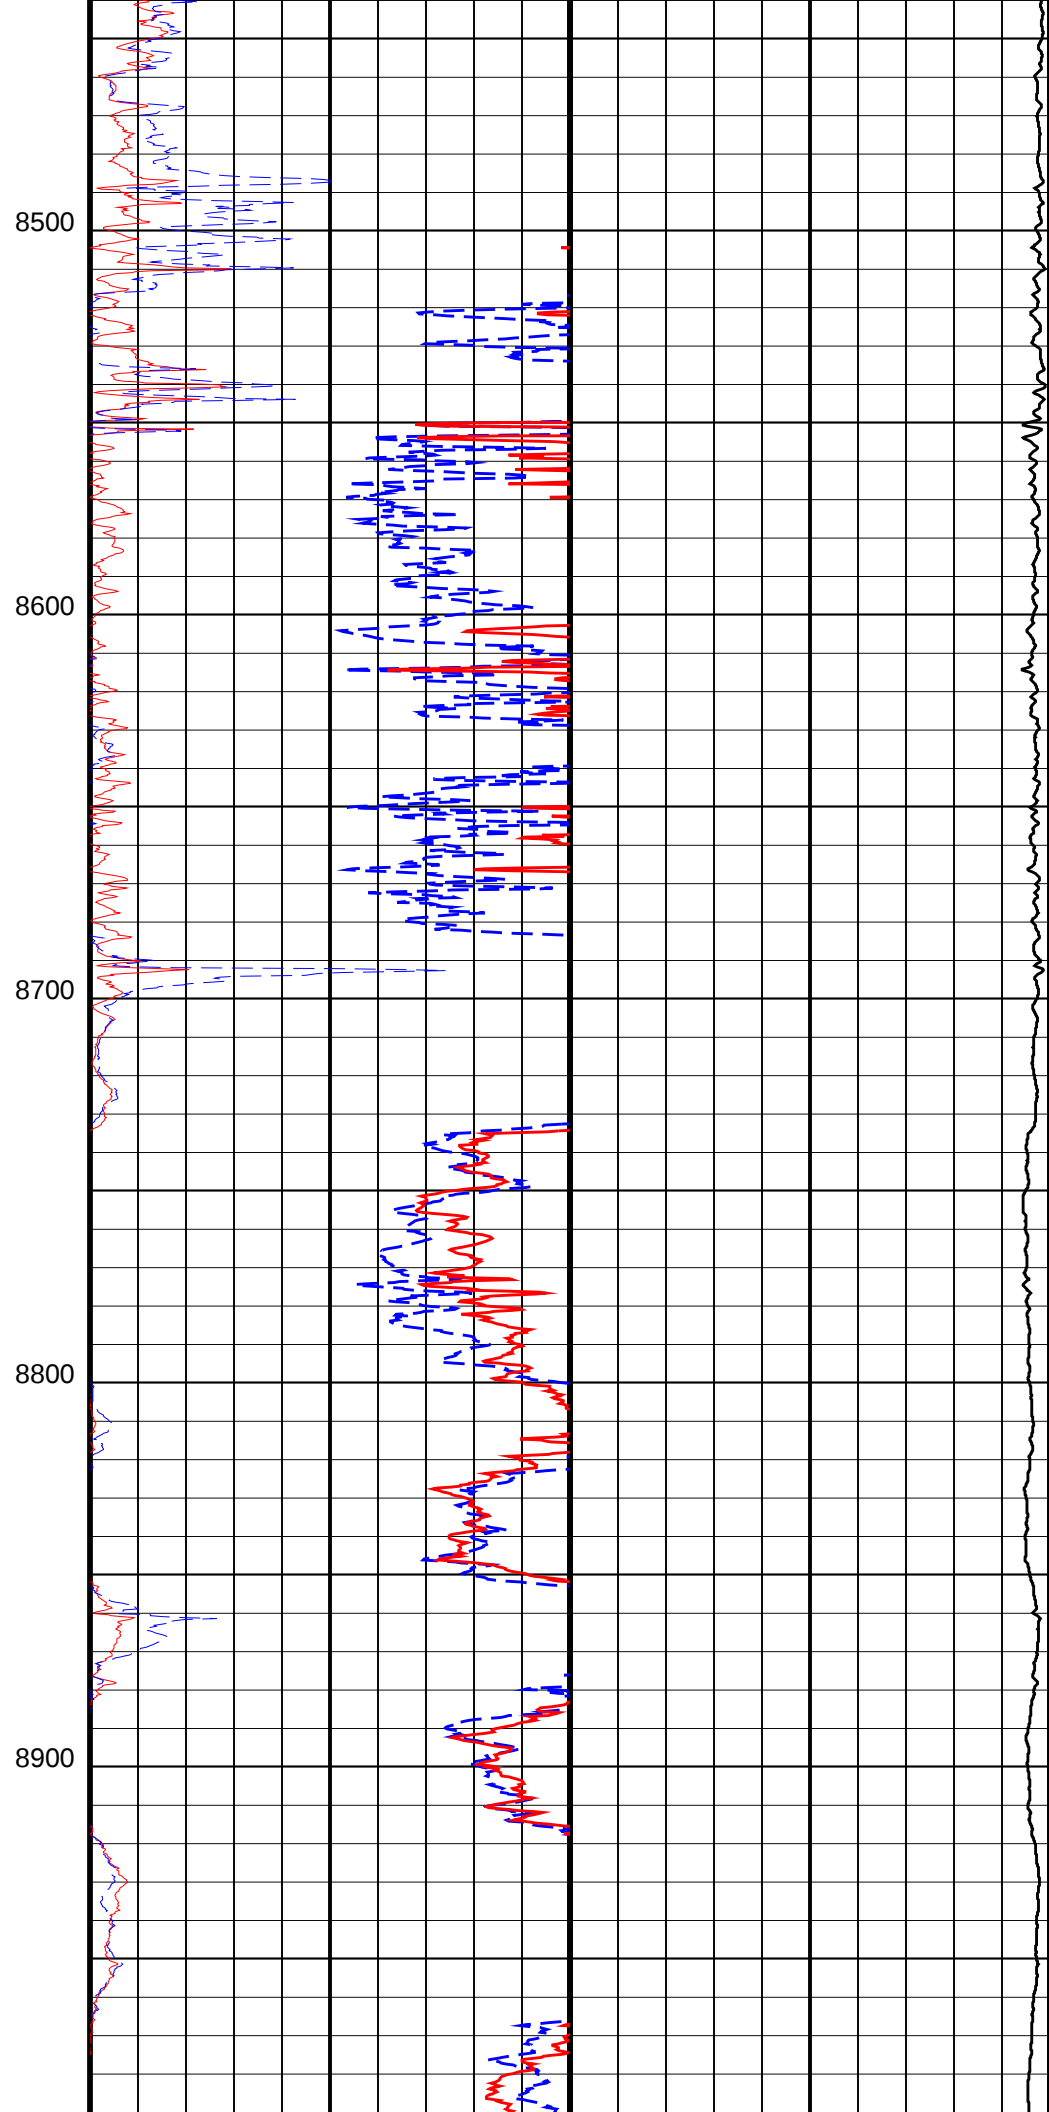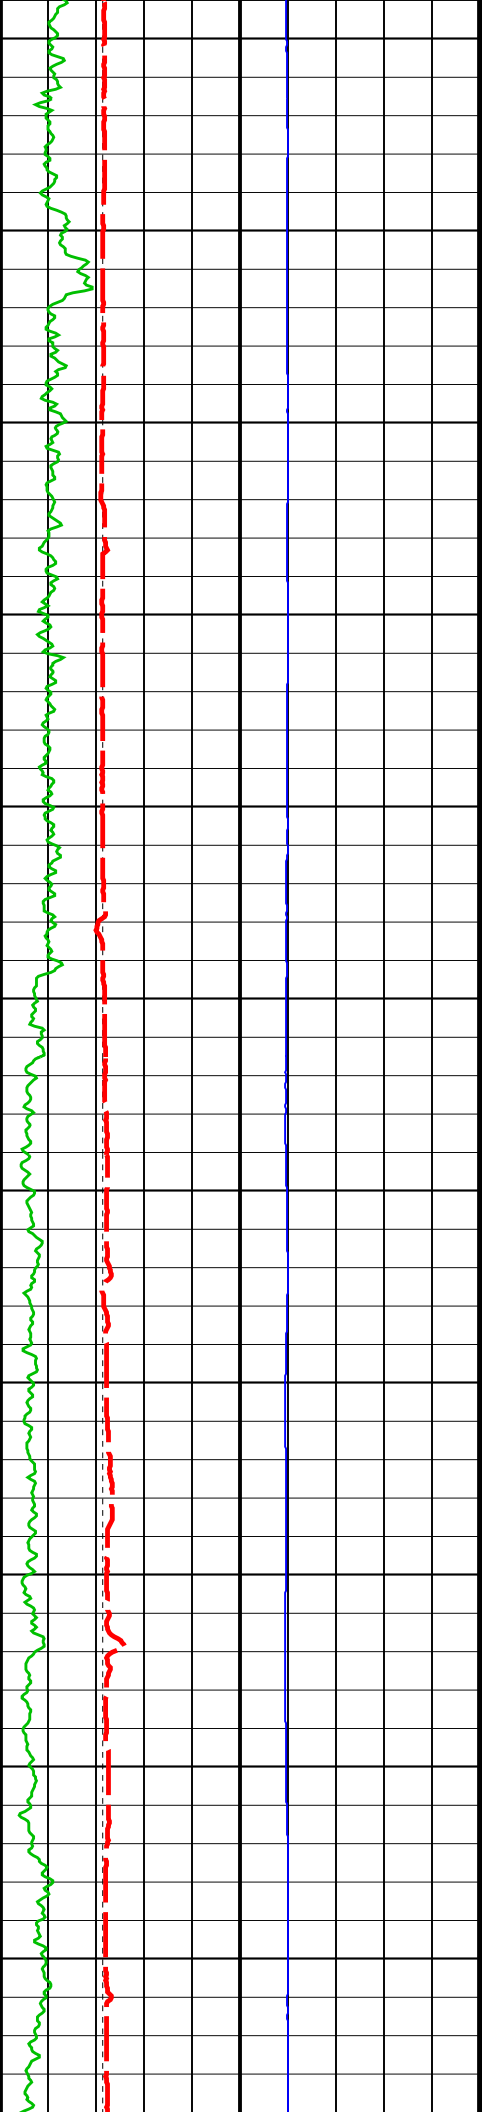

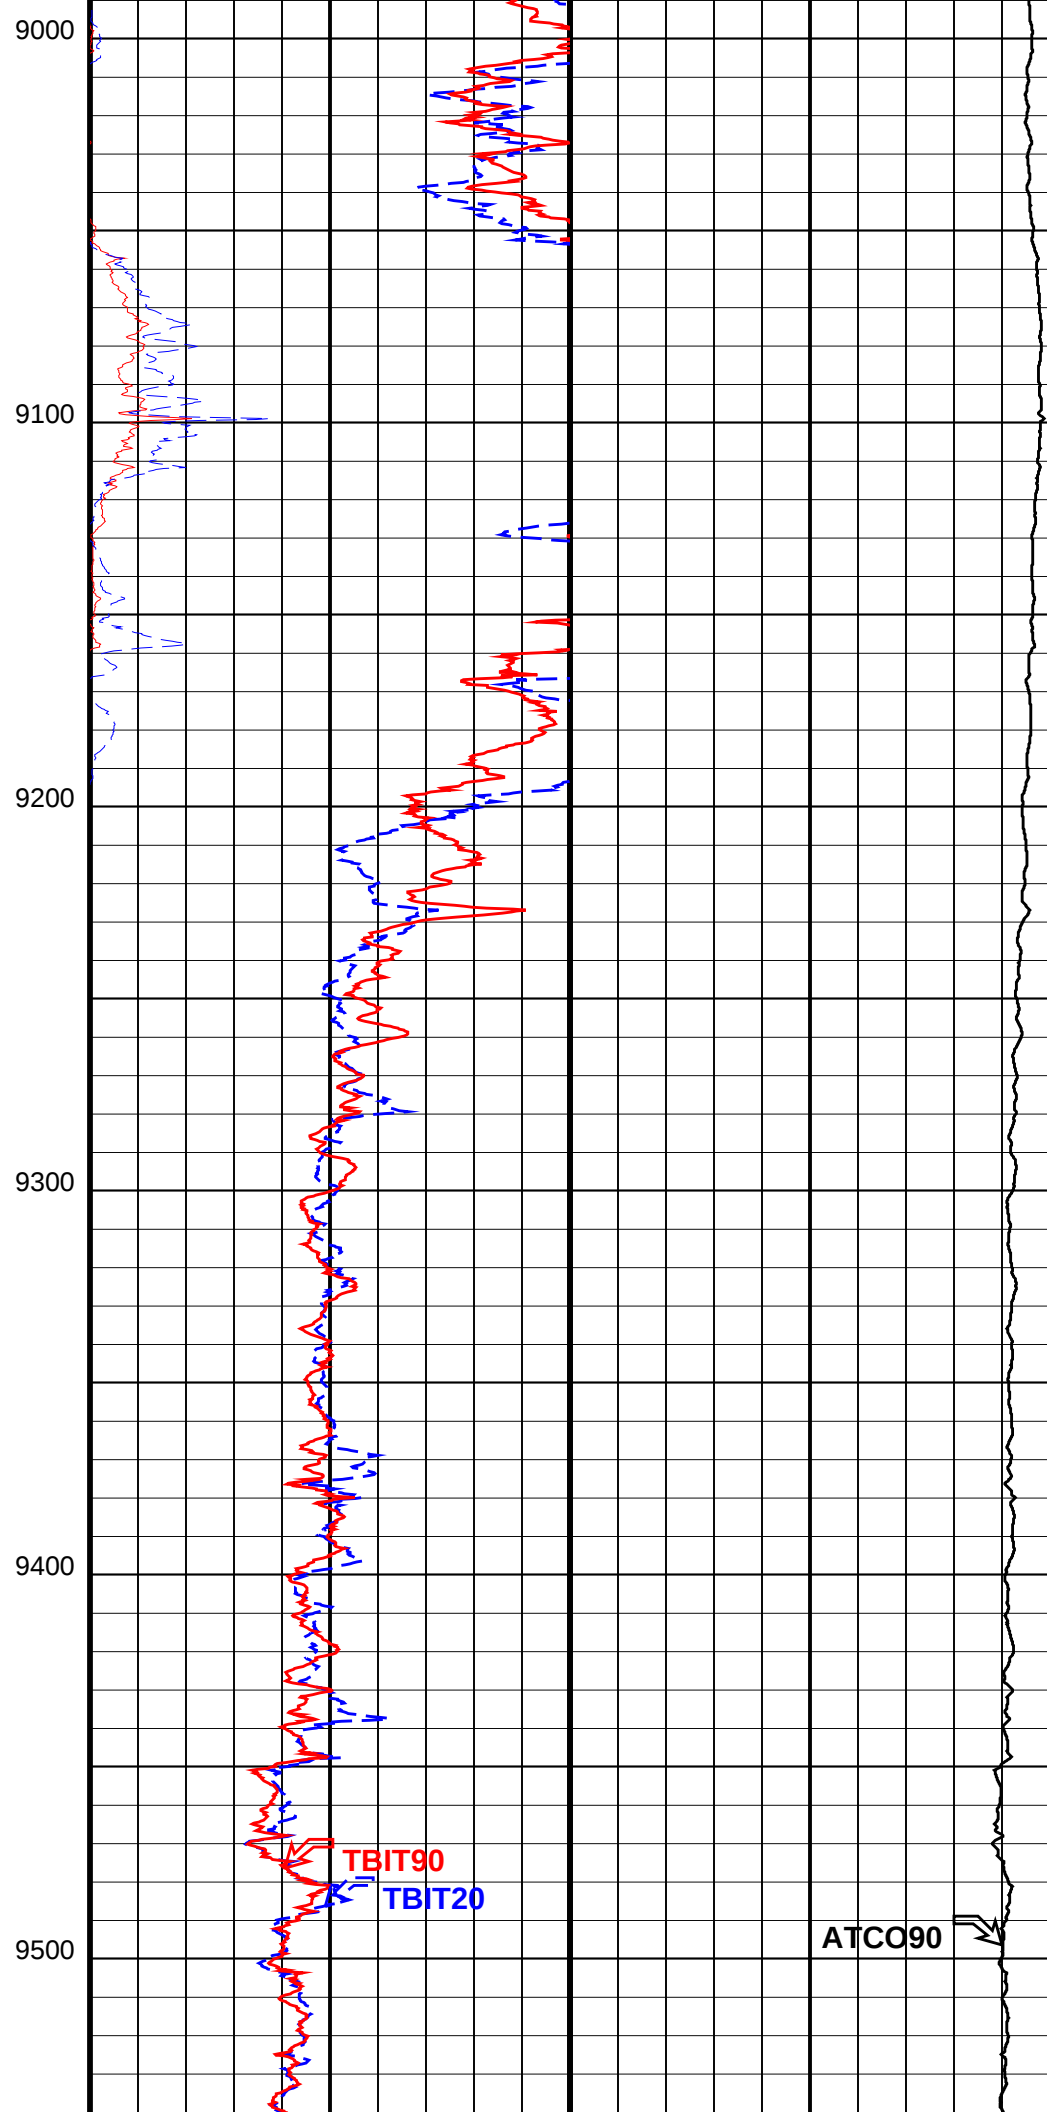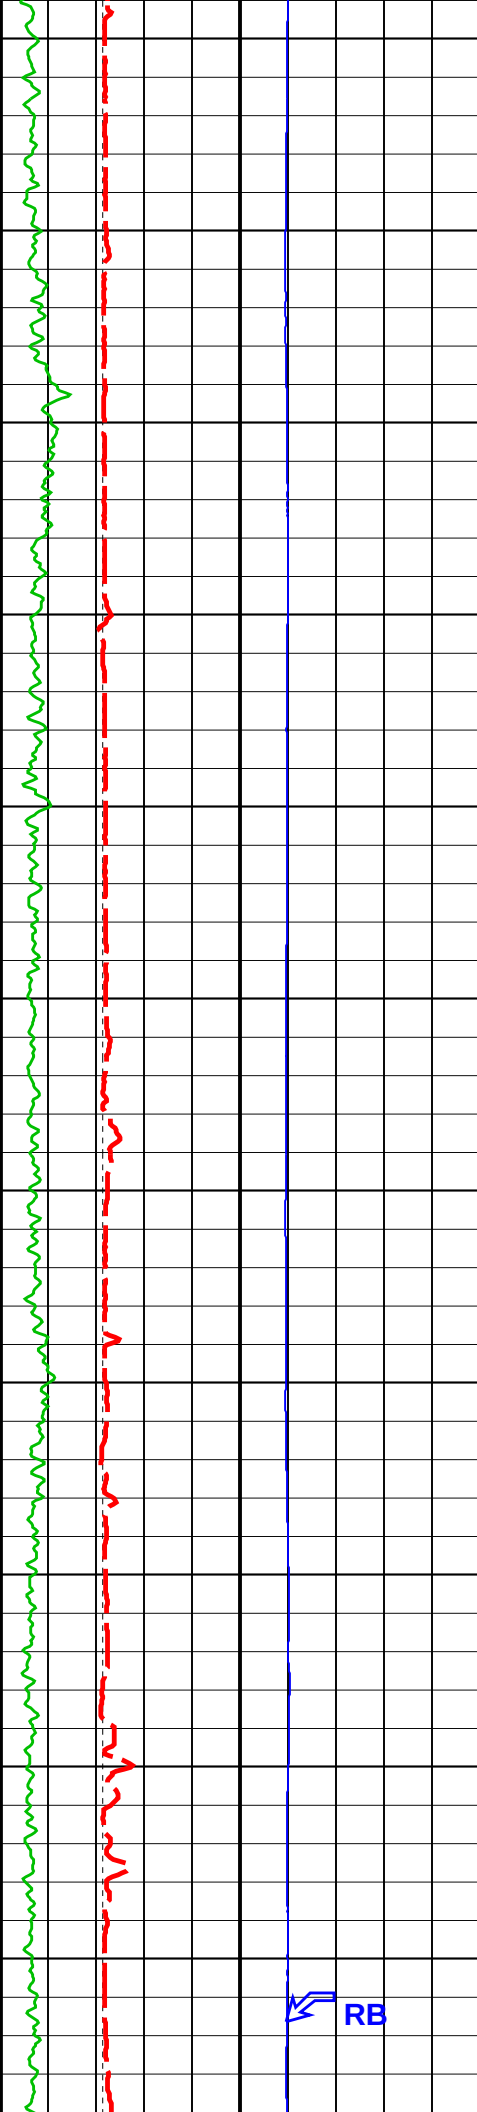

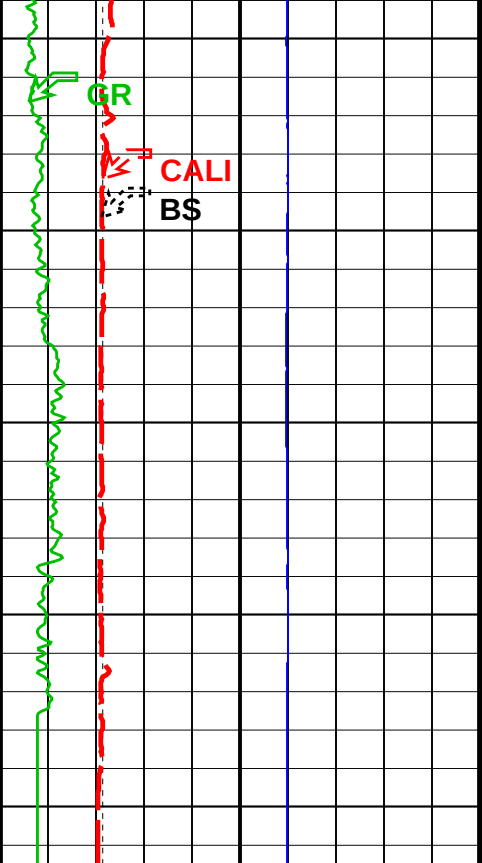

Bit Size (BS)
(IN) 4 14

Gamma Ray (GR)
(GAPI) 0 150

Gamma Ray 1 (GR)
(GAPI) 150 300

Gamma Ray 2 (GR)
(GAPI) 300 450

Gamma Ray 3 (GR)
(GAPI) 450 600

Gamma Ray 4 (GR)
(GAPI) 600 750

Caliper (CALI)
(IN) 4 14


gr wrap1
From LHT1 to GR1

gr wrap2
From LHT1 to GR2

gr wrap3
From LHT1 to GR3

gr wrap4
From LHT1 to GR4

Relative Bearing
(RB)
0 (DEG) 940

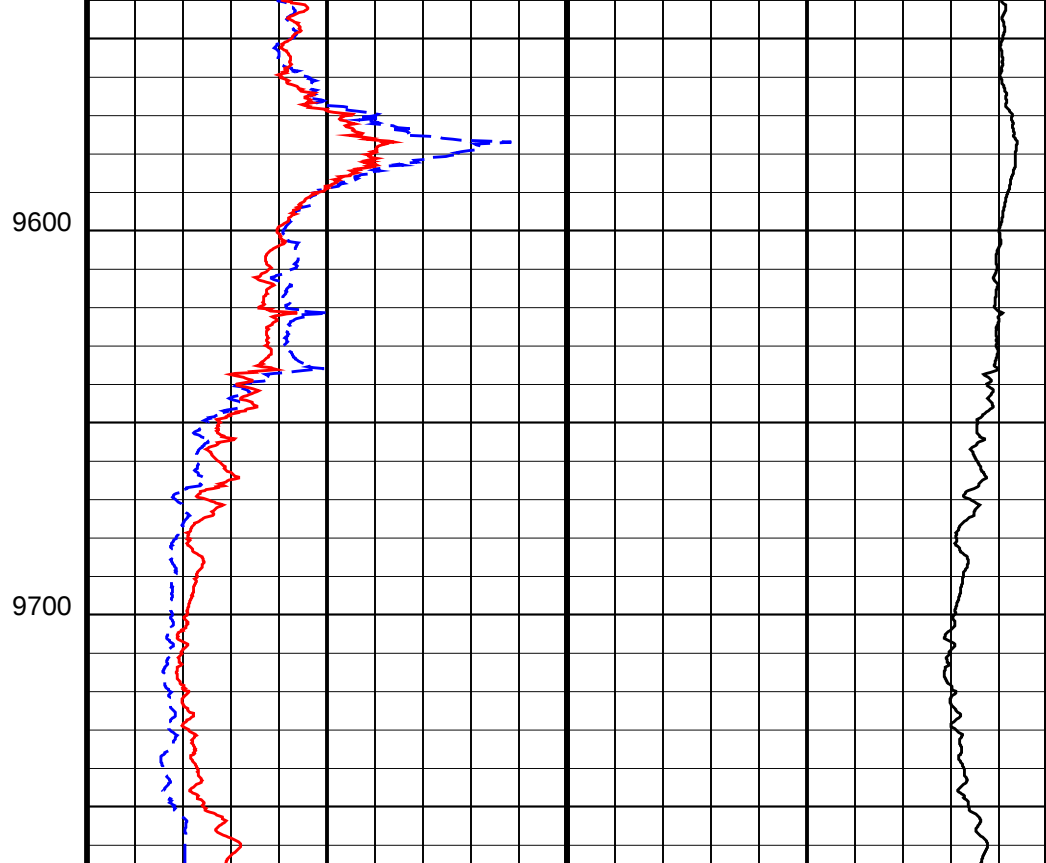

TBI 60 Inch Conductivity (ATCO90)
(MM/M) 1000 0

TBI 20 Inch Investigation (TBIT20)
(OHMM) 0 50

TBI 90 Inch Investigation (TBIT90)
(OHMM) 0 50

TBI 90 Inch Investigation (TBIT90)
(OHMM) 50 500

TBI 20 Inch Investigation (TBIT20)
(OHMM) 50 500

Parameters		
DLIS Name	Description	Value

TBT-A: ThruBit String		
MT	Mud Type (for TBN and TBI correction)	WBM
RB_OFFSET	Additional RB offset (degrees)	0.000 deg
TBI_ALGO	TBI Algorithm Selection	AIT
TBI_BHC_OP	Borehole Correction Option (for TBI)	CALIPER
TBI_CALTYP	TBI Mastercal Type	THRUBIT
TBI_REPL_ARRAY_DEST	TBI: Replace This Array	NONE
TBI_REPL_ARRAY_SOURCE	TBI: With This Array	NONE
TBI_TC_OP	Induction Temperature Correction Option	LOWER
System and Miscellaneous		
BS	Bit Size	6.125 in

Format: TB_2INCH_RESISTIVITY	Vertical Scale: 2" per 100'	Graphics File Created: 17-Sep-2014 06:54
OP System Version: 19C2-270		
TBT	SRPC-5303-ThruBit	
Input DLIS Files		
ThruBit_003PUP	FN:2	17-Sep-2014 06:46 9765.0 FT 2970.0 FT




MAIN PASS


MAXIS Field Log


Company: SANDRIDGE ENERGY		Well: RANDY 3508 2-3H 1L	
Input DLIS Files			
ThruBit_003PUP	FN:2	17-Sep-2014 06:46	9765.0 FT 2970.0 FT
OP System Version: 19C2-270			
TBT	SRPC-5303-ThruBit		
	Relative Bearing (RB) 0 (DEG) 940		
gr wrap4 From LHT1 to GR4			
gr wrap3 From LHT1 to GR3			
gr wrap2 From LHT1 to GR2			
gr wrap1 From LHT1 to GR1			
Caliper (CALI)			
4	(IN)		14
Gamma Ray 4 (GR)			
600	(GAPI)		750
Gamma Ray 3 (GR)			
450	(GAPI)		600

Gamma Ray 2 (GR)		
300	(GAPI)	450
Gamma Ray 1 (GR)		
150	(GAPI)	300
Gamma Ray (GR)		
0	(GAPI)	150
Bit Size (BS)		
4	(IN)	14

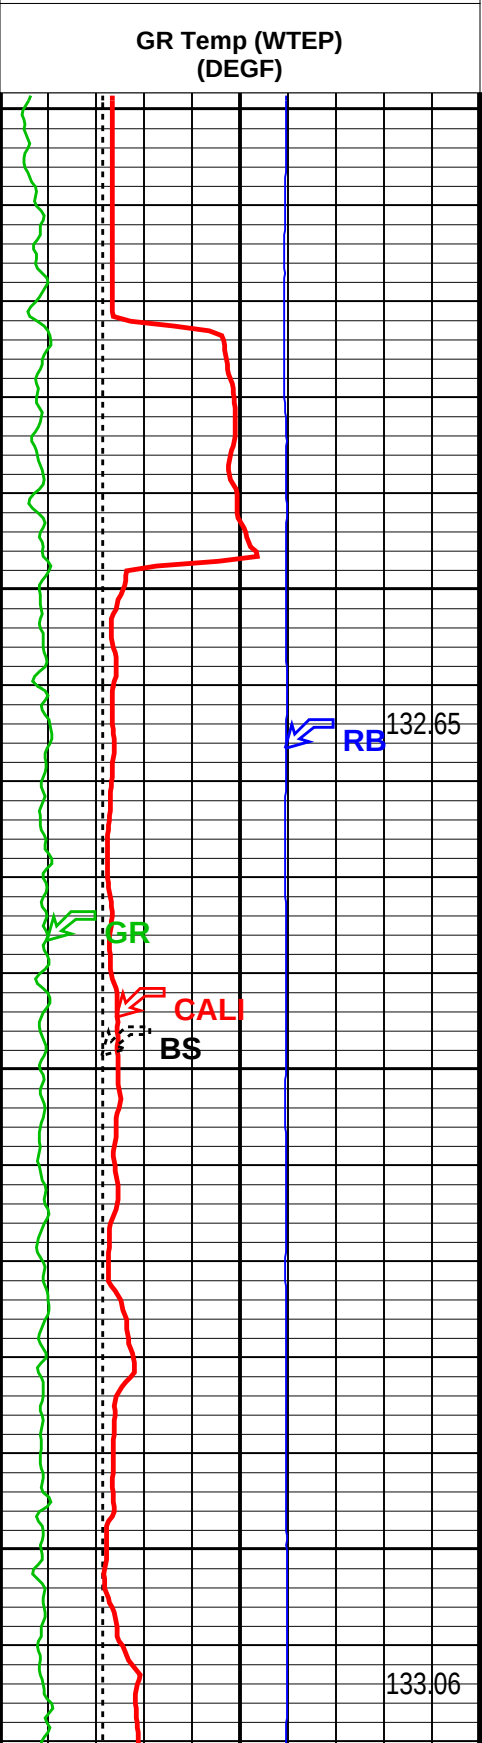

TBI 90 Inch Investigation (TBIT90)		
0.2	(OHMM)	2000
TBI 60 Inch Investigation (TBIT60)		
0.2	(OHMM)	2000
TBI 30 Inch Investigation (TBIT30)		
0.2	(OHMM)	2000
TBI 20 Inch Investigation (TBIT20)		
0.2	(OHMM)	2000

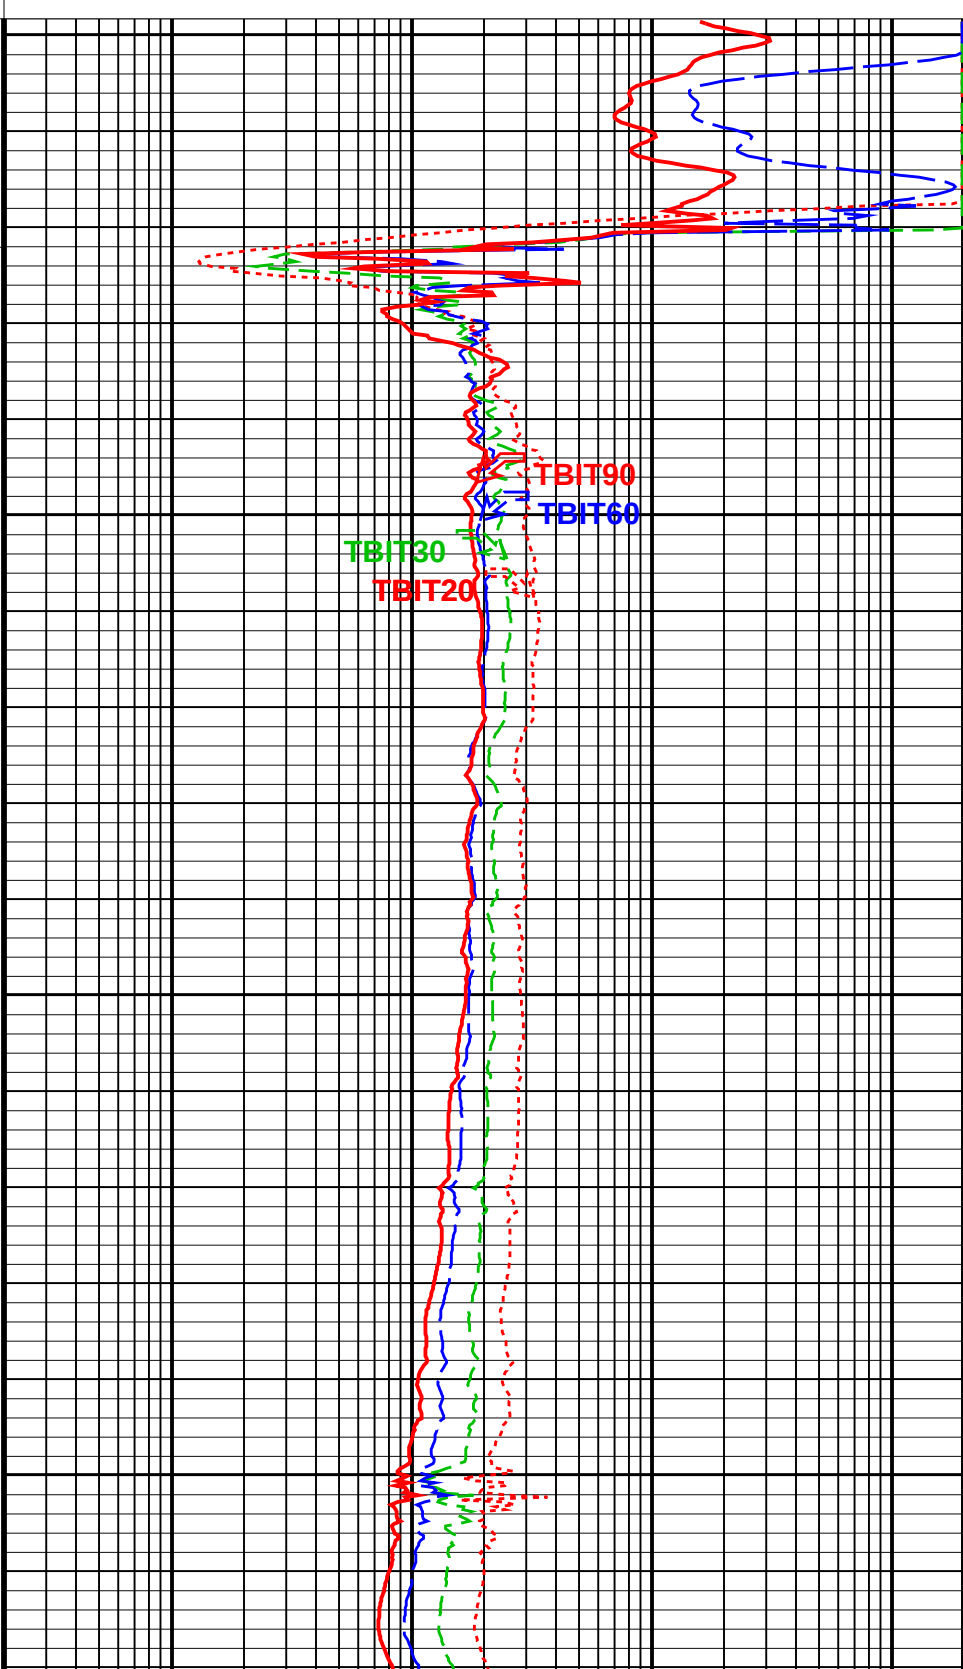


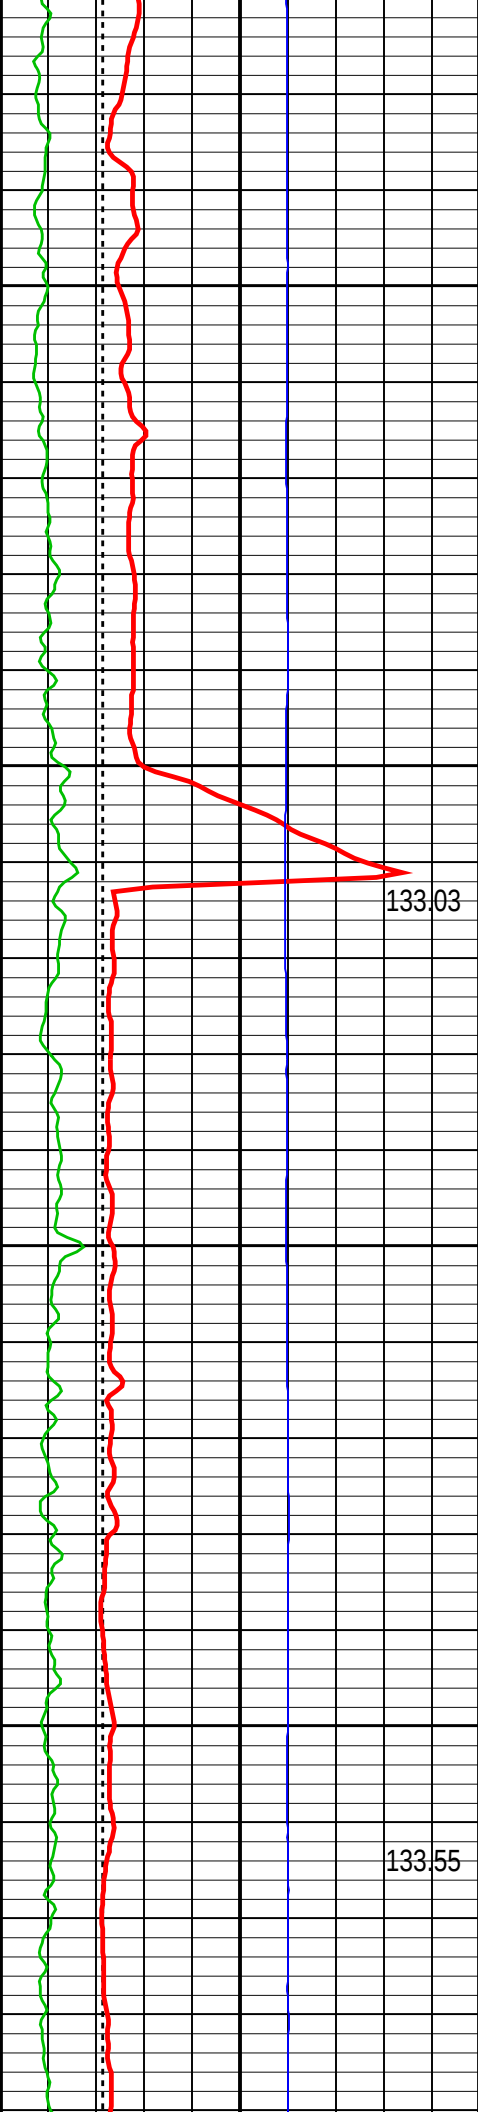

5500

5600

133.55

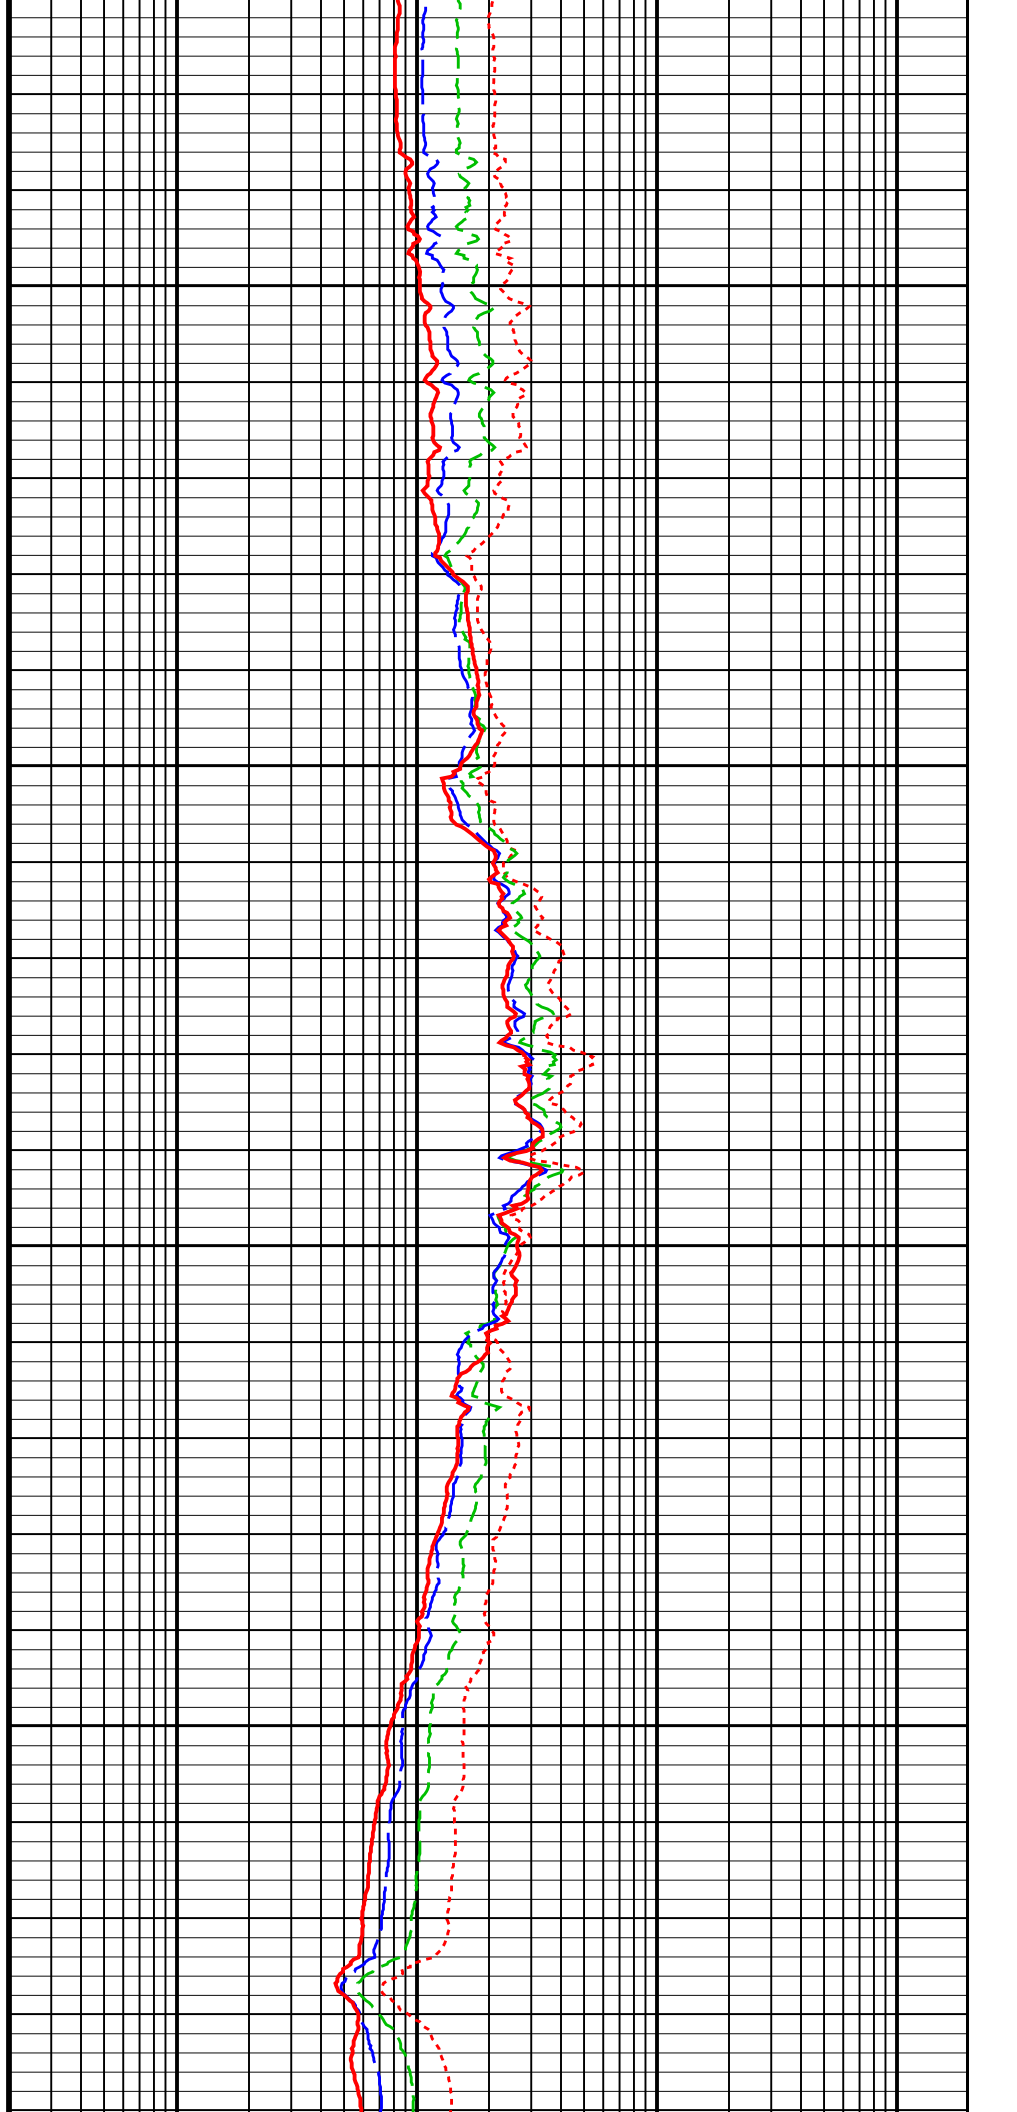




5700


133.96

5800

134.16


5900

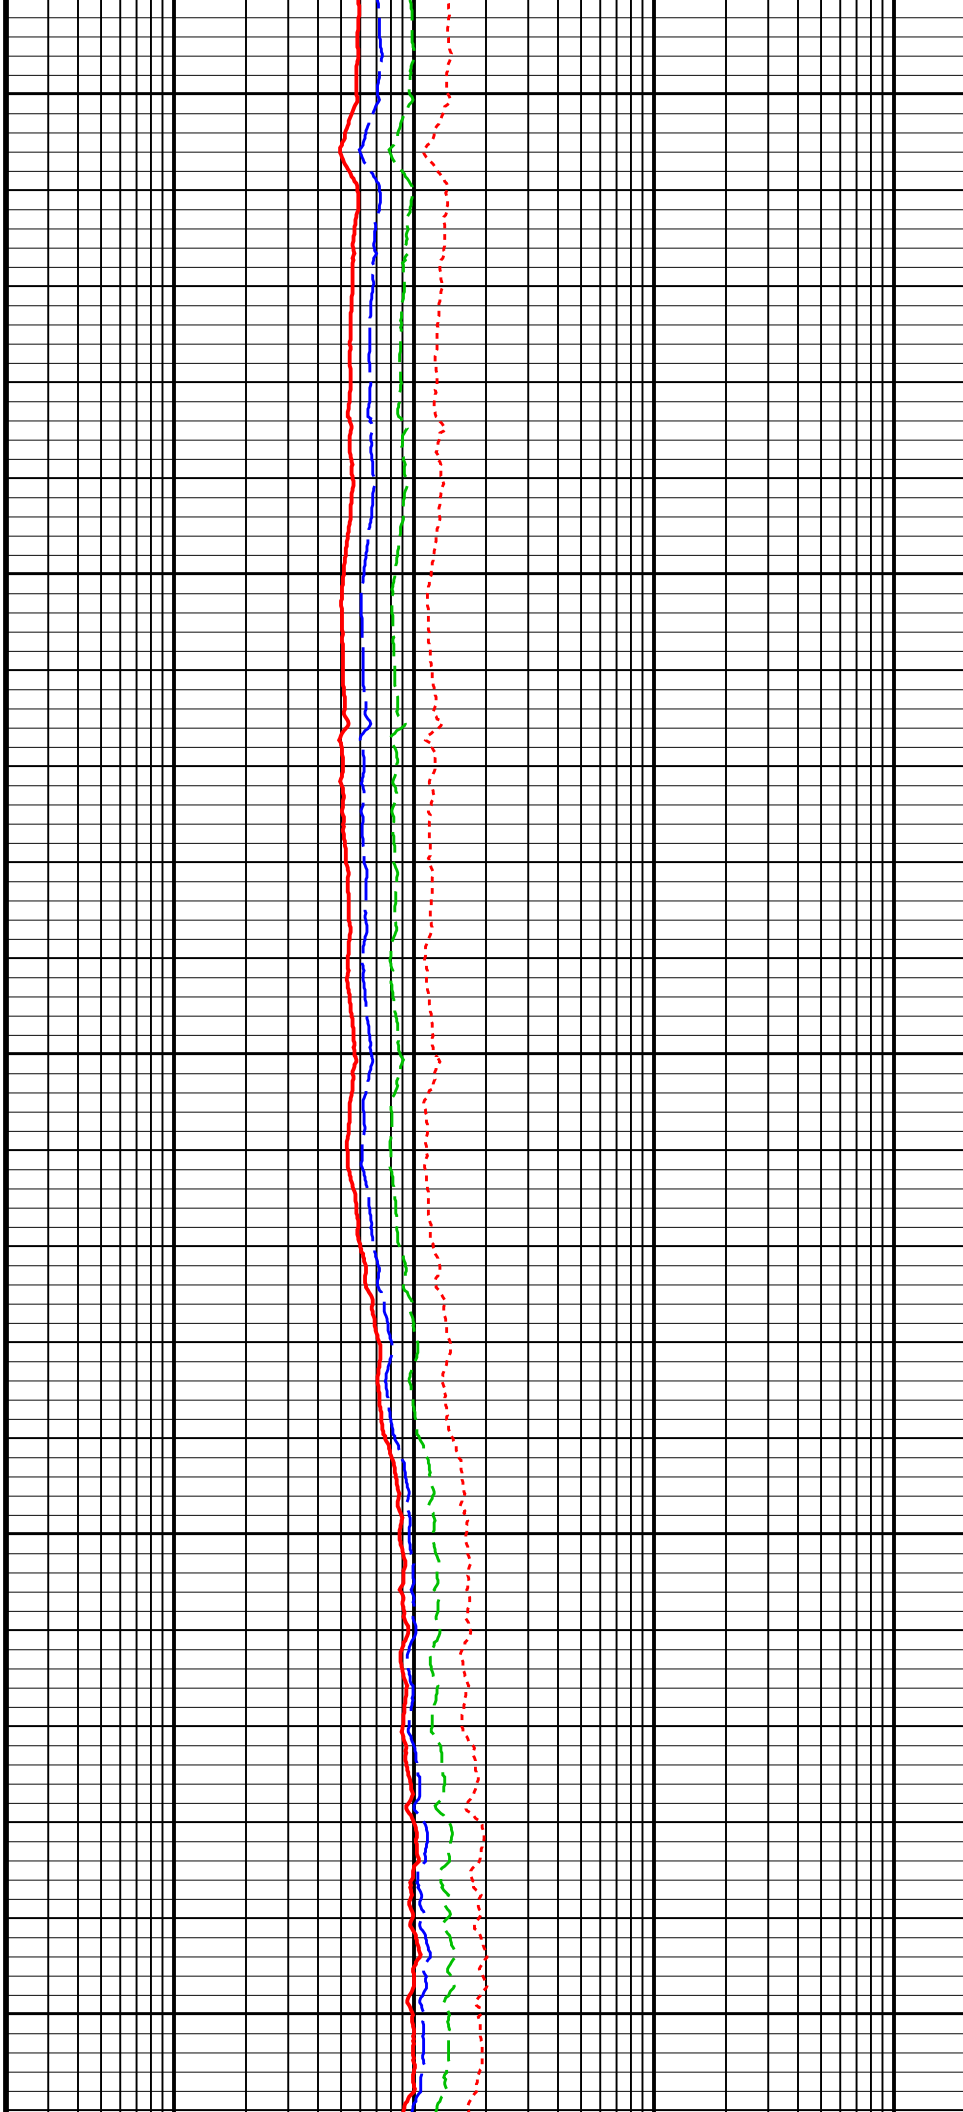


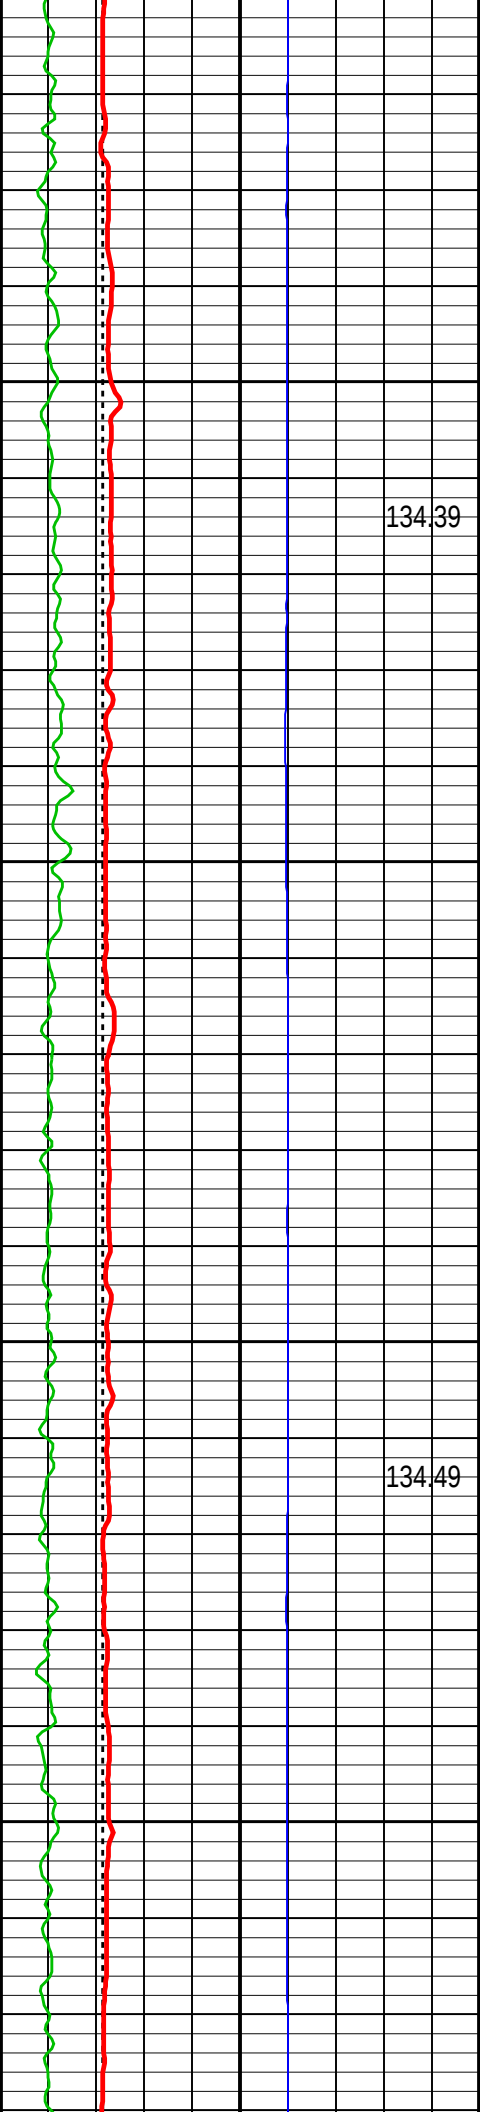

6000


6100

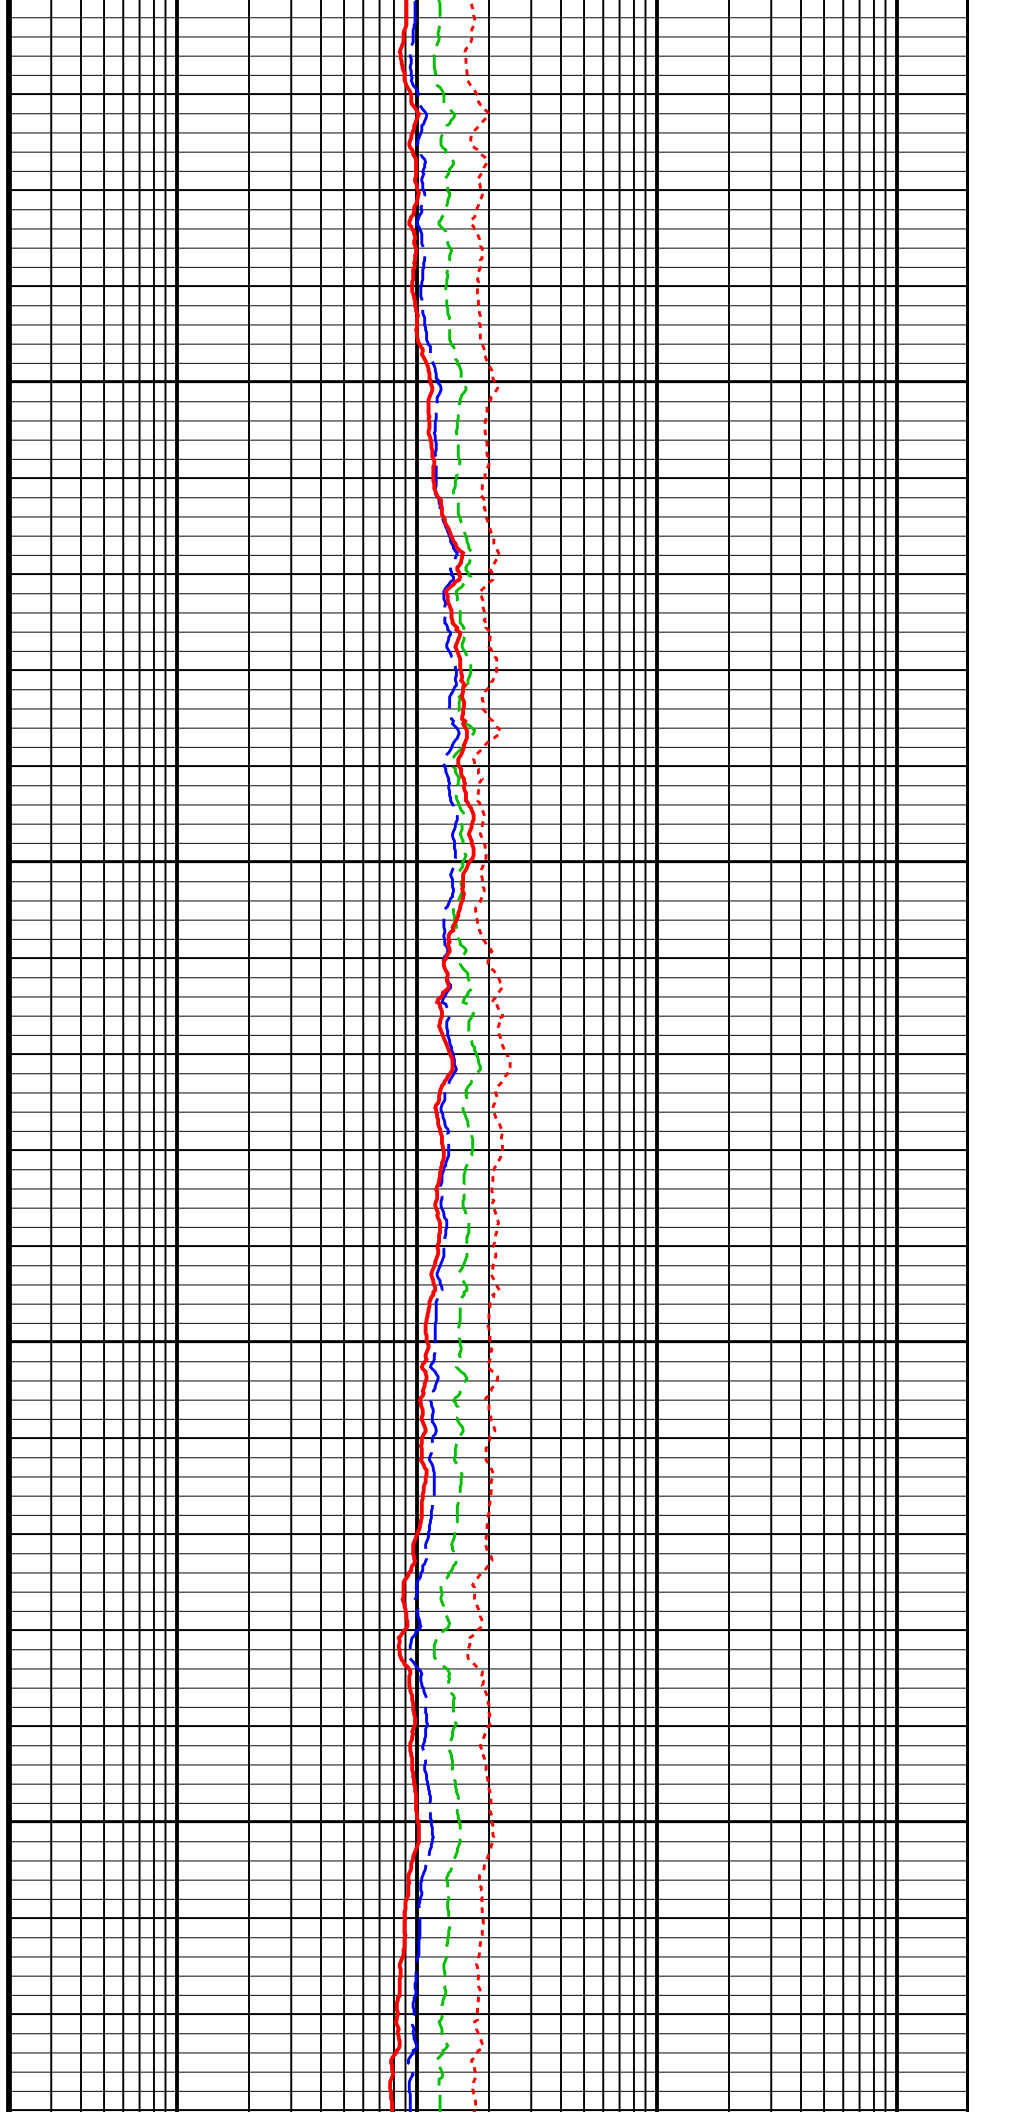


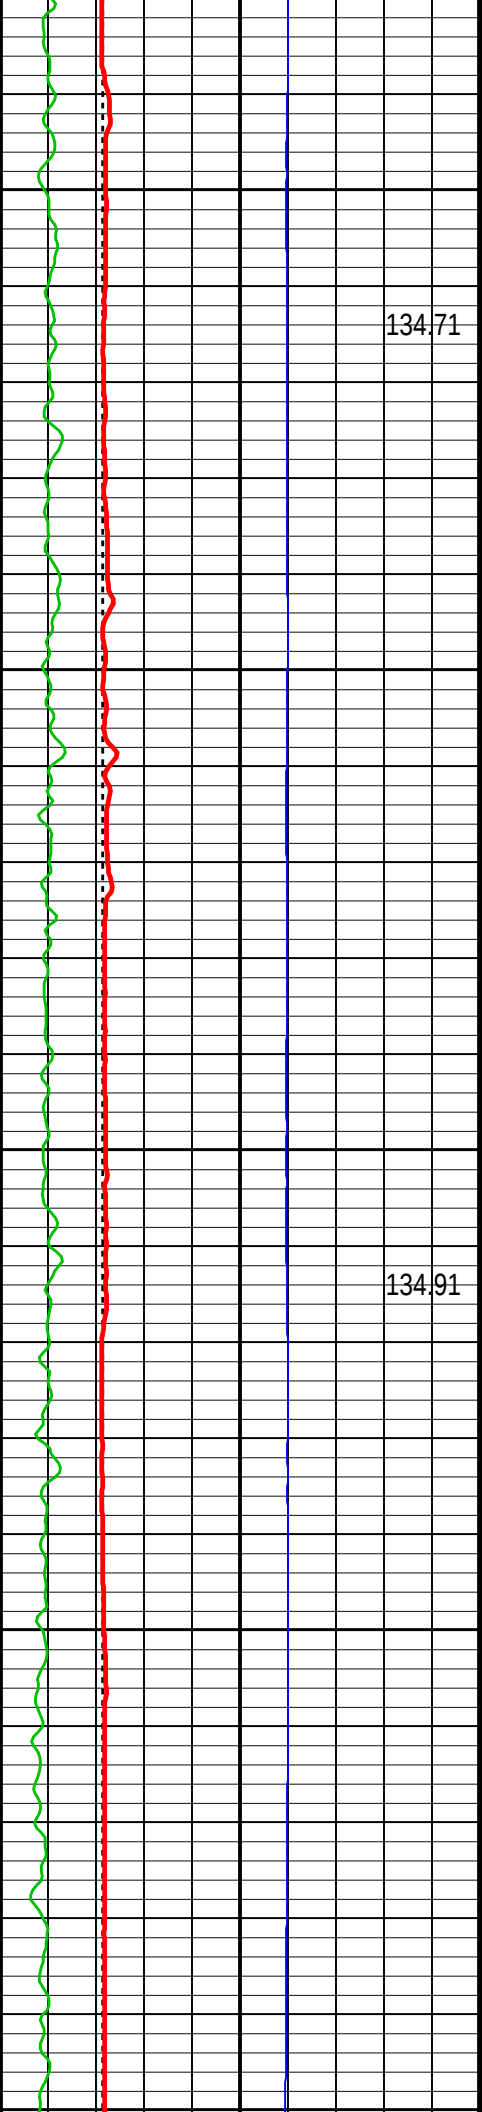

6200


6300

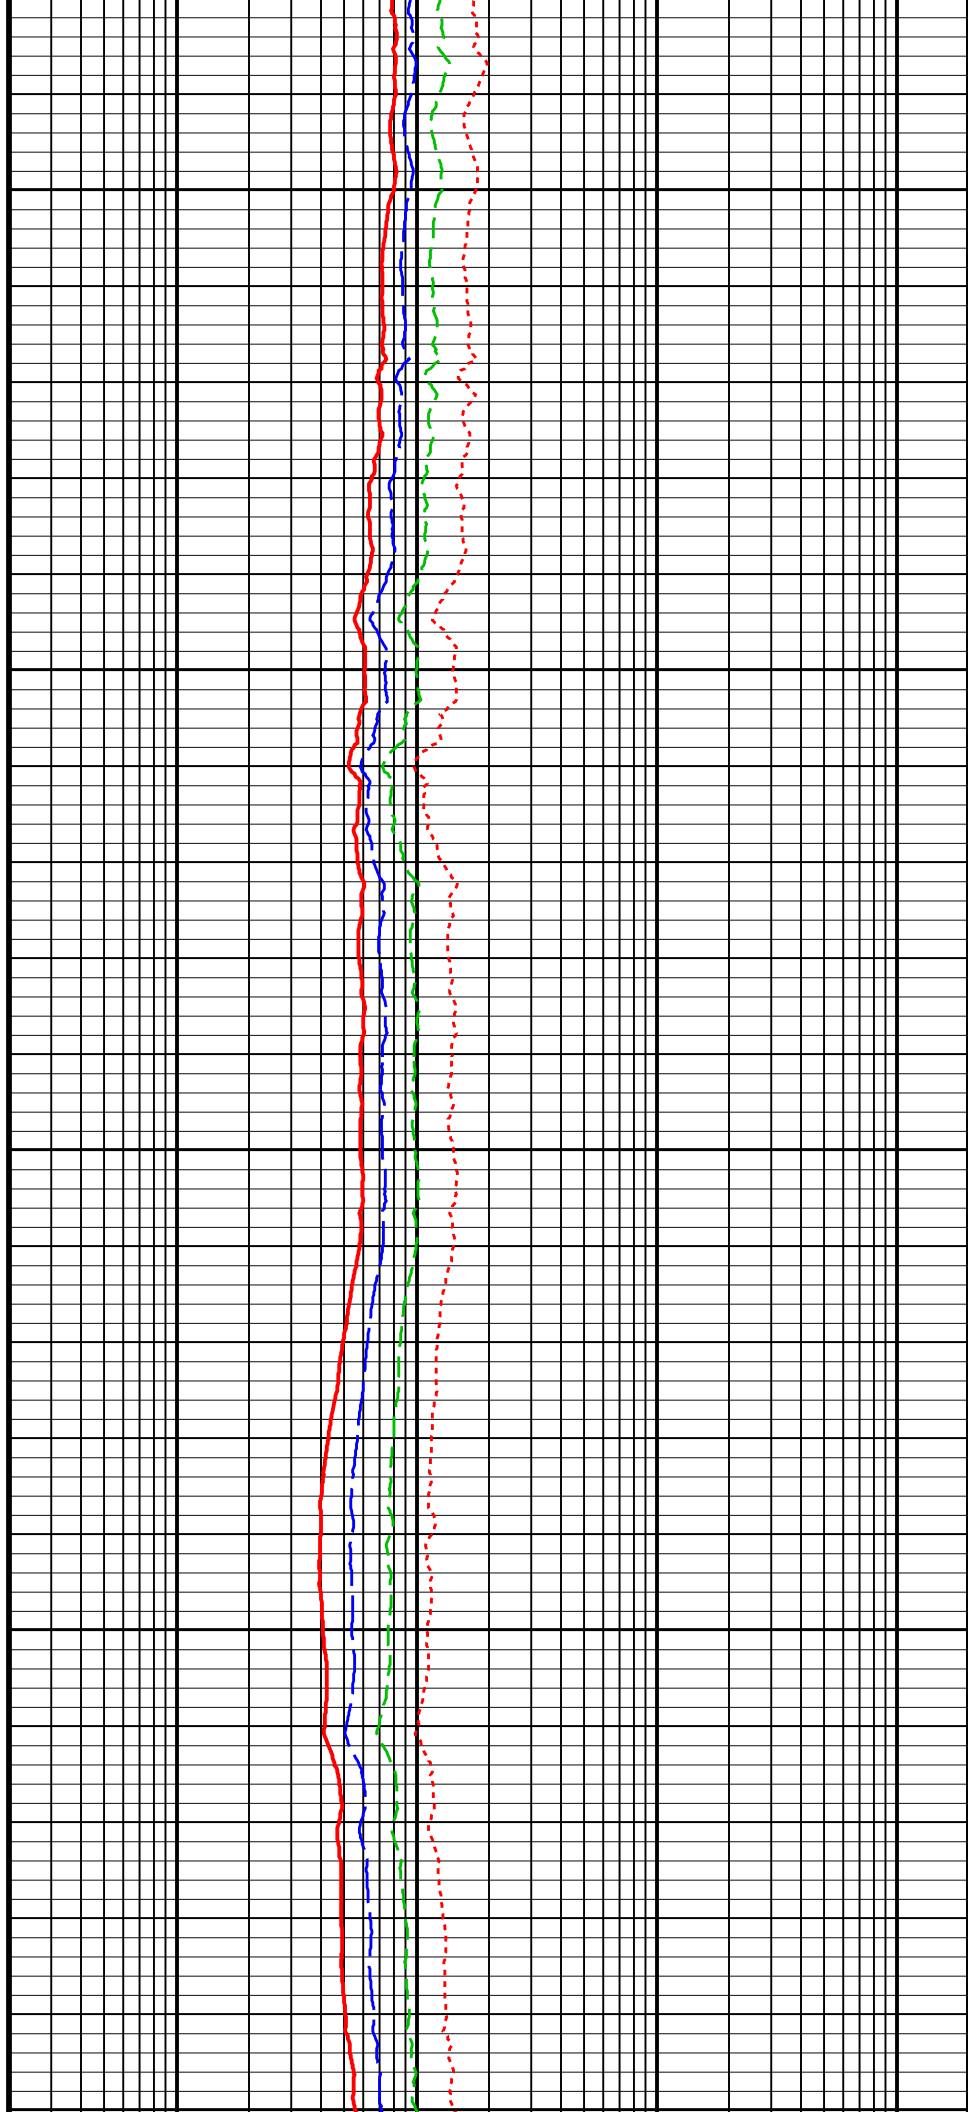


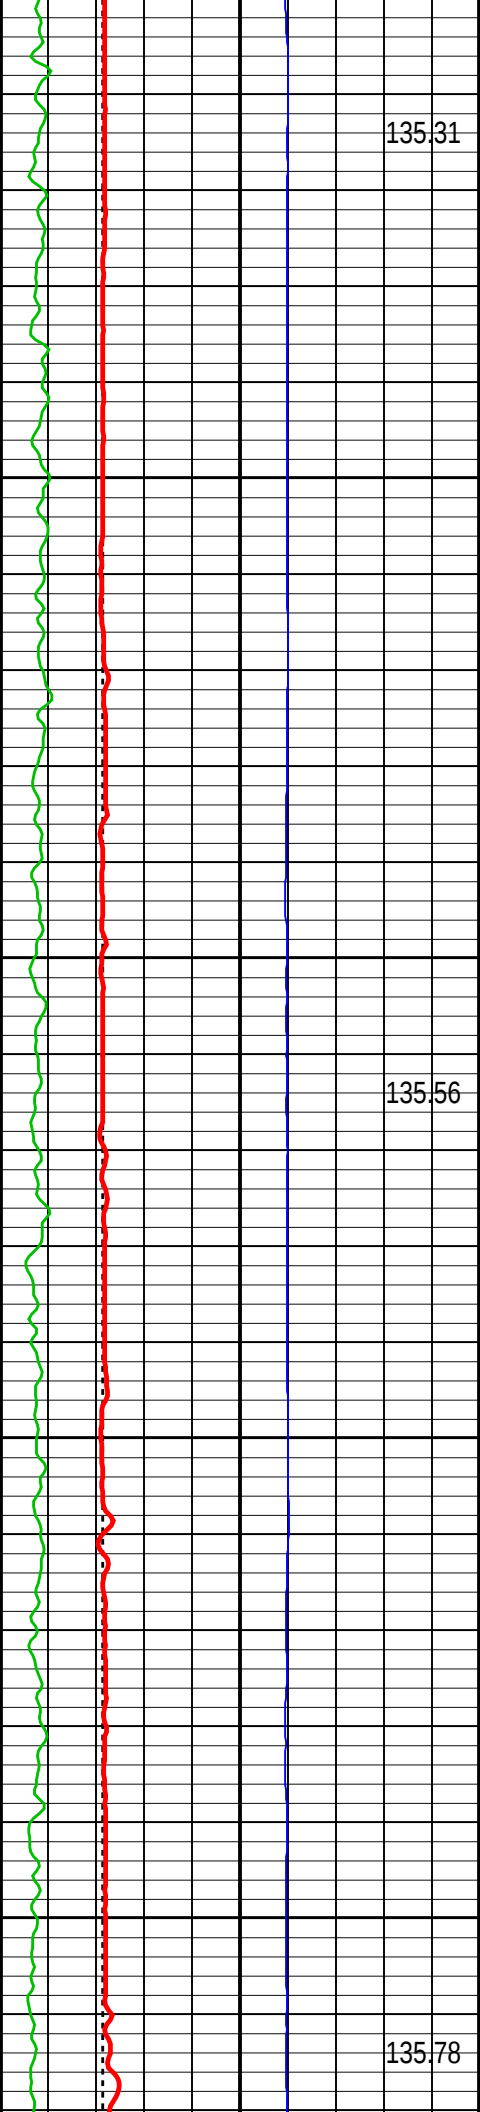

6400


6500

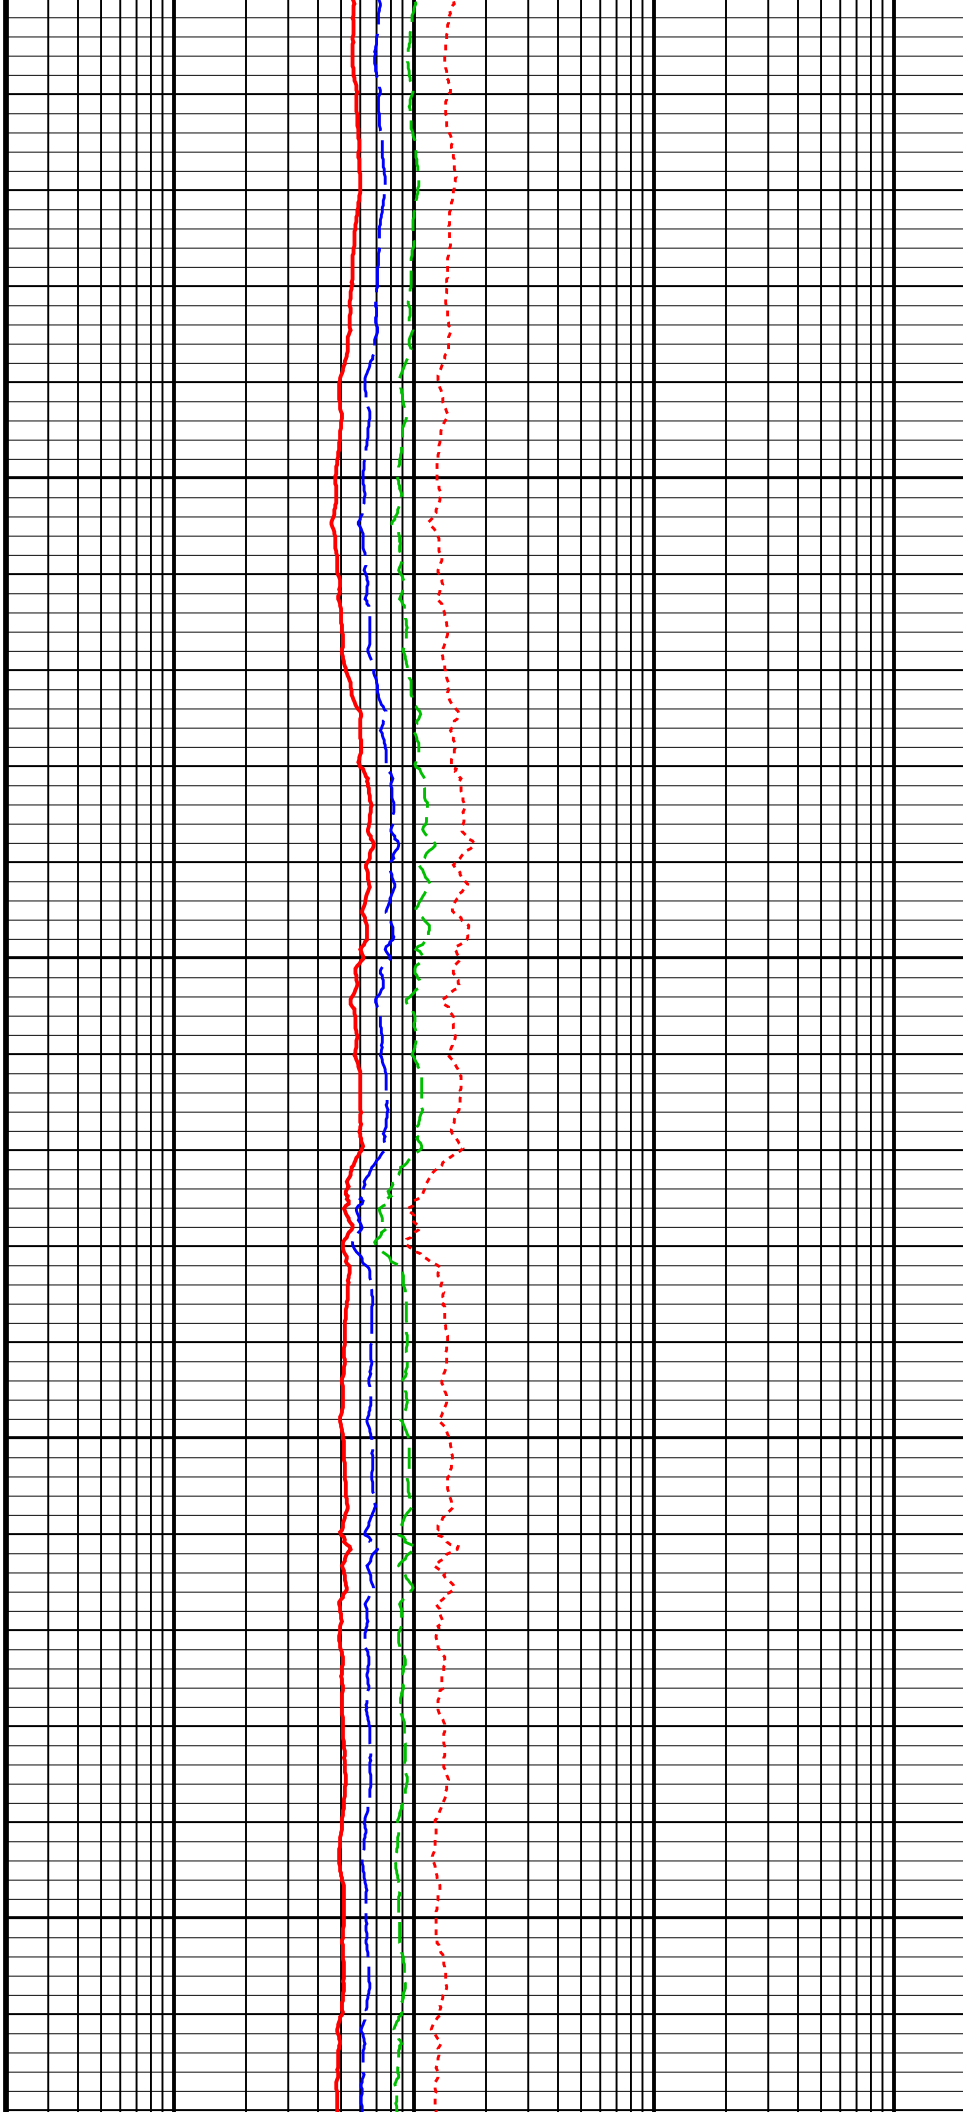


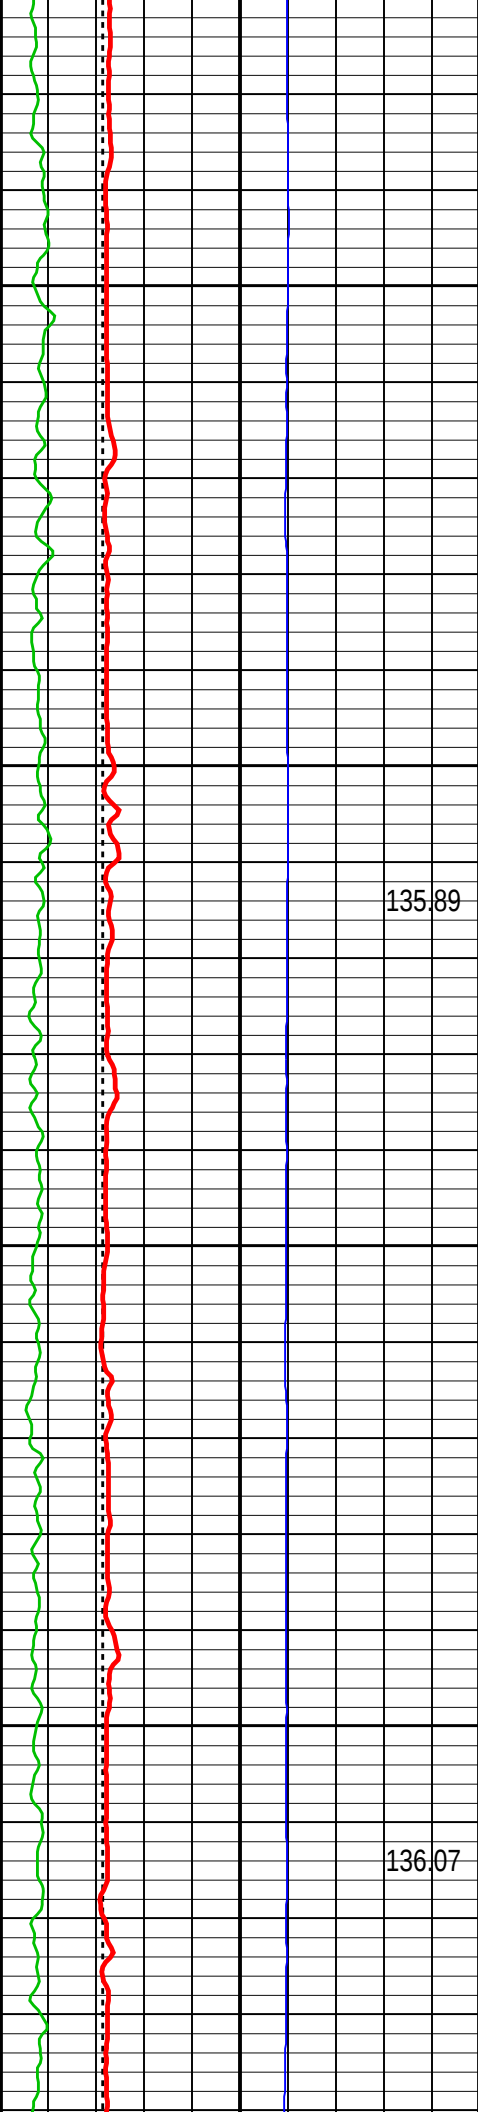

6600

6700

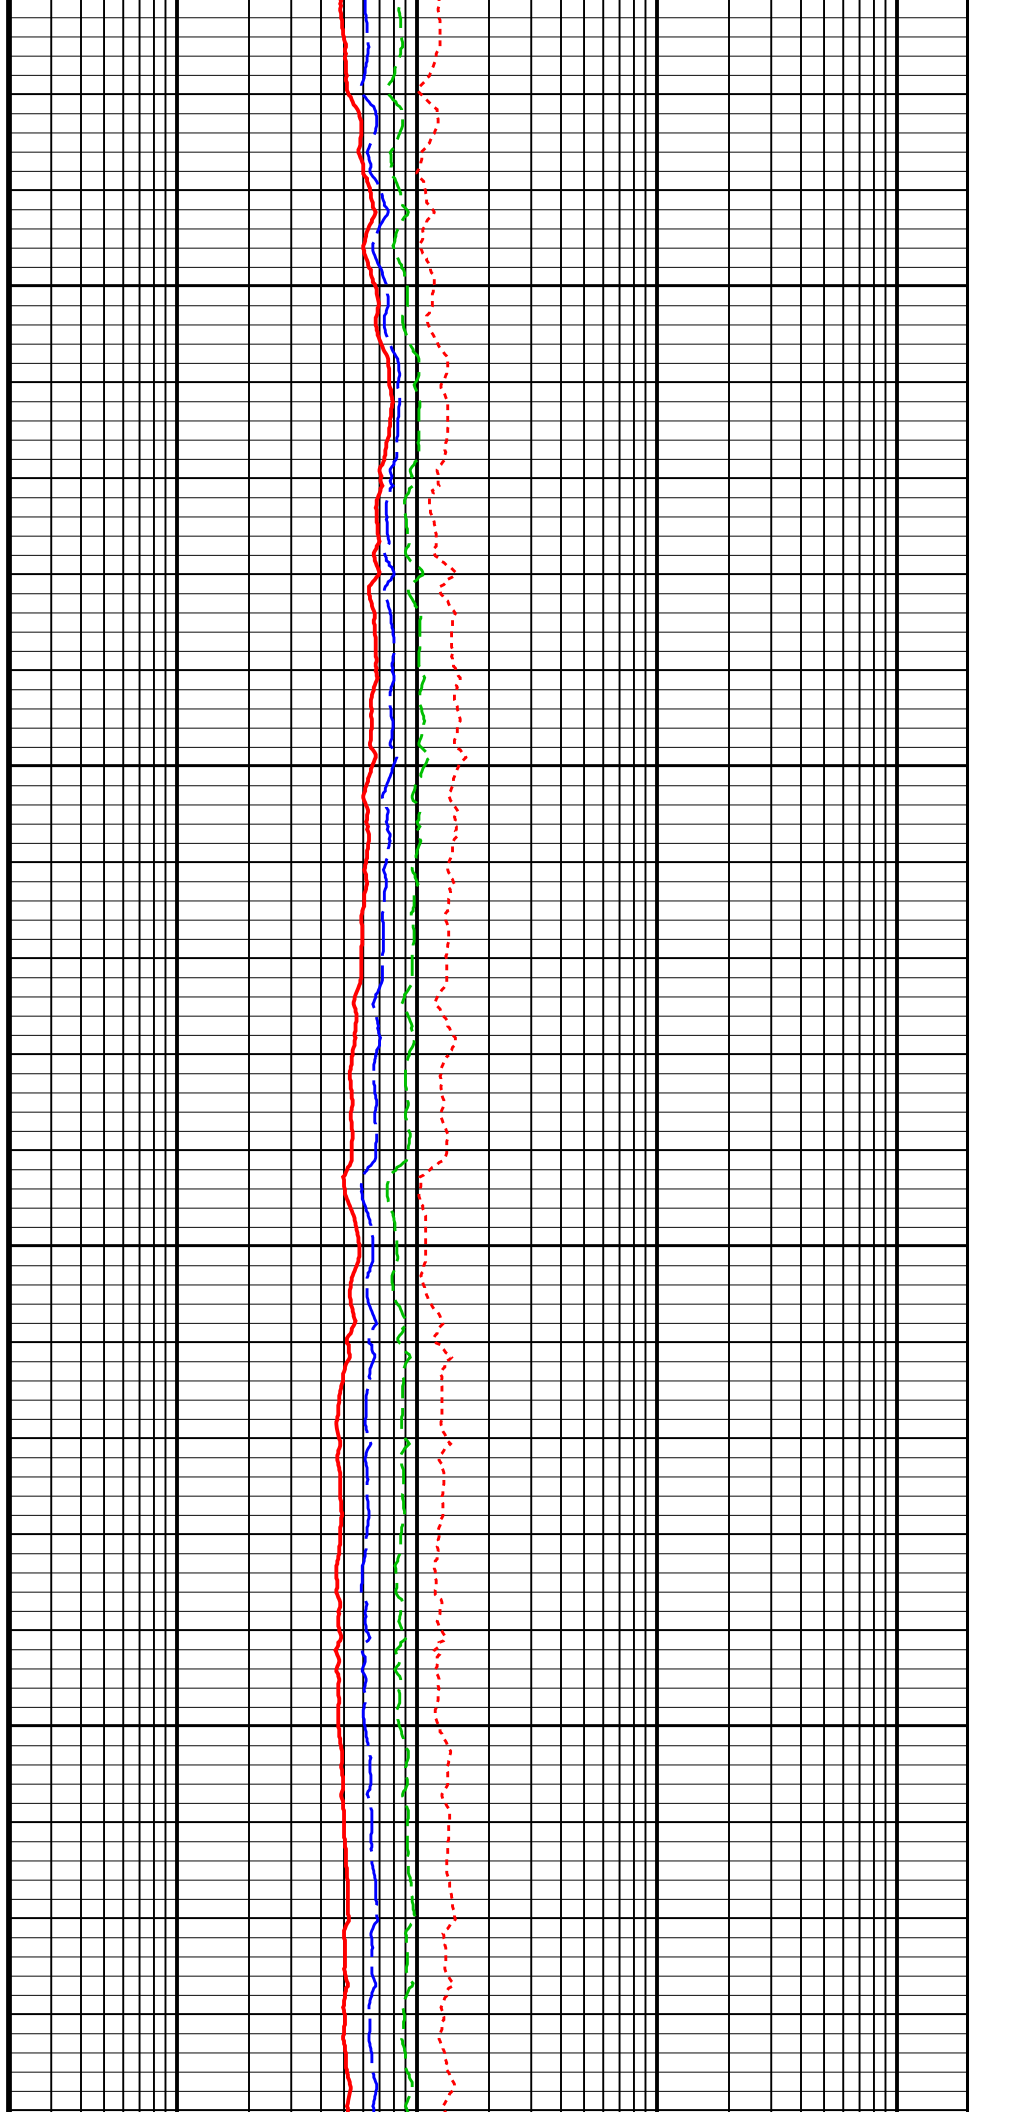

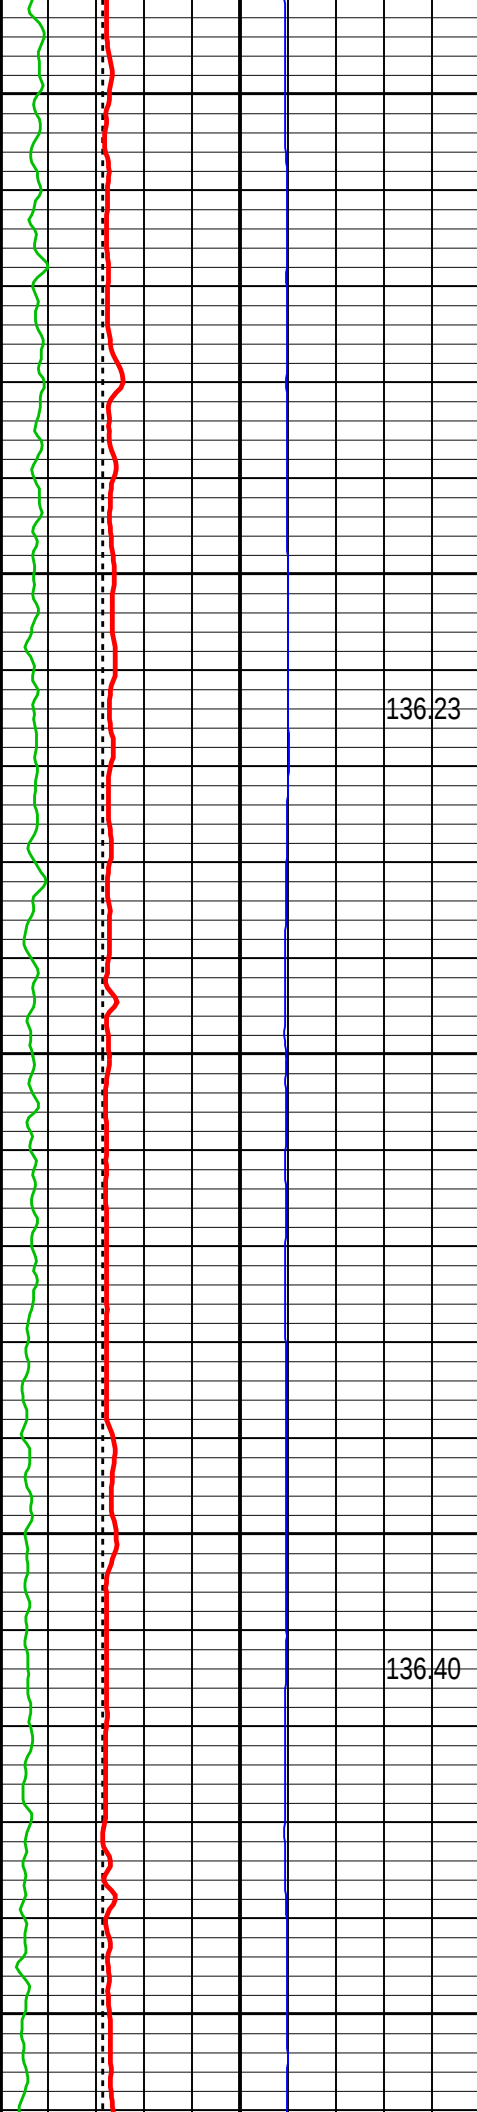


6800


136.23

6900

136.40

7000

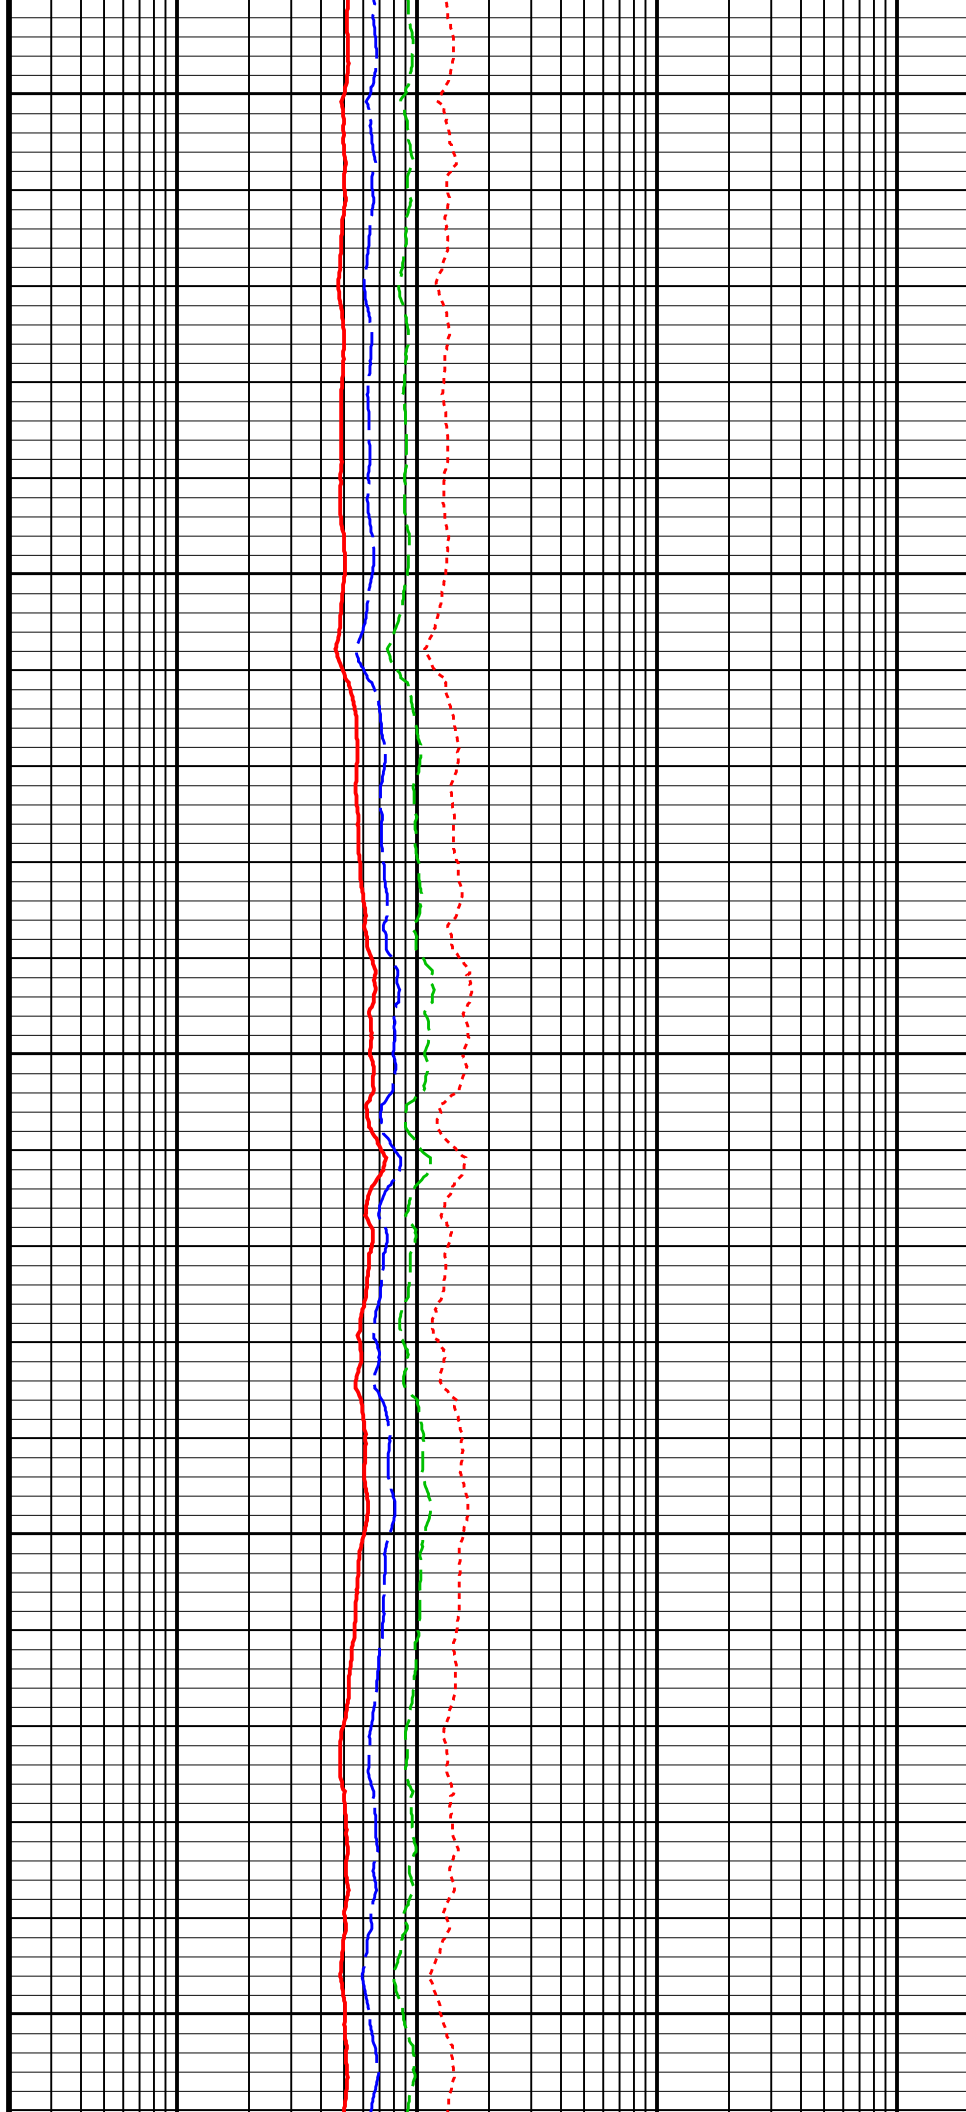


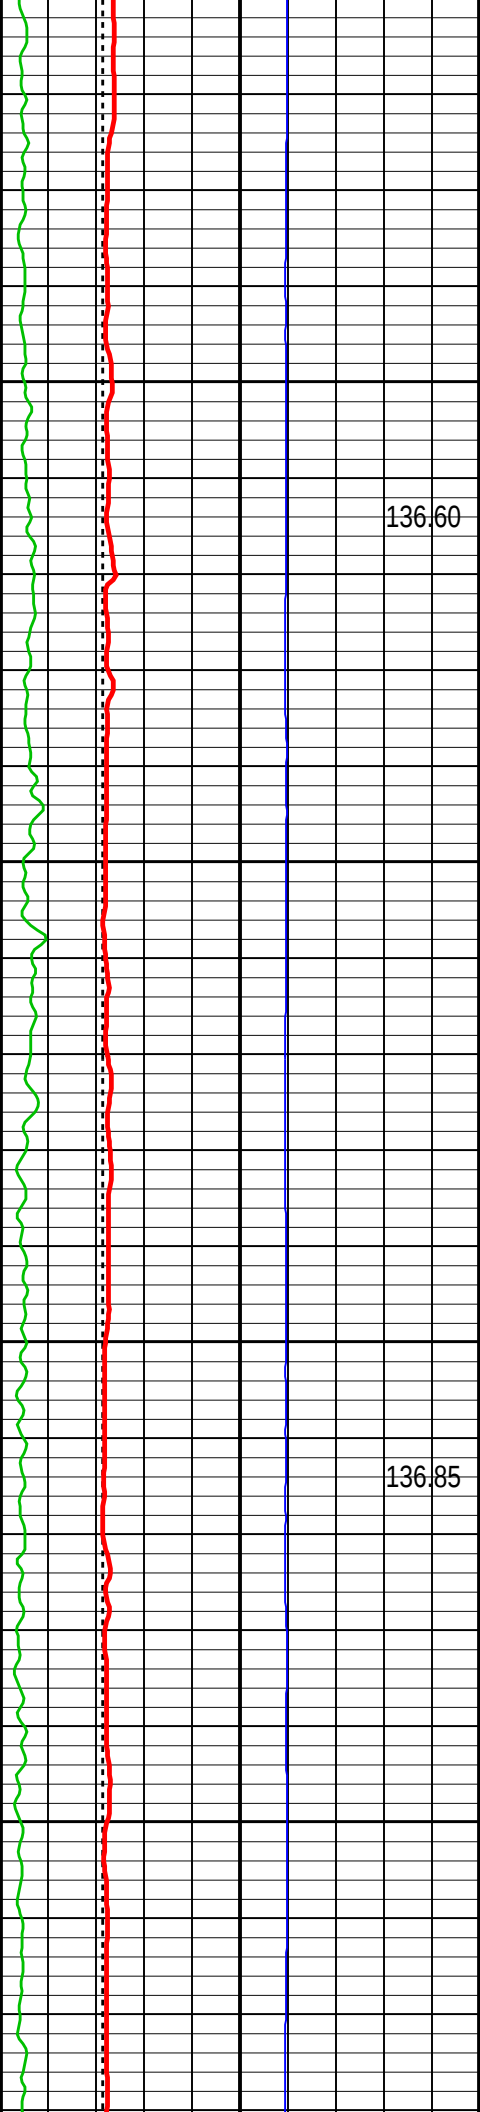


7100

136.85


7200


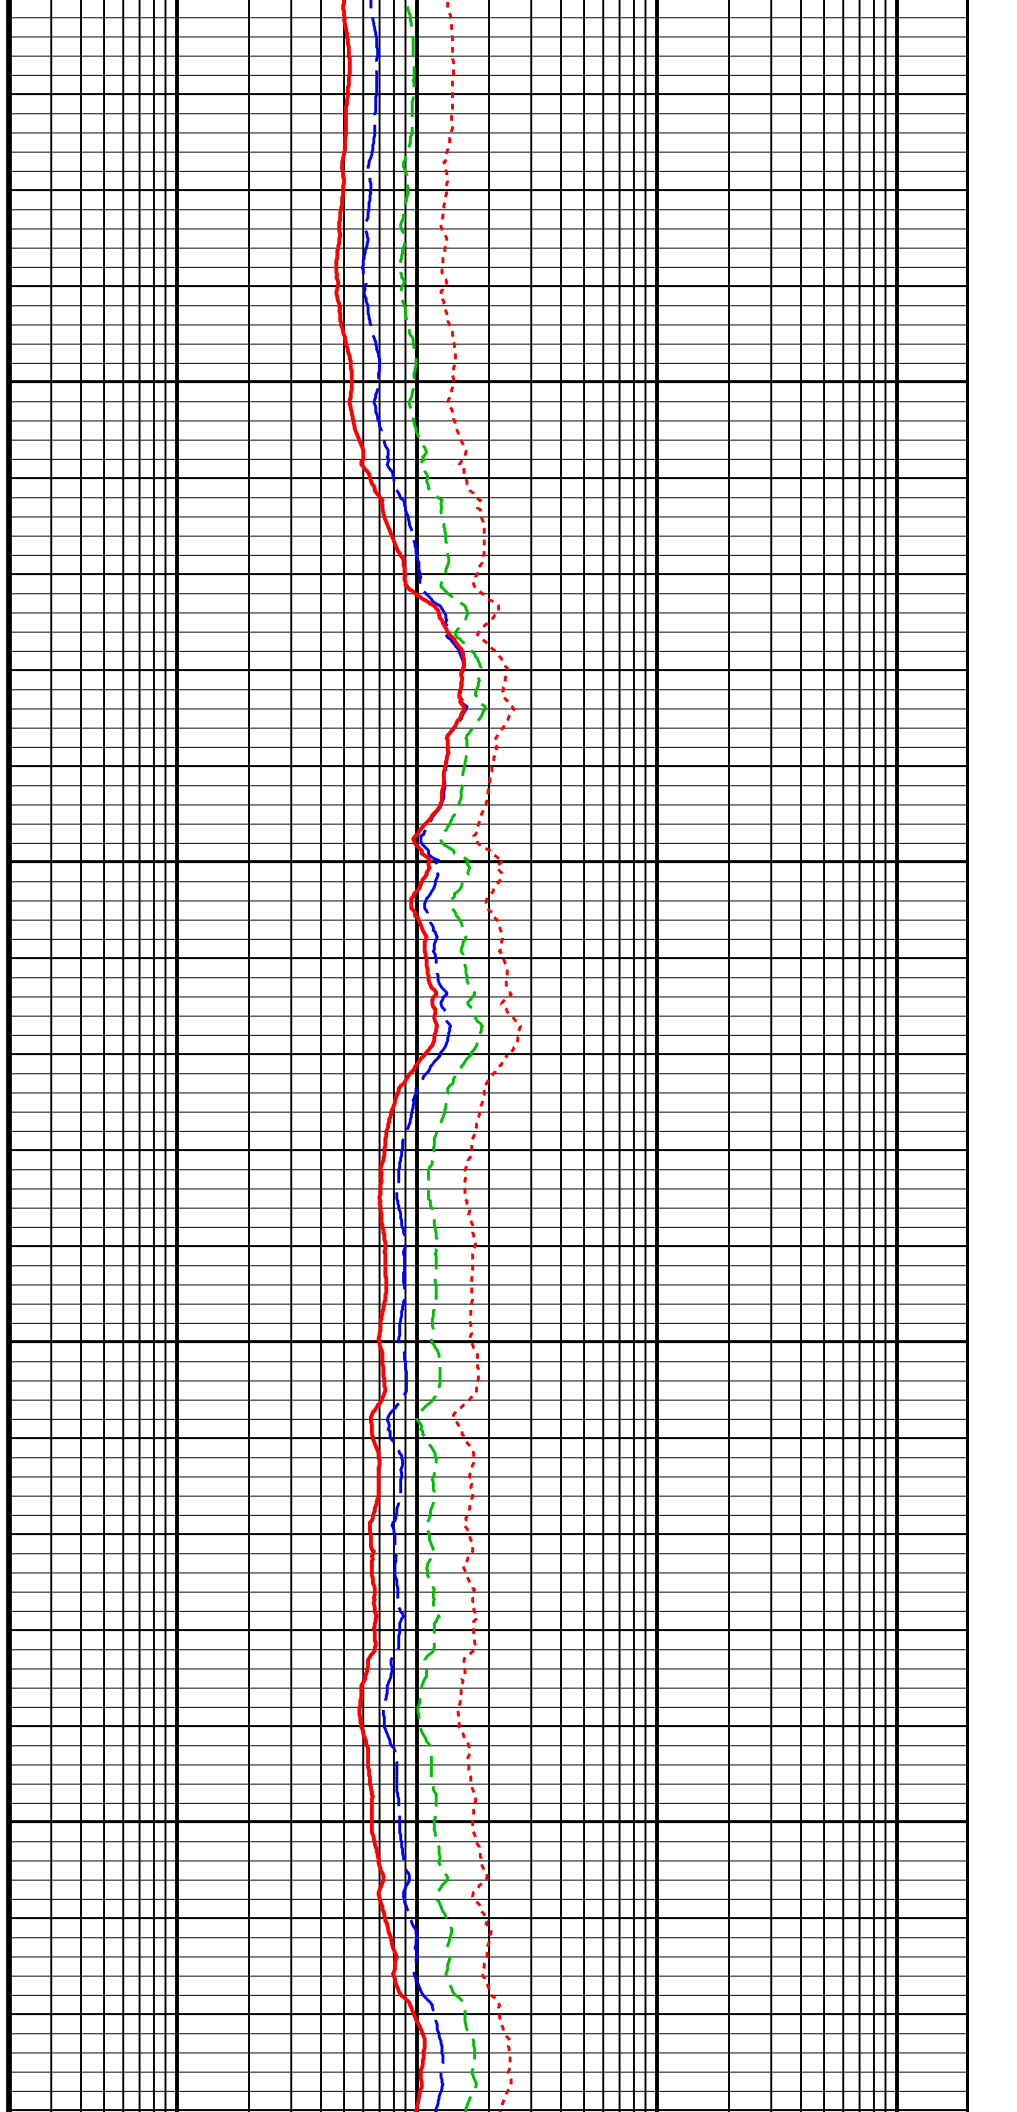


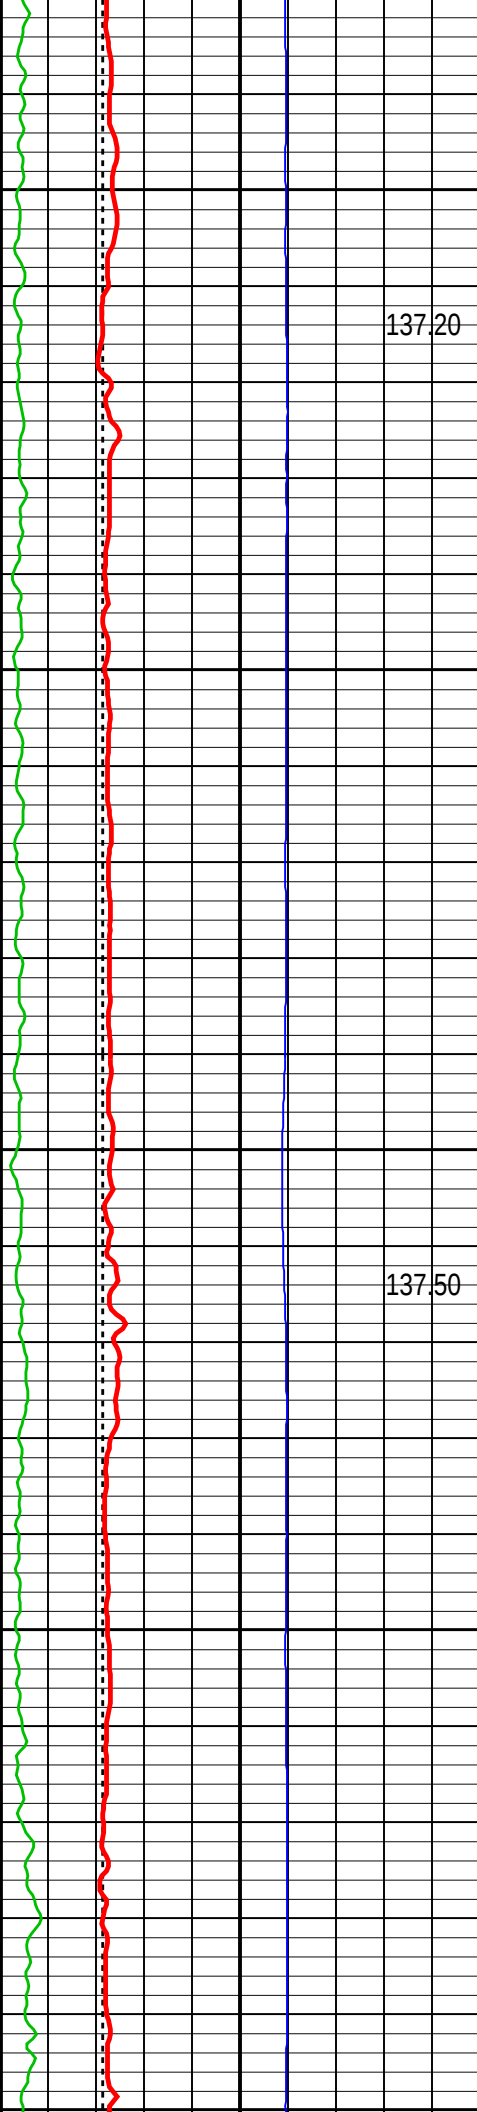


7300

7400

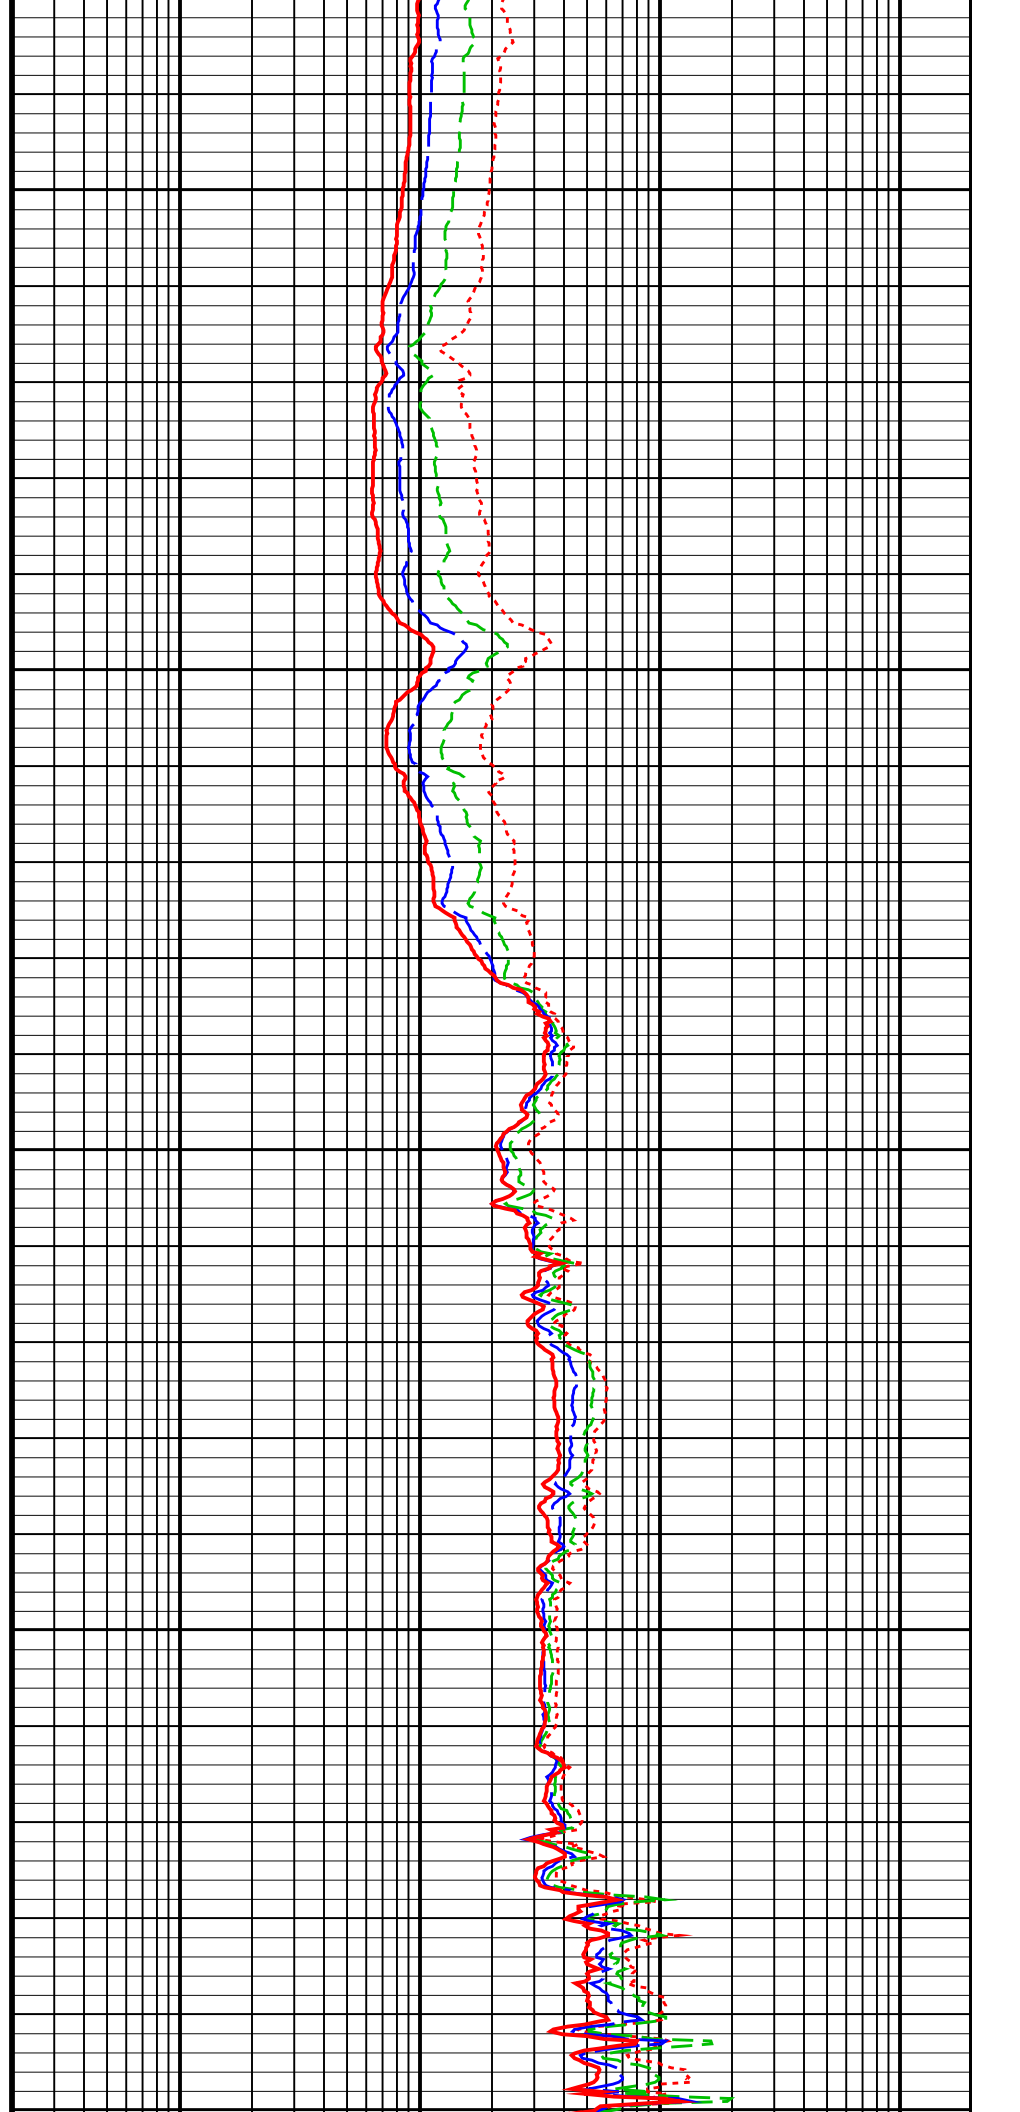


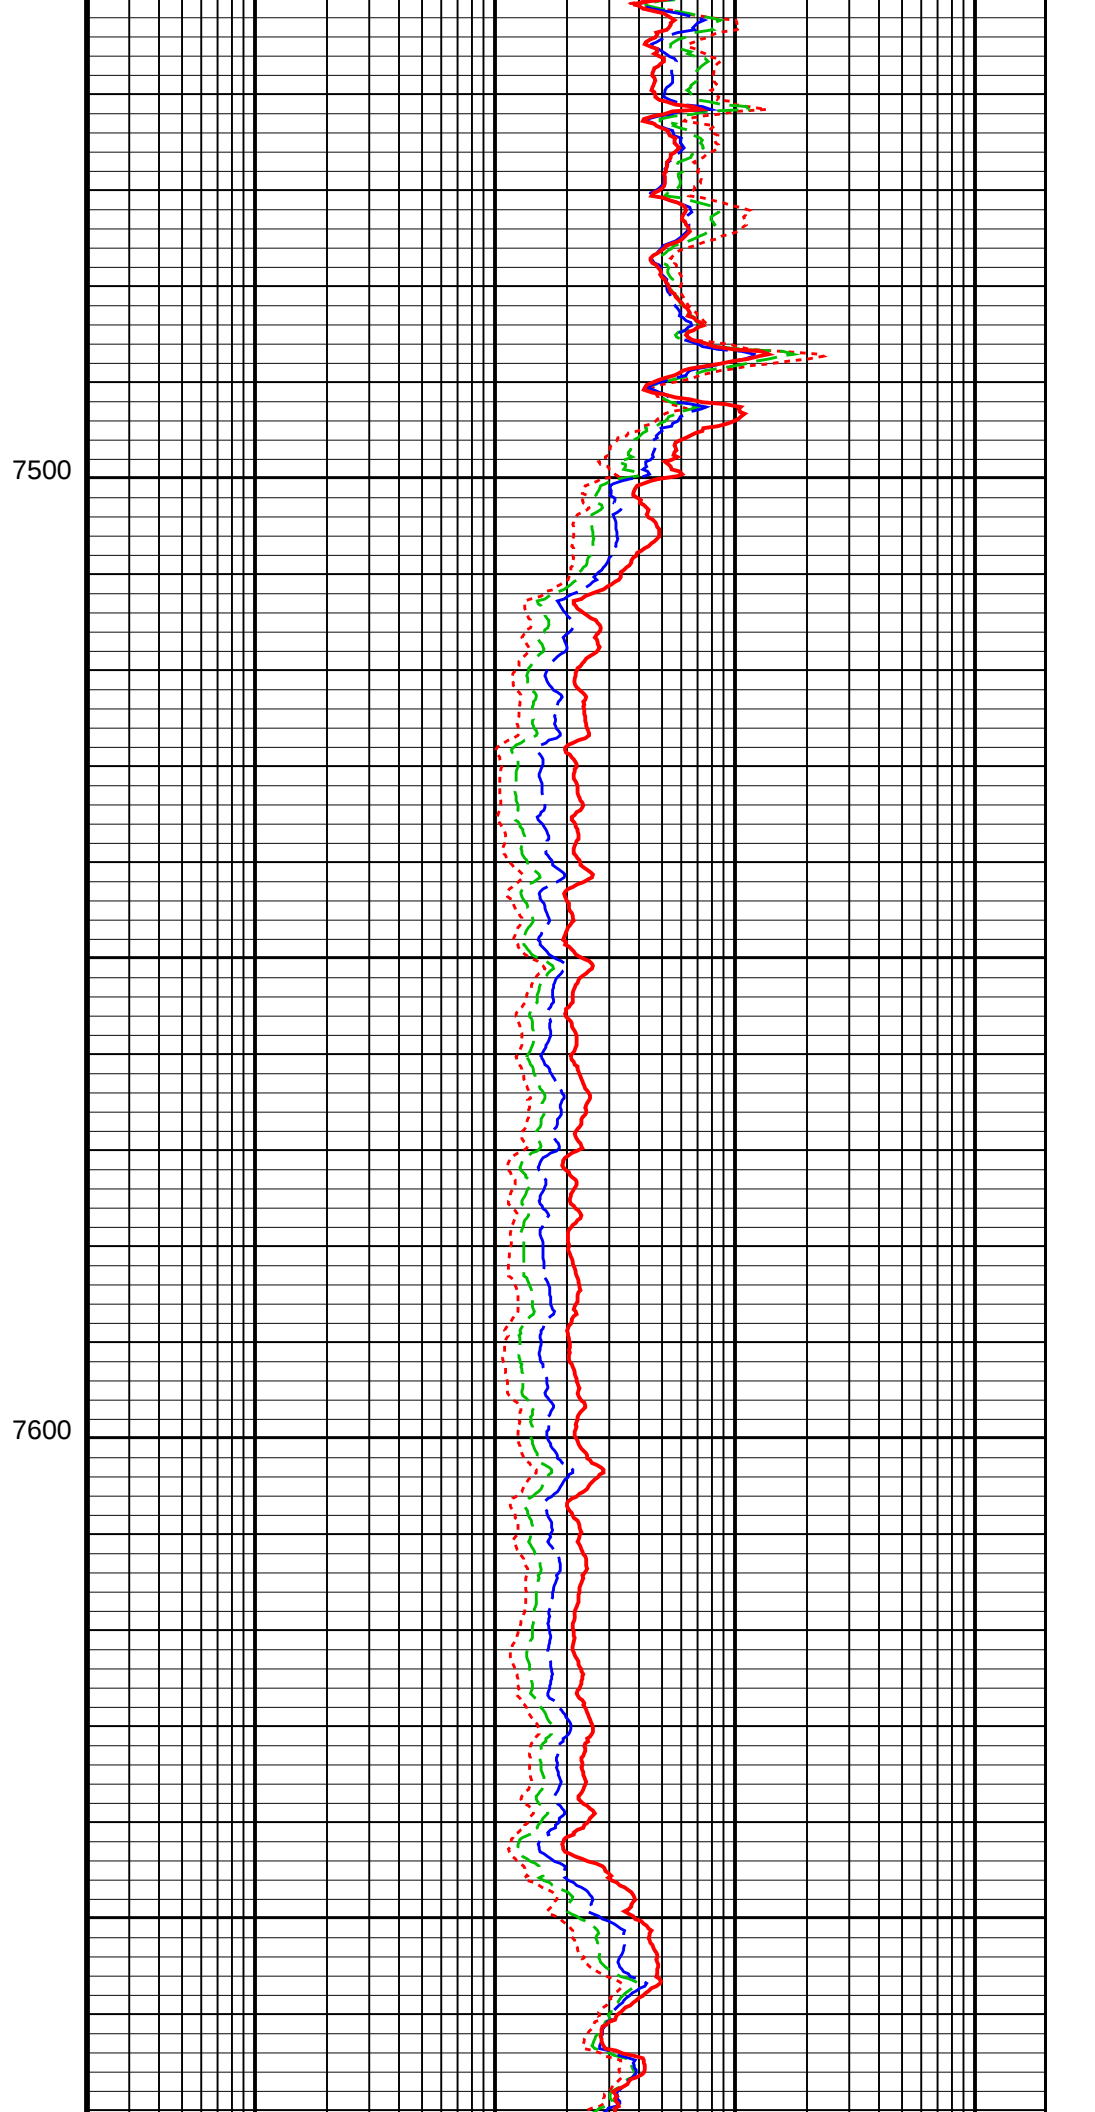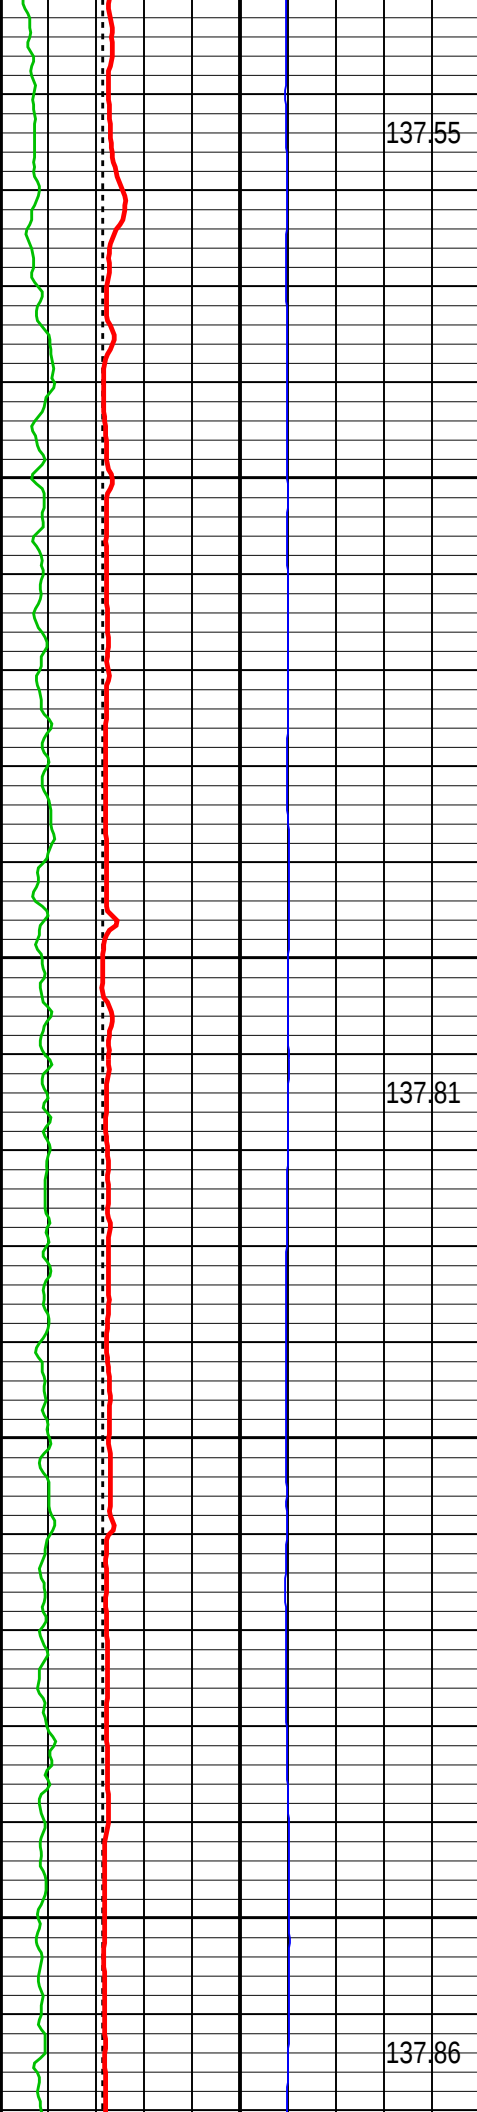


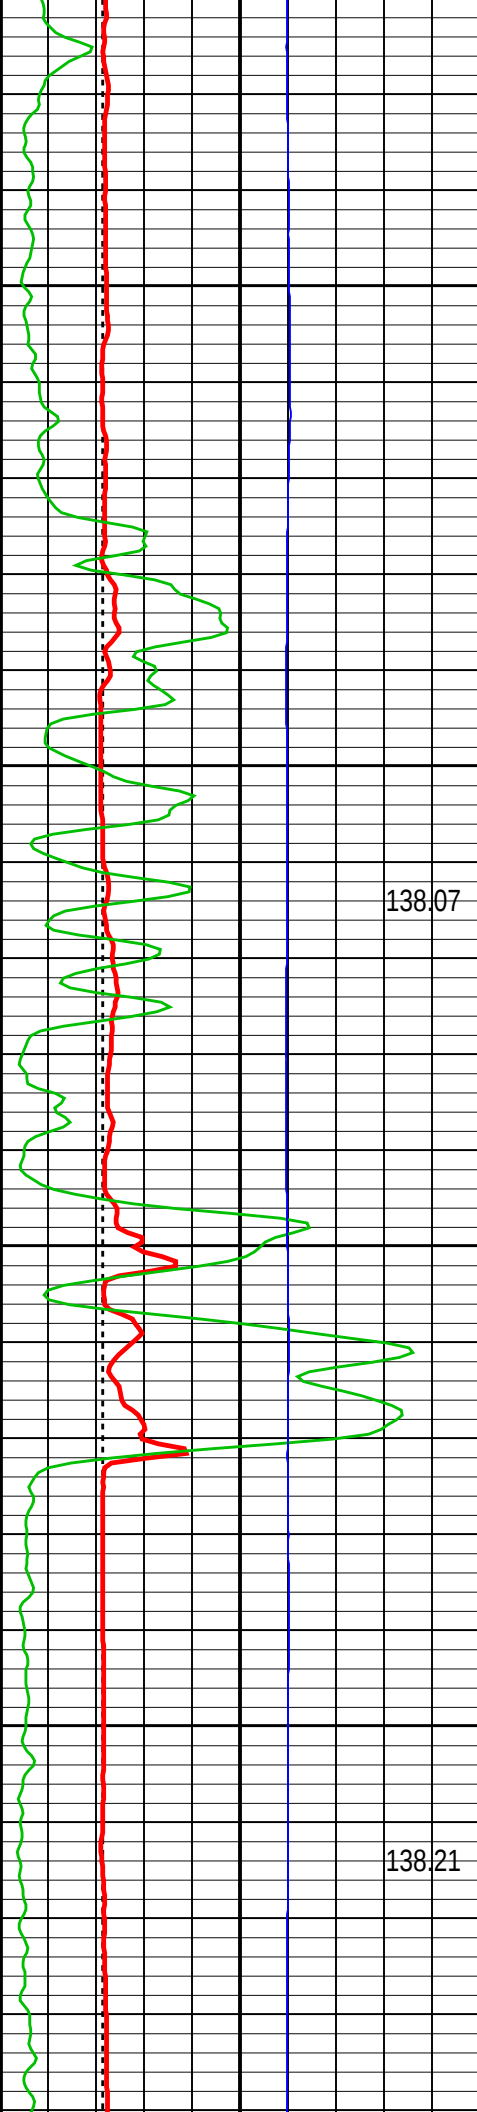

7700

7800

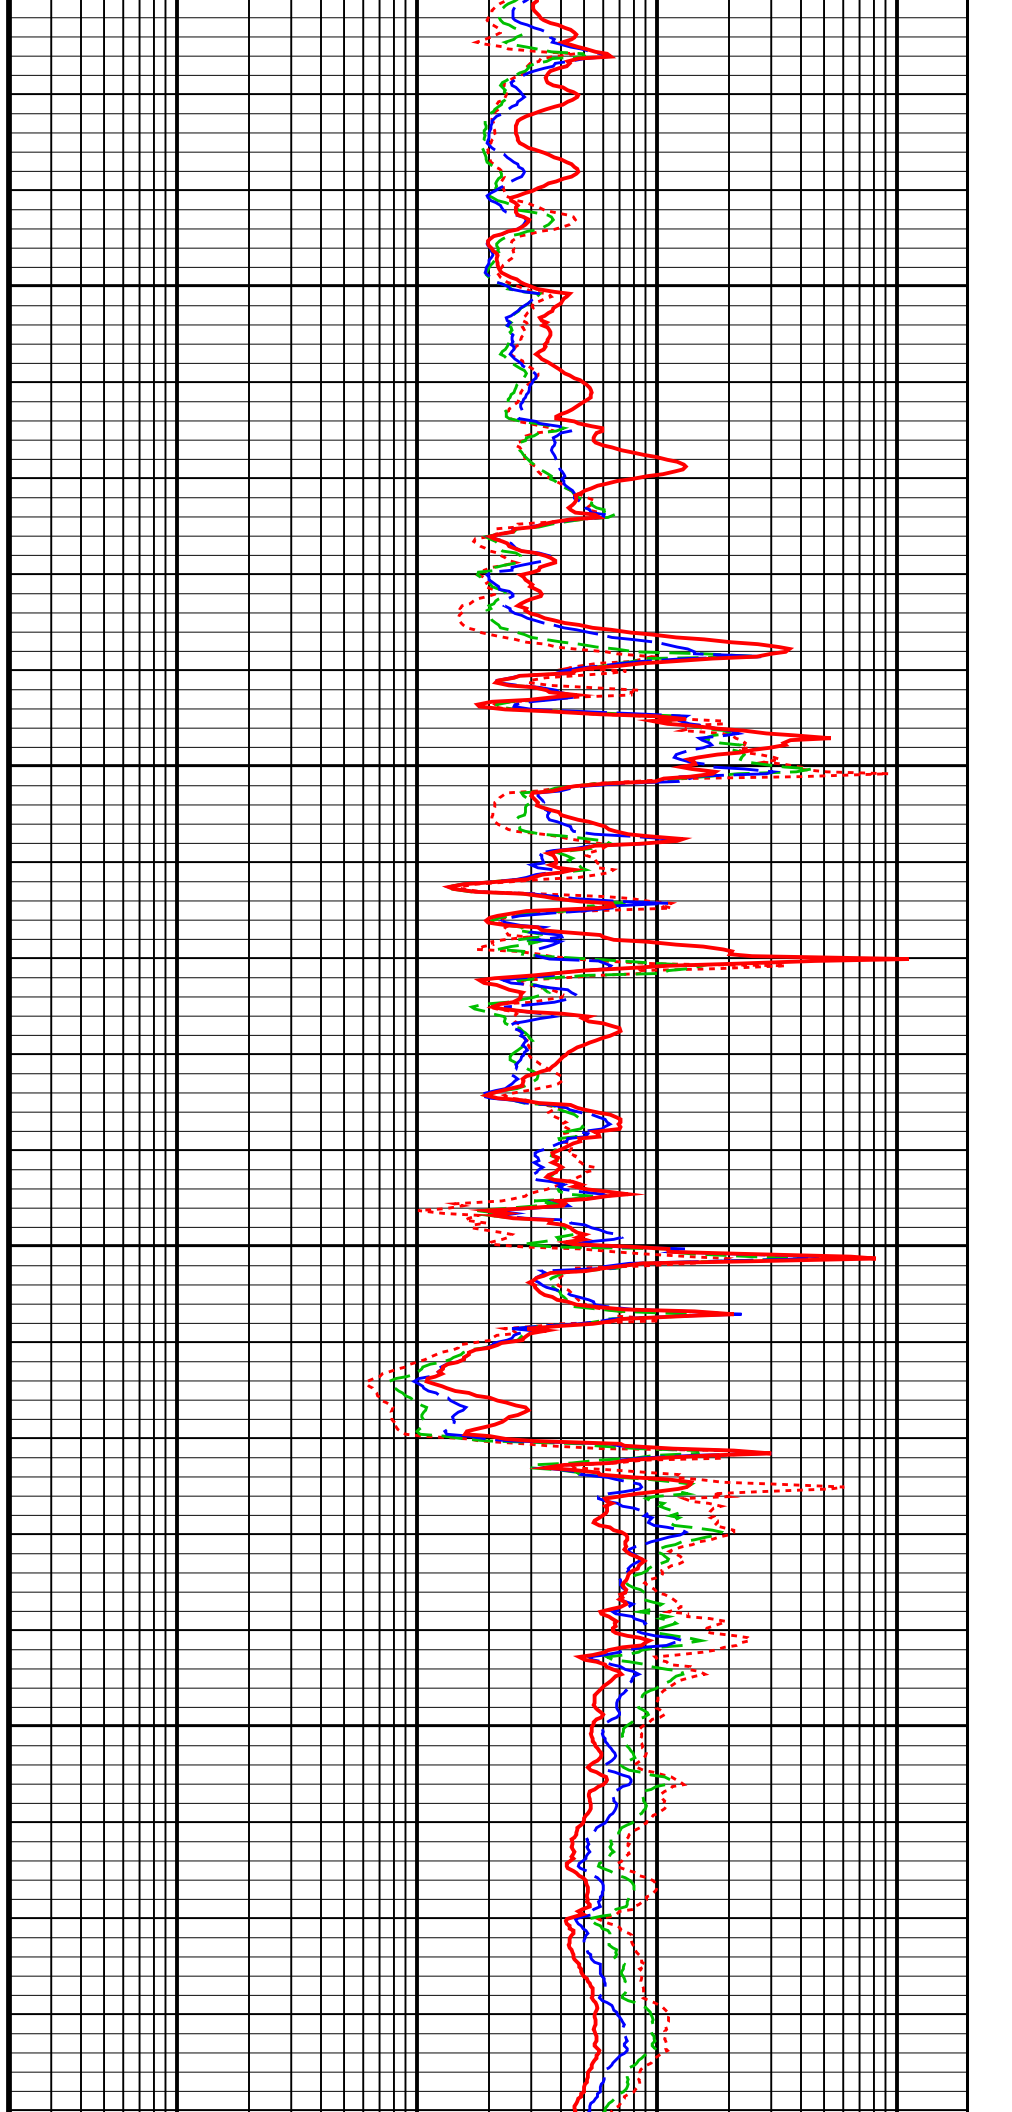



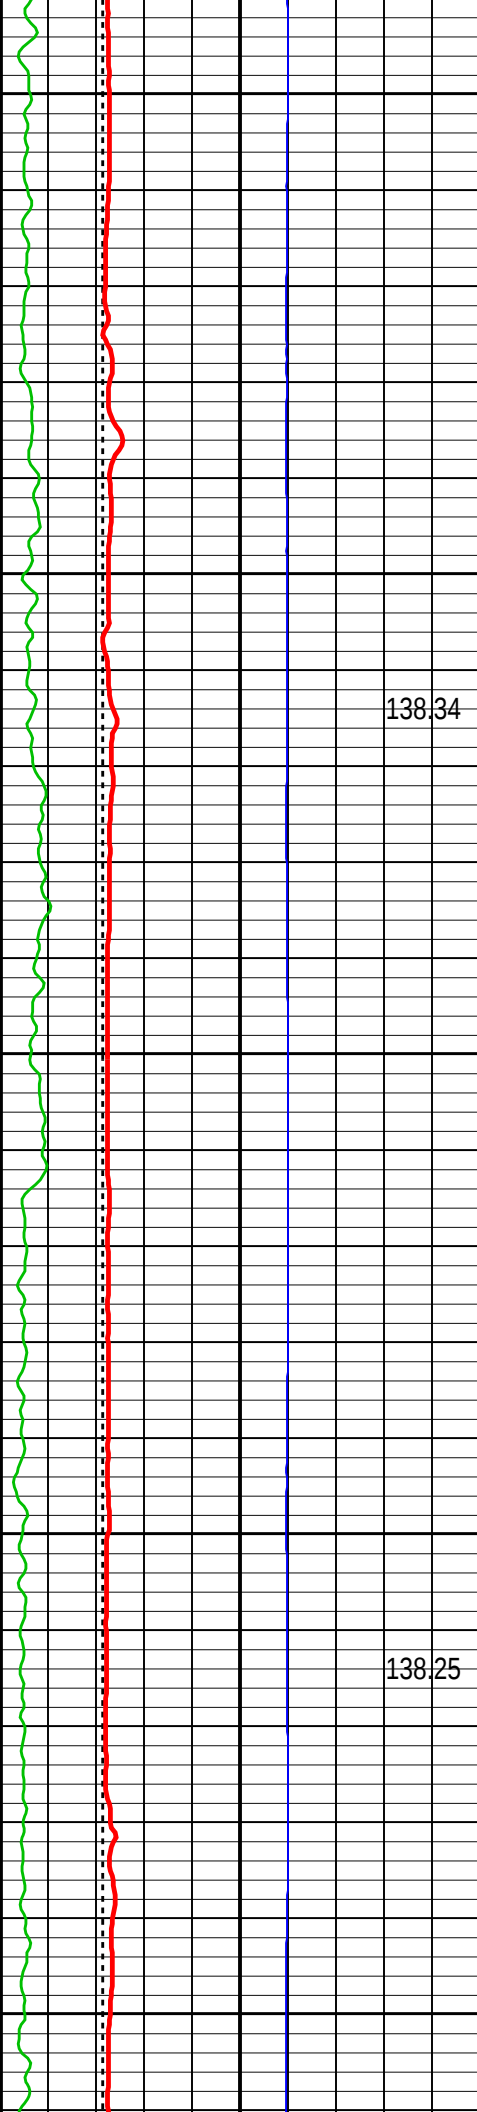



7900

8000

8100

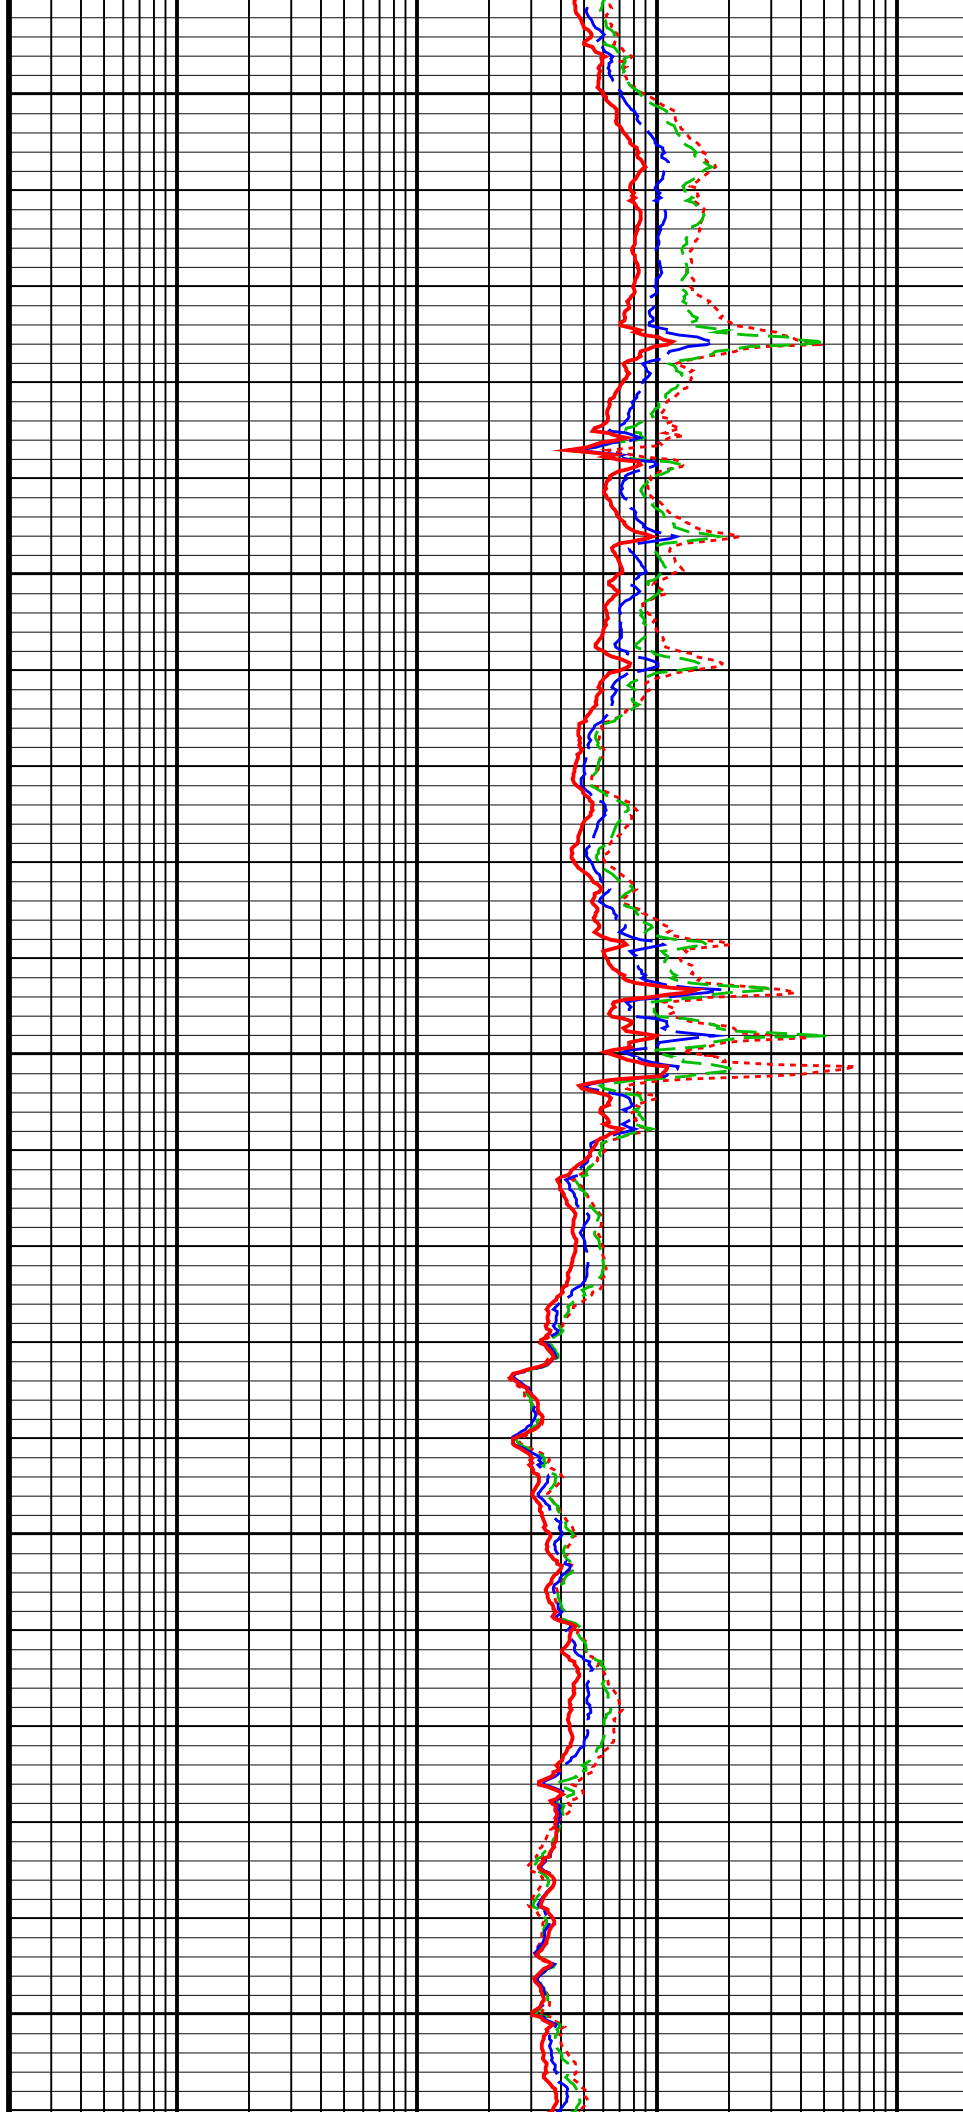

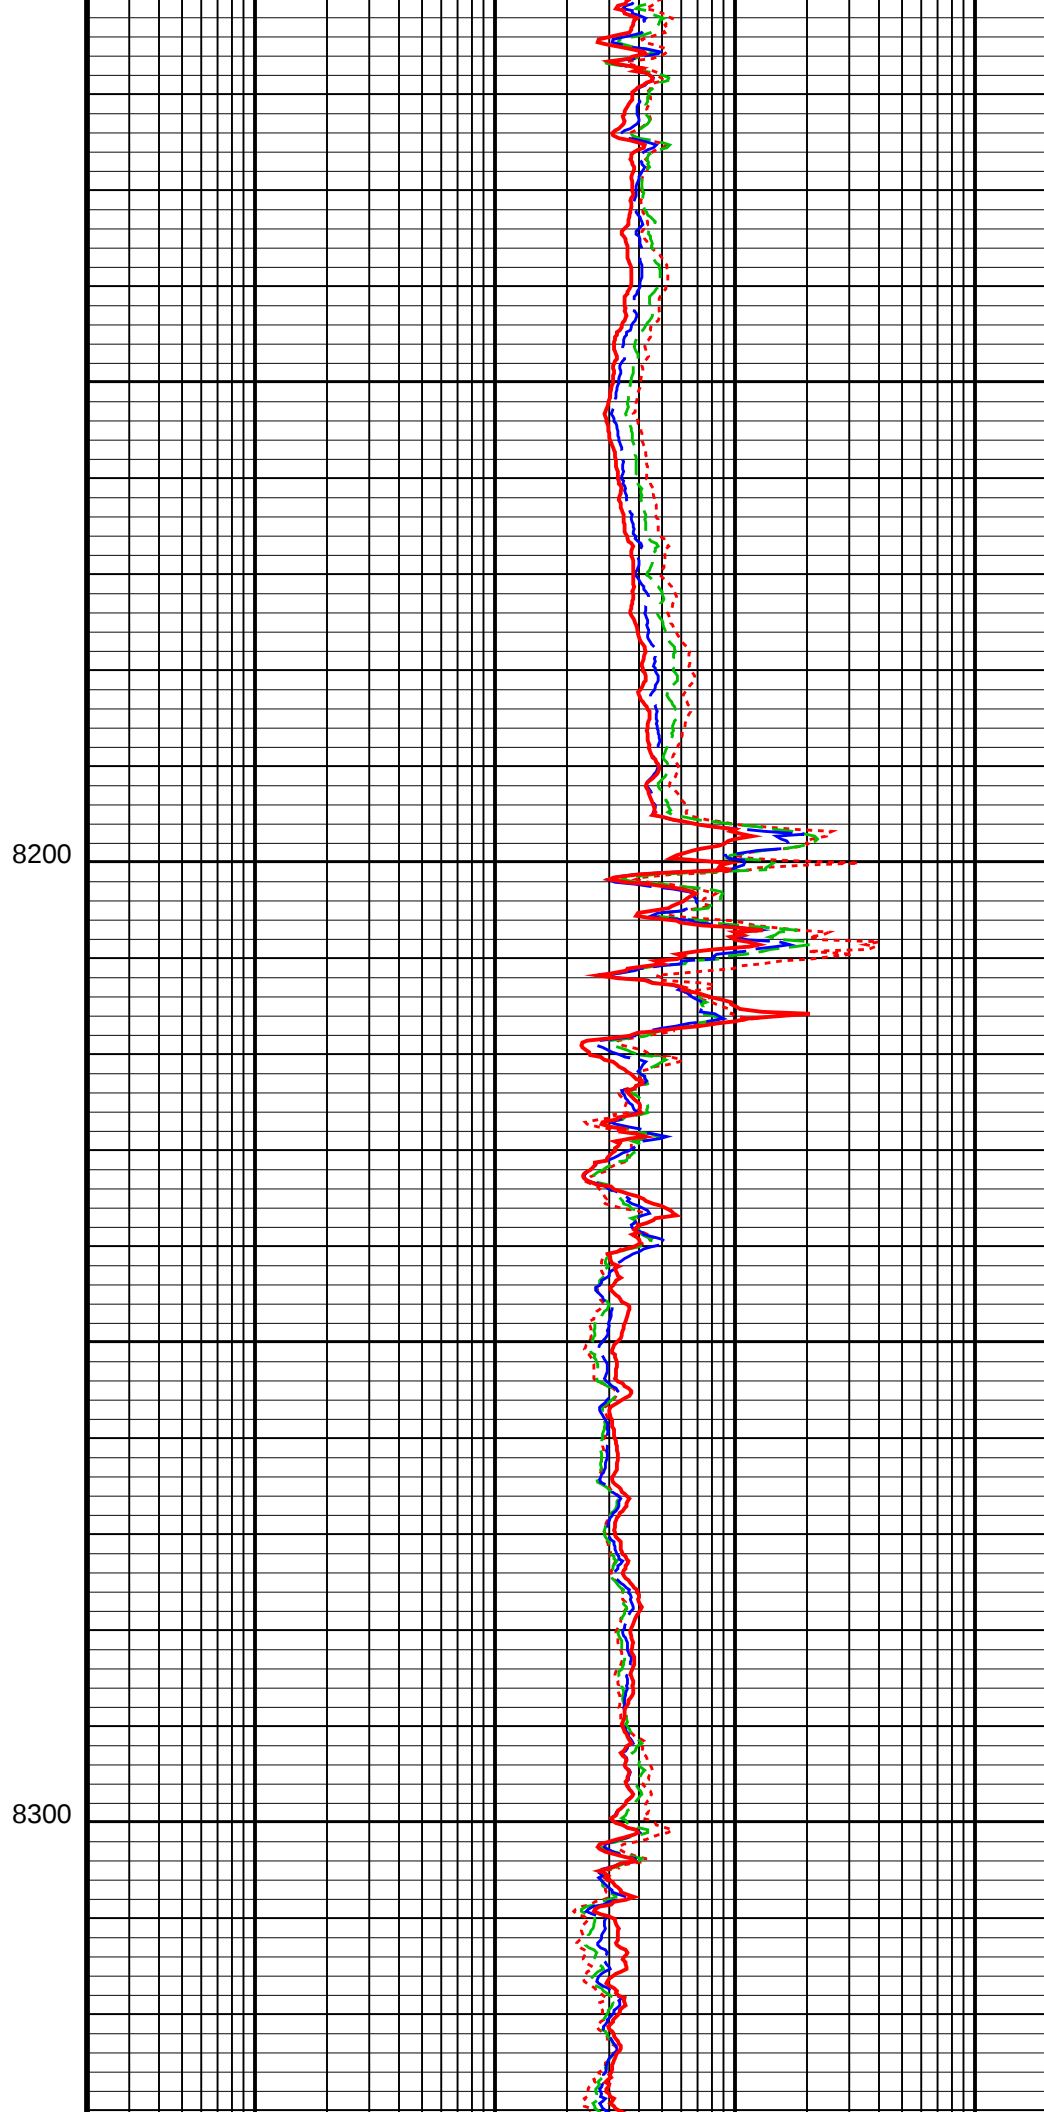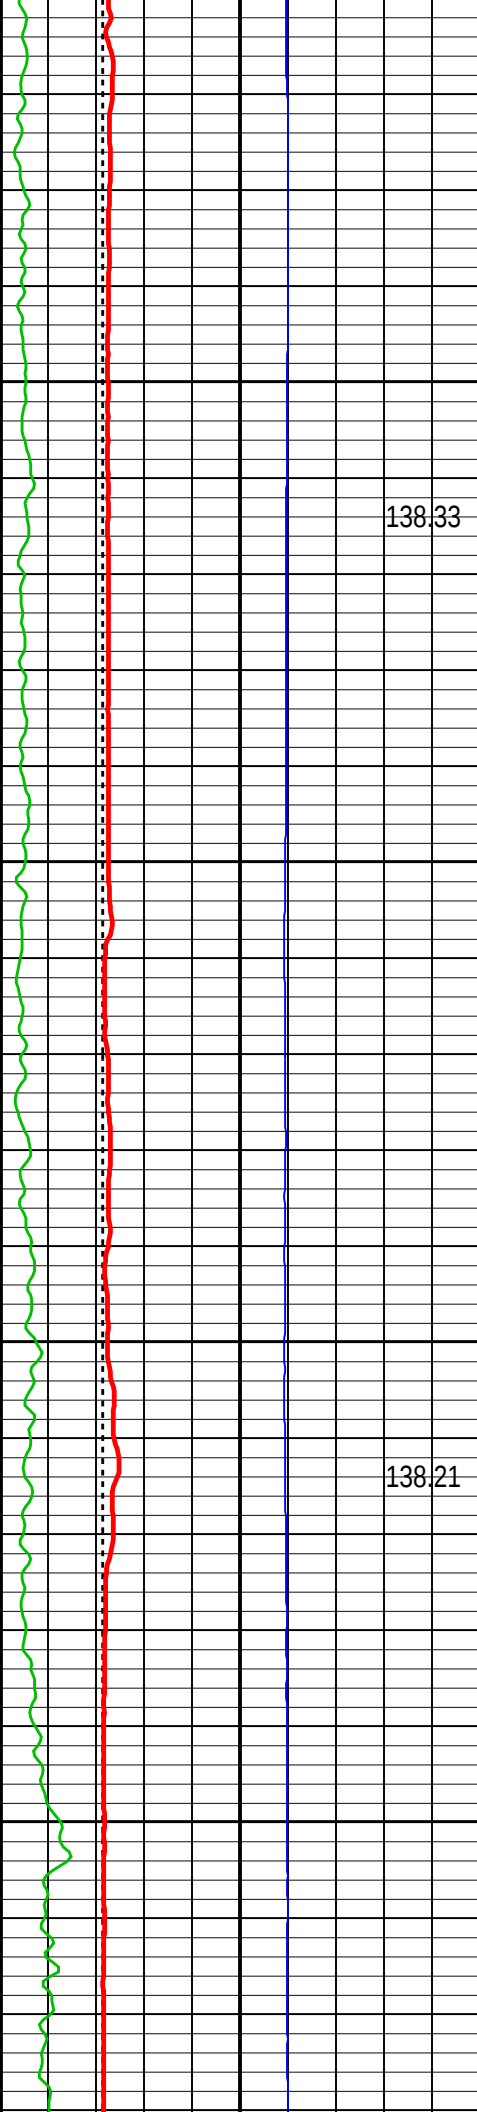

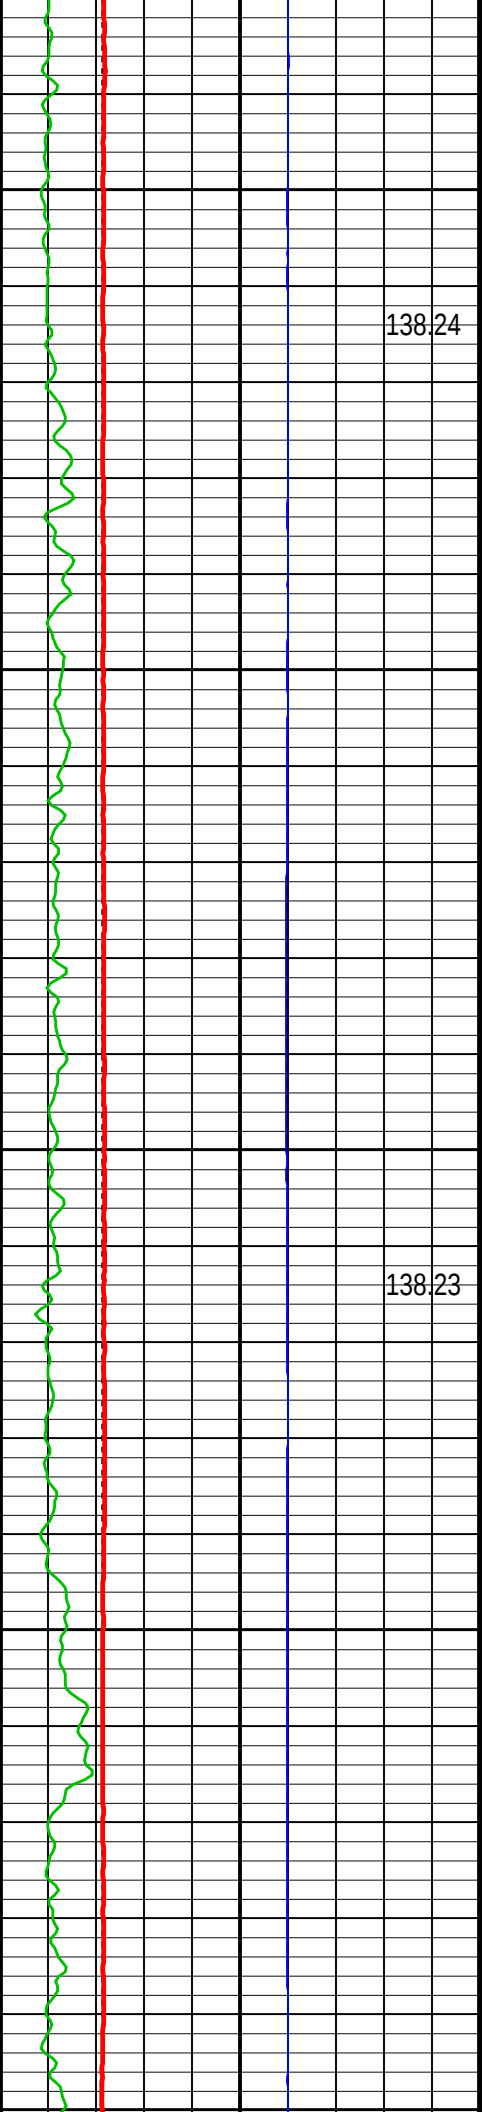



8400

138.24

138.23


8500

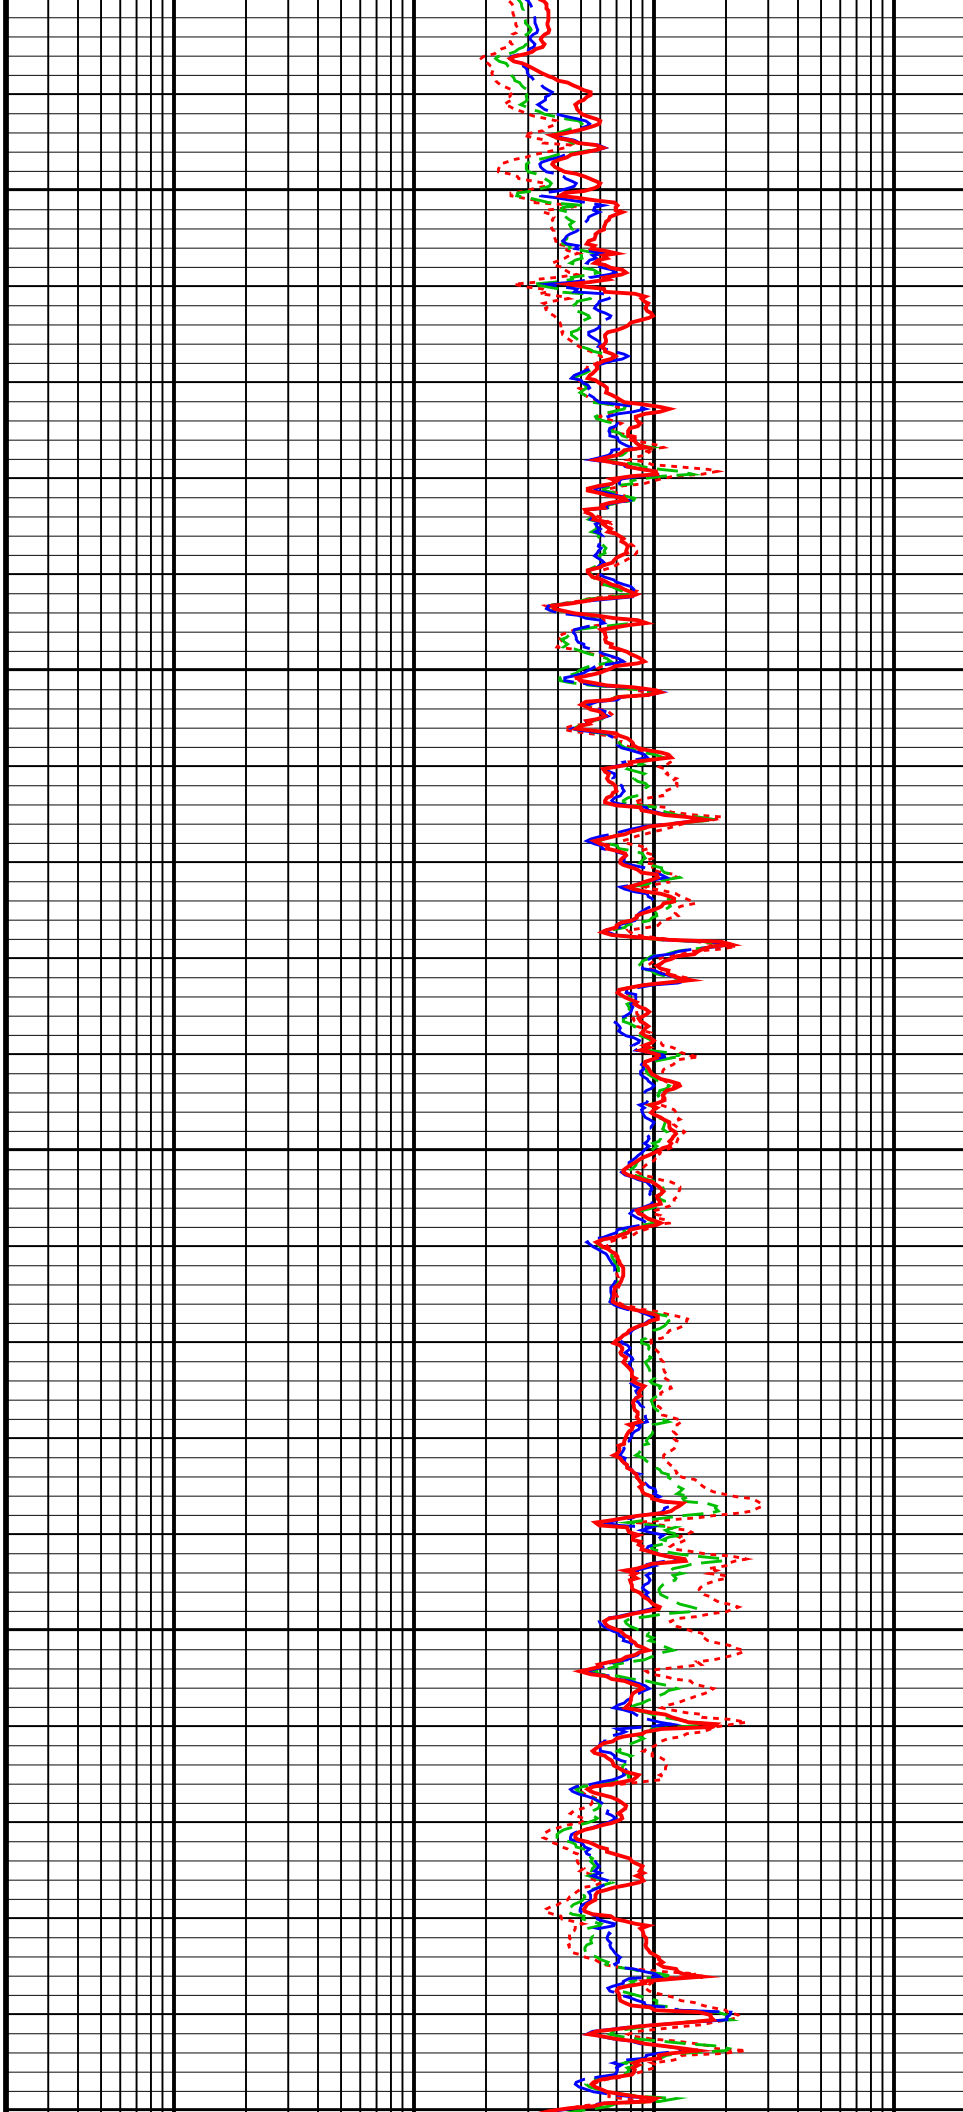


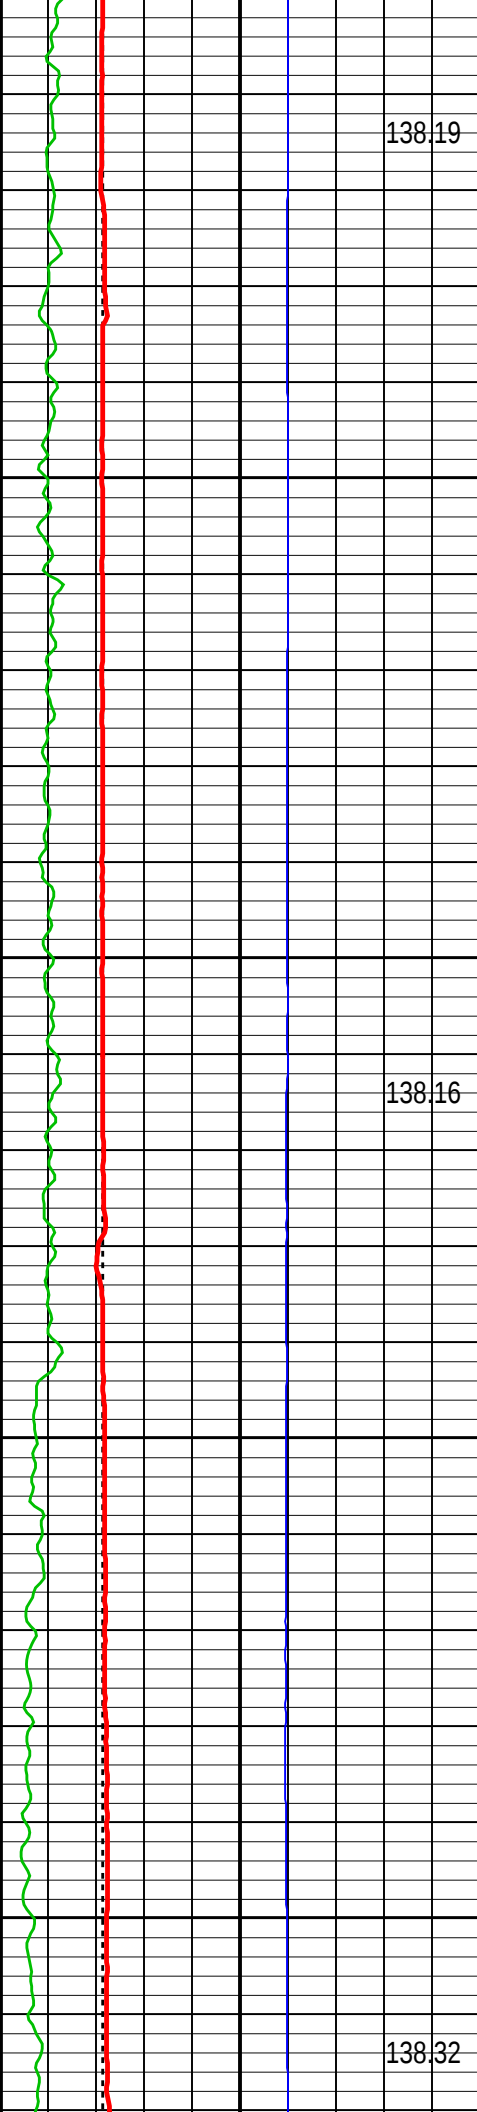

8600


8700

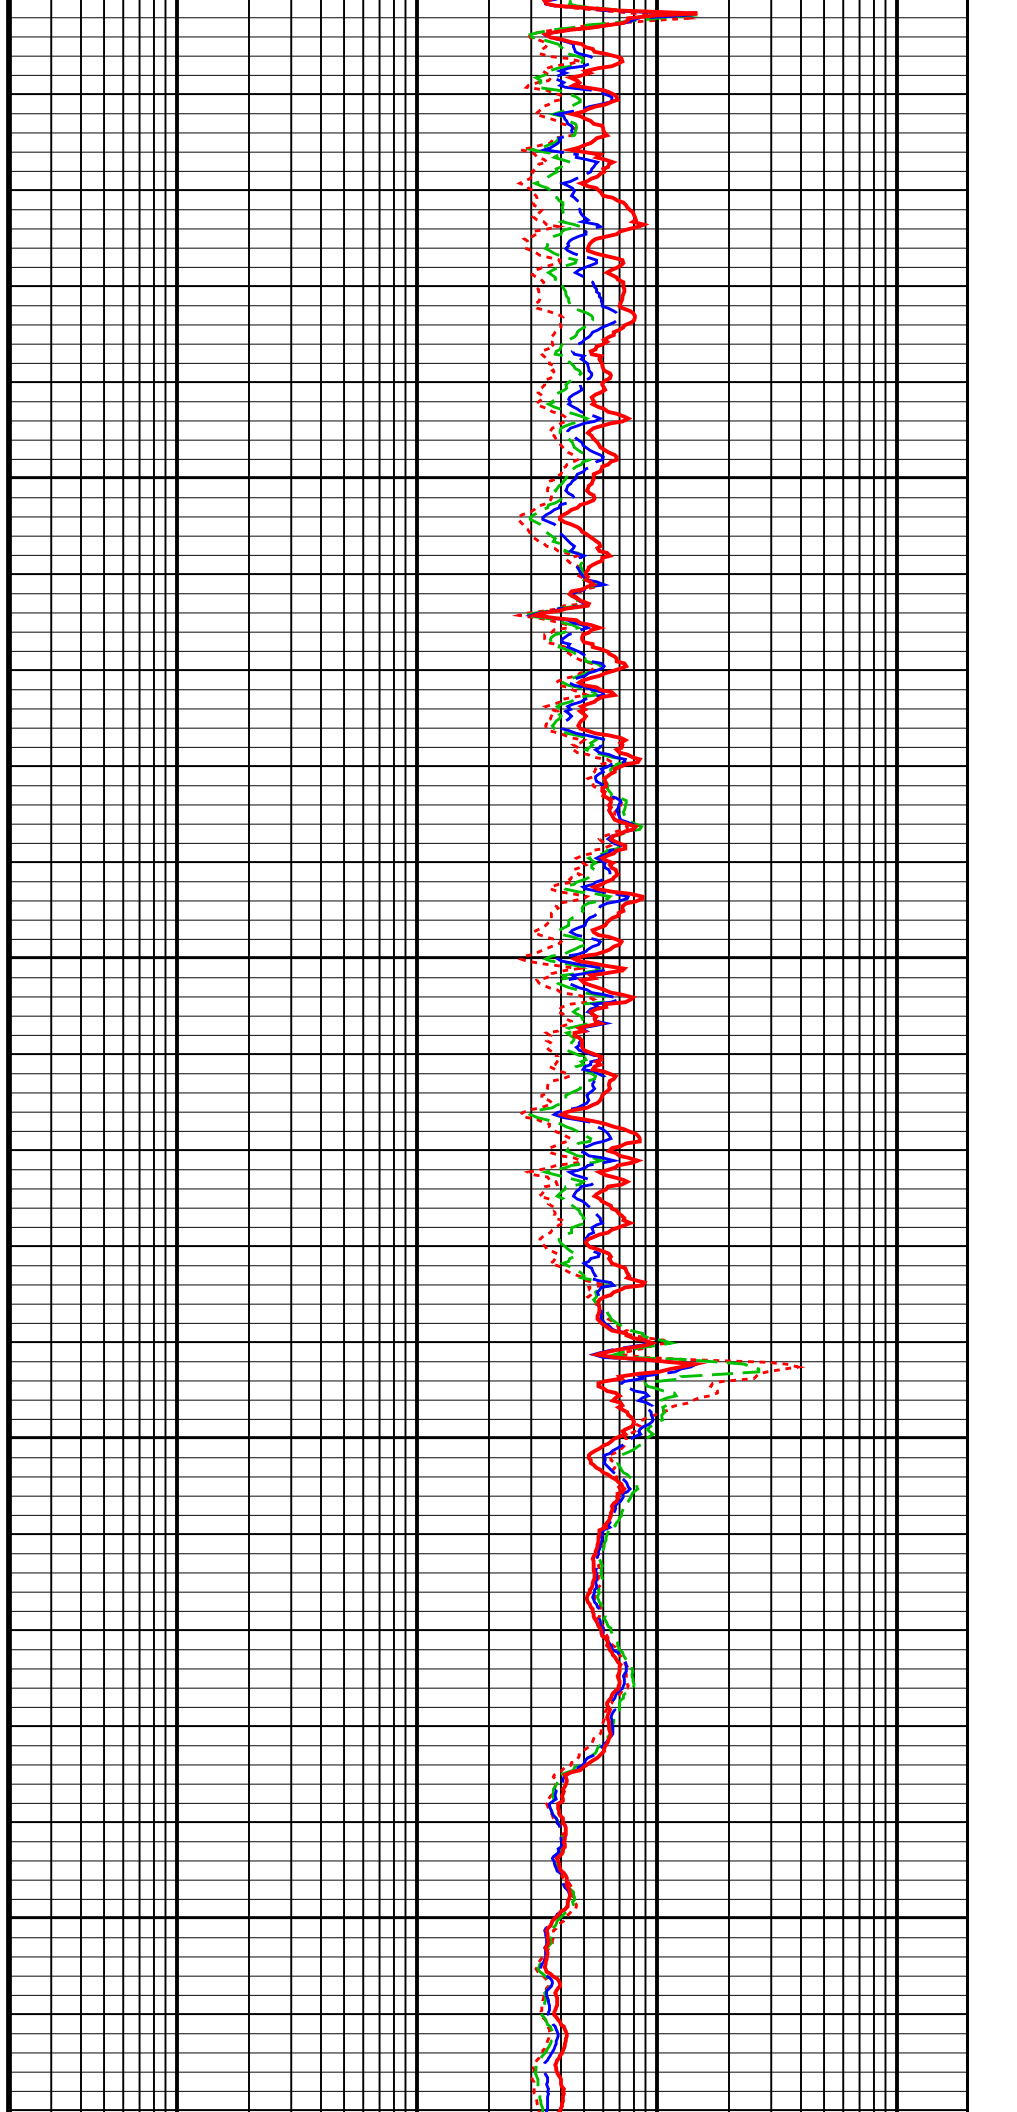


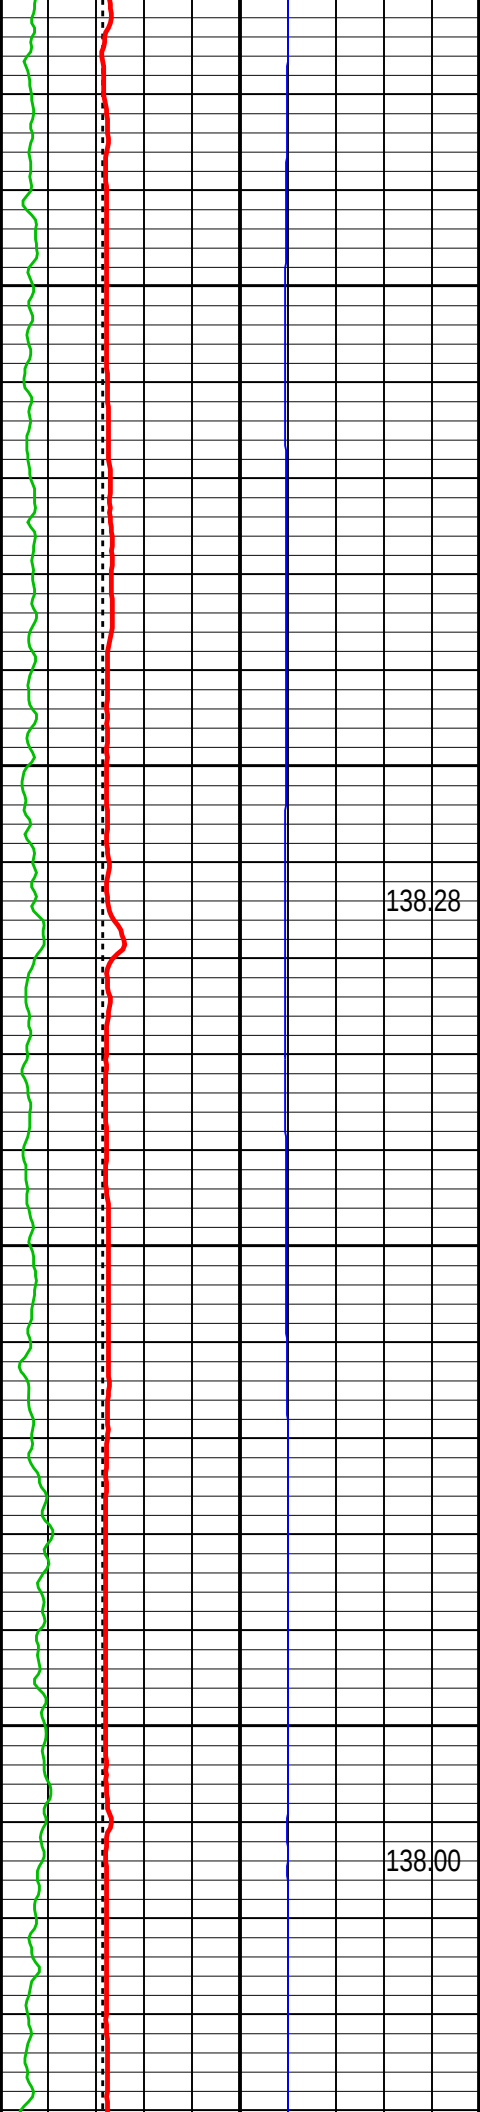

8800

8900

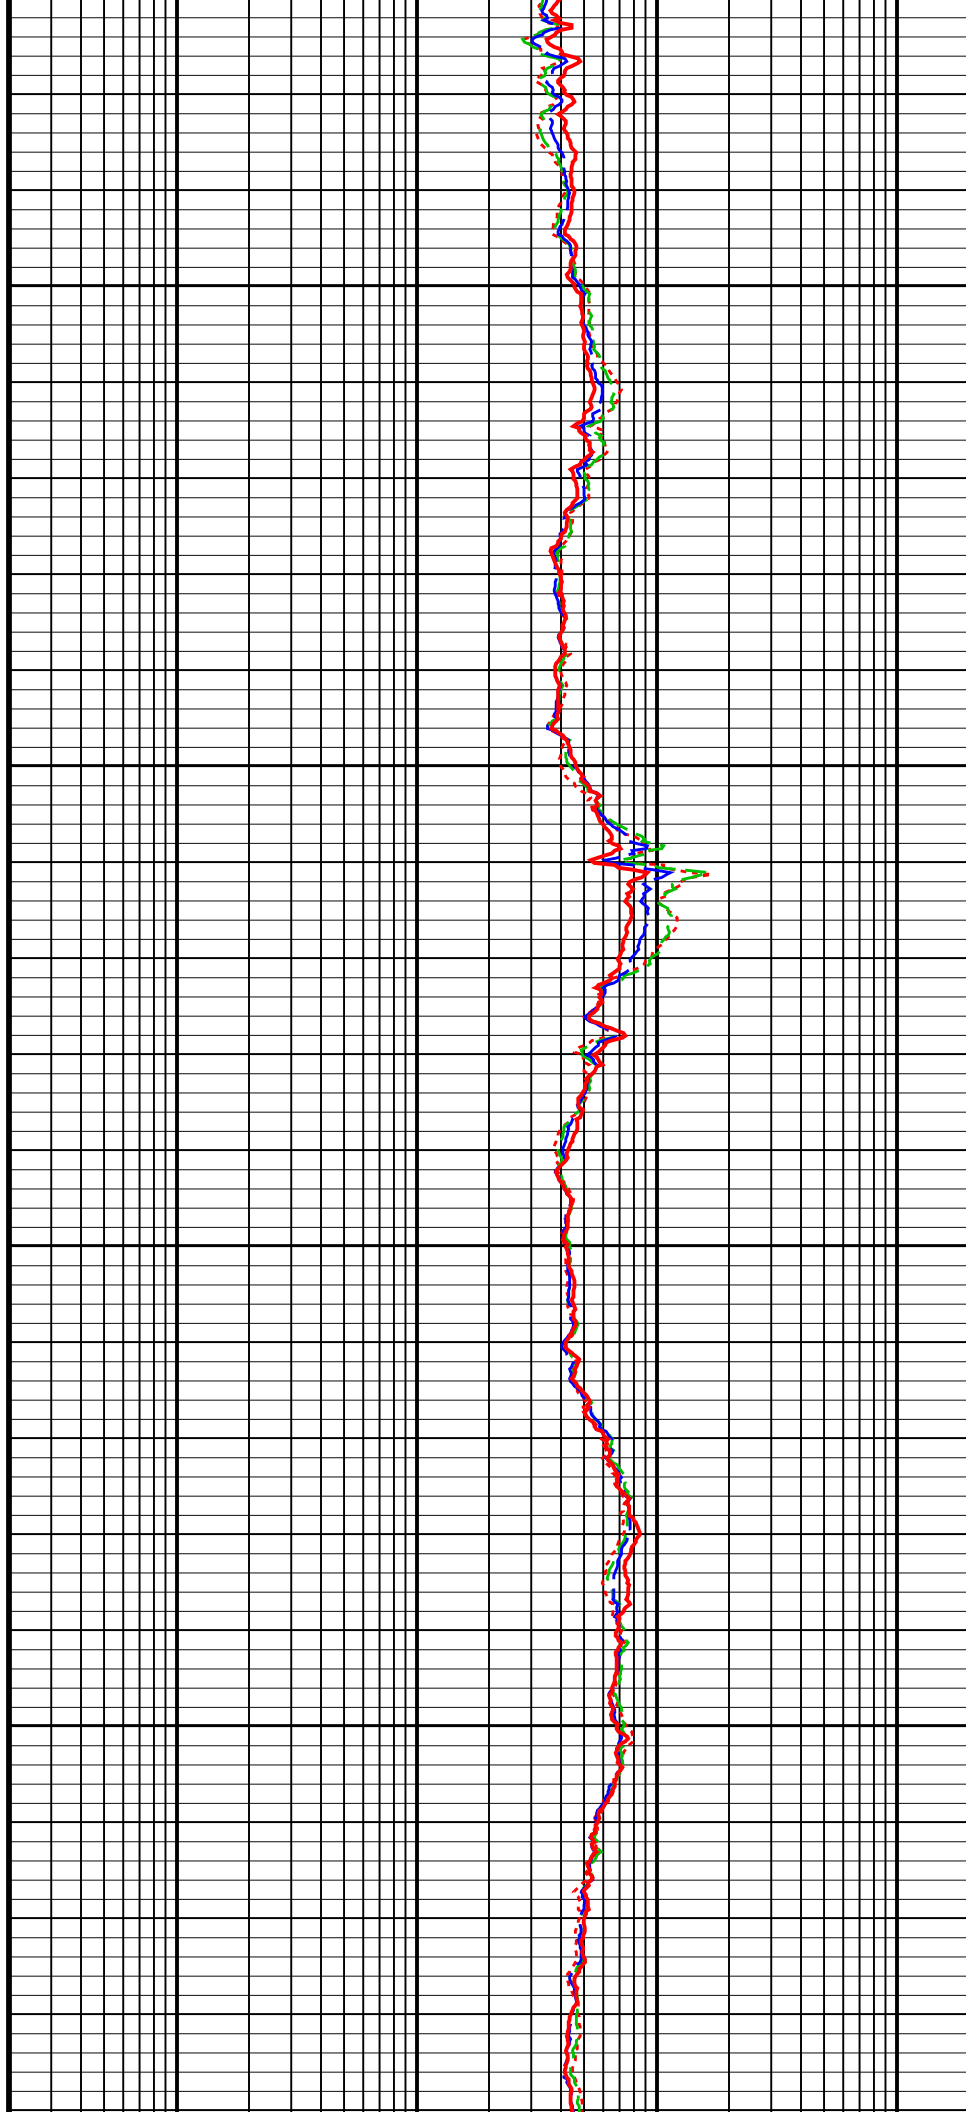

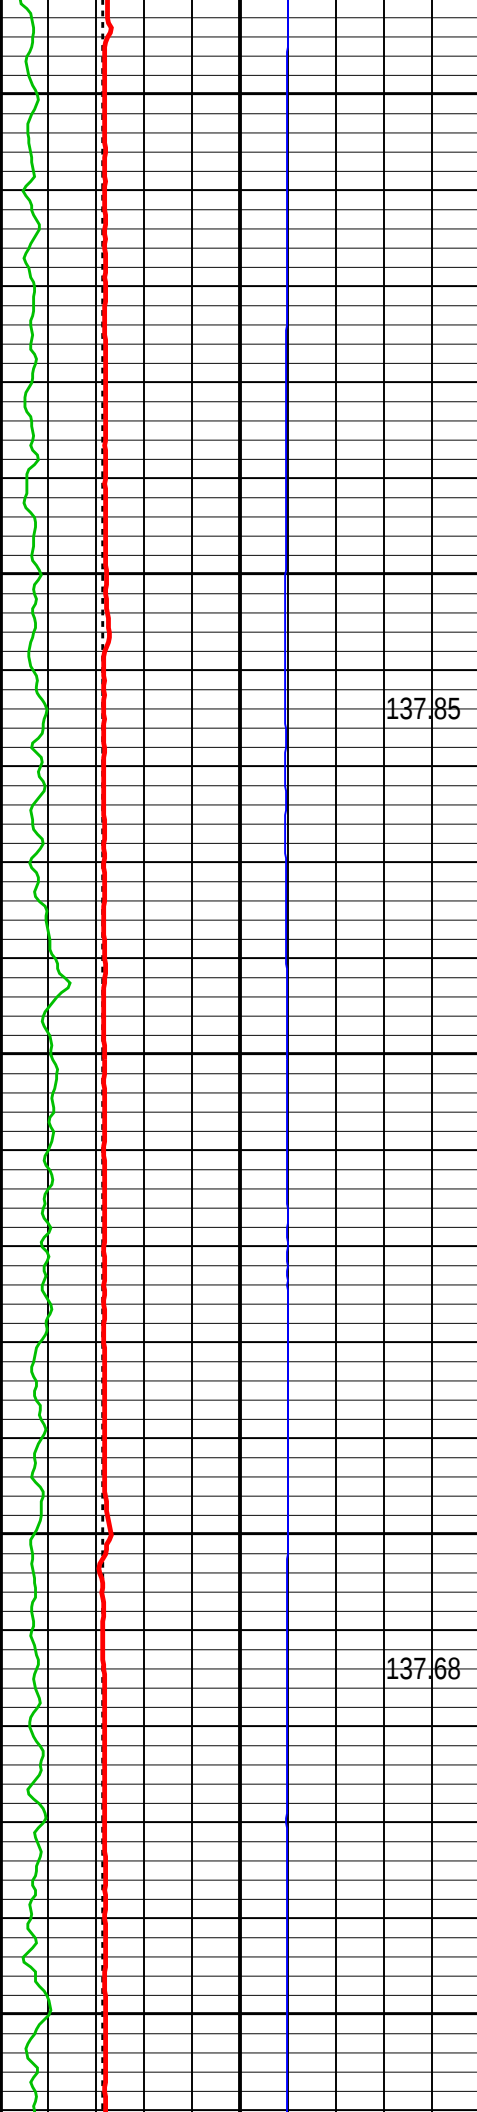


9000


137.85

9100

137.68


9200


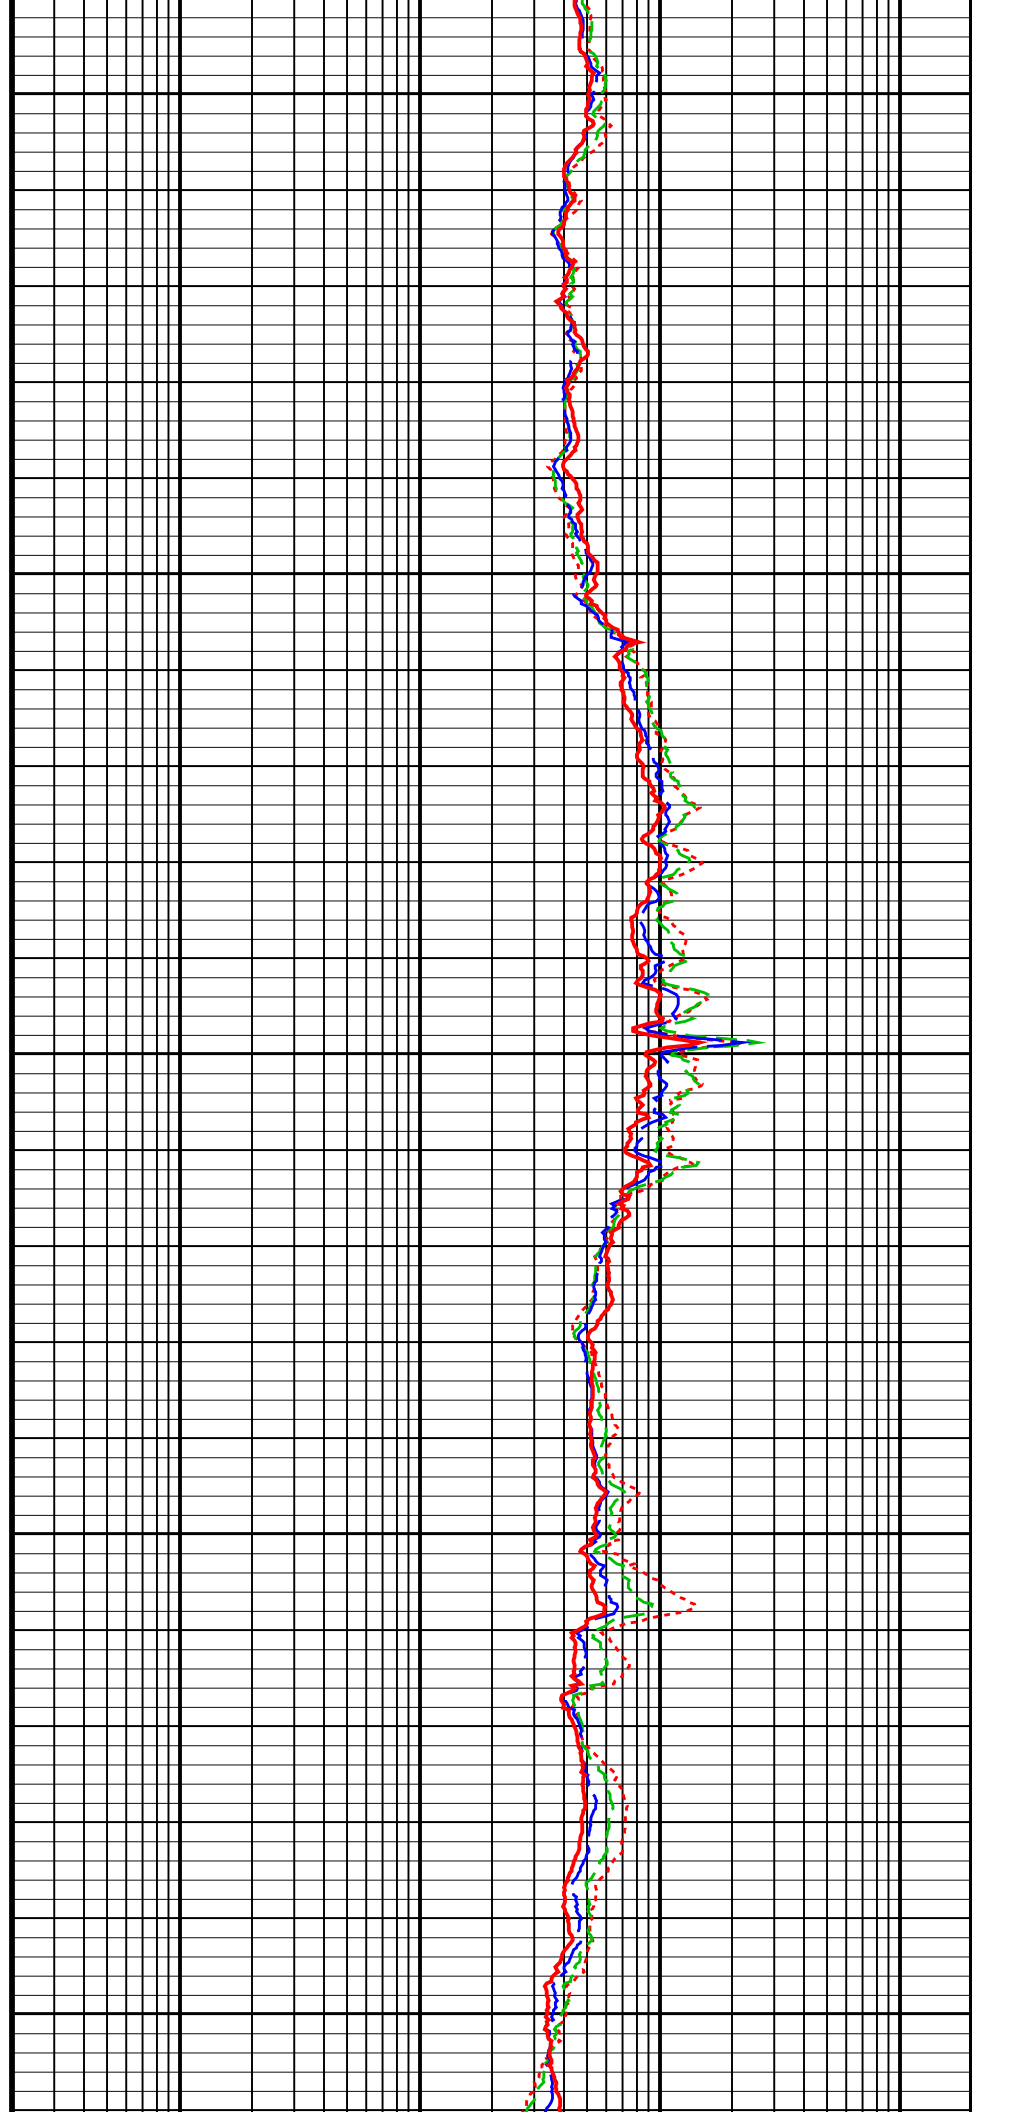


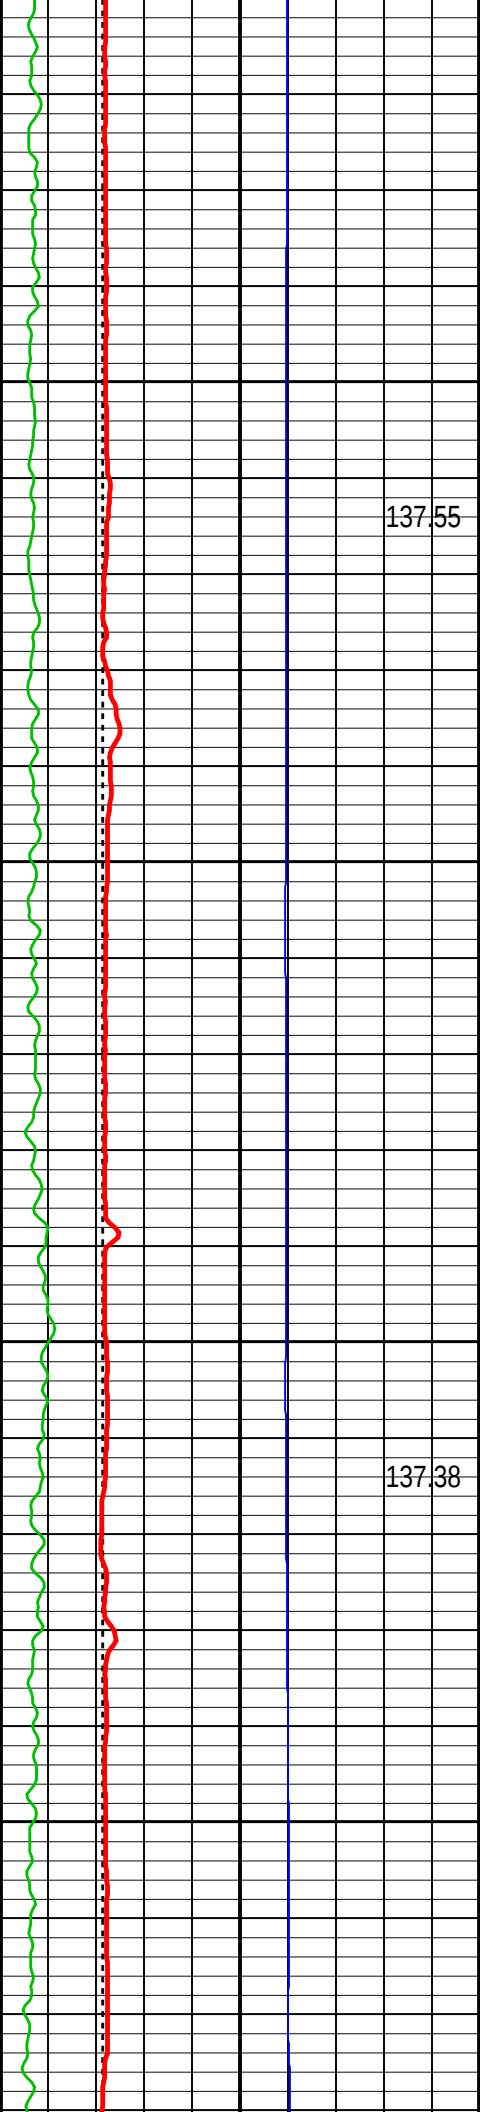


9300


9400

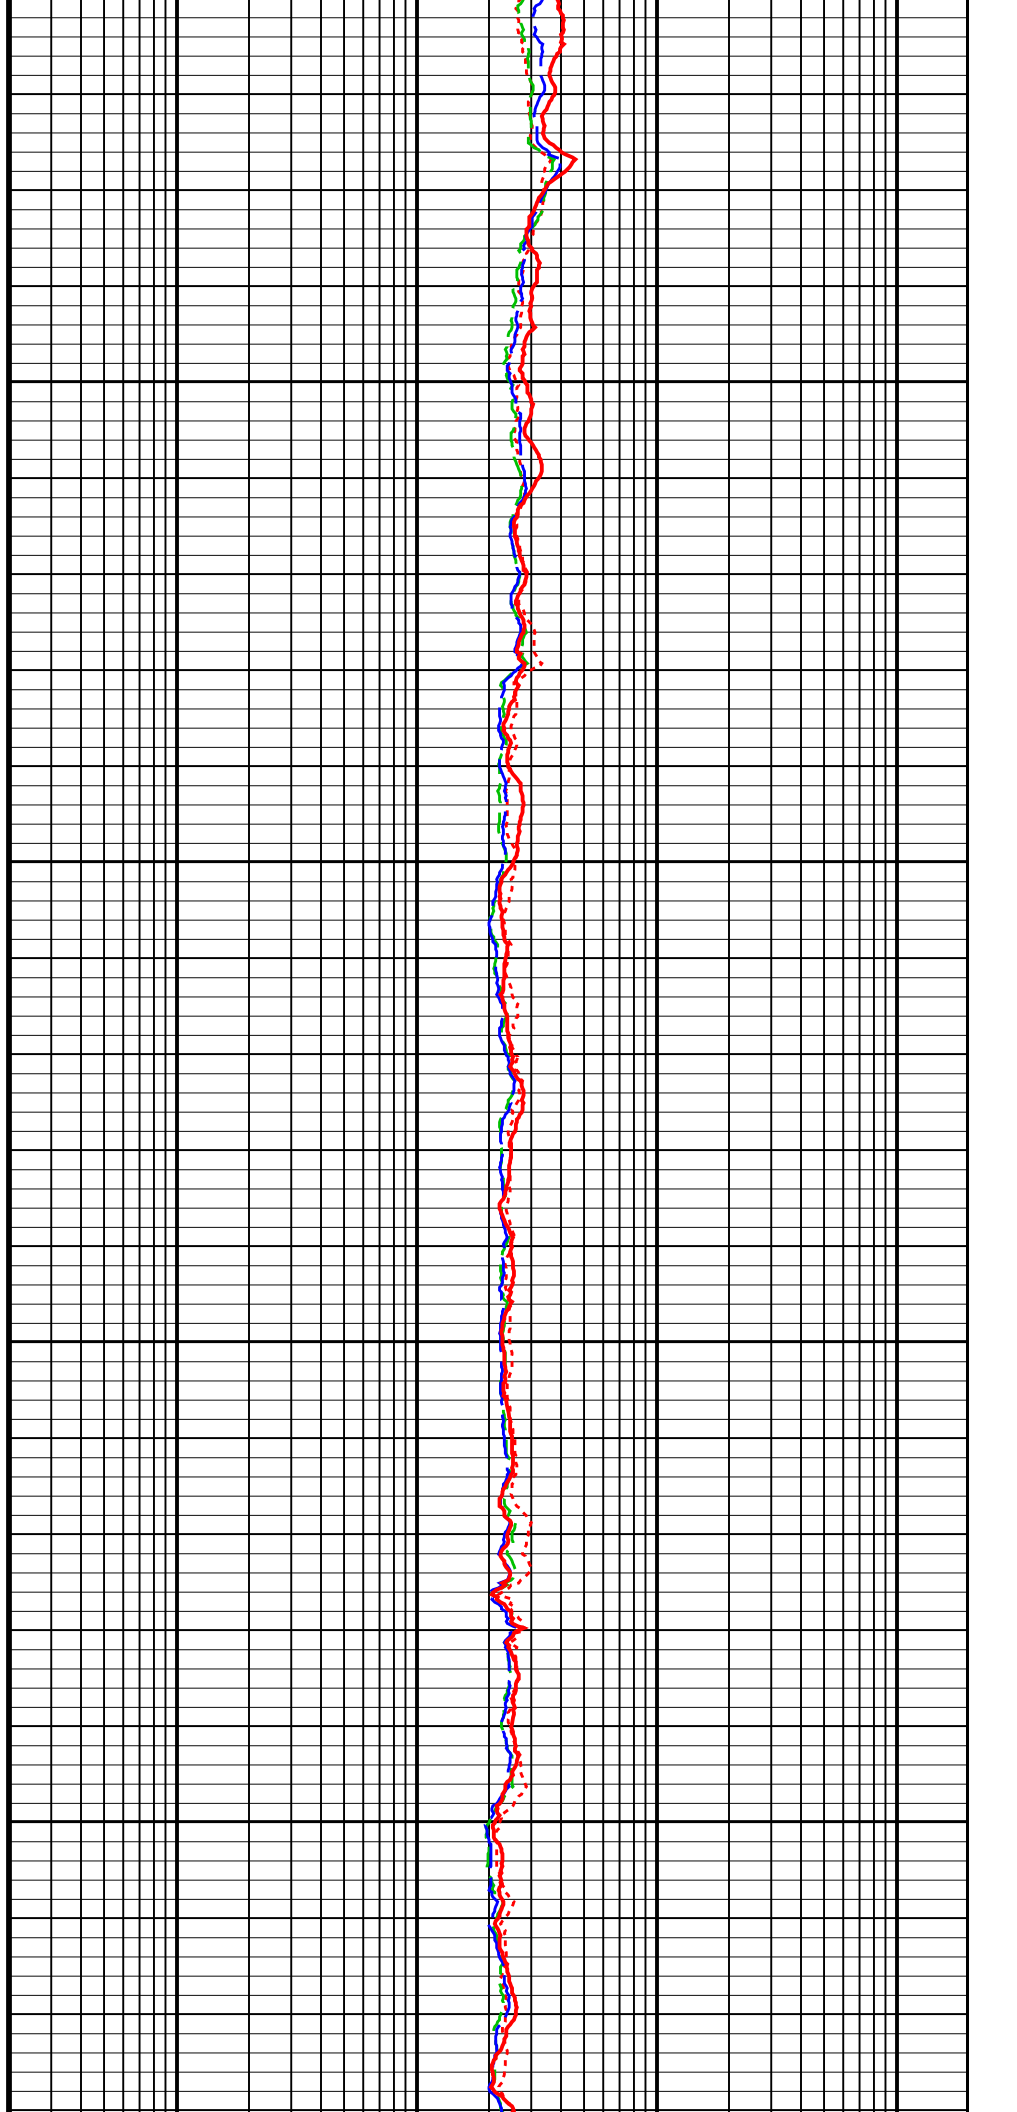

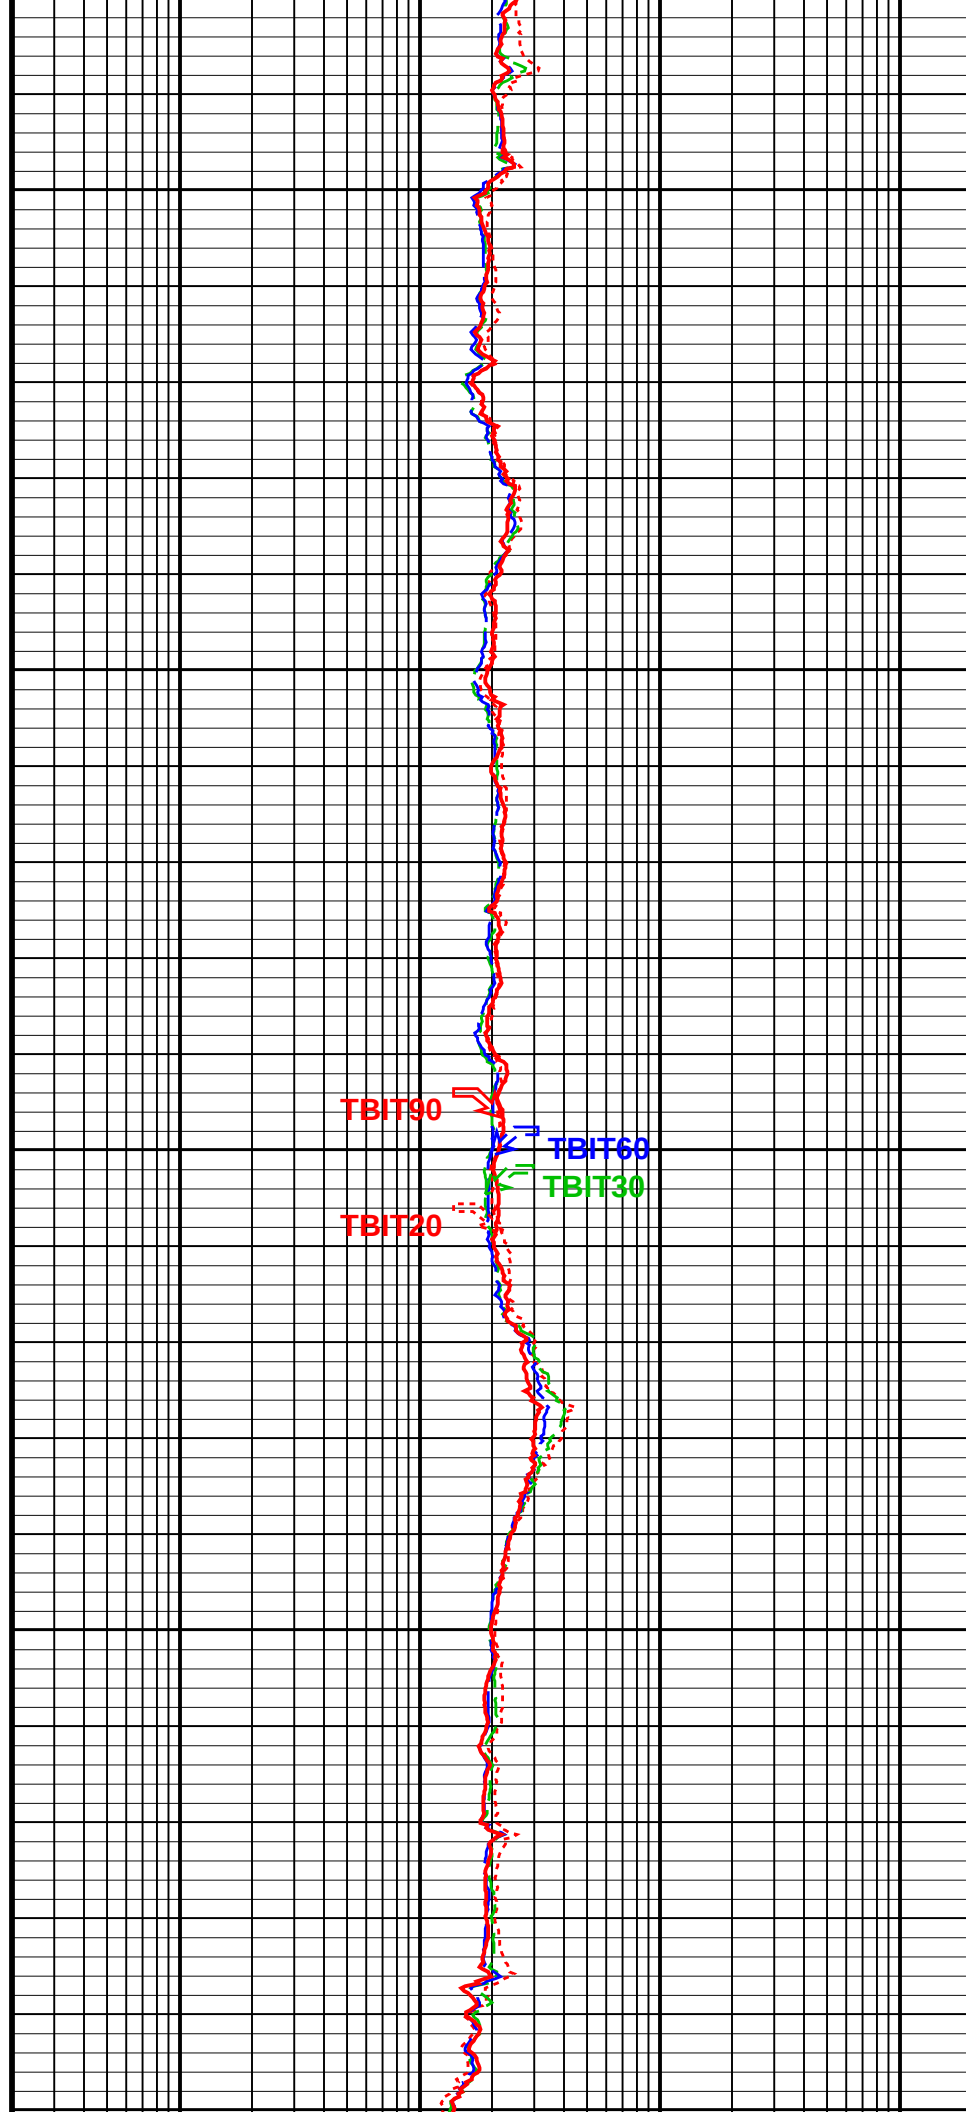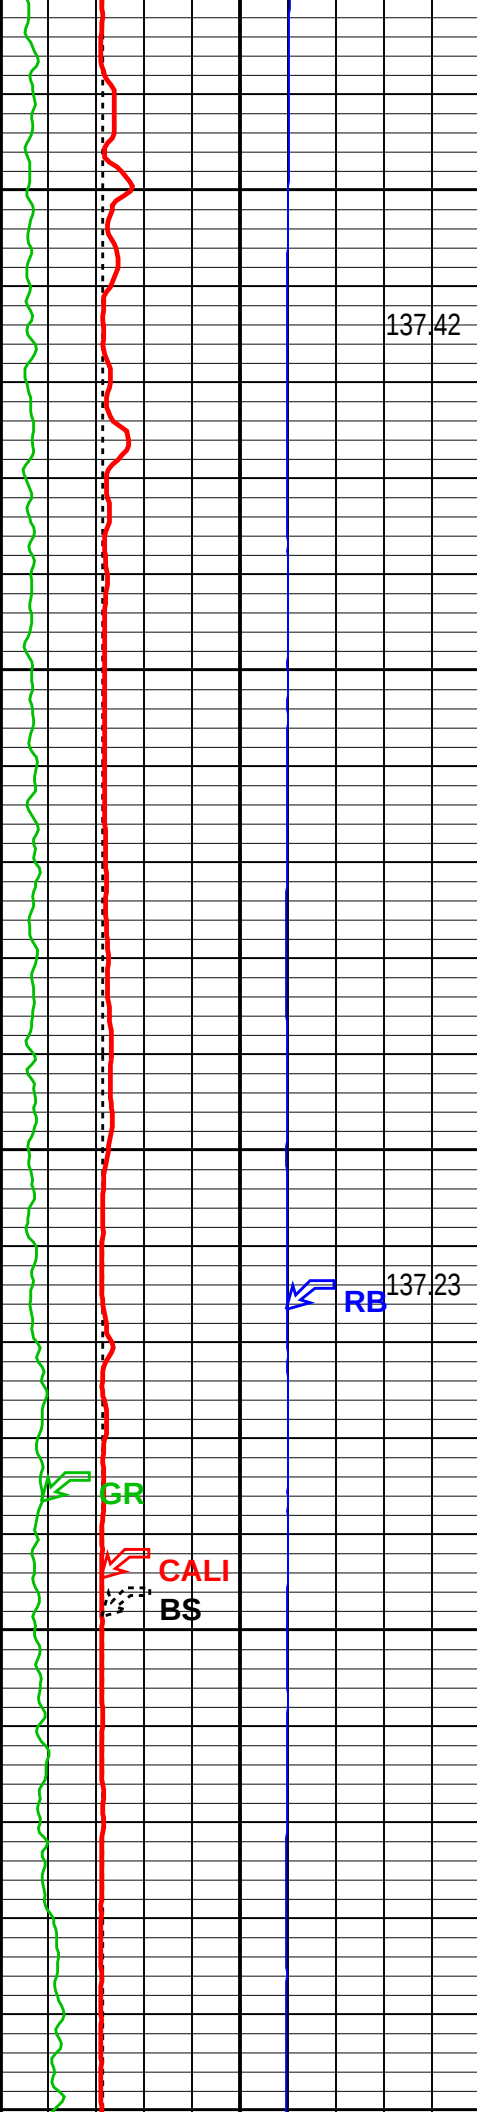

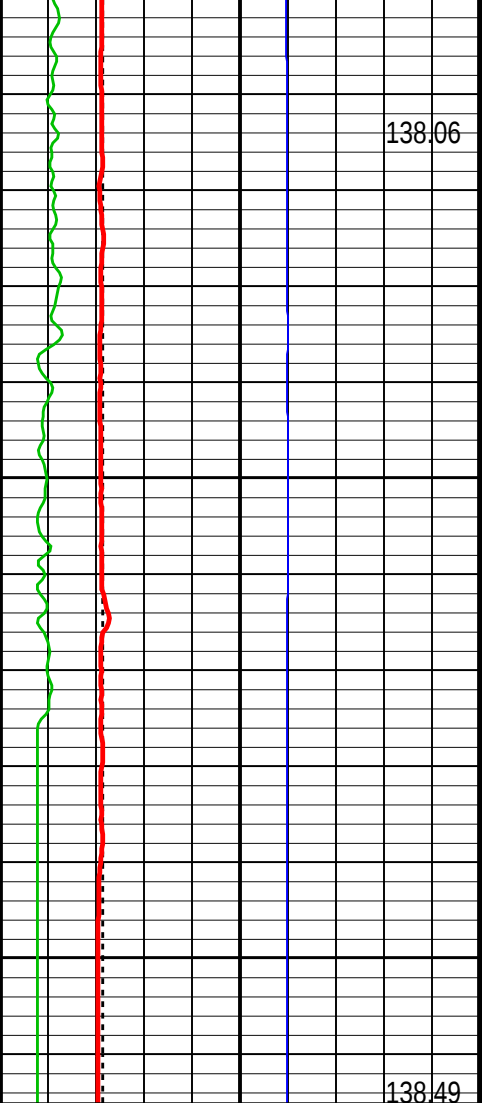

GR Temp (WTEP) (DEGF)		
Bit Size (BS) (IN)		
4		14
Gamma Ray (GR) (GAPI)		
0		150
Gamma Ray 1 (GR) (GAPI)		
150		300
Gamma Ray 2 (GR) (GAPI)		
300		450
Gamma Ray 3 (GR) (GAPI)		
450		600
Gamma Ray 4 (GR) (GAPI)		
600		750
Caliper (CALI) (IN)		
4		14
gr wrap1 From LHT1 to GR1		
gr wrap2 From LHT1 to GR2		
gr wrap3 From LHT1 to GR3		

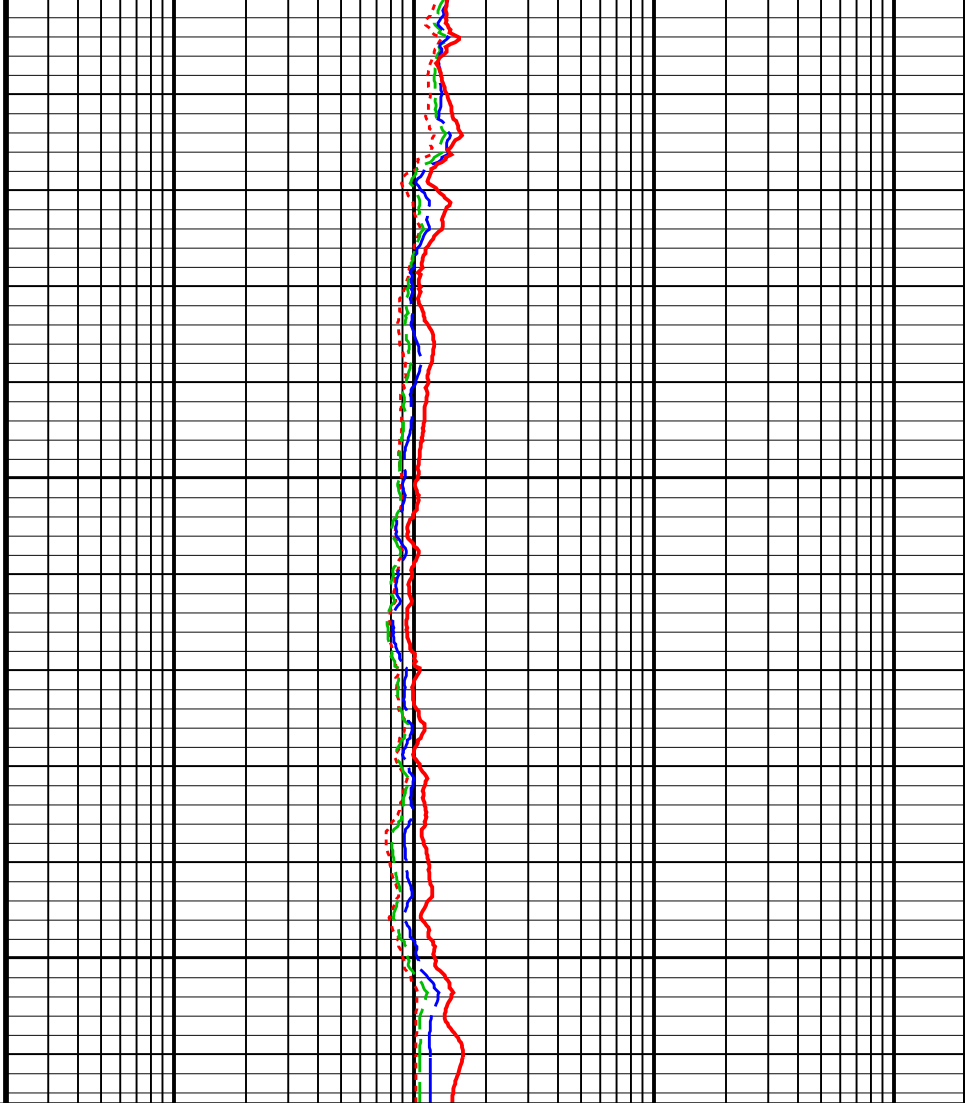

TBI 20 Inch Investigation (TBIT20) (OHMM)		
0.2		2000
TBI 30 Inch Investigation (TBIT30) (OHMM)		
0.2		2000
TBI 60 Inch Investigation (TBIT60) (OHMM)		
0.2		2000
TBI 90 Inch Investigation (TBIT90) (OHMM)		
0.2		2000

gr wrap4 From LHT1 to GR4	
	Relative Bearing (RB)
0	(DEG) 940

Parameters		
DLIS Name	Description	Value
TBT-A: ThruBit String		
MT	Mud Type (for TBN and TBI correction)	WBM
RB_OFFSET	Additional RB offset (degrees)	0.000 deg
TBI_ALGO	TBI Algorithm Selection	AIT
TBI_BHC_OP	Borehole Correction Option (for TBI)	CALIPER
TBI_CALTYP	TBI Mastercal Type	THRUBIT
TBI_REPL_ARRAY_DEST	TBI: Replace This Array	NONE
TBI_REPL_ARRAY_SOURCE	TBI: With This Array	NONE
TBI_TC_OP	Induction Temperature Correction Option	LOWER
System and Miscellaneous		
BS	Bit Size	6.125 in
Format: TB_5INCH_RESISTIVITY Vertical Scale: 5" per 100' Graphics File Created: 17-Sep-2014 06:54		

OP System Version: 19C2-270		
TBT	SRPC-5303-ThruBit	



Input DLIS Files				
ThruBit_003PUP	FN:2	17-Sep-2014 06:46	9765.0 FT	2970.0 FT





CALIBRATIONS

MAXIS Field Log

ThruBit String / Equipment Identification		
Primary Equipment:		
Induction Resistivity	TBI - A	19
Density	TBD - A	46
Gamma-Ray Logging Source	GGLS - FZ	3216
Thermal Neutron	TBN - A	6
Neutron Logging Source	NNLS - EWA	4484
Telemetry Memory GR	TMG - A	24
Battery	TBAT -	35
Battery	TBAT -	13
Auxiliary Equipment:		

ThruBit String Master Calibration					
TBI Master Calibration Sonde Errors					
Freq 1, A1, R	Value	Nominal	Freq 1, A1, X	Value	Nominal
	-501.175	-457.000		-132.542	300.000
-556.000 (Minimum)	-387.000 (Nominal)		-500.000 (Minimum)	1100.00 (Nominal)	
Freq 1, A2, R	Value	Nominal	Freq 1, A2, X	Value	Nominal
	-151.191	-141.000		16.3318	320.000

-182.000 (Minimum)	(Nominal)	-120.000 (Maximum)		-75.0000 (Minimum)	(Nominal)	700.000 (Maximum)	
Freq 1, A3, R		Value	Nominal	Freq 1, A3, X		Value	Nominal
		-29.8364	-28.0000			-48.3363	50.0000
-38.0000 (Minimum)	(Nominal)	-18.0000 (Maximum)		-375.000 (Minimum)	(Nominal)	475.000 (Maximum)	
Freq 1, A4, R		Value	Nominal	Freq 1, A4, X		Value	Nominal
		-17.1567	-16.0000			218.068	300.000
-24.0000 (Minimum)	(Nominal)	-8.00000 (Maximum)		25.0000 (Minimum)	(Nominal)	575.000 (Maximum)	
Freq 1, A5, R		Value	Nominal	Freq 1, A5, X		Value	Nominal
		-14.2031	-14.0000			114.044	150.000
-21.0000 (Minimum)	(Nominal)	-7.00000 (Maximum)		25.0000 (Minimum)	(Nominal)	300.000 (Maximum)	
Freq 2, A1, R		Value	Nominal	Freq 2, A1, X		Value	Nominal
		-264.524	-237.000			-117.857	150.000
-313.000 (Minimum)	(Nominal)	-186.000 (Maximum)		-375.000 (Minimum)	(Nominal)	675.000 (Maximum)	
Freq 2, A2, R		Value	Nominal	Freq 2, A2, X		Value	Nominal
		-97.7719	-92.0000			-18.7953	160.000
-126.000 (Minimum)	(Nominal)	-76.0000 (Maximum)		-100.000 (Minimum)	(Nominal)	425.000 (Maximum)	
Freq 2, A3, R		Value	Nominal	Freq 2, A3, X		Value	Nominal
		-21.3012	-21.0000			-85.2752	-20.0000
-28.0000 (Minimum)	(Nominal)	-13.0000 (Maximum)		-325.000 (Minimum)	(Nominal)	250.000 (Maximum)	
Freq 2, A4, R		Value	Nominal	Freq 2, A4, X		Value	Nominal
		-19.8394	-20.0000			59.2524	100.000
-28.0000 (Minimum)	(Nominal)	-10.0000 (Maximum)		-75.0000 (Minimum)	(Nominal)	275.000 (Maximum)	
Freq 2, A5, R		Value	Nominal	Freq 2, A5, X		Value	Nominal
		-18.8111	-20.0000			-15.4752	-25.0000
-27.0000 (Minimum)	(Nominal)	-10.0000 (Maximum)		-125.000 (Minimum)	(Nominal)	100.000 (Maximum)	
Freq 3, A1, R		Value	Nominal	Freq 3, A1, X		Value	Nominal
		-169.026	-149.000			-157.427	25.0000
-213.000 (Minimum)	(Nominal)	-108.000 (Maximum)		-375.000 (Minimum)	(Nominal)	425.000 (Maximum)	
Freq 3, A2, R		Value	Nominal	Freq 3, A2, X		Value	Nominal
		-74.1193	-70.0000			-56.4180	70.0000
-101.000 (Minimum)	(Nominal)	-57.0000 (Maximum)		-125.000 (Minimum)	(Nominal)	250.000 (Maximum)	
Freq 3, A3, R		Value	Nominal	Freq 3, A3, X		Value	Nominal
		-17.0567	-17.0000			-122.429	-90.0000
-23.0000 (Minimum)	(Nominal)	-11.0000 (Maximum)		-300.000 (Minimum)	(Nominal)	125.000 (Maximum)	
Freq 3, A4, R		Value	Nominal	Freq 3, A4, X		Value	Nominal
		-21.0103	-22.0000			-47.1540	-50.0000
-31.0000 (Minimum)	(Nominal)	-11.0000 (Maximum)		-200.000 (Minimum)	(Nominal)	100.000 (Maximum)	
Freq 3, A5, R		Value	Nominal	Freq 3, A5, X		Value	Nominal
		-21.0473	-22.0000			-110.211	-110.000
-32.0000 (Minimum)	(Nominal)	-11.0000 (Maximum)		-250.000 (Minimum)	(Nominal)	0 (Maximum)	
Freq 4, A1, R		Value	Nominal	Freq 4, A1, X		Value	Nominal
		-93.5993	-80.0000			-260.416	-190.000
-128.000 (Minimum)	(Nominal)	-54.0000 (Maximum)		-450.000 (Minimum)	(Nominal)	75.0000 (Maximum)	
Freq 4, A2, R		Value	Nominal	Freq 4, A2, X		Value	Nominal
		-54.0924	-50.0000			-122.848	-75.0000
-80.0000 (Minimum)	(Nominal)	-41.0000 (Maximum)		-200.000 (Minimum)	(Nominal)	50.0000 (Maximum)	
Freq 4, A3, R		Value	Nominal	Freq 4, A3, X		Value	Nominal
		-13.7423	-14.0000			-191.764	-190.000
-18.0000 (Minimum)	(Nominal)	-8.00000 (Maximum)		-250.000 (Minimum)	(Nominal)	-25.0000 (Maximum)	

Aluminium Density G/C3			Value	Nominal	Magnesium Density G/C3			Value	Nominal
			2.607	2.607				1.752	1.752
2.557 (Minimum)	(Nominal)	2.657 (Maximum)			1.702 (Minimum)	(Nominal)	1.802 (Maximum)		
LS1 Background CPS			Value	Nominal	SS1 Background CPS			Value	Nominal
			136.40	140.00				132.05	140.00
100.00 (Minimum)	(Nominal)	187.00 (Maximum)			100.00 (Minimum)	(Nominal)	185.00 (Maximum)		
LS4 Background CPS			Value	Nominal	SS1 Aluminium CPS			Value	Nominal
			27.82	29.00				4577.00	4850.00
20.00 (Minimum)	(Nominal)	38.00 (Maximum)			4076.00 (Minimum)	(Nominal)	5613.00 (Maximum)		
LS1 Aluminium CPS			Value	Nominal	SS1 Magnesium CPS			Value	Nominal
			837.28	870.00				7616.22	8000.00
750.00 (Minimum)	(Nominal)	982.00 (Maximum)			6695.00 (Minimum)	(Nominal)	9269.00 (Maximum)		
LS4 Aluminium CPS			Value	Nominal					
			971.63	955.00					
796.00 (Minimum)	(Nominal)	1169.0 (Maximum)							
LS1 Al + Sleeve CPS			Value	Nominal					
			774.98	725.00					
650.00 (Minimum)	(Nominal)	838.00 (Maximum)							
LS4 Al + Sleeve CPS			Value	Nominal					
			492.05	426.50					
382.00 (Minimum)	(Nominal)	638.00 (Maximum)							
LS1 Magnesium CPS			Value	Nominal					
			5475.24	5800.00					
5158.00 (Minimum)	(Nominal)	6486.00 (Maximum)							
SS Slope			Value	Nominal					
			1.622	1.645					
1.520 (Minimum)	(Nominal)	1.770 (Maximum)							
LS Slope			Value	Nominal					
			0.4180	0.4150					
0.3800 (Minimum)	(Nominal)	0.4500 (Maximum)							
Pef K Factor			Value	Nominal					
			4.925	4.840					
3.510 (Minimum)	(Nominal)	6.170 (Maximum)							
Pef B Factor			Value	Nominal					
			-0.6519	-0.5550					
-0.7000 (Minimum)	(Nominal)	-0.4100 (Maximum)							
Master: 9-Sep-2014 11:14									

ThruBit String Master Calibration							
Thermal Neutron Master Calibration							
TNF, Background CPS		Value	Nominal	TNN, Background CPS		Value	Nominal
		0.10	1.0			0.033	1.0
0 (Minimum)		(Nominal)	2.0 (Maximum)	0 (Minimum)		(Nominal)	2.0 (Maximum)
TNF, Tank CPS		Value	Nominal	TNN, Tank CPS		Value	Nominal
		89.88	96.00			2635.5	2860.0
25.00 (Minimum)		(Nominal)	200.0 (Maximum)	750.00 (Minimum)		(Nominal)	5700.0 (Maximum)
TNF, Tank + Al Sleeve CPS		Value	Nominal	TNN, Tank + Al Sleeve CPS		Value	Nominal
		2891.4	3040.0			30175.8	32350.0
727.00 (Minimum)		(Nominal)	6080.0 (Maximum)	8000.00 (Minimum)		(Nominal)	64700.0 (Maximum)
Tank + Al Sleeve Ratio		Value	Nominal	Tank + Al Sleeve Porosity, PU		Value	Nominal

Tank + AI Sleeve Ratio		Value	Nominal	Tank + AI Sleeve Porosity - P0		Value	Nominal
		11.019	10.797			14.46	14.40
10.300 (Minimum)	(Nominal)	11.300 (Maximum)		13.40 (Minimum)	(Nominal)	15.40 (Maximum)	
Tank, Ratio		Value	Nominal	Tank, Temperature DEGF		Value	Nominal
		29.321	30.958			86.2	70.0
28.000 (Minimum)	(Nominal)	34.000 (Maximum)		20.0 (Minimum)	(Nominal)	120 (Maximum)	
Master: 3-Sep-2014 11:05							

ThruBit String Master Calibration							
TMG Accelerometer Calibration							
Minimum Ax, m/s2		Value	Nominal	Maximum Ax, m/s2		Value	Nominal
NOT DONE		N/A	-9.810	NOT DONE		N/A	9.810
-10.81 (Minimum)	(Nominal)	-8.810 (Maximum)		8.810 (Minimum)	(Nominal)	10.81 (Maximum)	
Minimum Ay, m/s2		Value	Nominal	Maximum Ay, m/s2		Value	Nominal
NOT DONE		N/A	-9.810	NOT DONE		N/A	9.810
-10.81 (Minimum)	(Nominal)	-8.810 (Maximum)		8.810 (Minimum)	(Nominal)	10.81 (Maximum)	
Minimum Az, m/s2		Value	Nominal	Maximum Az, m/s2		Value	Nominal
NOT DONE		N/A	0	NOT DONE		N/A	9.810
-1.000 (Minimum)	(Nominal)	1.000 (Maximum)		8.810 (Minimum)	(Nominal)	10.81 (Maximum)	
RB Offset, degrees		Value	Nominal				
		-17.00	0				
-360.0 (Minimum)	(Nominal)	360.0 (Maximum)					
Master: Calibration not done							

ThruBit String Master Calibration							
TMG Gamma-Ray Calibration							
GR Background GAPI		Value	Nominal	GR Jig-Background GAPI		Value	Nominal
		27.12	30.00			158.9	160.0
0 (Minimum)	(Nominal)	120.0 (Maximum)		128.0 (Minimum)	(Nominal)	192.0 (Maximum)	
Master: 14-Aug-2014 13:55							

Company: **SANDRIDGE ENERGY**

Schlumberger

Well: **RANDY 3508 2-3H 1L**

Field: **BOUSE**

County: **HARPER**

State: **KANSAS**

ARRAY INDUCTION
GAMMA RAY
MEMORY LOG

Company: SANDRIDGE ENERGY

Well: RANDY 3508 2-3H 1L

Input DLIS Files

ThruBit_003PUP


FN:2


17-Sep-2014 06:46 9765.0 FT

2970.0 FT

TBT SRPC-5303-ThruBit


Caliper (CALI) 4 (IN) 14	TBI 90 Inch Investigation (TBIT90) 0 (OHMM) 50
Gamma Ray (GR) 0 (GAPI) 150	TBI 20 Inch Investigation (TBIT20) 0 (OHMM) 50
Bit Size (BS) 4 (IN) 14	AIT 90 Inch Investigation Conductivity (ATCO90) 1000 (MS/M) 0

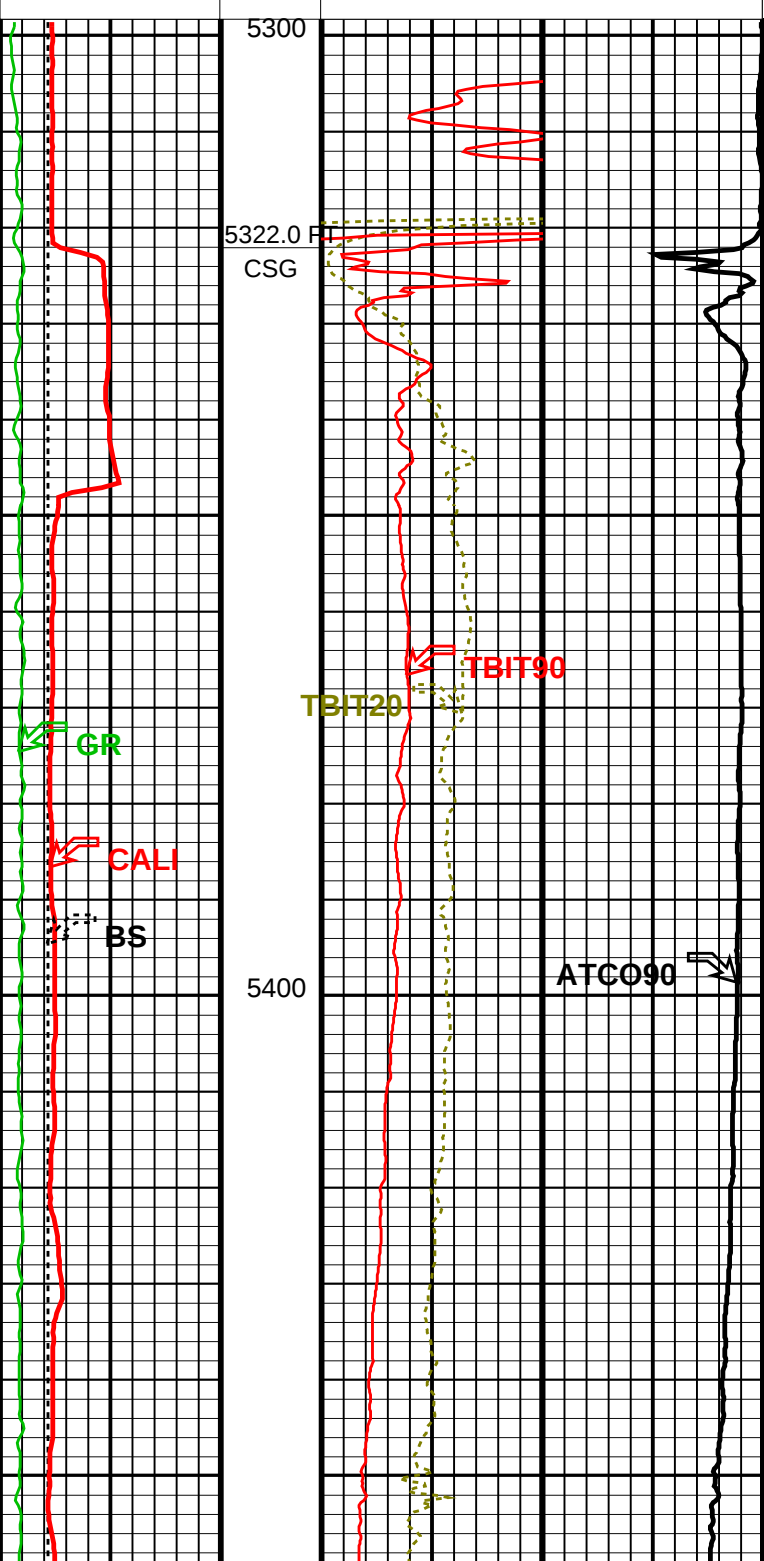


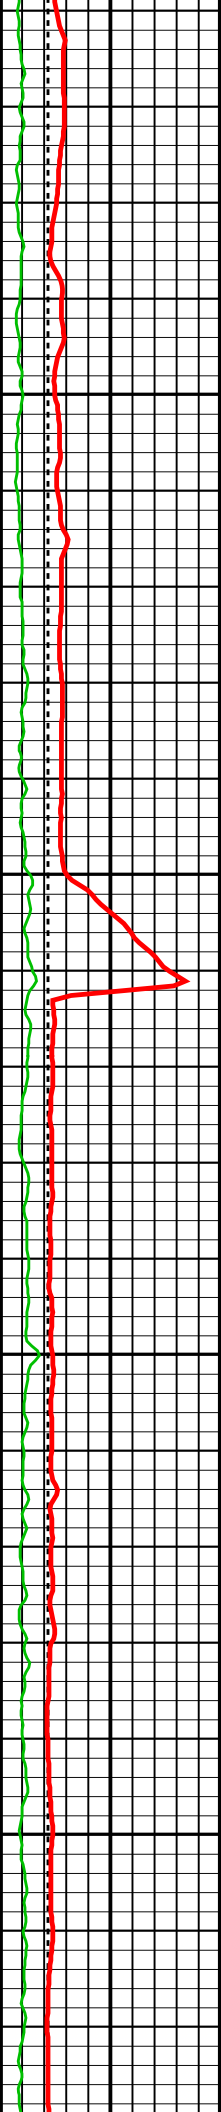



5500

5600

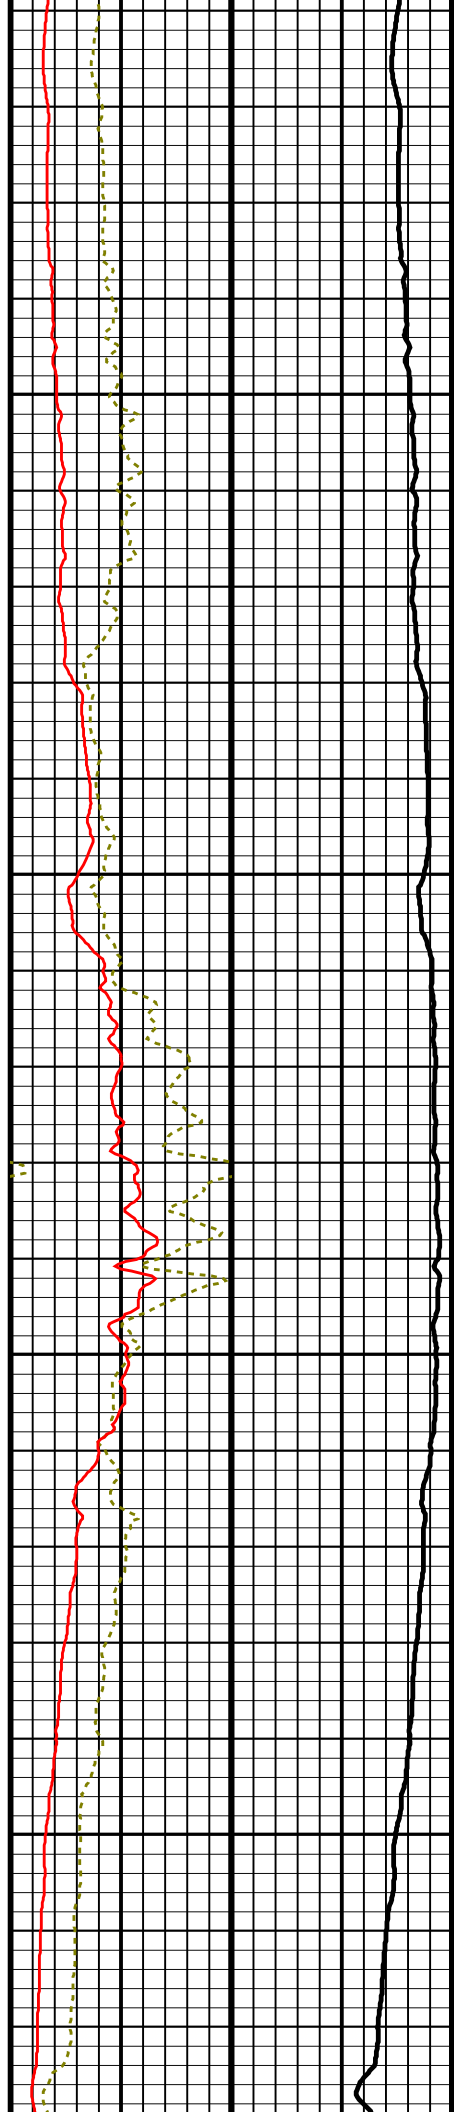

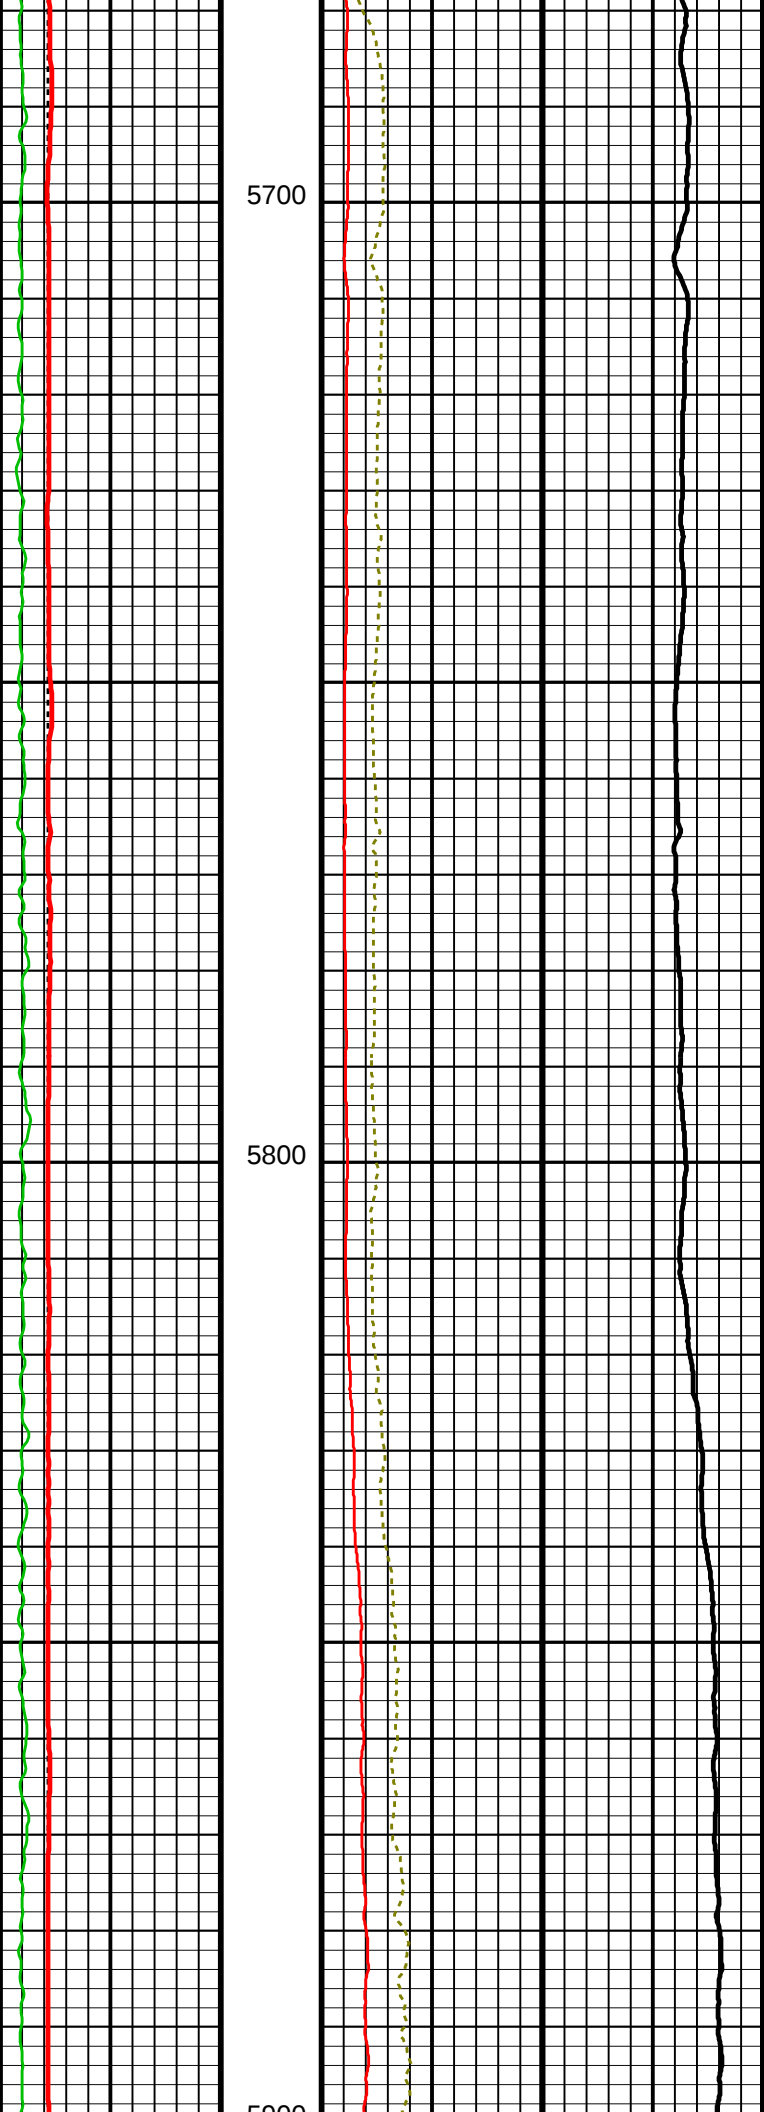


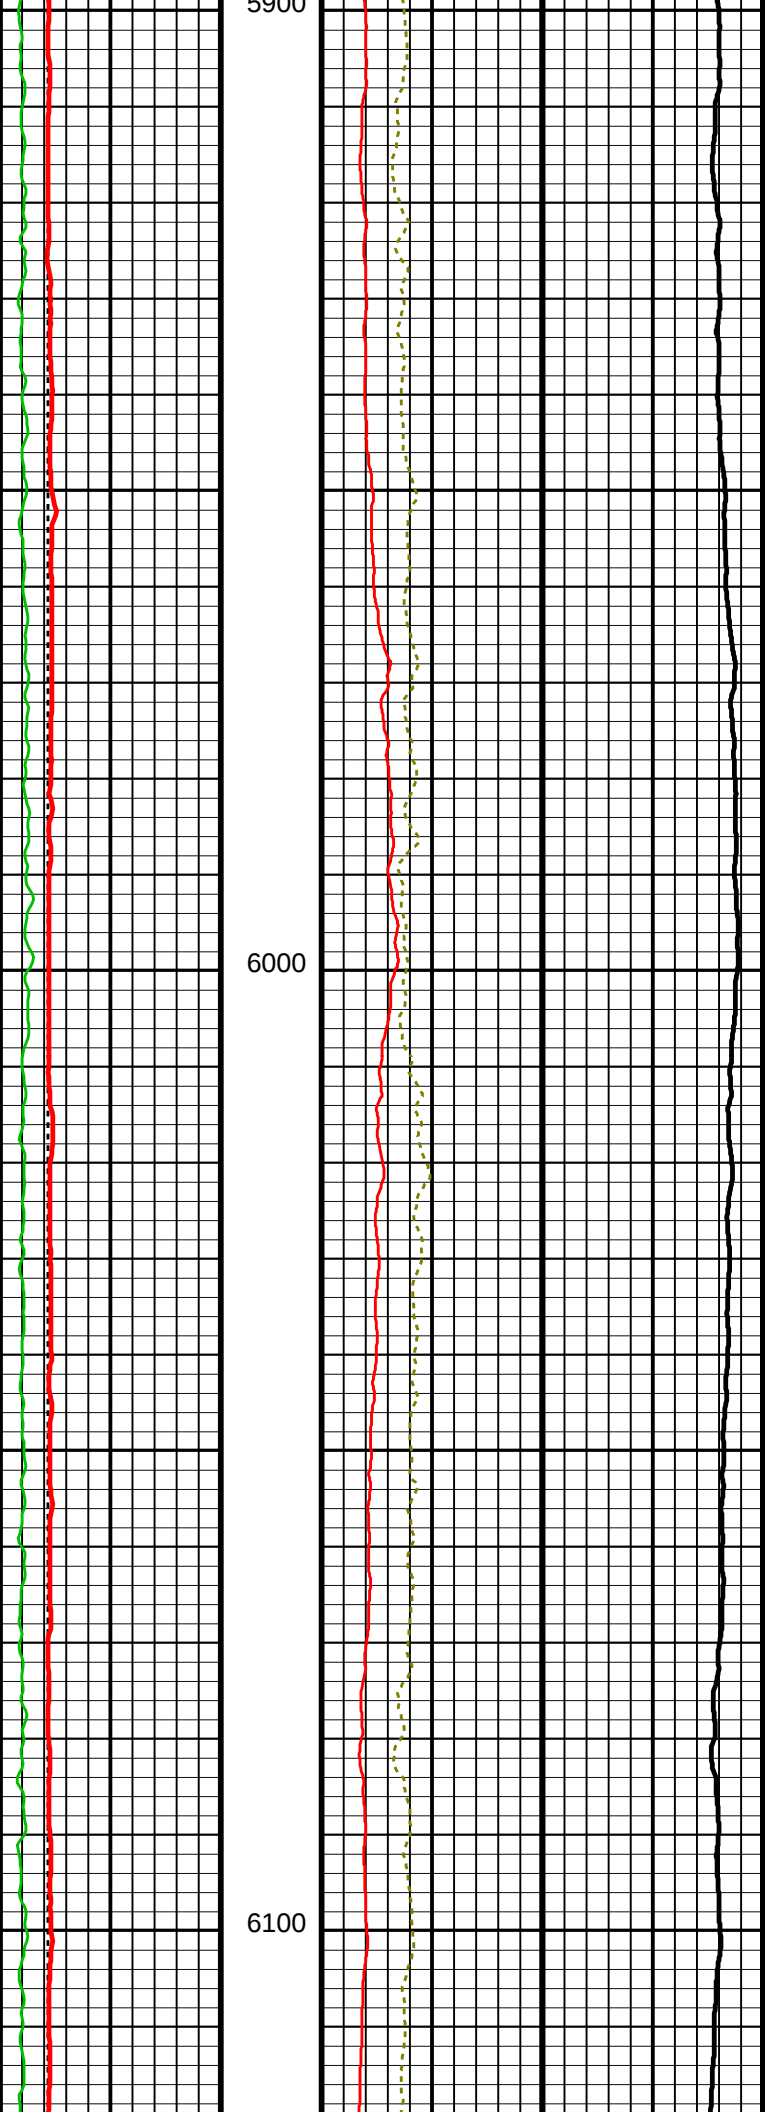


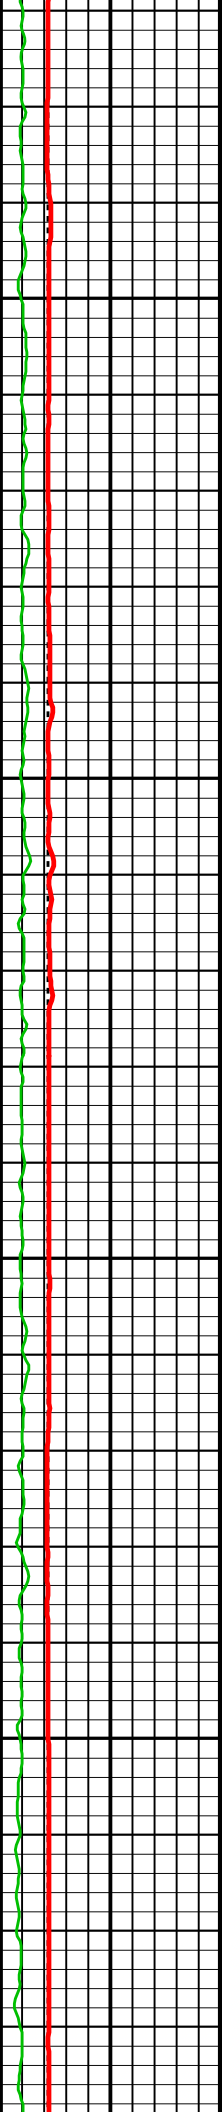

6200

6300

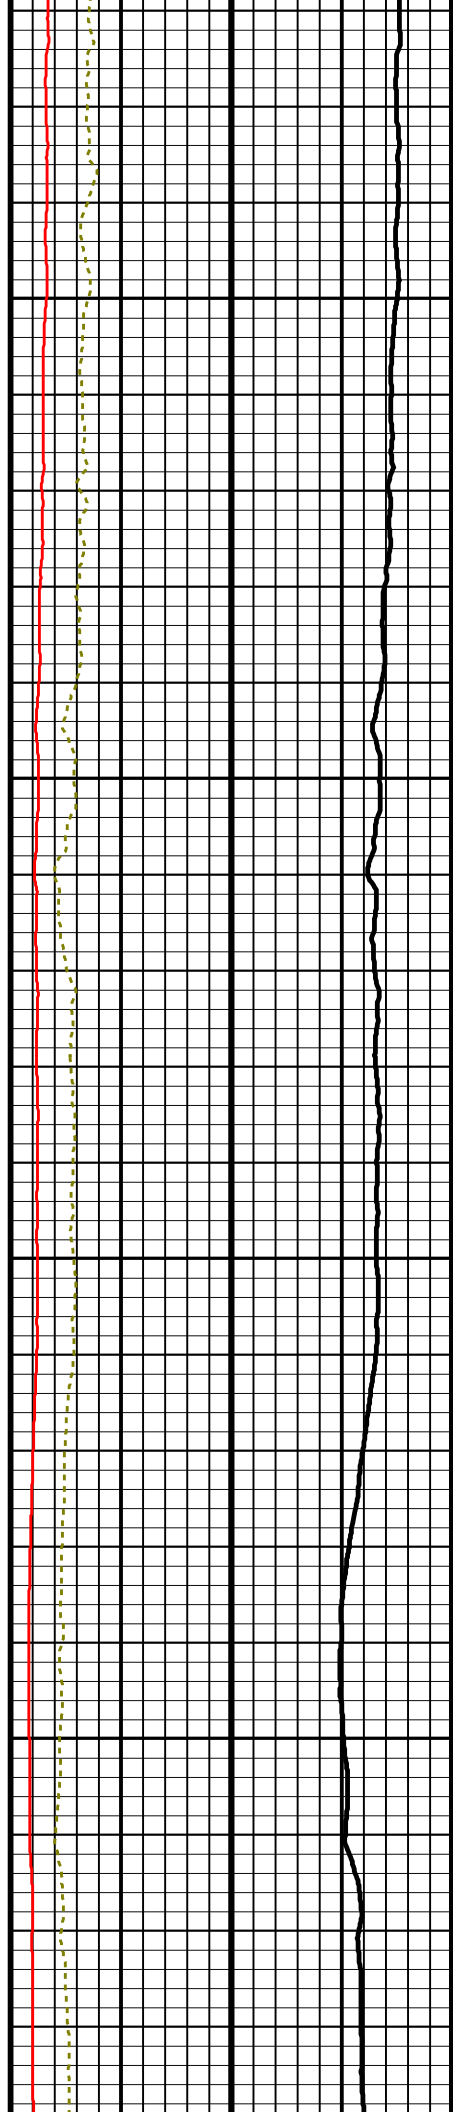


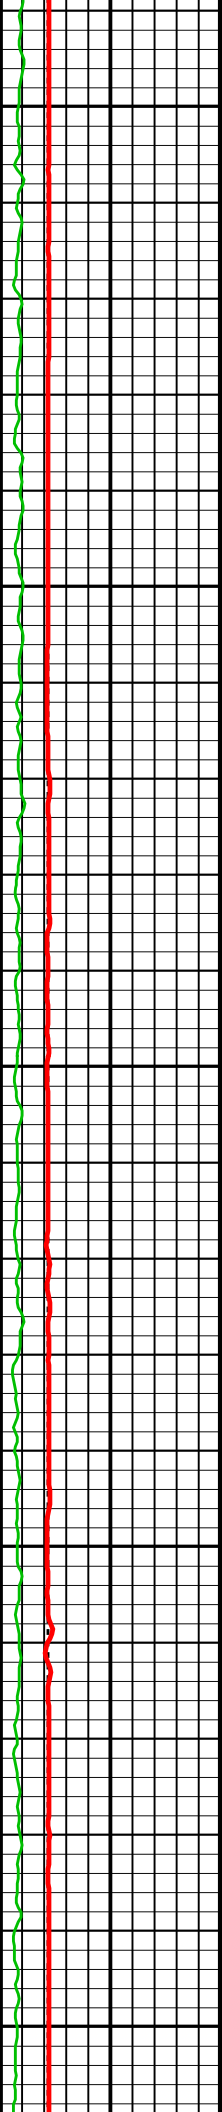

6400


6500




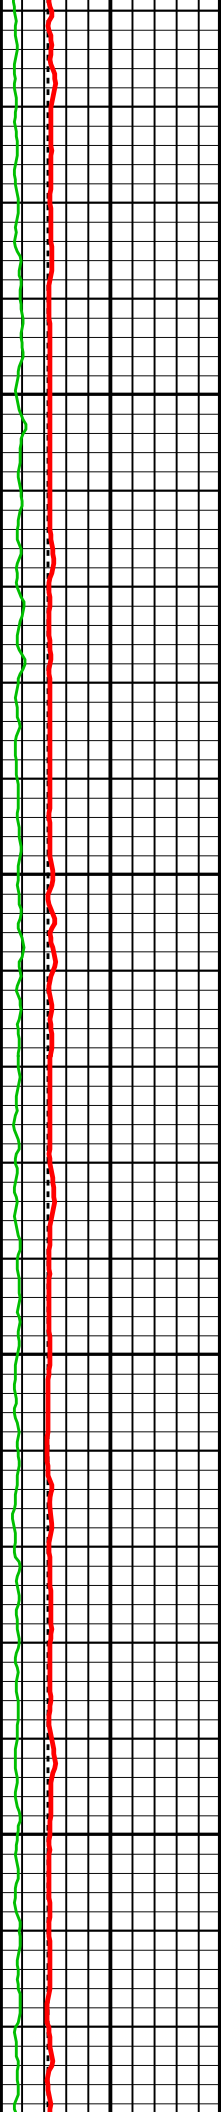



6600


6700

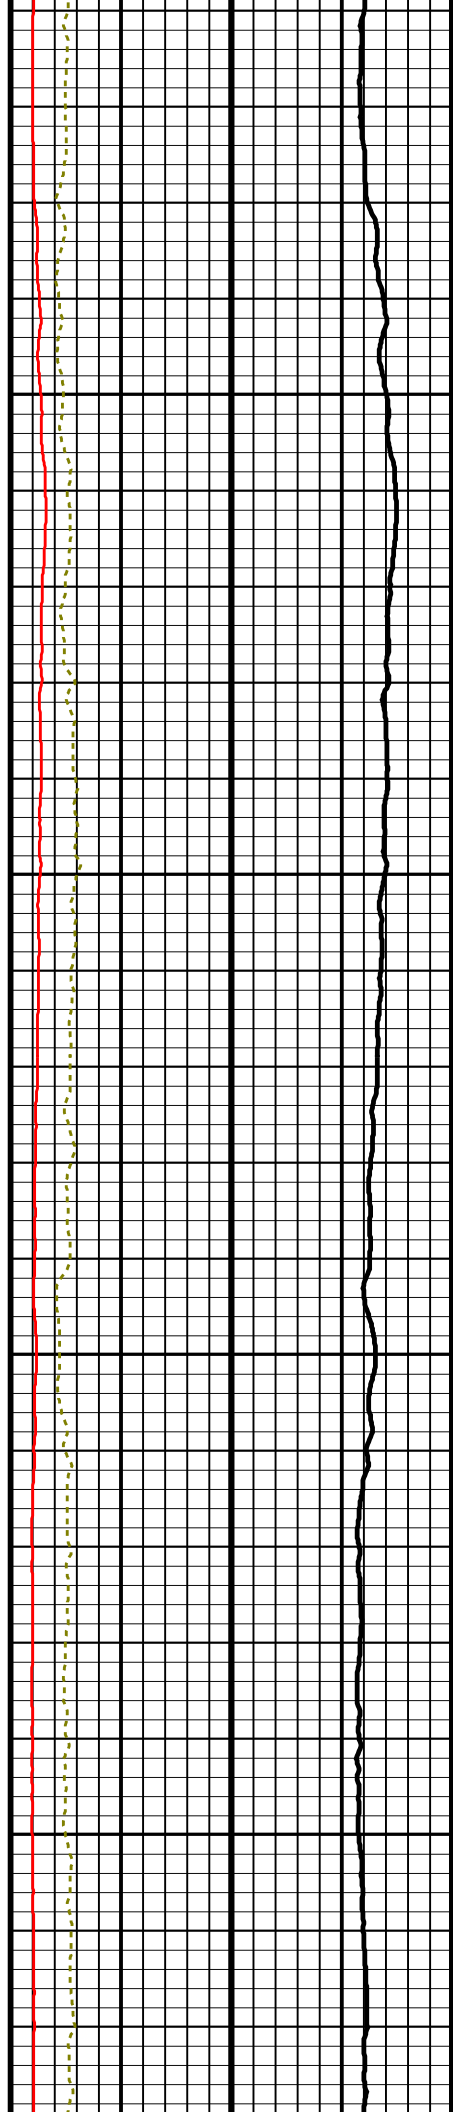


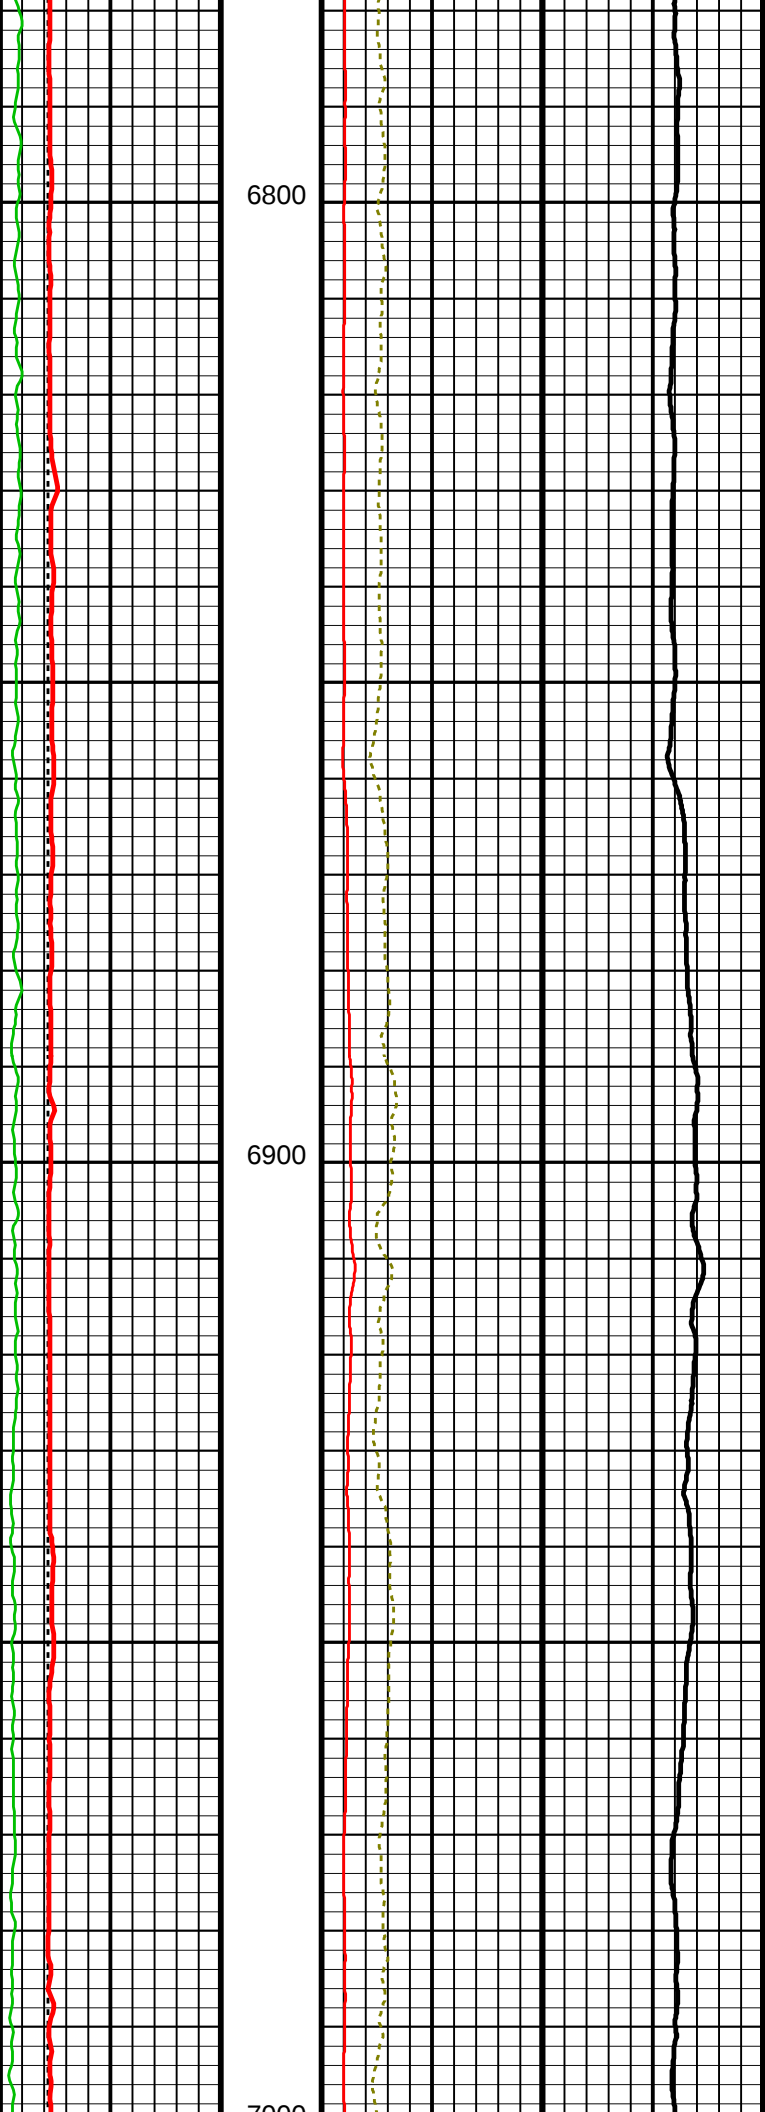


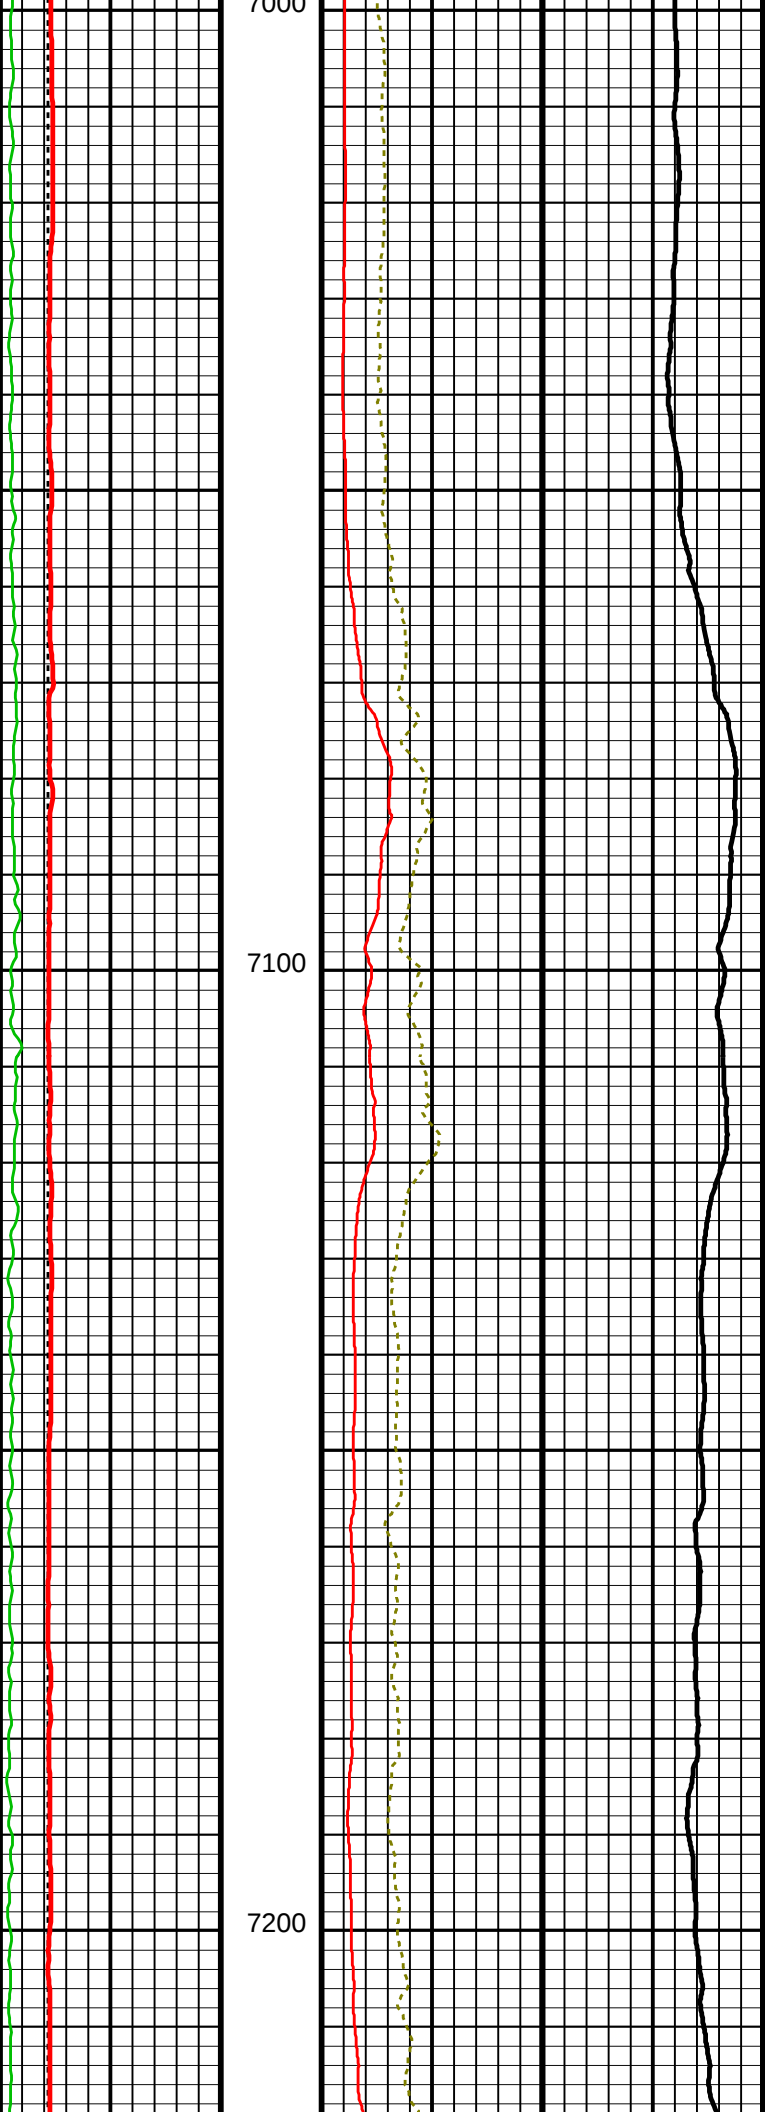


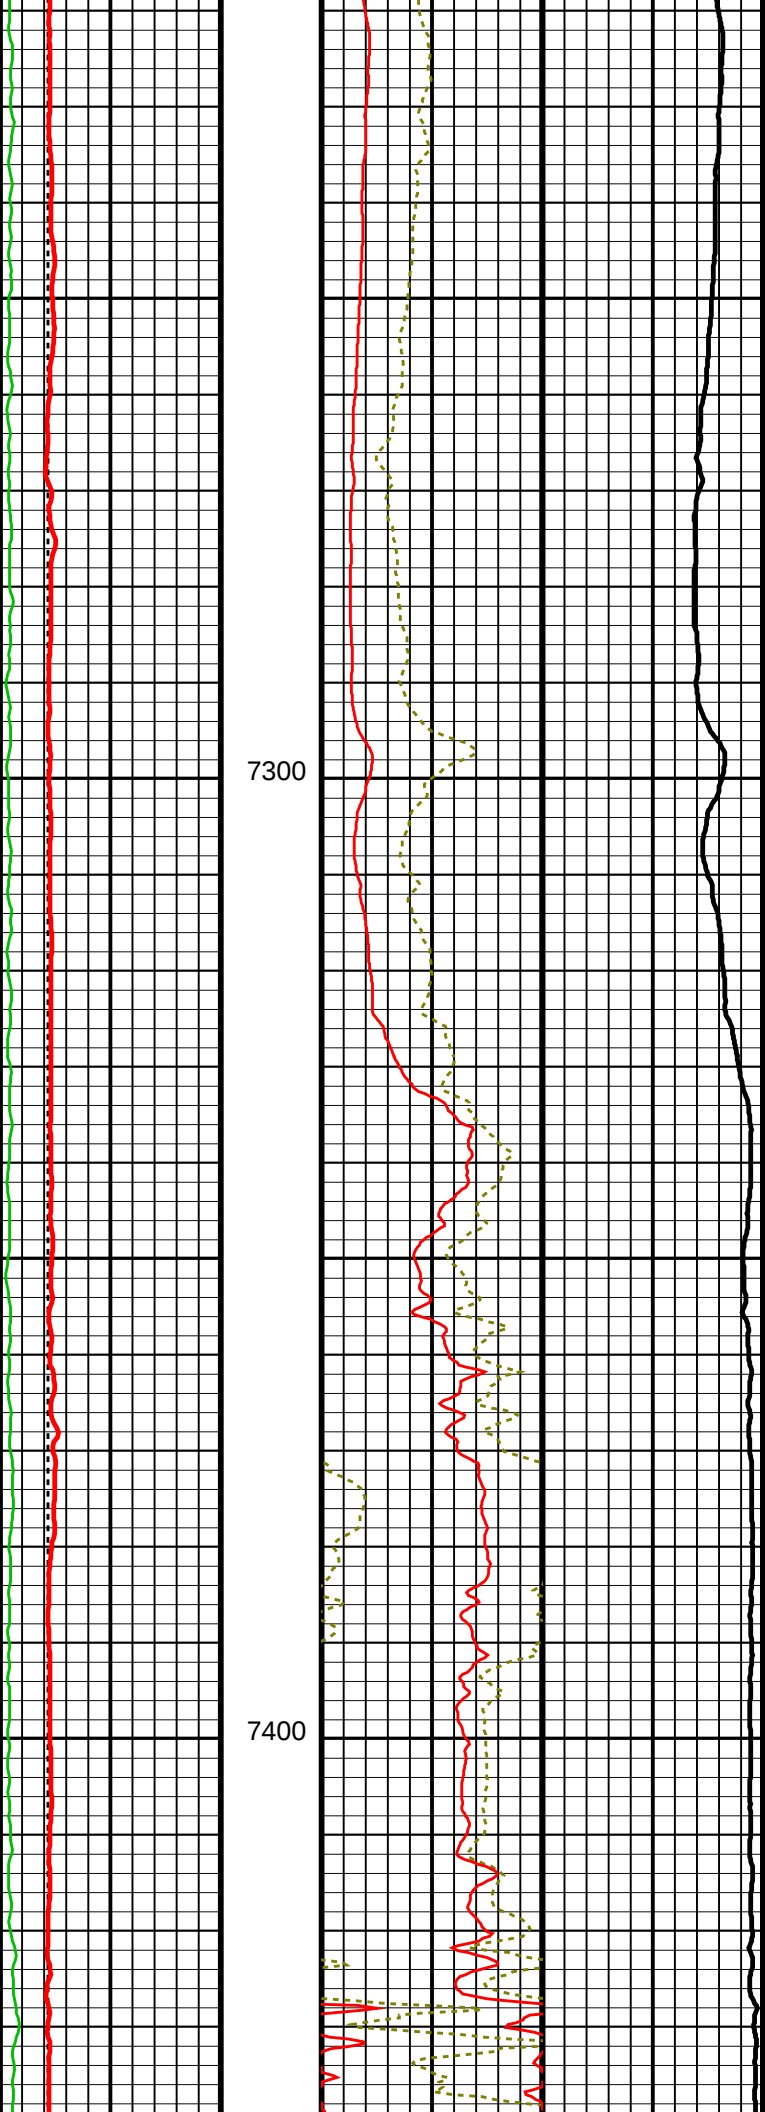


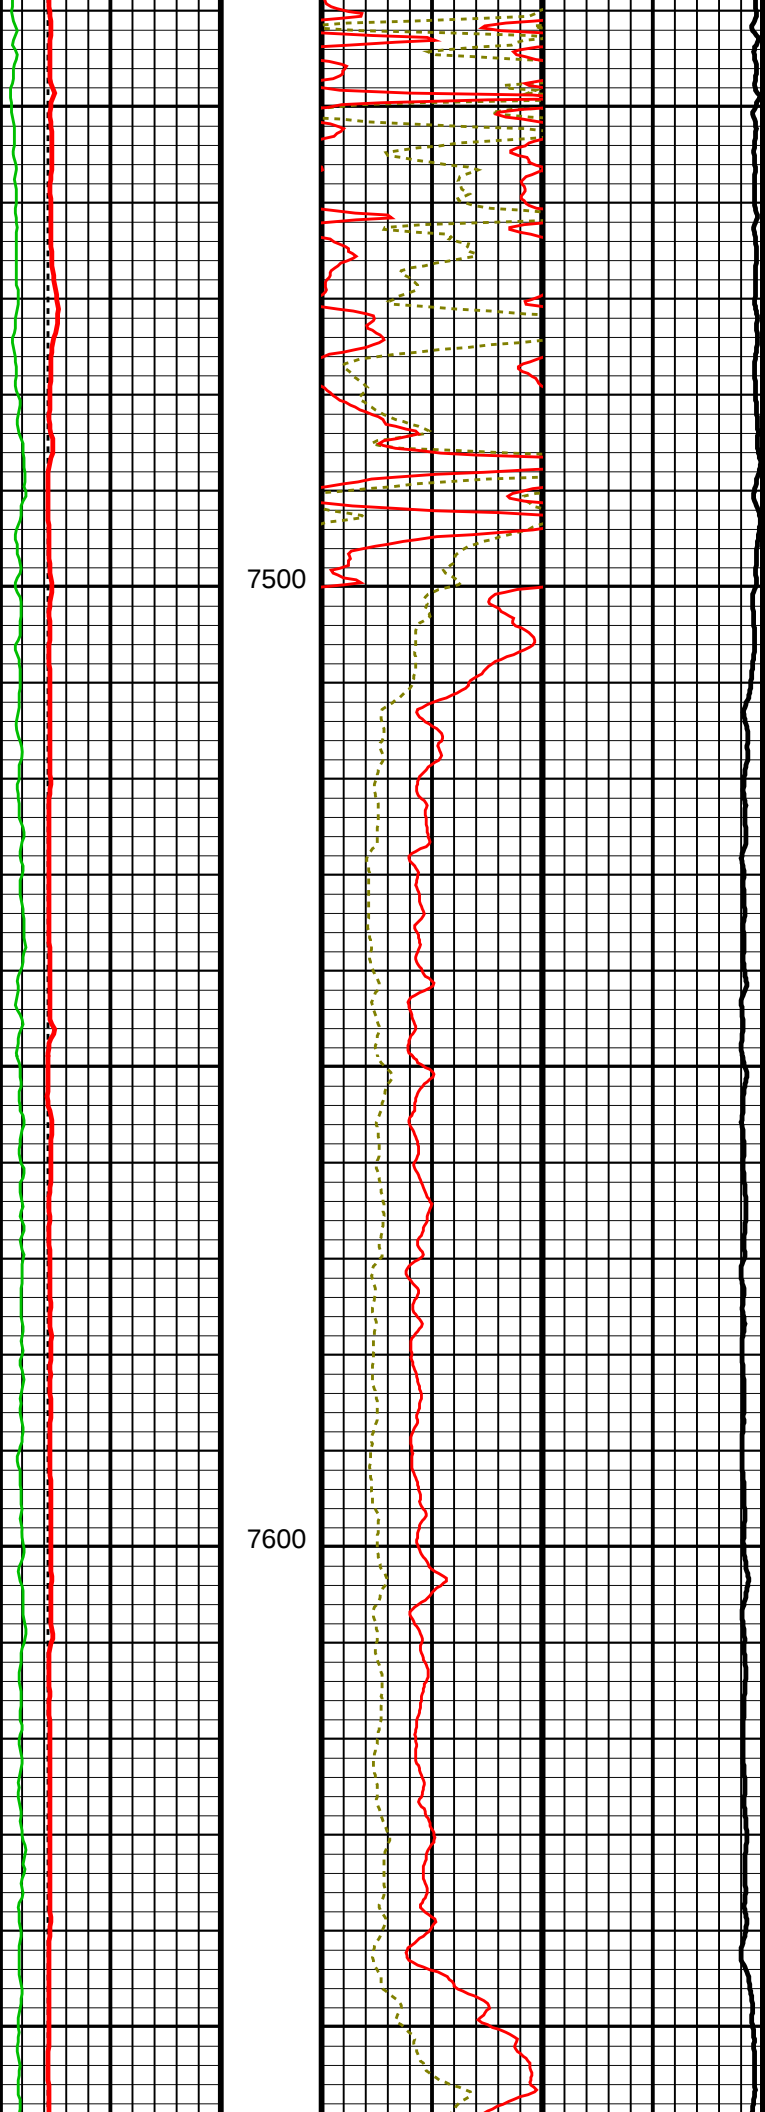


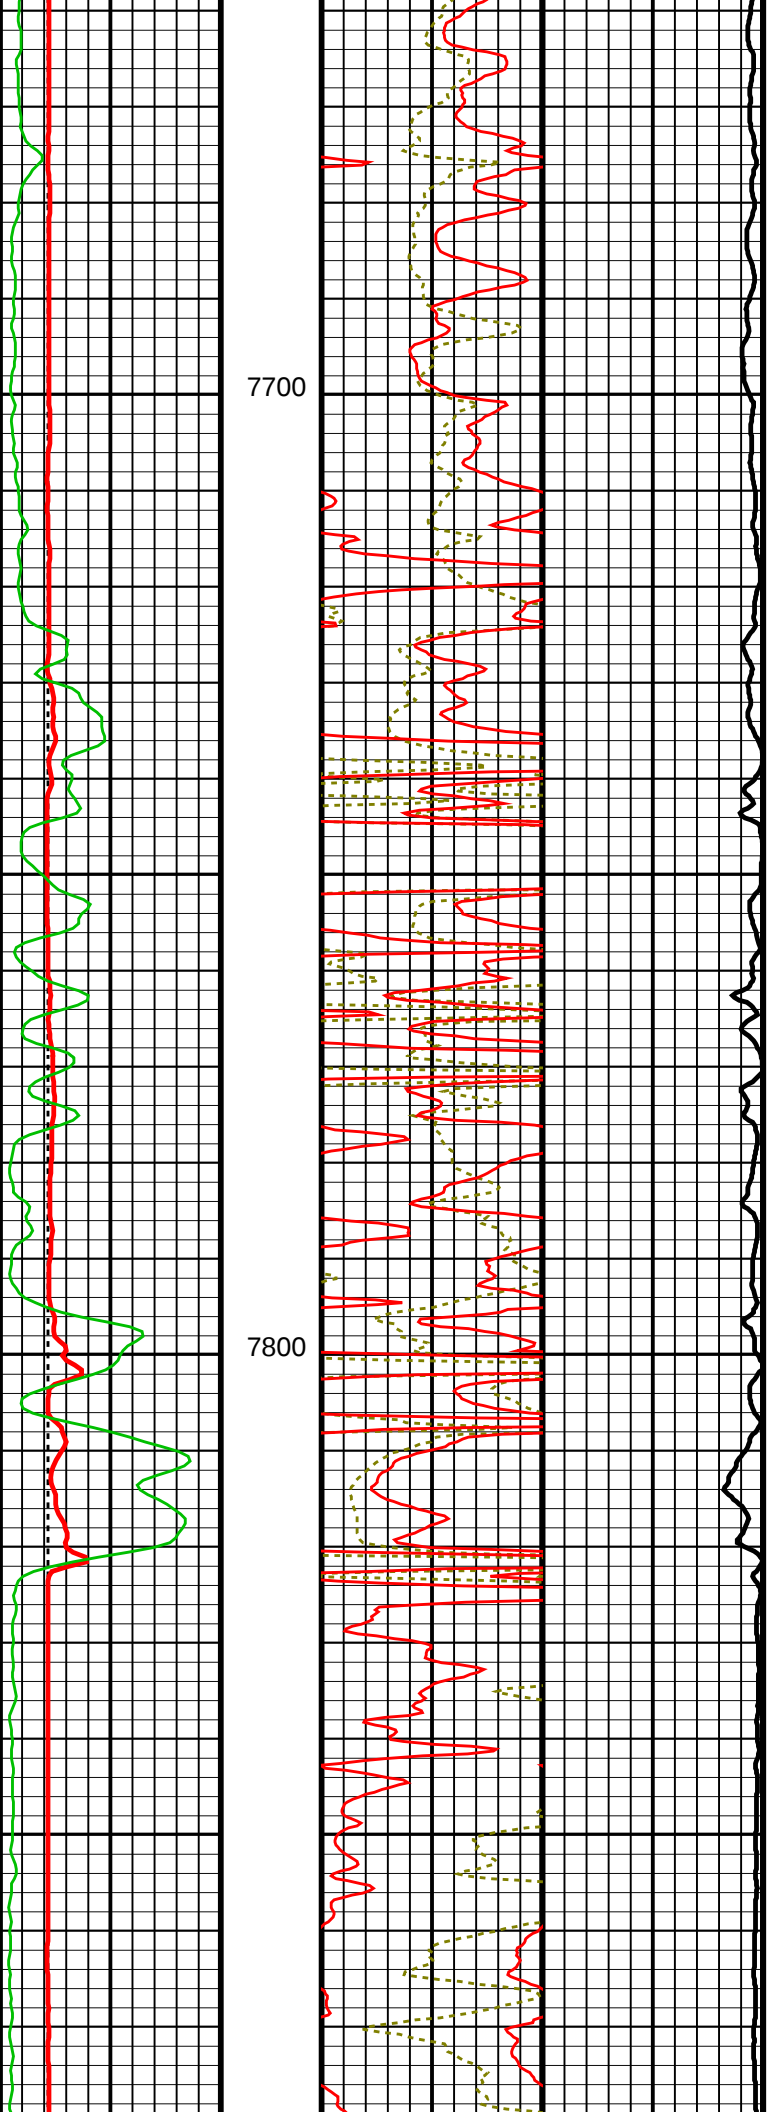


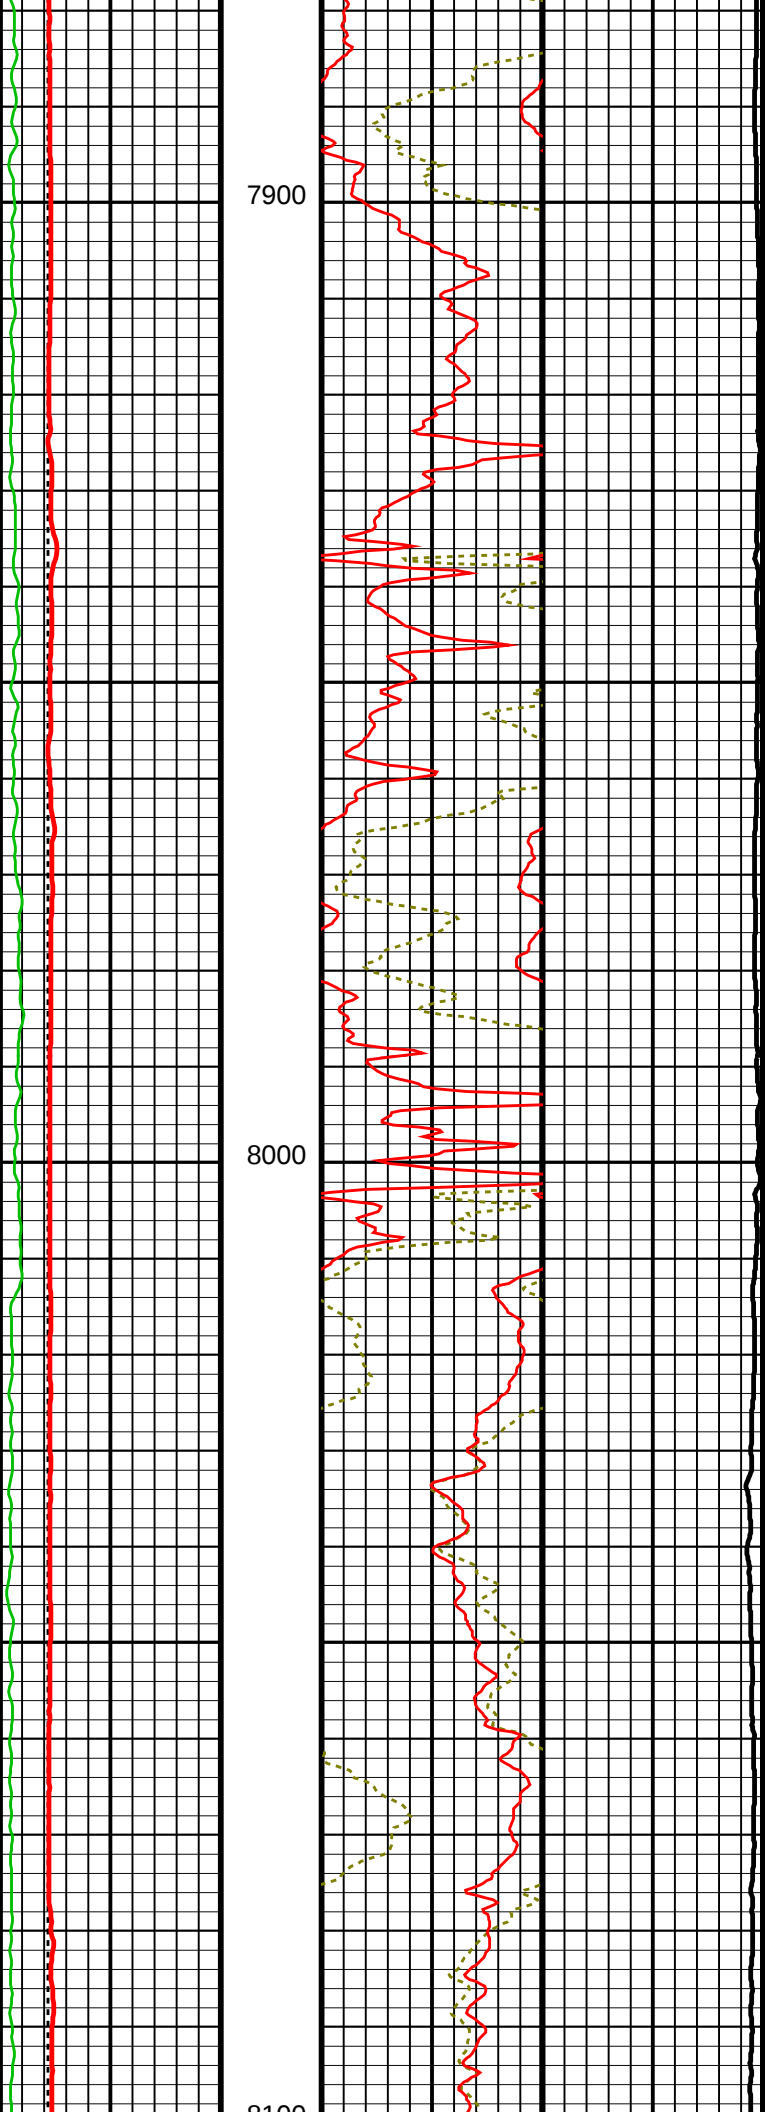



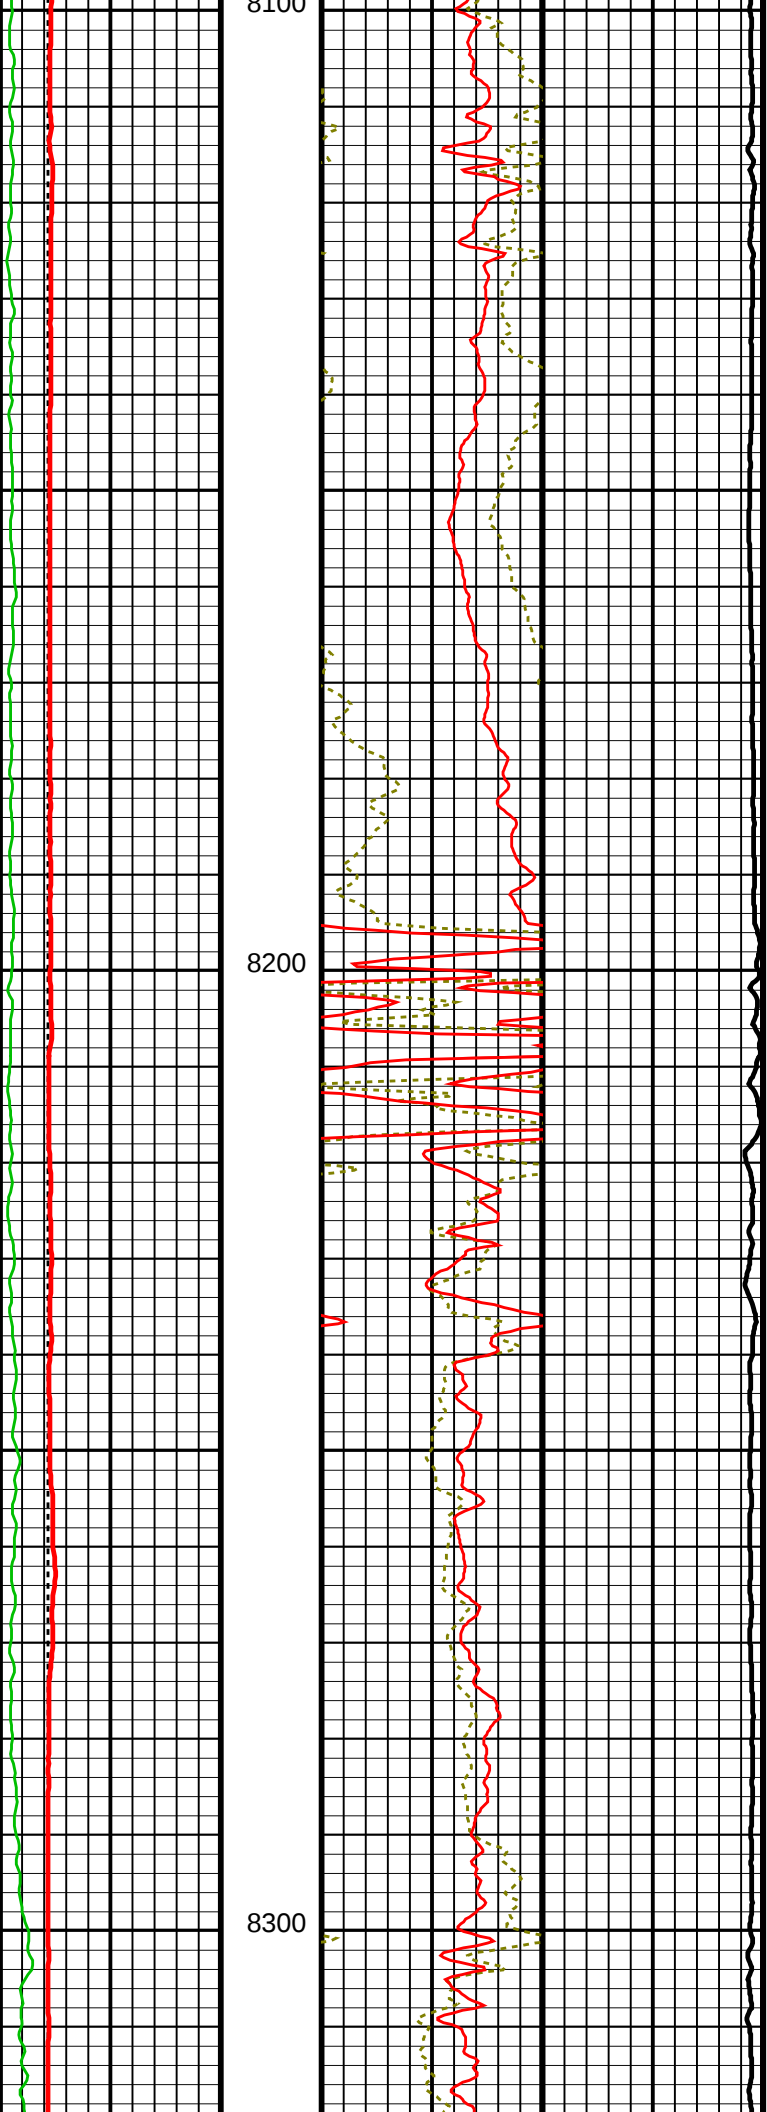


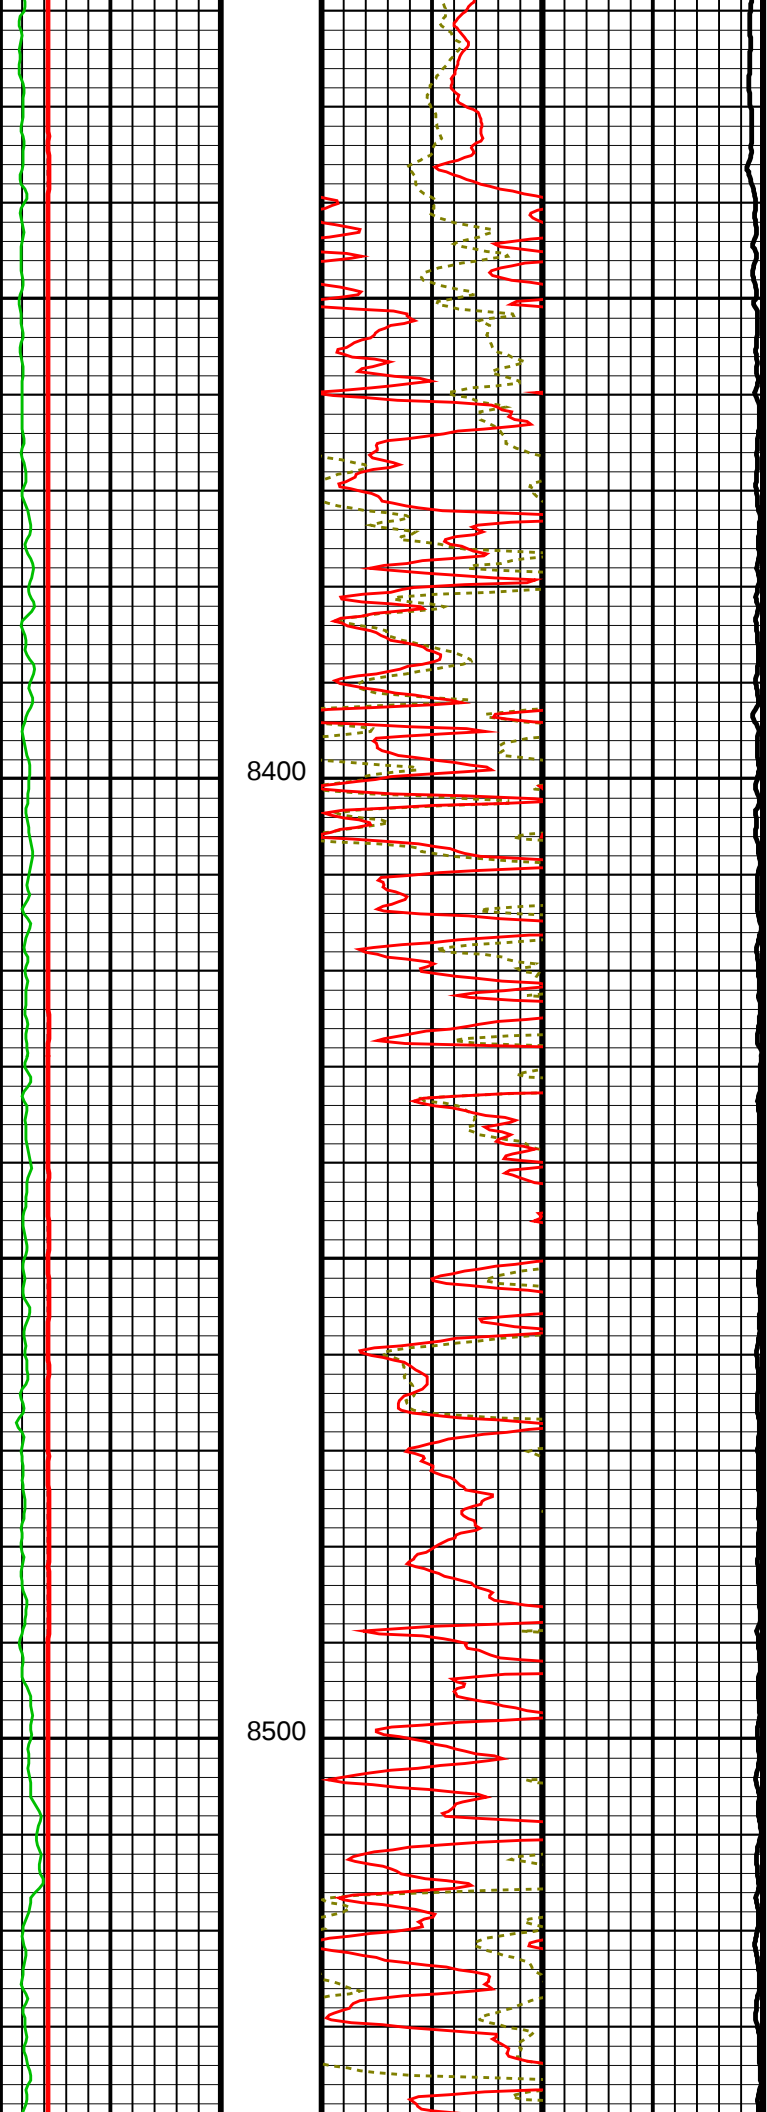


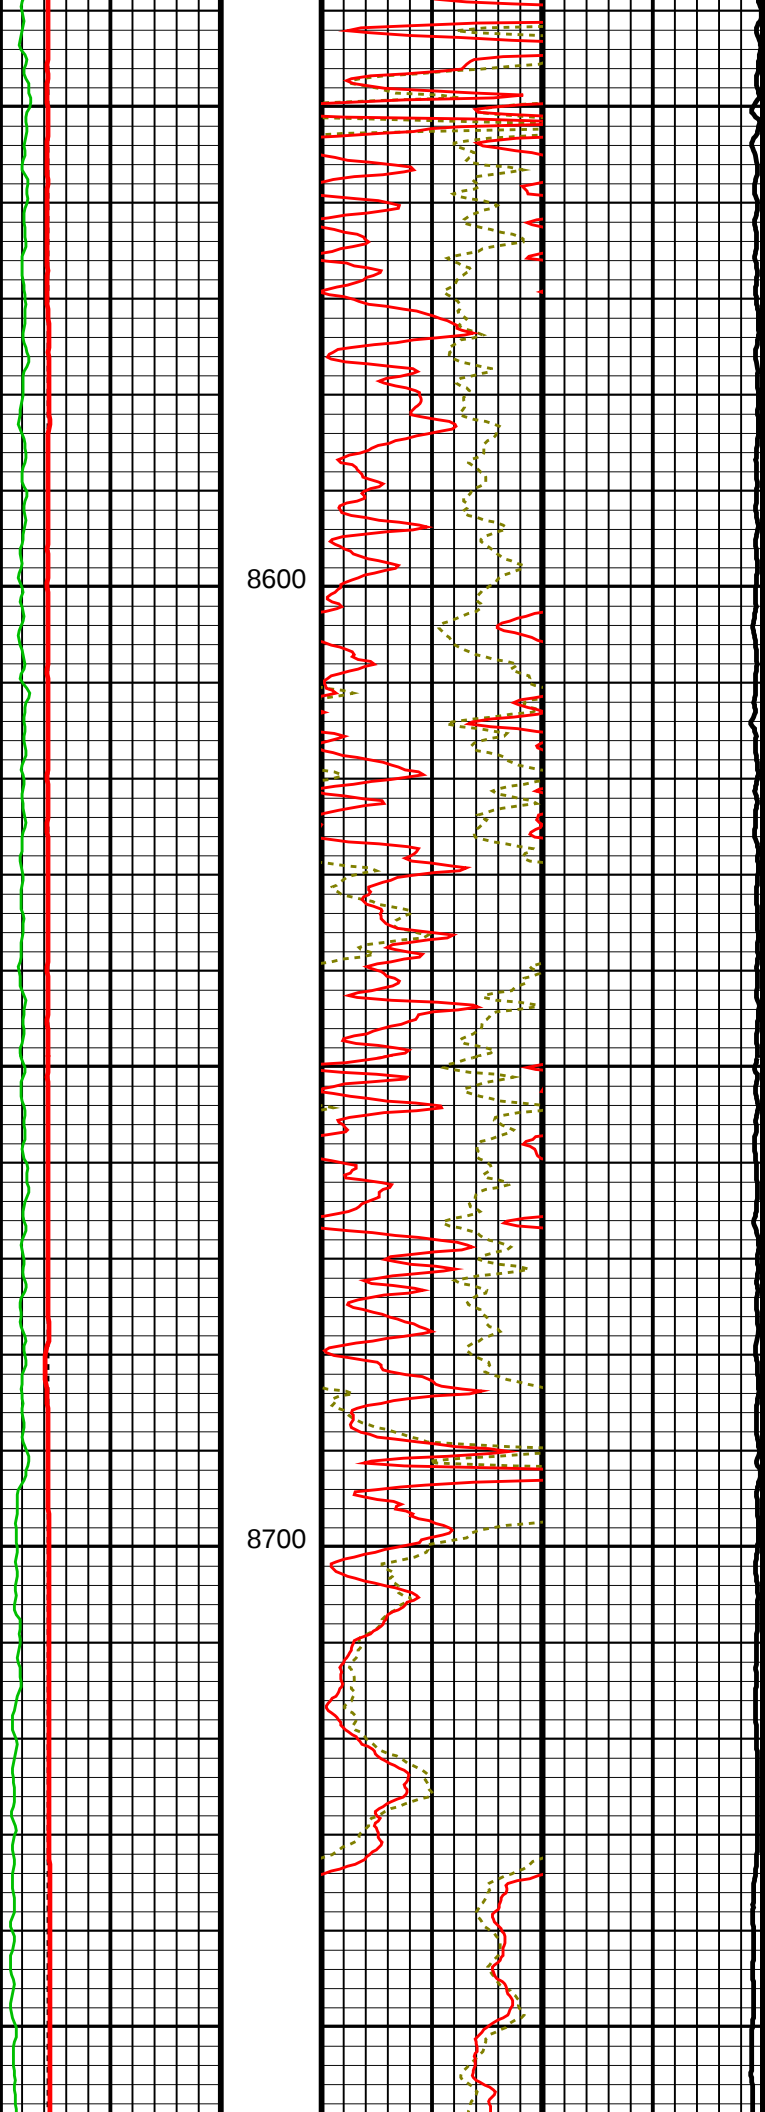


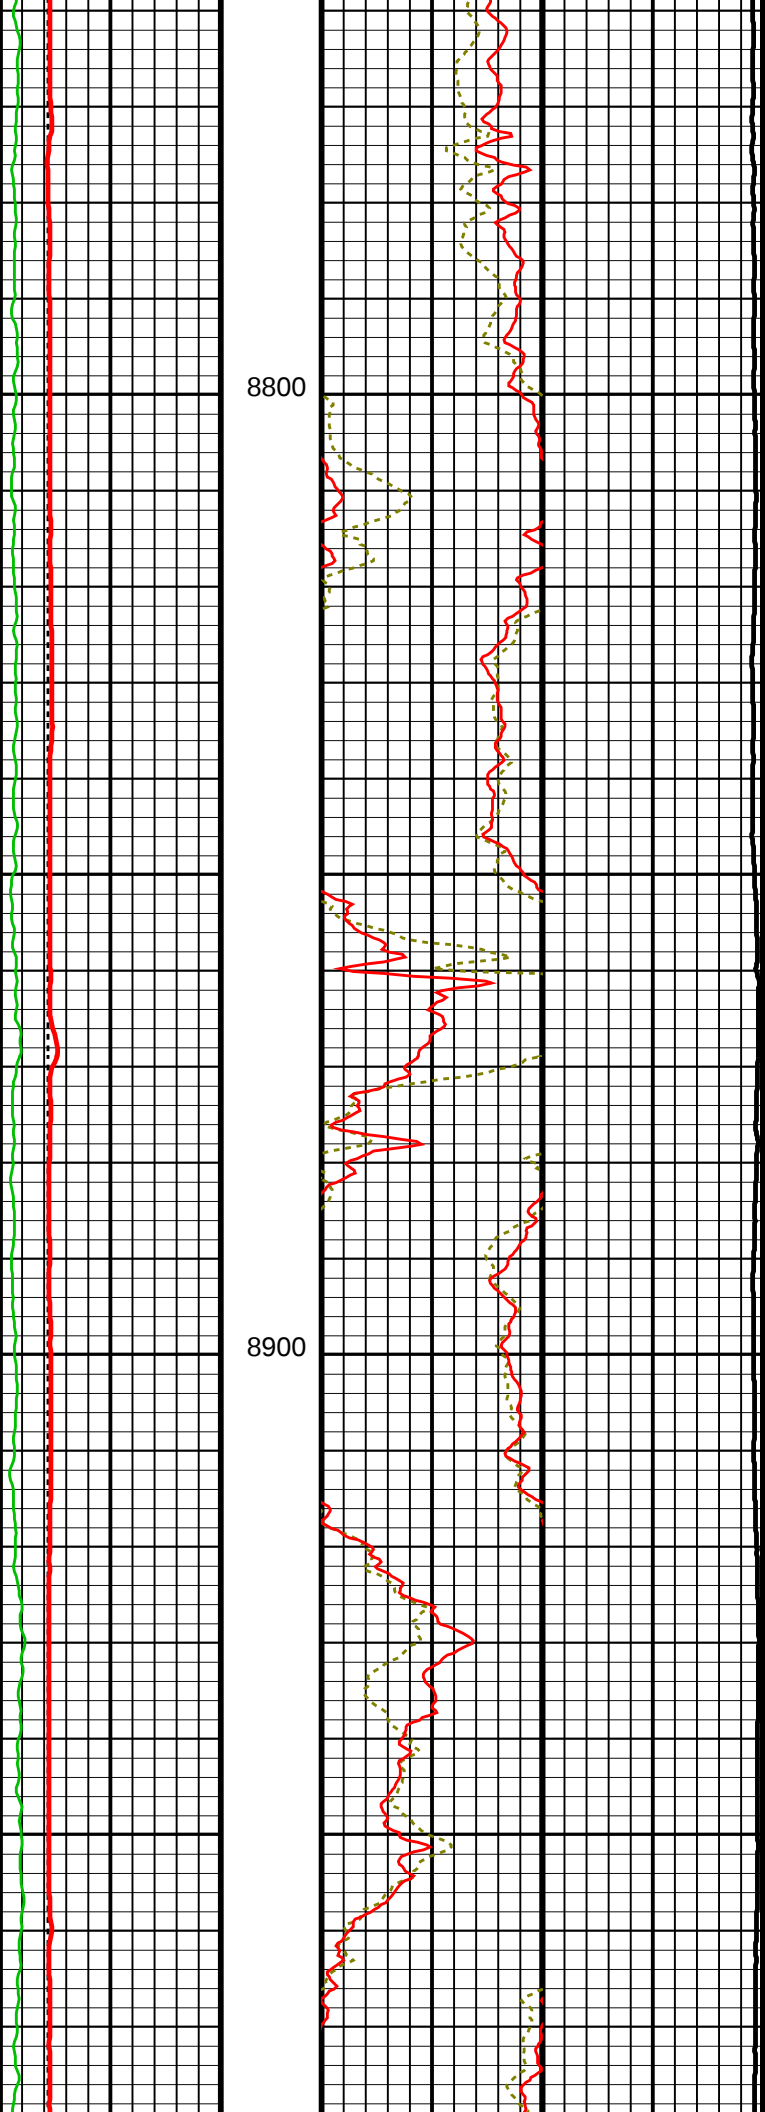

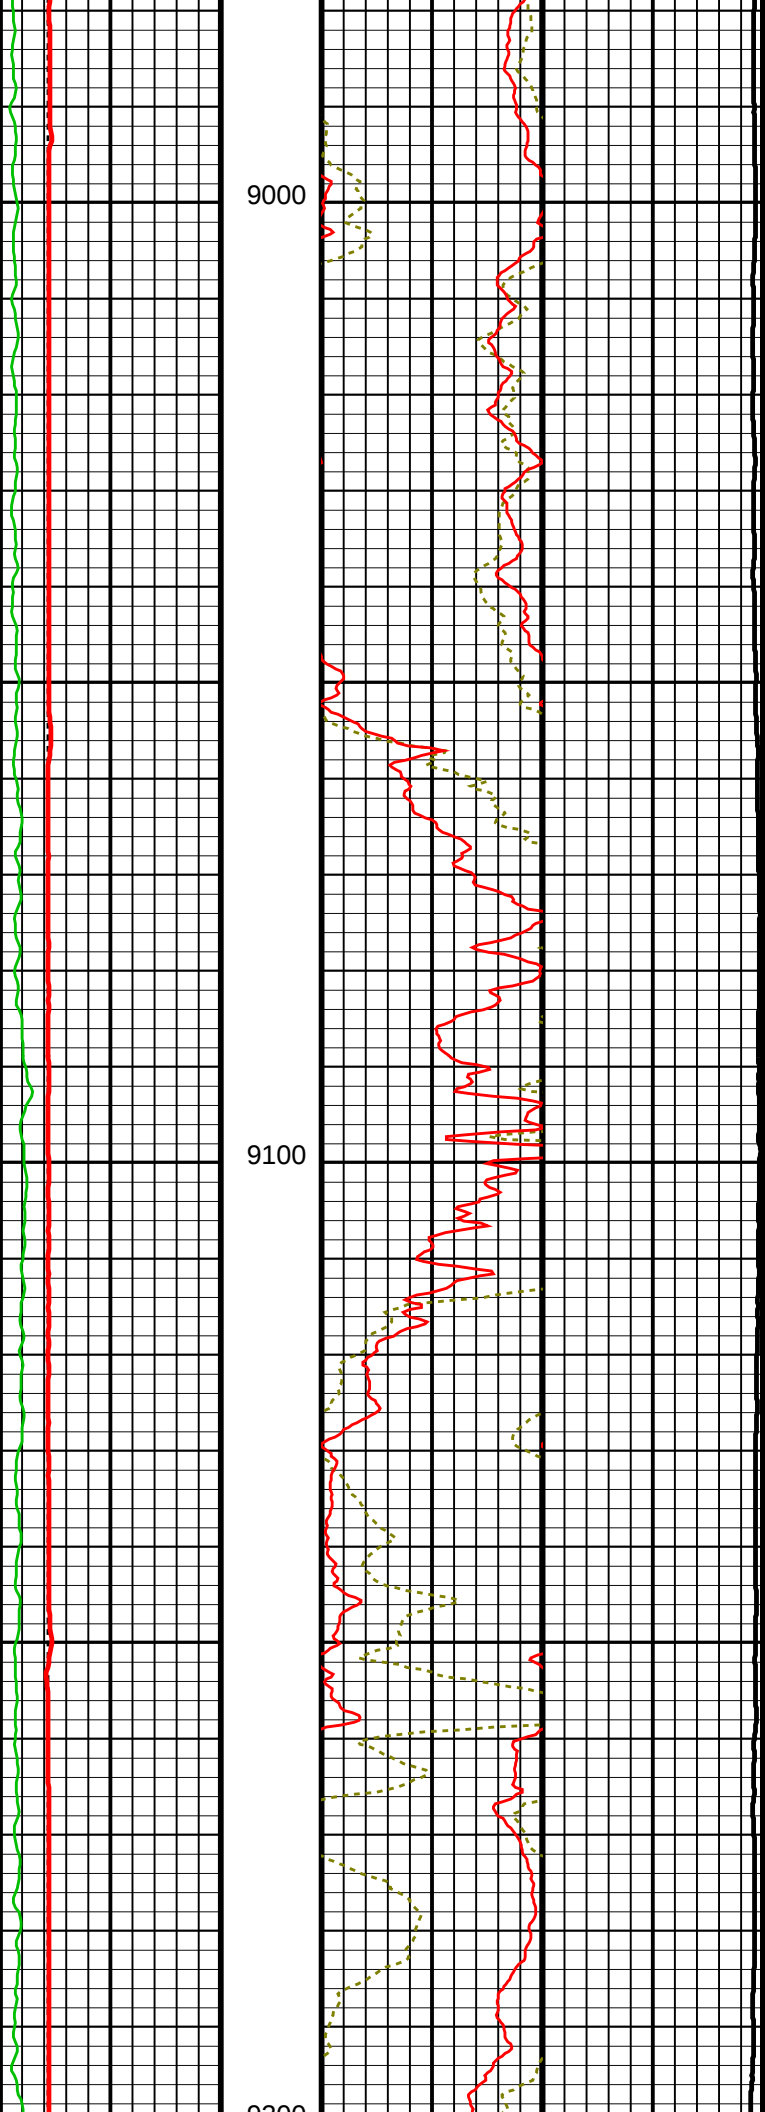

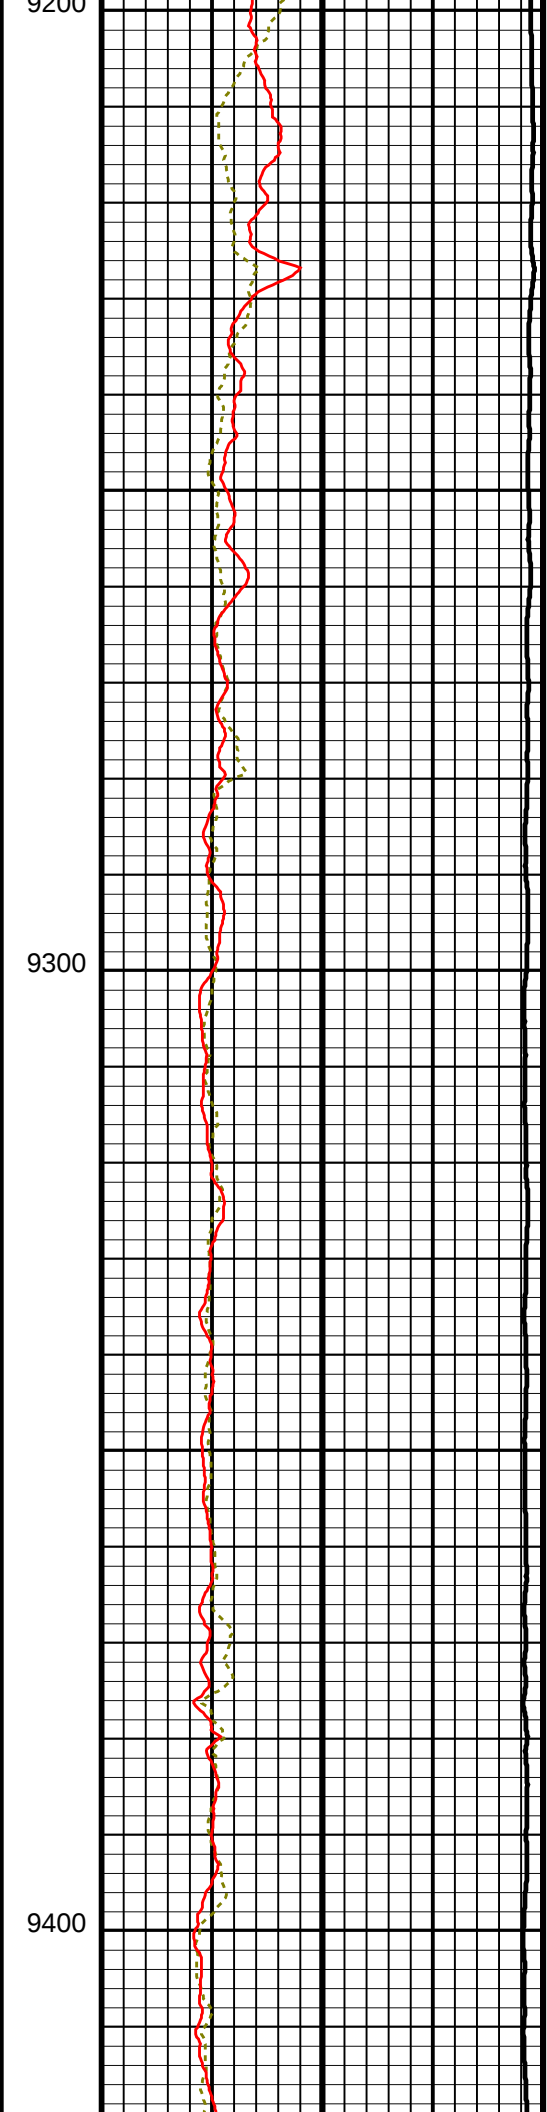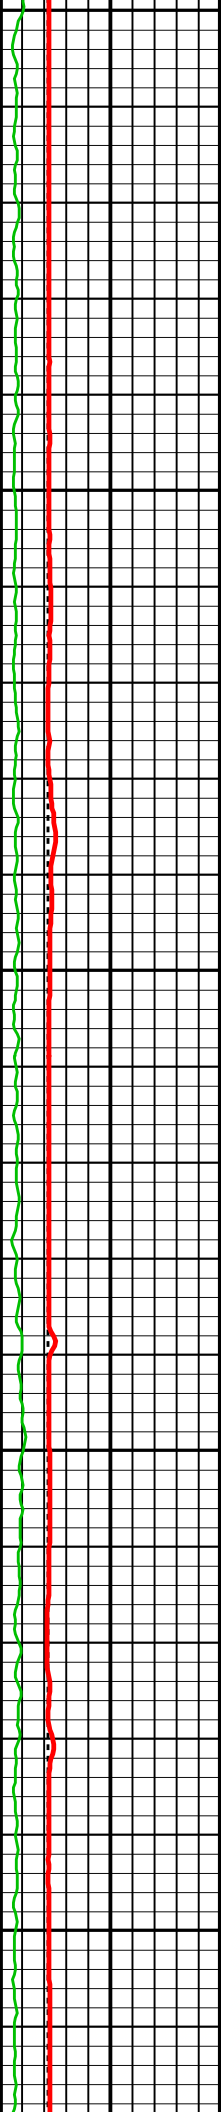

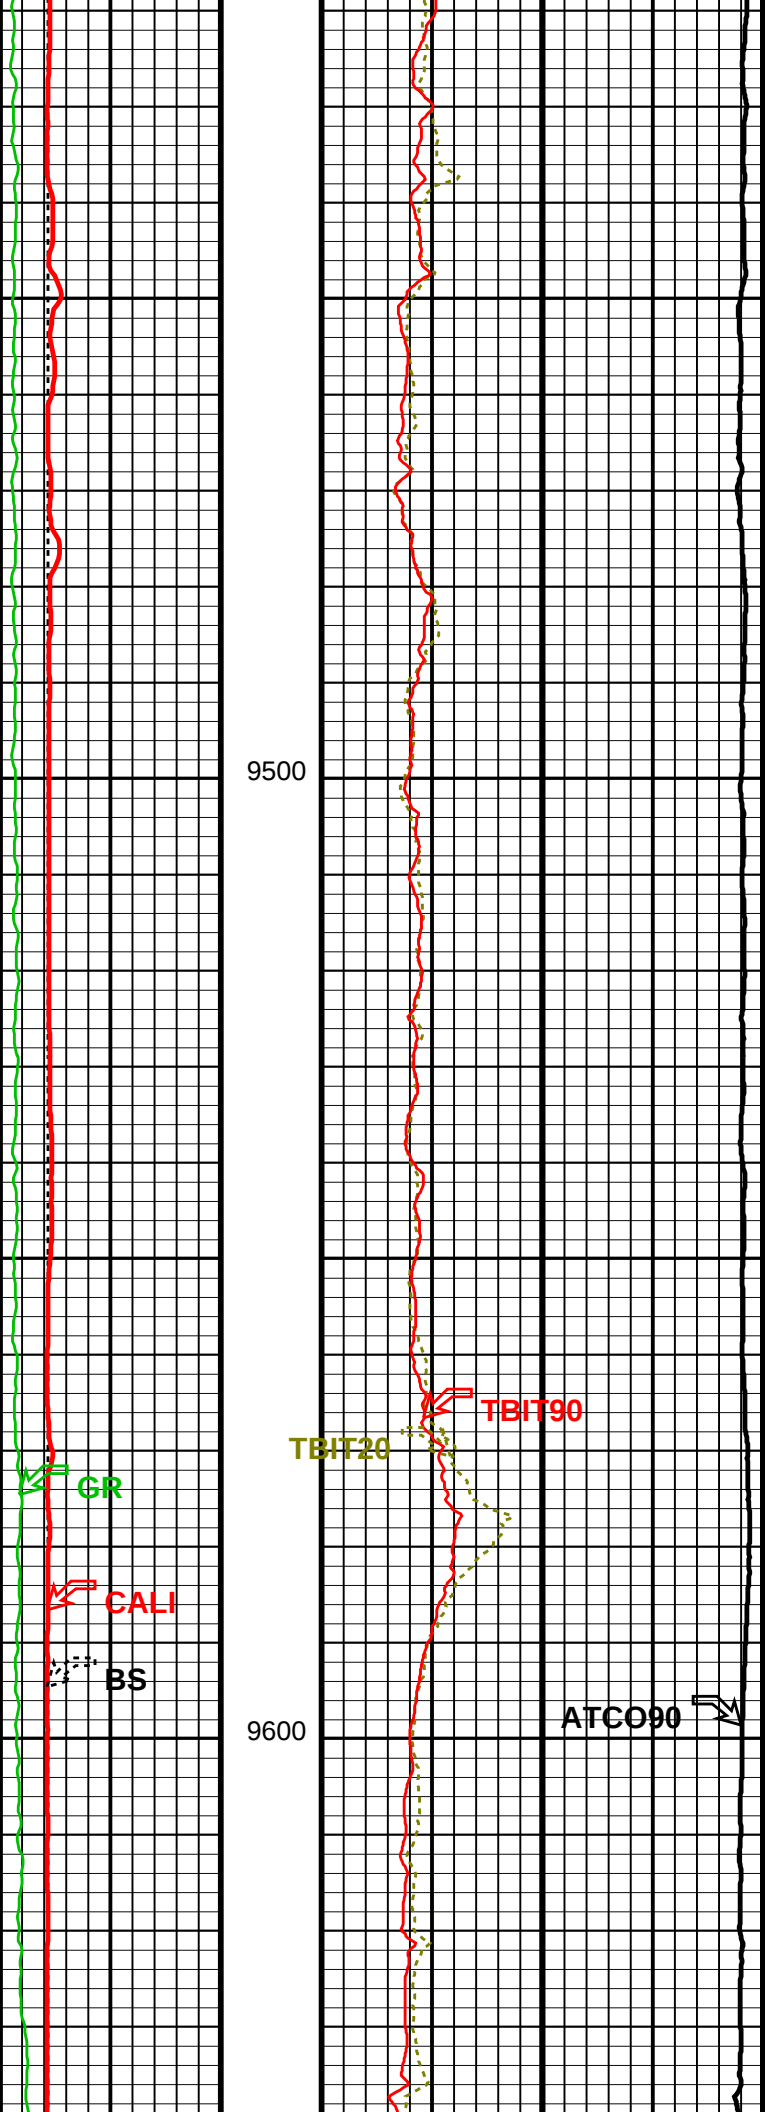

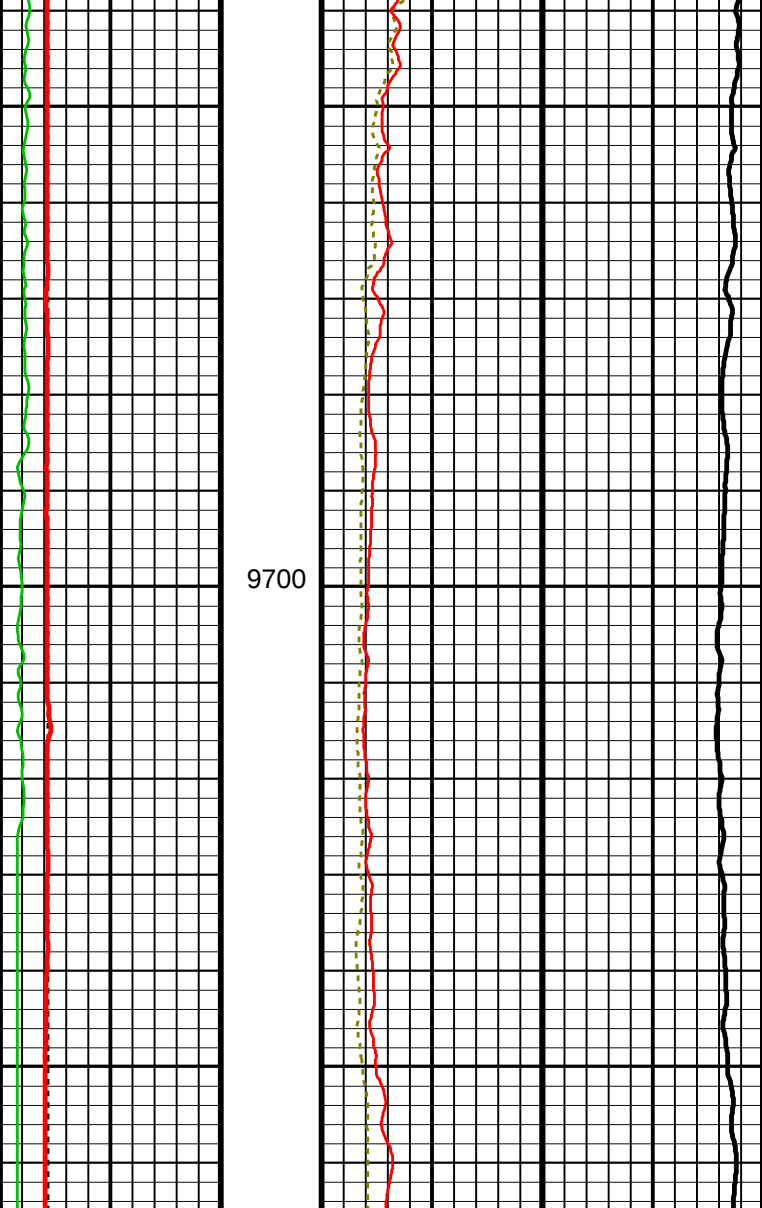

Bit Size (BS) (IN)	AIT 90 Inch Investigation Conductivity (ATCO90)	
	1000 (MS/M)	0
Gamma Ray (GR) (GAPI)	TBI 20 Inch Investigation (TBIT20)	
	0 (OHMM)	50
Caliper (CALI) (IN)	TBI 90 Inch Investigation (TBIT90)	
	0 (OHMM)	50

Format: TB_1INCH_RES		Vertical Scale: 5" per 100'		Graphics File Created: 17-Sep-2014 06:54	
OP System Version: 19C2-270					
TBT	SRPC-5303-ThruBit				
Input DLIS Files					
ThruBit_003PUP		FN:2	17-Sep-2014 06:46	9765.0 FT	2970.0 FT