

15-065-20063-00-00


STATE OF KANSAS  
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
212 No. Market  
Wichita, Kansas

WELL PLUGGING RECORD

NORTH

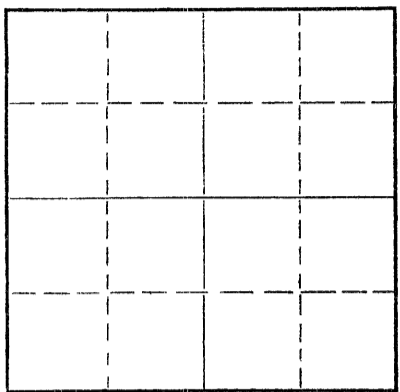

Locate well correctly on above  
Section Plat

Graham County. Sec. 15 Twp. 7S Rge. (1/4) 25(W)  
Location as "NE/CNW/SW" or footage from lines SW SE SE  
Lease Owner Hinkle Oil Company  
Lease Name TOLL Well No. 1  
Office Address 1016 Union Center  
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole  
Date well completed July 18, 1967 19 67  
Application for plugging filed (verbally) July 18, 19 67  
Application for plugging approved " July 18, 19 67  
Plugging commenced " July 18, 19 67  
Plugging completed " July 18, 19 67  
Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production \_\_\_\_\_ 19\_\_\_\_  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Bill Nichols  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 3732 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				7"	261'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Plugged with pump truck thru drill pipe. Plugged from 1990' back to 1648'  
with 60 sx. of cement. Plugged from 275' back to 195' with 15 sx. of cement.  
Plugged from 40' to surface with 8 sx. of cement. Job was completed 2:00 p.m.,  
July 18, 1967.

RECEIVED  
STATE CORPORATION COMMISSION  
JUL 24 1967  
CONSERVATION DIVISION  
WICHITA, KANSAS  
7-24-67

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Abercrombie Drilling, Inc.  
Address West Tenth Street, Great Bend, Kansas

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.  
A. L. Abercrombie (prop/byte/of b/w/h/r) / or / (b/w/h/r) / or operator of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) [Signature]  
801 Union Center (Address)

SUBSCRIBED AND SWORN TO before me this 21st day of July, 19 67

My commission expires March 31, 1970  
Marge Dee Montgomery Notary Public.

CONTRACTOR'S WELL LOG

15-069-20063-00-00

COMPANY:  
CONTRACTOR:  
FARM:  
LOCATION:  
  
COMMENCED:  
COMPLETED:

Hinkle Oil Company  
Abercrombie Drilling, Inc.  
TOLL #1  
SW SE SE, Sec. 15-7S-25W  
Graham County, Kansas  
July 12, 1967  
July 18, 1967

0	65	Sand
65	235	Surface clay & sand
235	1065	Shale & Shells
1065	1495	Shale
1495	1785	Shale & Shells
1785	1972	Sand
1972	2000	Red Bed
2000	2198	Shale
2198	2232	Anhydrite
2232	2480	Shale
2480	2850	Shale & Lime
2850	3455	Lime & Shale
3455	3732	Lime
	3732	Rotary Total Depth

RECEIVED  
STATE CORPORATION COMMISSION  
JUL 24 1967  
7-24-67  
CONSERVATION DIVISION  
Wichita, Kansas

Set 7" O. D. Casing at 261' with 150 sacks of Halliburton HA-5 Cement.

Dry and Abandoned.

ELECTRIC LOG TOPS:

ELEVATION:

Heebner	3716	(-1176)	2548 K. B.
			2547 D. F.
			2541 G. L.

STATE OF KANSAS )  
                          ) SS  
COUNTY OF SEDGWICK )

I, A. L. Abercrombie, do hereby certify that the above and foregoing is a true and correct copy of the log of the TOLL #1, SW SE SE, Section 15-7S-25W, Graham County, Kansas, as reflected by the files of Abercrombie Drilling, Inc.

*A. L. Abercrombie*  
A. L. Abercrombie  
President

Subscribed and sworn to before me, a Notary Public, in and for Sedgwick County, Kansas, this 21st day of July, 1967.

*Margo Des Montgomery*  
Margo Des Montgomery  
Notary Public

My Commission Expires:

March 31, 1970

