


STATE OF KANSAS  
STATE CORPORATION COMMISSION

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
212 No. Market  
Wichita, Kansas

15-065-20163-00-00 Form CP-4

WELL PLUGGING RECORD

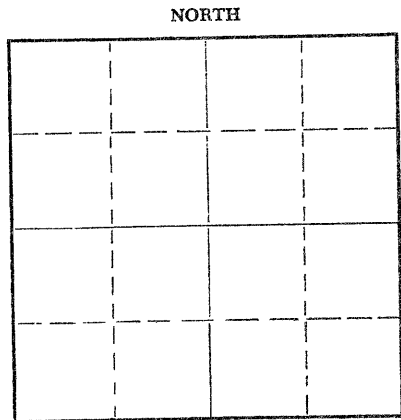

Locate well correctly on above Section Plat

Graham County. Sec. 10 Twp. 7 Rge. 23 (E) W (W)  
Location as "NE/CNW%SW%" or footage from lines NW NE  
Lease Owner Leo J. Dreiling Oil Company  
Lease Name Hale Well No. 1  
Office Address Route 2, Victoria, Kansas 67671  
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole  
Date well completed 8-12 1968  
Application for plugging filed 8-12 1968  
Application for plugging approved 8-12 1968  
Plugging commenced 8-12 1968  
Plugging completed 8-12 1968  
Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production \_\_\_\_\_ 19\_\_\_\_  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well W. L. Nichols  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well \_\_\_\_\_ Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Surface Pipe				8 5/8"	174'	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

1st. plug was set @ 1200' with 100 sacks cement, 50-50 Pozmix & 6% gel  
2nd. plug was set @ 210' with 20 sacks cement  
3rd. plug was set @ 40' with 10 sacks cement  
Cementing to bottom of cellar

RECEIVED  
STATE CORPORATION COMMISSION  
AUG 16 1968  
CONSERVATION DIVISION  
Wichita, Kansas

8-16-68


(If additional description is necessary, use BACK of this sheet)  
Name of Plugging Contractor L. J. Dreiling & Sons, Inc.  
Address Route 2, Victoria, Kansas 67671

STATE OF KANSAS, COUNTY OF ELLIS, ss.  
I, Leo F. Dreiling (employee of owner) or (~~owner or operator~~) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Leo F. Dreiling  
LEO F. DREILING, ROUTE 2, VICTORIA, KANSAS 67671  
(Address)

SUBSCRIBED AND SWORN TO before me this 15th day of August, 19 68

My commission expires September 19, 1970  
Joseph A. Hess  
JOSEPH A. HESS Notary Public.



15-005-20163-00-00

# L. J. DREILING AND SONS, INC.

Victoria, Kansas 67671

## WELL LOG

Company	Leo J. Dreiling Oil Company Route 2 Victoria, Kansas 67671	Sec. 10	Twp. 7	Rng. 23
Farm	Hale No. 1	Location	NW NE	
Total Depth	3887'	County	Graham	
Comm.	8-6-68 Comp. 8-12-68	Elevation:	2408'	K. B.
Contractor	L. J. Dreiling & Sons, Inc. Route 2 Victoria, Kansas 67671		2405'	D. F.
	Casing Record	Cement Record	2403'	G. R.
	174' - 8 5/8"	150 sacks cement	Production:	D & A

### Figures Indicate Bottom of Formations

0'	165'	Surface Soil & Sand
165'	174'	Blue Shale
174'	900'	Shale & Shells
900'	1677'	Shale & Sand
1677'	1830'	Sand
1830'	2083'	Sand & Red Rock
2083'	2119'	Anhy.
2119'	2480'	Shale
2480'	2729'	Shale & Shells
2729'	3483'	Shale & Lime
3483'	3887'	Lime

RECEIVED  
STATE CORPORATION COMMISSION  
AUG 16 1968  
CONSERVATION DIVISION  
Wichita, Kansas


*8/16/68*

STATE OF KANSAS)  
)ss  
COUNTY OF ELLIS)

I, Leo F. Dreiling, of the L. J. Dreiling & Sons, Inc., upon oath states that the above and foregoing is a true and correct copy from the Daily Drilling Report from your Hale #1.

*Leo F. Dreiling*  
\_\_\_\_\_  
LEO F. DREILING

Subscribed and sworn to before me this 15th day of August 1968.



*Joseph A. Hess*  
\_\_\_\_\_  
JOSEPH A. HESS NOTARY PUBLIC

My commission expires: September 19, 1970